



NIPPON BEARING

2833 Chiya, Ojiya-city, Niigata-pref., 947-8503 JAPAN
Phone:+81 (0)258-82-0011 FAX:+81 (0)258-81-1135
Overseas direct call:+81 (0)258-82-5709
<http://www.nb-linear.co.jp>

NB CORPORATION OF AMERICA

930 Muirfield Drive, Hanover Park, IL60133, U.S.A.
Phone:(630)295-8880 FAX:(630)295-8881
TOLL FREE:(800)521-2045

Western Regional Office

46750 Lakeview Blvd, Fremont, CA 94538, U.S.A.
Phone:(510)490-1420 FAX:(510)490-1733
TOLL FREE:(888)562-4175

Eastern Regional Office

500 N. Franklin Turnpike, Suite 103, Ramsey, NJ 07446, U.S.A.
Phone:(201)236-3886 FAX:(201)236-5112
TOLL FREE:(800)981-8190

<http://www.nbcorporation.com>
info@nbcorporation.com

NB EUROPE B.V.

Boekweitstraat 21, 2153 GK Nieuw-Venep, The Netherlands
Phone:+31 (0)252-463-200 FAX:+31 (0)252-463-209
<http://www.nbeurope.com>
info@nbeurope.com

NB CHINA CO.,LTD.

Room 108, Building 2, Randong Commercial Center No.150,
Lane 2161 Wanyuan Road, Minhang District, Shanghai 201103,
P.R. China
Phone:+86-21-5228-6811 FAX:+86-21-5228-6810
<http://www.nb-linear.co.jp/chinese/index.html>
info@nb-china.com.cn

NIPPON BEARING MALAYSIA SDN. BHD.

No.27, Jalan PJS 11/14, Bandar Sunway, 46150 Petaling Jaya,
Selangor Darul Ehsan, Malaysia
Phone:+60-3-5621-0716 FAX:+60-3-5621-0729
info@nb-linear.com.my

NB LINEAR SYSTEM

General Catalog

No.176E

NIPPON BEARING

NB

LINEAR SYSTEM

General Catalog No.176E



NIPPON BEARING



NIPPON BEARING

NIPPON BEARING CO., LTD.

NB LINEAR SYSTEM
 TECHNICAL INFORMATION Eng-1~43

CONTENTS

SLIDE GUIDE A-1~79

**BALL SPLINE
 ROTARY BALL SPLINE
 STROKE BALL SPLINE
 BALL SCREW SPLINE** B-1~59

SLIDE BUSH C-1~143

TOP BALL® D-1~25

**STROKE BUSH
 SLIDE ROTARY BUSH** E-1~27

**SLIDE SHAFT
 SPINDLE SHAFT** F-1~42

**SLIDE WAY•SLIDE TABLE
 MINIATURE SLIDE
 GONIO WAY** G-1~70

ACTUATOR H-1~79


SLIDE SCREW I-1~7




TECHNICAL REFERENCE Tech-1~7
 INDEX INDEX-1~12

SLIDE GUIDE

SEBS-BS/B/BY P.A-26
SEBS-BSM/BM/BYM P.A-26



SEBS-WBS/WB/WBY P.A-30




SEB-A/AY P.A-34



SEB-WA/WAY P.A-38




SER-A P.A-46



SER-WA P.A-48




SGL-F P.A-54



SGL-TF P.A-56




SGL-HTF P.A-58



SGL-HYF P.A-60




SGL-E P.A-62



SGL-TE P.A-64




SGL-HTE P.A-66



SGL-HYE P.A-68




SGL-HTEX P.A-70



SGW-TF P.A-76



SGW-TE P.A-78



BALL SPLINE

SSP P.B-18



SSP-AM P.B-20




SSPM P.B-22



SSPF P.B-24



SSPT P.B-26






SSPT-AM
SSPK-AM P.B-28














ROTARY BALL SPLINE




STROKE BALL SPLINE BALL SCREW SPLINE



SLIDE BUSH





SMJ P.C-126



SME P.C-128



SME-W P.C-130



SMD P.C-132



CE P.C-134



CD P.C-136



SWA P.C-138



SWJ P.C-140



SWD P.C-142



TOPBALL®

TK P.D-8



TK-OP P.D-8



TW P.D-10



TW-OP P.D-10



TKA P.D-12



TKA-W P.D-13



TKE P.D-14



TKE-W P.D-15



TKD P.D-16



TKD-W P.D-17



TMF P.D-18




TMA P.D-19










STROKE BUSH / SLIDE ROTARY BUSH



SHAFT



SH P.F-12



SHF SHF-FC P.F-13



SA P.F-14



SVW/SVWS P.G-24




NVT/NVTS P.G-30



NYT/NYTS P.G-34



WH-A P.F-16



WA P.F-18



LWA P.F-19



NYT-D/NYTS-D P.G-36



SVT/SVTS P.G-38



SYT/SYTS P.G-44



WSS/WSS-SS P.F-20



SYT-D/SYTS-D P.G-48



SYBS P.G-56



RVF P.G-66



SLIDE WAY/SLIDE TABLE/MINIATURE SLIDE/GONIO WAY

NV/NVS P.G-10



NVS-RNS P.G-14



SV/SVS P.G-16



ACTUATOR

RV P.G-68




BG P.H-1



SLIDE SCREW

SS P.I-7



NBLINEAR SYSTEM

The NB linear system is a linear motion mechanism which utilizes the rolling motion of ball and/or roller elements. NB offers a wide range of linear motion products of high precision quality that contribute to the size and weight reduction of machinery and equipment.

ADVANTAGES

Low Friction and Excellent Response

The dynamic friction of the ball or roller elements is substantially lower than that of full-face surface sliding friction. Since the difference between dynamic and static frictional resistance is small, motion response is excellent in terms of positioning accuracy and in high speed applications with acceleration and deceleration.

High Precision and Smooth Movement

The NB linear system is designed for the rolling elements to achieve extremely smooth motion. The raceway surface is finished by precision grinding for high precision movement with optimal clearance.

High Load Capacity and Long Travel Life

Despite the compactness of the NB linear system, the system uses relatively large rolling elements on a long raceway resulting in a high load capacity and a long travel life.

Ease of Installation

The NB linear system shortens machining and assembly time compared with that of a full-face surface sliding bearing.


Variety of Types

A wide variety of types and sizes of the NB linear systems are available to best serve the purpose for every application and requirement.



Eng-1

PROCESS FOR SELECTING NB LINEAR SYSTEM

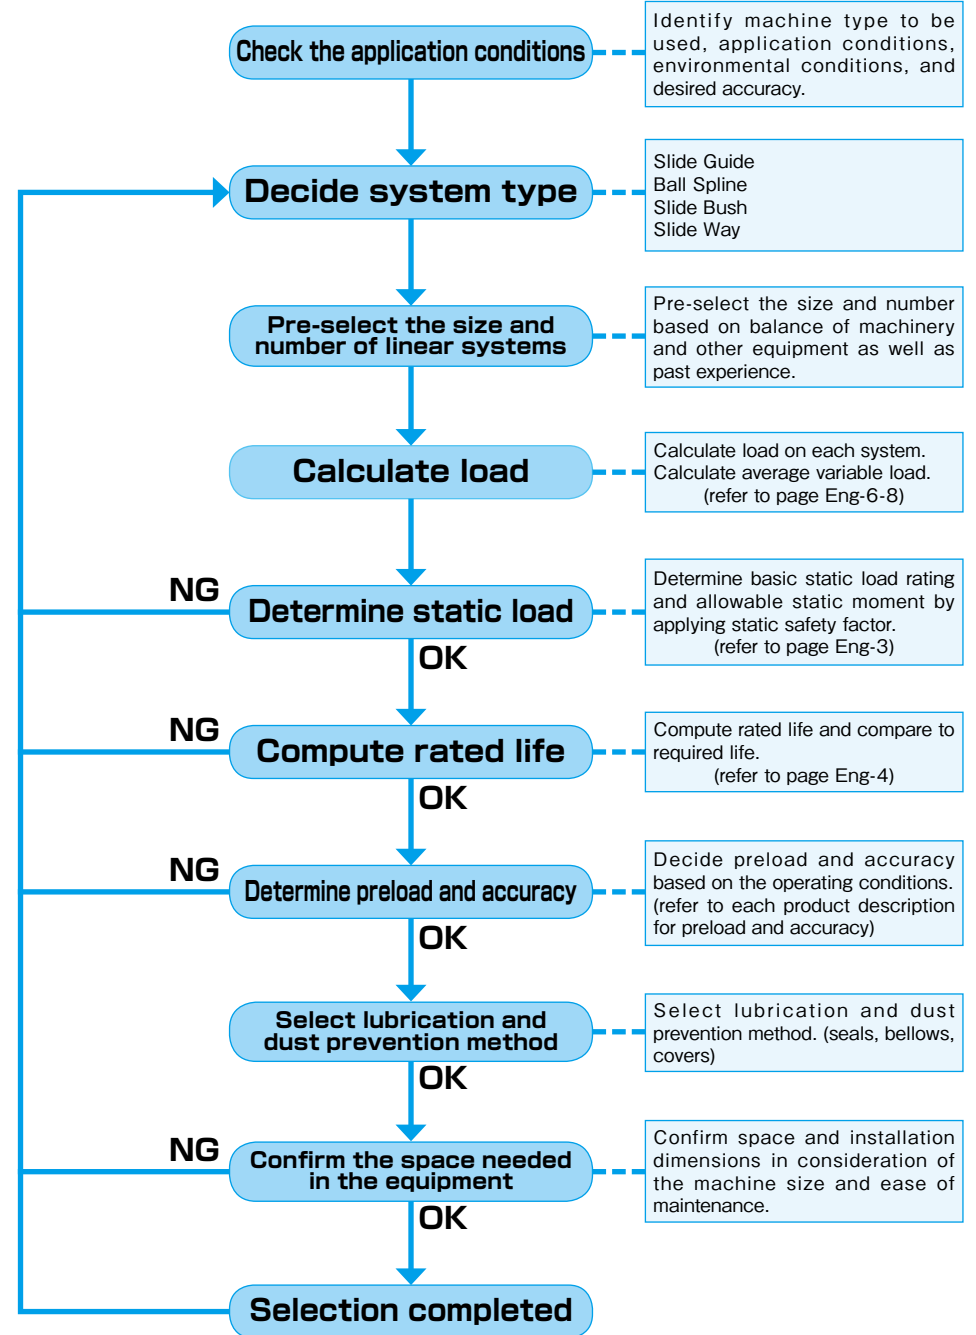

Eng-2

ALLOWABLE LOAD

Load and Moment

A load is applied to the linear system as Figure 1-1 shows. Sometimes moment loads are applied to, for example, slide guides. Load and moment are defined as follows.

Basic Static Load Rating (compliant with ISO14728-2*) and Allowable Static Moment

When excess load or impact load is applied to the linear system while it is stationary or moving slowly, a permanent deformation occurs on the rolling elements and the race way.

If this deformation exceeds a certain limit, it causes vibration and noise during operation resulting in a non-smooth motion and a shorter life time. To prevent this permanent deformation and deterioration in motion accuracy, the basic static load rating (Co) is given as the allowable load for the linear system. This basic static load rating is defined as the static load that results in the maximum allowable stress at the center of the contact surface between the rolling elements and the race way. The sum of the permanent deformation of the rolling element and that of the race way is 0.0001 time the diameter of the rolling element. In the linear system, a moment load may be present in addition to the static load. The allowable static moments are defined by Mp, My, and Mr as illustrated in Figure 1-1.

*1: This does not apply to some products.

Allowable Load and Static Safety Factor

The basic static load rating and allowable static moment define the maximum static load in each direction, however, these maximum static loads are not necessarily applicable depending on the operating conditions, the mounting accuracy, and the required motion accuracy. Therefore, an allowable load with a safety factor must be obtained. The minimum static safety factor is listed in Table 1-1.

Allowable Load

$$P_{max} \leq Co / fs \dots\dots\dots (1)$$

Allowable Moment

$$M_{max} \leq (Mp, My, Mr, Mp2, My2) / fs \dots\dots (2)$$

fs: static safety factor Co: basic static load rating (N)

Pmax.: allowable load (N)


Mp, Mr, My, Mp2, My2: allowable static moment (N · m)

Mmax.: allowable moment (N · m)

Table 1-1 Minimum Static Safety Factor (fs)

| operating conditions | static safety factor |
|--------------------------|----------------------|
| normal | 1~2 |
| smooth motion required | 2~4 |
| vibration/impact loading | 3~5 |

Figure 1-1 Load and Moment

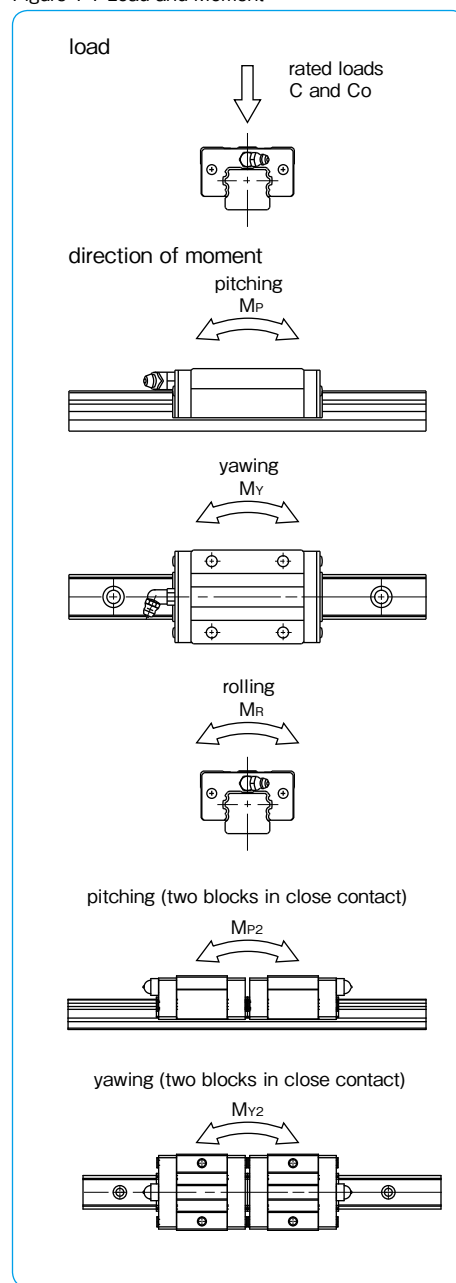

LIFE

Life of a Linear System

When a linear system reciprocates under loading, a continuous stress acts on it, ultimately causing flaking of its race way surface due to material fatigue. The distance a linear system travels before this flaking occurs is defined as the life of the linear system. A linear system can also become inoperable due to sintering, cracking, pitting, or rusting, however, these causes are differentiated from flaking because they are related to installation accuracy, operating environment, and relubrication method.

Rated Life

Even when a group of linear systems from the same production lot operated under identical conditions, the life time can differ due to differences in the material fatigue failure characteristics. This fact prevents from determining the exact life time of a single linear system for use. Therefore, the rated life is defined statistically as the distance of 90% of the linear systems travel before causing flaking.

Basic Dynamic Load Rating (compliant with ISO14728-1*2) and Basic Dynamic Torque Rating

The life of a linear system is expressed in terms of the distance traveled. Therefore, the life of a linear system is calculated reversely by using the allowable load that achieves a certain travel distance. This allowable load is called the basic dynamic load rating. The basic dynamic load rating is defined as a constant load in weight and direction that can achieve a travel distance of 50x10³m on the linear system. NB assumes the load is applied from the top as a normal radial load, because basic dynamic load ratings change depending on the applied load direction. The basic dynamic load ratings in the dimensional tables are based on this assumption. Ball splines can carry torque loading, so the basic dynamic torque rating is defined for the Ball Spline.

*2: This does not apply to some products.

Rated Life Estimation

The rated life estimation depends on the type of the rolling element. Equations (3) and (4) are used for the ball element and for the roller element, respectively. Equation (5) is used when torque loading is present.

balls are used as the rolling element

$$L = \left(\frac{C}{P}\right)^3 \cdot 50 \dots\dots\dots (3)$$

rollers are used as the rolling element

$$L = \left(\frac{C}{P}\right)^{10/3} \cdot 50 \dots\dots\dots (4)$$

torque loading is present

$$L = \left(\frac{CT}{T}\right)^3 \cdot 50 \dots\dots\dots (5)$$

L: rated life (km) C: basic dynamic load rating (N)
P: applied load (N) Cr: basic dynamic torque rating (N · m)
T: applied torque (N · m)

In the actual application, numerous variable factors are present such as in guide rail/shaft accuracy, in mounting conditions, in operating conditions, vibration and shock, etc. Therefore, calculating the actual applied load accurately is extremely difficult. In general, the calculation is simplified by using coefficients representing these factors: hardness coefficient (fh), temperature coefficient (ft), contact coefficient (fc), and applied load coefficient (fw). Taking these coefficients into account, Equations (3) to (5) become Equations (6) to (8).

balls are used as the rolling element

$$L = \left(\frac{fh \cdot ft \cdot fc \cdot C}{fw \cdot P}\right)^3 \cdot 50 \dots\dots\dots (6)$$

rollers are used as the rolling element

$$L = \left(\frac{fh \cdot ft \cdot fc \cdot C}{fw \cdot P}\right)^{10/3} \cdot 50 \dots\dots\dots (7)$$

torque loading is present

$$L = \left(\frac{fh \cdot ft \cdot fc \cdot CT}{fw \cdot T}\right)^3 \cdot 50 \dots\dots\dots (8)$$

L: rated life (km) fh: hardness coefficient
ft: temperature coefficient fc: contact coefficient
fw: applied load coefficient P: applied load (N)
C: basic dynamic load rating (N)
Cr: basic dynamic torque rating (N · m)
T: applied torque (N · m)

When the travel distance per unit time is constant, the rated life can be expressed in terms of time (hour). Equation (9) shows the relationship between stroke length, number of cycles per minute, and the life time.

$$L_h = \frac{L \cdot 10^3}{2 \cdot \ell_s \cdot n_1 \cdot 60} \dots\dots\dots (9)$$

L_h: life time (hr) ℓ_s: stroke length (m)
n₁: number of cycles per minute (cpm)

Figure 1-2 Hardness Coefficient



Figure 1-3 Temperature Coefficient

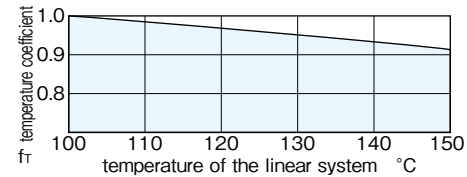


Table 1-2 Contact Coefficient

| number of linear bearings in close contact on rail/shaft | contact coefficient f _c |
|--|------------------------------------|
| 1 | 1.00 |
| 2 | 0.81 |
| 3 | 0.72 |
| 4 | 0.66 |
| 5 | 0.61 |

Table 1-3 Applied Load Coefficient

| operating conditions | | applied load coefficient f _w |
|--------------------------|---------------|---|
| loading | velocity | |
| no shock and vibration | 0.25 m/s less | 1.0~1.5 |
| low shock and vibration | 1 m/s less | 1.5~2.0 |
| high shock and vibration | 1 m/s more | 2.0~3.5 |

•Hardness Coefficient (f_H)

In the linear system, the guide rail or shaft works as race way of the rolling elements. Therefore, the hardness of the rail or shaft is an important factor in determining the rated load. The rated load decreases as the hardness decrease below 58HRC. NB products hold appropriate hardness by advanced heat treatment technology. In case of using the rail or shaft of insufficient hardness, please take the hardness coefficient (Figure 1-2) into the life calculation equation.

•Temperature Coefficient (f_T)

In order to give low wear characteristics NB products are hardened by heat treatment. If the temperature of the linear system exceeds 100°C, the hardness is decreased by tempering effect, so as the rated load decreases. Figure 1-3 shows the temperature coefficient as hardness changes with temperature.

•Contact Coefficient (f_c)

When more than one bearing is used in close contact, the contact coefficient should be taken into consideration due to the variation of products and the accuracy of the mounting surface. Table 1-2 shows the contact coefficient for life calculation.

•Applied Load Coefficient (f_w)

The actual applied load on a liner system can be greater than the calculated load due to impact, vibration, or inertia. Hence, an appropriate applied load coefficient(table 1-3) must be incorporated into a life calculation.

There are separate applied load coefficient tables for TOPBALL products on page D-4.

Calculation of Applied Load (1)

Tables 1-4 and 1-5 show the formulas of applied load calculation for typical applications.

W: applied load (N) P₁ - P₄: load applied to linear system (N) X,Y: linear system span (mm)
x, y, ℓ: distance to applied load or to working center of gravity (mm) g: gravitational acceleration (9.8 x 10³mm/s²)
V: velocity (mm/s) t: acceleration time (sec) t_s: deceleration time (sec)

Table 1-4 Applied Load Calculation (1)

| | condition | applied load calculation formula |
|---|------------------------------------|---|
| under static conditions or constant velocity motion | 2 horizontal axes | $P_1 = \frac{1}{4}W + \frac{x_0}{2X}W + \frac{y_0}{2Y}W$ $P_2 = \frac{1}{4}W - \frac{x_0}{2X}W + \frac{y_0}{2Y}W$ $P_3 = \frac{1}{4}W + \frac{x_0}{2X}W - \frac{y_0}{2Y}W$ $P_4 = \frac{1}{4}W - \frac{x_0}{2X}W - \frac{y_0}{2Y}W$ <p>Note : If the calculation results in a negative value, the loading direction is in the opposite direction.</p> |
| | 2 horizontal axes, over-hang | $P_1 = \frac{1}{4}W + \frac{x_0}{2X}W + \frac{y_0}{2Y}W$ $P_2 = \frac{1}{4}W - \frac{x_0}{2X}W + \frac{y_0}{2Y}W$ $P_3 = \frac{1}{4}W + \frac{x_0}{2X}W - \frac{y_0}{2Y}W$ $P_4 = \frac{1}{4}W - \frac{x_0}{2X}W - \frac{y_0}{2Y}W$ <p>Note : If the calculation results in a negative value, the loading direction is in the opposite direction.</p> |
| | 2 horizontal axes, moving axes | $P_1 = \frac{1}{4}W + \frac{x_0}{2X}W + \frac{y_0}{2Y}W$ $P_2 = \frac{1}{4}W - \frac{x_0}{2X}W + \frac{y_0}{2Y}W$ $P_3 = \frac{1}{4}W + \frac{x_0}{2X}W - \frac{y_0}{2Y}W$ $P_4 = \frac{1}{4}W - \frac{x_0}{2X}W - \frac{y_0}{2Y}W$ <p>Note : If the calculation results in a negative value, the loading direction is in the opposite direction.</p> |

Table 1-5 Applied Load Calculation (2)

| | condition | applied load calculation formula |
|---|-----------------------------|--|
| under static conditions or constant velocity motion | 2 horizontal, side axes | $P_1=P_2=P_3=P_4=\frac{l_1}{2Y}W$ $P_{1S}=P_{3S}=\frac{1}{4}W+\frac{X_0}{2X}W$ $P_{2S}=P_{4S}=\frac{1}{4}W-\frac{X_0}{2X}W$ |
| | 2 vertical axes | $P_1=P_2=P_3=P_4=\frac{l_1}{2X}W$ $P_{1S}=P_{2S}=P_{3S}=P_{4S}=\frac{l_2}{2X}W$ |
| under constant acceleration conditions | 2 horizontal axes | under acceleration $P_1=P_3=\frac{1}{4}W\left(1+\frac{2V_1l_1}{gt_1X}\right)$ $P_2=P_4=\frac{1}{4}W\left(1-\frac{2V_1l_1}{gt_1X}\right)$ under deceleration $P_1=P_3=\frac{1}{4}W\left(1-\frac{2V_1l_1}{gt_3X}\right)$ $P_2=P_4=\frac{1}{4}W\left(1+\frac{2V_1l_1}{gt_3X}\right)$ under constant velocity $P_1=P_2=P_3=P_4=\frac{1}{4}W$ ※g: acceleration of gravity (9.8×10 ³ mm/sec ²) |
| | velocity diagram | |

• Equivalent Coefficient

The linear systems are generally used with two axes, each axis with a couple of bearings installed. However, due to a space limitation, there must be an application in which one axis with one or two bearings in close contact installed. In such a case, multiply the applied moment by the equivalent moment coefficient shown in Tables 1-7~1-25 for applied load calculation. The following is a formula for calculating the equivalent moment load when a moment is applied to the linear system.

$$P=E \cdot M$$

P: equivalent moment load per bearing (N)
 E: equivalent moment coefficient
 M: applied moment (N · mm)

Calculation of Applied Load (2)

Table 1-6 shows the formulas for determining the applied load when moment is applied to the linear system.

W: applied load (N) P: load applied to the linear system (N) l: distance to applied load or to working center of gravity (mm)

Table 1-6 Applied Load Calculation (3)

| | condition | applied load calculation formula |
|--------------------|---------------------------------------|--|
| 1 axis application | 1 horizontal axis, 1 bearing | $P=W+E_{P1}Wl_1+E_{R1}Wl_2$ E _{P1} : M _P equivalent coefficient with 1 bearing used E _{R1} : M _R equivalent coefficient |
| | 1 sideways axis, 1 bearing | $P=W+E_{Y1}Wl_1+E_{R1}Wl_2$ E _{Y1} : M _Y equivalent coefficient with 1 bearing used E _{R1} : M _R equivalent coefficient |
| | 1 vertical axis, 1 bearing | $P=E_{P1}Wl_1+E_{Y1}Wl_2$ E _{P1} : M _P equivalent coefficient with 1 bearing used E _{Y1} : M _Y equivalent coefficient with 1 bearing used |
| 2 axes application | 2 horizontal axes, 1 bearing each | $P=W/2+Wl_2/Y+E_{P1}Wl_1/2$ E _{P1} : M _P equivalent coefficient with 1 bearing used Y: span between the two axes centers |
| | 2 sideways axes, 1 bearing each | $P=W/2+E_{Y1}Wl_2/2+Wl_1/Y$ E _{Y1} : M _Y equivalent coefficient with 1 bearing used Y: span between the two axes centers |
| | 2 vertical axes, 1 bearing each | $P=E_{P1}Wl_1/2+E_{Y1}Wl_2/2$ E _{P1} : M _P equivalent coefficient with 1 bearing used E _{Y1} : M _Y equivalent coefficient with 1 bearing used |

Table 1-7 Slide Guide SEB type

unit: 1/mm

| part number | equivalent coefficient | | | | |
|-------------|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| | E_{P1} | E_{P2} | E_{Y1} | E_{Y2} | E_R |
| SEBS 5B | 6.64×10^{-1} | 9.61×10^{-2} | 7.91×10^{-1} | 1.15×10^{-1} | 3.85×10^{-1} |
| SEBS 5BY(D) | 5.17×10^{-1} | 8.38×10^{-2} | 6.16×10^{-1} | 9.99×10^{-2} | 3.85×10^{-1} |
| SEBS 7BS | 6.70×10^{-1} | 7.76×10^{-2} | 7.98×10^{-1} | 9.25×10^{-2} | 2.74×10^{-1} |
| SEBS 7B | 4.62×10^{-1} | 6.65×10^{-2} | 5.50×10^{-1} | 7.93×10^{-2} | 2.74×10^{-1} |
| SEBS 7BY | 2.84×10^{-1} | 5.00×10^{-2} | 3.38×10^{-1} | 5.96×10^{-2} | 2.74×10^{-1} |
| SEBS 9BS | 5.83×10^{-1} | 6.96×10^{-2} | 6.95×10^{-1} | 8.30×10^{-2} | 2.15×10^{-1} |
| SEBS 9B | 3.26×10^{-1} | 5.26×10^{-2} | 3.88×10^{-1} | 6.27×10^{-2} | 2.15×10^{-1} |
| SEBS 9BY | 2.26×10^{-1} | 4.14×10^{-2} | 2.69×10^{-1} | 4.94×10^{-2} | 2.15×10^{-1} |
| SEBS12BS | 5.27×10^{-1} | 5.90×10^{-2} | 6.28×10^{-1} | 7.03×10^{-2} | 1.60×10^{-1} |
| SEBS12B | 3.08×10^{-1} | 4.71×10^{-2} | 3.67×10^{-1} | 5.61×10^{-2} | 1.60×10^{-1} |
| SEBS12BY | 2.02×10^{-1} | 3.64×10^{-2} | 2.41×10^{-1} | 4.33×10^{-2} | 1.60×10^{-1} |
| SEBS15BS | 3.95×10^{-1} | 5.01×10^{-2} | 4.71×10^{-1} | 5.97×10^{-2} | 1.30×10^{-1} |
| SEBS15B | 2.31×10^{-1} | 3.85×10^{-2} | 2.75×10^{-1} | 4.58×10^{-2} | 1.29×10^{-1} |
| SEBS15BY | 1.52×10^{-1} | 2.90×10^{-2} | 1.81×10^{-1} | 3.45×10^{-2} | 1.29×10^{-1} |
| SEBS20B | 1.41×10^{-1} | 2.47×10^{-2} | 1.68×10^{-1} | 2.94×10^{-2} | 9.76×10^{-2} |
| SEBS20BY | 1.01×10^{-1} | 1.95×10^{-2} | 1.20×10^{-1} | 2.32×10^{-2} | 9.76×10^{-2} |
| SEBS 5WB | 4.51×10^{-1} | 7.70×10^{-2} | 5.37×10^{-1} | 9.17×10^{-2} | 1.96×10^{-1} |
| SEBS 5WBY | 3.25×10^{-1} | 6.15×10^{-2} | 3.88×10^{-1} | 7.33×10^{-2} | 1.96×10^{-1} |
| SEBS 7WBS | 5.83×10^{-1} | 6.96×10^{-2} | 6.95×10^{-1} | 8.30×10^{-2} | 1.40×10^{-1} |
| SEBS 7WB | 3.26×10^{-1} | 5.26×10^{-2} | 3.88×10^{-1} | 6.27×10^{-2} | 1.40×10^{-1} |
| SEBS 7WBY | 2.26×10^{-1} | 4.14×10^{-2} | 2.69×10^{-1} | 4.94×10^{-2} | 1.40×10^{-1} |
| SEBS 9WBS | 4.63×10^{-1} | 6.05×10^{-2} | 5.52×10^{-1} | 7.21×10^{-2} | 1.09×10^{-1} |
| SEBS 9WB | 2.41×10^{-1} | 4.23×10^{-2} | 2.87×10^{-1} | 5.04×10^{-2} | 1.08×10^{-1} |
| SEBS 9WBY | 1.71×10^{-1} | 3.31×10^{-2} | 2.03×10^{-1} | 3.94×10^{-2} | 1.08×10^{-1} |
| SEBS12WBS | 3.89×10^{-1} | 5.28×10^{-2} | 4.64×10^{-1} | 6.29×10^{-2} | 8.17×10^{-2} |
| SEBS12WB | 2.17×10^{-1} | 3.81×10^{-2} | 2.59×10^{-1} | 4.55×10^{-2} | 8.16×10^{-2} |
| SEBS12WBY | 1.51×10^{-1} | 2.94×10^{-2} | 1.79×10^{-1} | 3.50×10^{-2} | 8.16×10^{-2} |
| SEBS15WBS | 2.58×10^{-1} | 4.06×10^{-2} | 3.07×10^{-1} | 4.83×10^{-2} | 4.71×10^{-2} |
| SEBS15WB | 1.63×10^{-1} | 3.03×10^{-2} | 1.94×10^{-1} | 3.61×10^{-2} | 4.71×10^{-2} |
| SEBS15WBY | 1.13×10^{-1} | 2.29×10^{-2} | 1.35×10^{-1} | 2.73×10^{-2} | 4.71×10^{-2} |

E_{P1} : M_P equivalent coefficient with 1 block used E_{P2} : M_P equivalent coefficient with 2 blocks used in close contact
 E_{Y1} : M_Y equivalent coefficient with 1 block used E_{Y2} : M_Y equivalent coefficient with 2 blocks used in close contact
 E_R : M_R equivalent coefficient

Table 1-8 Slide Guide SEB and SER type

unit: 1/mm

| part number | equivalent coefficient | | | | |
|---------------|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| | E_{P1} | E_{P2} | E_{Y1} | E_{Y2} | E_R |
| SEBS 2A | 7.06×10^{-1} | 1.37×10^{-1} | 5.92×10^{-1} | 1.15×10^{-1} | 9.09×10^{-1} |
| SEBS 3A | 9.16×10^{-1} | 1.49×10^{-1} | 7.69×10^{-1} | 1.25×10^{-1} | 6.25×10^{-1} |
| SEBS 3AY | 6.02×10^{-1} | 1.13×10^{-1} | 5.05×10^{-1} | 9.48×10^{-2} | 6.25×10^{-1} |
| SEBS 5A | 6.11×10^{-1} | 1.01×10^{-1} | 5.13×10^{-1} | 8.46×10^{-2} | 3.85×10^{-1} |
| SEBS 5AY | 4.65×10^{-1} | 8.45×10^{-2} | 3.90×10^{-1} | 7.09×10^{-2} | 3.85×10^{-1} |
| SEBS 7A | 4.62×10^{-1} | 7.48×10^{-2} | 3.87×10^{-1} | 6.27×10^{-2} | 2.74×10^{-1} |
| SEBS 7AY | 2.84×10^{-1} | 5.49×10^{-2} | 2.38×10^{-1} | 4.61×10^{-2} | 2.74×10^{-1} |
| SEB(S) 9A | 3.32×10^{-1} | 5.89×10^{-2} | 2.78×10^{-1} | 4.94×10^{-2} | 2.20×10^{-1} |
| SEB(S) 9AY | 2.25×10^{-1} | 4.46×10^{-2} | 1.89×10^{-1} | 3.74×10^{-2} | 2.20×10^{-1} |
| SEB(S) 12A | 3.08×10^{-1} | 5.62×10^{-2} | 2.58×10^{-1} | 4.72×10^{-2} | 1.60×10^{-1} |
| SEB(S) 12AY | 2.02×10^{-1} | 4.11×10^{-2} | 1.70×10^{-1} | 3.45×10^{-2} | 1.60×10^{-1} |
| SEB(S) 15A | 2.31×10^{-1} | 4.30×10^{-2} | 1.94×10^{-1} | 3.61×10^{-2} | 1.29×10^{-1} |
| SEB(S) 15AY | 1.52×10^{-1} | 3.12×10^{-2} | 1.27×10^{-1} | 2.62×10^{-2} | 1.29×10^{-1} |
| SEB(S) 20A | 1.53×10^{-1} | 3.03×10^{-2} | 1.28×10^{-1} | 2.54×10^{-2} | 9.76×10^{-2} |
| SEB(S) 20AY | 1.01×10^{-1} | 2.16×10^{-2} | 8.44×10^{-2} | 1.81×10^{-2} | 9.76×10^{-2} |
| SEBS 3WA | 6.74×10^{-1} | 1.14×10^{-1} | 5.42×10^{-1} | 9.58×10^{-2} | 3.23×10^{-1} |
| SEBS 3WAY | 4.48×10^{-1} | 8.78×10^{-2} | 3.76×10^{-1} | 7.37×10^{-2} | 3.23×10^{-1} |
| SEBS 7WA(D) | 3.26×10^{-1} | 5.56×10^{-2} | 2.73×10^{-1} | 4.67×10^{-2} | 1.40×10^{-1} |
| SEBS 7WAY | 2.26×10^{-1} | 4.32×10^{-2} | 1.90×10^{-1} | 3.63×10^{-2} | 1.40×10^{-1} |
| SEB(S) 9WA(D) | 2.41×10^{-1} | 4.72×10^{-2} | 2.02×10^{-1} | 3.96×10^{-2} | 1.08×10^{-1} |
| SEB(S) 9WAY | 1.71×10^{-1} | 3.58×10^{-2} | 1.43×10^{-1} | 3.00×10^{-2} | 1.08×10^{-1} |
| SEB(S) 12WA | 2.02×10^{-1} | 4.13×10^{-2} | 1.70×10^{-1} | 3.46×10^{-2} | 8.16×10^{-2} |
| SEB(S) 12WAY | 1.43×10^{-1} | 3.10×10^{-2} | 1.20×10^{-1} | 2.60×10^{-2} | 8.16×10^{-2} |
| SEB(S) 15WA | 1.63×10^{-1} | 3.29×10^{-2} | 1.37×10^{-1} | 2.76×10^{-2} | 4.71×10^{-2} |
| SEB(S) 15WAY | 1.13×10^{-1} | 2.43×10^{-2} | 9.48×10^{-2} | 2.04×10^{-2} | 4.71×10^{-2} |
| SER(S) 9A | 2.49×10^{-1} | 4.15×10^{-2} | 2.15×10^{-1} | 3.58×10^{-2} | 1.50×10^{-1} |
| SER(S) 12A | 2.50×10^{-1} | 4.16×10^{-2} | 2.23×10^{-1} | 3.71×10^{-2} | 1.33×10^{-1} |
| SER(S) 15A | 1.99×10^{-1} | 3.32×10^{-2} | 1.79×10^{-1} | 2.98×10^{-2} | 1.05×10^{-1} |
| SER(S) 20A | 1.66×10^{-1} | 2.77×10^{-2} | 1.47×10^{-1} | 2.45×10^{-2} | 6.49×10^{-2} |
| SER(S) 9WA | 1.52×10^{-1} | 2.53×10^{-2} | 1.36×10^{-1} | 2.26×10^{-2} | 7.17×10^{-2} |
| SER(S) 12WA | 1.42×10^{-1} | 2.36×10^{-2} | 1.28×10^{-1} | 2.13×10^{-2} | 5.86×10^{-2} |
| SER(S) 15WA | 1.60×10^{-1} | 2.66×10^{-2} | 1.45×10^{-1} | 2.41×10^{-2} | 4.15×10^{-2} |

E_{P1} : M_P equivalent coefficient with 1 block used E_{P2} : M_P equivalent coefficient with 2 blocks used in close contact
 E_{Y1} : M_Y equivalent coefficient with 1 block used E_{Y2} : M_Y equivalent coefficient with 2 blocks used in close contact
 E_R : M_R equivalent coefficient

Table 1-9 Slide Guide SGL, SGW type unit: 1/mm

| part number | equivalent coefficient | | | | |
|----------------------------|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| | E _{P1} | E _{P2} | E _{V1} | E _{V2} | E _R |
| SGL15F (E) | 2.57×10 ⁻¹ | 3.75×10 ⁻² | 2.57×10 ⁻¹ | 3.75×10 ⁻² | 1.28×10 ⁻¹ |
| SGL20F (E) | 2.06×10 ⁻¹ | 3.31×10 ⁻² | 2.06×10 ⁻¹ | 3.31×10 ⁻² | 9.31×10 ⁻² |
| SGL25F (E) | 1.72×10 ⁻¹ | 2.81×10 ⁻² | 1.72×10 ⁻¹ | 2.81×10 ⁻² | 8.31×10 ⁻² |
| SGL30F (E) | 1.47×10 ⁻¹ | 2.28×10 ⁻² | 1.47×10 ⁻¹ | 2.28×10 ⁻² | 6.88×10 ⁻² |
| SGL35F (E) | 1.29×10 ⁻¹ | 2.02×10 ⁻² | 1.29×10 ⁻¹ | 2.02×10 ⁻² | 5.45×10 ⁻² |
| SGL15TF (TE) | 1.63×10 ⁻¹ | 2.87×10 ⁻² | 1.63×10 ⁻¹ | 2.87×10 ⁻² | 1.29×10 ⁻¹ |
| SGL20TF (TE) | 1.41×10 ⁻¹ | 2.59×10 ⁻² | 1.41×10 ⁻¹ | 2.59×10 ⁻² | 9.28×10 ⁻² |
| SGL25TF (TE) | 1.09×10 ⁻¹ | 2.09×10 ⁻² | 1.09×10 ⁻¹ | 2.09×10 ⁻² | 8.31×10 ⁻² |
| SGL30TF (TE) | 9.32×10 ⁻² | 1.71×10 ⁻² | 9.32×10 ⁻² | 1.71×10 ⁻² | 6.87×10 ⁻² |
| SGL35TF (TE) | 8.14×10 ⁻² | 1.51×10 ⁻² | 8.14×10 ⁻² | 1.51×10 ⁻² | 5.49×10 ⁻² |
| SGL15HTF (HTE,HTEX) | 1.63×10 ⁻¹ | 2.87×10 ⁻² | 1.63×10 ⁻¹ | 2.87×10 ⁻² | 1.29×10 ⁻¹ |
| SGL20HTF (HTE,HTEX) | 1.22×10 ⁻¹ | 2.33×10 ⁻² | 1.22×10 ⁻¹ | 2.33×10 ⁻² | 9.29×10 ⁻² |
| SGL25HTF (HTE,HTEX) | 1.09×10 ⁻¹ | 2.09×10 ⁻² | 1.09×10 ⁻¹ | 2.09×10 ⁻² | 8.31×10 ⁻² |
| SGL30HTF (HTE,HTEX) | 9.32×10 ⁻² | 1.71×10 ⁻² | 9.32×10 ⁻² | 1.71×10 ⁻² | 6.87×10 ⁻² |
| SGL35HTF (HTE,HTEX) | 8.14×10 ⁻² | 1.51×10 ⁻² | 8.14×10 ⁻² | 1.51×10 ⁻² | 5.49×10 ⁻² |
| SGL45HTF (HTE,HTEX) | 6.52×10 ⁻² | 1.22×10 ⁻² | 6.52×10 ⁻² | 1.22×10 ⁻² | 4.37×10 ⁻² |
| SGL15HYF (HYE) | 1.08×10 ⁻¹ | 2.13×10 ⁻² | 1.08×10 ⁻¹ | 2.13×10 ⁻² | 1.28×10 ⁻¹ |
| SGL20HYF (HYE) | 8.61×10 ⁻² | 1.79×10 ⁻² | 8.61×10 ⁻² | 1.79×10 ⁻² | 9.31×10 ⁻² |
| SGL25HYF (HYE) | 7.54×10 ⁻² | 1.57×10 ⁻² | 7.54×10 ⁻² | 1.57×10 ⁻² | 8.32×10 ⁻² |
| SGL30HYF (HYE) | 6.47×10 ⁻² | 1.30×10 ⁻² | 6.47×10 ⁻² | 1.30×10 ⁻² | 6.90×10 ⁻² |
| SGL35HYF (HYE) | 5.65×10 ⁻² | 1.15×10 ⁻² | 5.65×10 ⁻² | 1.15×10 ⁻² | 5.46×10 ⁻² |
| SGL45HYF (HYE) | 5.00×10 ⁻² | 1.01×10 ⁻² | 5.00×10 ⁻² | 1.01×10 ⁻² | 4.35×10 ⁻² |
| SGW17TF (TE) | 2.00×10 ⁻¹ | 3.28×10 ⁻² | 2.00×10 ⁻¹ | 3.28×10 ⁻² | 5.35×10 ⁻² |
| SGW21TF (TE) | 1.67×10 ⁻¹ | 2.89×10 ⁻² | 1.67×10 ⁻¹ | 2.89×10 ⁻² | 4.78×10 ⁻² |
| SGW27TF (TE) | 1.26×10 ⁻¹ | 2.31×10 ⁻² | 1.26×10 ⁻¹ | 2.31×10 ⁻² | 4.33×10 ⁻² |
| SGW35TF (TE) | 8.39×10 ⁻² | 1.56×10 ⁻² | 8.39×10 ⁻² | 1.56×10 ⁻² | 2.62×10 ⁻² |

E_{P1}: M_P equivalent coefficient with 1 block used
 E_{V1}: M_V equivalent coefficient with 1 block used
 E_R: M_R equivalent coefficient
 E_{P2}: M_P equivalent coefficient with 2 blocks used in close contact
 E_{V2}: M_V equivalent coefficient with 2 blocks used in close contact

Table 1-10 Ball Spline · Rotary Ball Spline unit: 1/mm

| part number | equivalent coefficient | |
|-----------------|------------------------|-----------------------|
| | E ₁ | E ₂ |
| SSP 4 | — | — |
| SSP 6 | SPR 6 | SPB 6 KP |
| SSP 8 | SPR 8 | SPB 8 KP |
| SSP 10 | SPR 10 | SPB 10 KP |
| SSP 13A | SPR 13 | SPB 13 KP |
| SSP 16A | SPR 16 | SPB 16 (KP) |
| SSP 20A | SPR 20A | SPB 20 (KP) |
| SSP 25A | SPR 25A | SPB 25 (KP) |
| SSP 30A | SPR 30A | — |
| SSP 40A | SPR 40A | — |
| SSP 50A | SPR 50A | — |
| SSP 60A | SPR 60A | — |
| SSP 80 | — | — |
| SSP 80L | — | — |
| SSP100 | — | — |
| SSP100L | — | — |
| SSP 20 | SPR 20 | — |
| SSP 25 | SPR 25 | — |
| SSP 30 | SPR 30 | — |
| SSP 40 | SPR 40 | — |
| SSP 50 | SPR 50 | — |
| SSP 60 | SPR 60 | — |
| SPLFS 6 | 2.68×10 ⁻¹ | 6.67×10 ⁻² |
| SPLFS 8 | 2.57×10 ⁻¹ | 6.48×10 ⁻² |
| SPLFS 10 | 2.09×10 ⁻¹ | 5.25×10 ⁻² |
| SPLFS 13 | 1.96×10 ⁻¹ | 4.90×10 ⁻² |
| SPLFS 16 | 1.59×10 ⁻¹ | 3.97×10 ⁻² |

E₁: equivalent moment coefficient with 1 nut used
 E₂: equivalent moment coefficient with 2 nuts used in close contact

unit: 1/mm

| part number | equivalent coefficient | | | |
|----------------|------------------------|-----------------------|-----------------------|-----------------------|
| | E _{P1} | E _{P2} | E _{V1} | E _{V2} |
| SSP 4AM | 7.42×10 ⁻¹ | 1.30×10 ⁻¹ | 4.25×10 ⁻¹ | 7.50×10 ⁻² |
| SSP 5AM | 5.52×10 ⁻¹ | 8.70×10 ⁻² | 4.53×10 ⁻¹ | 7.10×10 ⁻² |
| SSP 6AM | 5.06×10 ⁻¹ | 7.80×10 ⁻² | 4.15×10 ⁻¹ | 6.40×10 ⁻² |
| SSP 8AM | 4.40×10 ⁻¹ | 6.50×10 ⁻² | 3.62×10 ⁻¹ | 5.40×10 ⁻² |
| SSP10AM | 3.66×10 ⁻¹ | 5.50×10 ⁻² | 3.01×10 ⁻¹ | 4.50×10 ⁻² |

E_{P1}: M_P equivalent coefficient with 1 nut used
 E_{V1}: M_V equivalent coefficient with 1 nut used
 E_R: M_R equivalent coefficient
 E_{P2}: M_P equivalent coefficient with 2 nuts used in close contact
 E_{V2}: M_V equivalent coefficient with 2 nuts used in close contact

Table 1-11 Slide Bush SM type unit: 1/mm

| part number | equivalent coefficient | |
|--------------|------------------------|-----------------------|
| | E ₁ | E ₂ |
| SM 3 | 1.24 | 2.13×10 ⁻¹ |
| SM 4 | 1.21 | 1.78×10 ⁻¹ |
| SM 5 | 8.96×10 ⁻¹ | 1.40×10 ⁻¹ |
| SM 6 | 7.29×10 ⁻¹ | 1.09×10 ⁻¹ |
| SM 8s | 7.19×10 ⁻¹ | 1.20×10 ⁻¹ |
| SM 8 | 5.46×10 ⁻¹ | 8.42×10 ⁻² |
| SM 10 | 4.55×10 ⁻¹ | 7.02×10 ⁻² |
| SM 12 | 4.32×10 ⁻¹ | 6.64×10 ⁻² |
| SM 13 | 4.06×10 ⁻¹ | 6.21×10 ⁻² |
| SM 16 | 3.59×10 ⁻¹ | 5.46×10 ⁻² |
| SM 20 | 3.07×10 ⁻¹ | 4.70×10 ⁻² |
| SM 25 | 2.17×10 ⁻¹ | 3.33×10 ⁻² |
| SM 30 | 1.99×10 ⁻¹ | 3.07×10 ⁻² |
| SM 35 | 1.71×10 ⁻¹ | 2.70×10 ⁻² |
| SM 40 | 1.64×10 ⁻¹ | 2.51×10 ⁻² |
| SM 50 | 1.20×10 ⁻¹ | 1.89×10 ⁻² |
| SM 60 | 1.13×10 ⁻¹ | 1.75×10 ⁻² |
| SM 80 | 8.18×10 ⁻² | 1.36×10 ⁻² |
| SM100 | 6.66×10 ⁻² | 1.11×10 ⁻² |
| SM120 | 5.63×10 ⁻² | 9.38×10 ⁻³ |
| SM150 | 4.62×10 ⁻² | 7.71×10 ⁻³ |

E₁: equivalent coefficient with 1 bush used
 E₂: equivalent coefficient with 2 bushes used in close contact

Table 1-12 Slide Bush SM-G-L type unit: 1/mm

| part number | equivalent coefficient | |
|------------------|------------------------|-----------------------|
| | E ₁ | E ₂ |
| SM 6G-LUU | 4.14×10 ⁻¹ | 7.39×10 ⁻² |
| SM 8G-LUU | 3.17×10 ⁻¹ | 5.90×10 ⁻² |
| SM10G-LUU | 2.53×10 ⁻¹ | 4.78×10 ⁻² |
| SM12G-LUU | 2.28×10 ⁻¹ | 4.47×10 ⁻² |
| SM13G-LUU | 2.03×10 ⁻¹ | 4.03×10 ⁻² |
| SM16G-LUU | 1.78×10 ⁻¹ | 3.45×10 ⁻² |
| SM20G-LUU | 1.53×10 ⁻¹ | 3.06×10 ⁻² |
| SM25G-LUU | 1.09×10 ⁻¹ | 2.17×10 ⁻² |
| SM30G-LUU | 9.59×10 ⁻² | 1.97×10 ⁻² |

E₁: equivalent coefficient with 1 bush used
 E₂: equivalent coefficient with 2 bushes used in close contact

Table 1-13 Slide Bush SM-W type unit : 1/mm

| part number | equivalent coefficient | |
|---------------|-------------------------|----------------|
| | E ₁ | E ₂ |
| SM 3W | 4.12 × 10 ⁻¹ | — |
| SM 4W | 4.03 × 10 ⁻¹ | — |
| SM 5W | 2.99 × 10 ⁻¹ | — |
| SM 6W | 2.43 × 10 ⁻¹ | — |
| SM 8W | 1.82 × 10 ⁻¹ | — |
| SM 10W | 1.52 × 10 ⁻¹ | — |
| SM 12W | 1.44 × 10 ⁻¹ | — |
| SM 13W | 1.35 × 10 ⁻¹ | — |
| SM 16W | 1.19 × 10 ⁻¹ | — |
| SM 20W | 1.02 × 10 ⁻¹ | — |
| SM 25W | 7.24 × 10 ⁻² | — |
| SM 30W | 6.63 × 10 ⁻² | — |
| SM 35W | 5.70 × 10 ⁻² | — |
| SM 40W | 5.47 × 10 ⁻² | — |
| SM 50W | 4.01 × 10 ⁻² | — |
| SM 60W | 3.77 × 10 ⁻² | — |

E1: equivalent coefficient with 1 bush used

Table 1-14 Slide Bush TRF type unit : 1/mm

| part number | equivalent coefficient | |
|--------------|-------------------------|----------------|
| | E ₁ | E ₂ |
| TRF 6 | 6.46 × 10 ⁻² | — |
| TRF 8 | 4.90 × 10 ⁻² | — |
| TRF10 | 4.07 × 10 ⁻² | — |
| TRF12 | 3.92 × 10 ⁻² | — |
| TRF13 | 3.66 × 10 ⁻² | — |
| TRF16 | 3.20 × 10 ⁻² | — |
| TRF20 | 2.80 × 10 ⁻² | — |
| TRF25 | 2.00 × 10 ⁻² | — |
| TRF30 | 1.85 × 10 ⁻² | — |
| TRF35 | 1.68 × 10 ⁻² | — |
| TRF40 | 1.45 × 10 ⁻² | — |
| TRF50 | 1.16 × 10 ⁻² | — |
| TRF60 | 1.11 × 10 ⁻² | — |

E1: equivalent coefficient with 1 bush used

Table 1-15 Slide Bush KB type unit : 1/mm

| part number | equivalent coefficient | |
|--------------|-------------------------|-------------------------|
| | E ₁ | E ₂ |
| KB 3 | 1.28 | 2.13 × 10 ⁻¹ |
| KB 4 | 1.05 | 1.75 × 10 ⁻¹ |
| KB 5 | 5.40 × 10 ⁻¹ | 9.00 × 10 ⁻² |
| KB 8 | 5.61 × 10 ⁻¹ | 8.00 × 10 ⁻² |
| KB10 | 4.21 × 10 ⁻¹ | 7.02 × 10 ⁻² |
| KB12 | 4.02 × 10 ⁻¹ | 6.20 × 10 ⁻² |
| KB16 | 3.77 × 10 ⁻¹ | 5.73 × 10 ⁻² |
| KB20 | 3.29 × 10 ⁻¹ | 4.49 × 10 ⁻² |
| KB25 | 2.14 × 10 ⁻¹ | 3.37 × 10 ⁻² |
| KB30 | 2.08 × 10 ⁻¹ | 2.96 × 10 ⁻² |
| KB40 | 1.64 × 10 ⁻¹ | 2.51 × 10 ⁻² |
| KB50 | 1.20 × 10 ⁻¹ | 1.89 × 10 ⁻² |
| KB60 | 1.21 × 10 ⁻¹ | 1.55 × 10 ⁻² |
| KB80 | 7.34 × 10 ⁻² | 1.22 × 10 ⁻² |
| KB 8W | 1.87 × 10 ⁻¹ | — |
| KB12W | 1.34 × 10 ⁻¹ | — |
| KB16W | 1.25 × 10 ⁻¹ | — |
| KB20W | 1.10 × 10 ⁻¹ | — |
| KB25W | 7.14 × 10 ⁻² | — |
| KB30W | 6.96 × 10 ⁻² | — |
| KB40W | 5.47 × 10 ⁻² | — |
| KB50W | 4.02 × 10 ⁻² | — |
| KB60W | 4.11 × 10 ⁻² | — |

E1: equivalent coefficient with 1 bush used

E2: equivalent coefficient with 2 bushes used in close contact

Table 1-16 TOPBALL TK type unit : 1/mm

| part number | equivalent coefficient | |
|-------------|-------------------------|-------------------------|
| | E ₁ | E ₂ |
| TK 8 | 4.91 × 10 ⁻¹ | 8.18 × 10 ⁻² |
| TK10 | 4.17 × 10 ⁻¹ | 6.95 × 10 ⁻² |
| TK12 | 3.70 × 10 ⁻¹ | 6.17 × 10 ⁻² |
| TK16 | 3.30 × 10 ⁻¹ | 5.49 × 10 ⁻² |
| TK20 | 2.55 × 10 ⁻¹ | 4.24 × 10 ⁻² |
| TK25 | 1.90 × 10 ⁻¹ | 3.16 × 10 ⁻² |
| TK30 | 1.66 × 10 ⁻¹ | 2.76 × 10 ⁻² |
| TK40 | 1.42 × 10 ⁻¹ | 2.36 × 10 ⁻² |
| TK50 | 1.11 × 10 ⁻¹ | 1.84 × 10 ⁻² |

E1: equivalent coefficient with 1 bush used

E2: equivalent coefficient with 2 bushes used in close contact

Table 1-17 TOPBALL TW type unit : 1/mm

| part number | equivalent coefficient | |
|-------------|-------------------------|-------------------------|
| | E ₁ | E ₂ |
| TW 3 | 8.70 × 10 ⁻¹ | 1.45 × 10 ⁻¹ |
| TW 4 | 6.57 × 10 ⁻¹ | 1.09 × 10 ⁻¹ |
| TW 6 | 5.17 × 10 ⁻¹ | 8.60 × 10 ⁻² |
| TW 8 | 3.55 × 10 ⁻¹ | 5.90 × 10 ⁻² |
| TW10 | 3.00 × 10 ⁻¹ | 5.00 × 10 ⁻² |
| TW12 | 2.66 × 10 ⁻¹ | 4.40 × 10 ⁻² |
| TW16 | 1.90 × 10 ⁻¹ | 3.10 × 10 ⁻² |
| TW20 | 1.66 × 10 ⁻¹ | 2.70 × 10 ⁻² |
| TW24 | 1.44 × 10 ⁻¹ | 2.40 × 10 ⁻² |
| TW32 | 1.08 × 10 ⁻¹ | 1.80 × 10 ⁻² |

E1: equivalent coefficient with 1 bush used

E2: equivalent coefficient with 2 bushes used in close contact

Table 1-18 Slide Bush SW type unit : 1/mm

| part number | equivalent coefficient | |
|--------------|-------------------------|-------------------------|
| | E ₁ | E ₂ |
| SWS 2 | 8.90 × 10 ⁻¹ | 1.48 × 10 ⁻¹ |
| SWS 3 | 8.01 × 10 ⁻¹ | 1.33 × 10 ⁻¹ |
| SW 4 | 7.95 × 10 ⁻¹ | 1.05 × 10 ⁻¹ |
| SW 6 | 6.98 × 10 ⁻¹ | 9.75 × 10 ⁻² |
| SW 8 | 4.09 × 10 ⁻¹ | 6.23 × 10 ⁻² |
| SW10 | 3.54 × 10 ⁻¹ | 5.33 × 10 ⁻² |
| SW12 | 3.10 × 10 ⁻¹ | 4.76 × 10 ⁻² |
| SW16 | 2.29 × 10 ⁻¹ | 3.40 × 10 ⁻² |
| SW20 | 1.94 × 10 ⁻¹ | 3.01 × 10 ⁻² |
| SW24 | 1.69 × 10 ⁻¹ | 2.59 × 10 ⁻² |
| SW32 | 1.19 × 10 ⁻¹ | 1.87 × 10 ⁻² |
| SW40 | 9.23 × 10 ⁻² | 1.54 × 10 ⁻² |
| SW48 | 7.84 × 10 ⁻² | 1.31 × 10 ⁻² |
| SW64 | 5.47 × 10 ⁻² | 9.11 × 10 ⁻³ |
| SW 4W | 2.65 × 10 ⁻¹ | — |
| SW 6W | 2.33 × 10 ⁻¹ | — |
| SW 8W | 1.37 × 10 ⁻¹ | — |
| SW10W | 1.18 × 10 ⁻¹ | — |
| SW12W | 1.03 × 10 ⁻¹ | — |
| SW16W | 7.62 × 10 ⁻² | — |
| SW20W | 6.47 × 10 ⁻² | — |
| SW24W | 5.62 × 10 ⁻² | — |
| SW32W | 3.98 × 10 ⁻² | — |

E1: equivalent coefficient with 1 bush used

E2: equivalent coefficient with 2 bushes used in close contact

Table 1-19 Slide Bush GM type unit : 1/mm

| part number | equivalent coefficient | |
|--------------|-------------------------|-------------------------|
| | E ₁ | E ₂ |
| GM 6 | 6.43 × 10 ⁻¹ | 1.08 × 10 ⁻¹ |
| GM 8 | 4.92 × 10 ⁻¹ | 8.20 × 10 ⁻² |
| GM10 | 4.21 × 10 ⁻¹ | 7.01 × 10 ⁻² |
| GM12 | 3.85 × 10 ⁻¹ | 6.42 × 10 ⁻² |
| GM13 | 3.78 × 10 ⁻¹ | 6.29 × 10 ⁻² |
| GM16 | 3.25 × 10 ⁻¹ | 5.42 × 10 ⁻² |
| GM20 | 2.75 × 10 ⁻¹ | 4.58 × 10 ⁻² |
| GM25 | 1.98 × 10 ⁻¹ | 3.30 × 10 ⁻² |
| GM30 | 1.82 × 10 ⁻¹ | 3.03 × 10 ⁻² |
| GM 6W | 3.54 × 10 ⁻¹ | 6.53 × 10 ⁻² |
| GM 8W | 2.38 × 10 ⁻¹ | 4.96 × 10 ⁻² |
| GM10W | 2.20 × 10 ⁻¹ | 4.50 × 10 ⁻² |
| GM12W | 2.07 × 10 ⁻¹ | 3.81 × 10 ⁻² |
| GM13W | 1.94 × 10 ⁻¹ | 3.76 × 10 ⁻² |
| GM16W | 1.71 × 10 ⁻¹ | 3.44 × 10 ⁻² |
| GM20W | 1.37 × 10 ⁻¹ | 2.69 × 10 ⁻² |
| GM25W | 9.03 × 10 ⁻² | 1.94 × 10 ⁻² |
| GM30W | 9.55 × 10 ⁻² | 1.78 × 10 ⁻² |

E1: equivalent coefficient with 1 bush used

E2: equivalent coefficient with 2 bushes used in close contact

Table 1-20 Slide Rotary Bush unit : 1/mm

| part number | equivalent coefficient | |
|--------------|-------------------------|-------------------------|
| | E ₁ | E ₂ |
| SRE 6 | 6.83 × 10 ⁻¹ | 1.14 × 10 ⁻¹ |
| SRE 8 | 4.98 × 10 ⁻¹ | 8.31 × 10 ⁻² |
| SRE10 | 4.12 × 10 ⁻¹ | 6.86 × 10 ⁻² |
| SRE12 | 4.19 × 10 ⁻¹ | 6.98 × 10 ⁻² |
| SRE13 | 3.93 × 10 ⁻¹ | 6.54 × 10 ⁻² |
| SRE16 | 3.40 × 10 ⁻¹ | 5.66 × 10 ⁻² |
| SRE20 | 2.90 × 10 ⁻¹ | 4.84 × 10 ⁻² |
| SRE25 | 1.98 × 10 ⁻¹ | 3.29 × 10 ⁻² |
| SRE30 | 1.80 × 10 ⁻¹ | 3.01 × 10 ⁻² |
| SRE40 | 1.52 × 10 ⁻¹ | 2.54 × 10 ⁻² |
| RK12 | 4.32 × 10 ⁻¹ | 6.64 × 10 ⁻² |
| RK16 | 3.59 × 10 ⁻¹ | 5.46 × 10 ⁻² |
| RK20 | 3.07 × 10 ⁻¹ | 4.70 × 10 ⁻² |
| RK25 | 2.17 × 10 ⁻¹ | 3.33 × 10 ⁻² |
| RK30 | 1.99 × 10 ⁻¹ | 3.07 × 10 ⁻² |

E1: equivalent coefficient with 1 bush used

E2: equivalent coefficient with 2 bushes used in close contact

Table 1-21 Slide Table NVT type (1) unit : 1/mm

| part number | equivalent coefficient | | |
|----------------|------------------------|-----------------------|-----------------------|
| | E _P | E _Y | E _R |
| NVT1025 | 2.27×10 ⁻¹ | 2.67×10 ⁻¹ | 1.48×10 ⁻¹ |
| NVT1035 | 9.54×10 ⁻¹ | 3.98×10 ⁻¹ | 8.75×10 ⁻¹ |
| NVT1045 | 2.79×10 ⁻¹ | 2.46×10 ⁻¹ | 3.31×10 ⁻¹ |
| NVT1055 | 2.40×10 ⁻¹ | 2.03×10 ⁻¹ | 3.51×10 ⁻¹ |
| NVT1065 | 1.70×10 ⁻¹ | 1.58×10 ⁻¹ | 2.77×10 ⁻¹ |
| NVT1075 | 1.53×10 ⁻¹ | 1.38×10 ⁻¹ | 2.95×10 ⁻¹ |
| NVT1085 | 1.24×10 ⁻¹ | 1.17×10 ⁻¹ | 2.58×10 ⁻¹ |
| NVT2035 | 1.51×10 ⁻¹ | 1.74×10 ⁻¹ | 1.12×10 ⁻¹ |
| NVT2050 | 1.62×10 ⁻¹ | 1.63×10 ⁻¹ | 1.45×10 ⁻¹ |
| NVT2065 | 1.25×10 ⁻¹ | 1.29×10 ⁻¹ | 1.32×10 ⁻¹ |
| NVT2080 | 1.15×10 ⁻¹ | 1.14×10 ⁻¹ | 1.54×10 ⁻¹ |
| NVT2095 | 9.51×10 ⁻² | 9.56×10 ⁻² | 1.43×10 ⁻¹ |
| NVT2110 | 8.81×10 ⁻² | 8.63×10 ⁻² | 1.57×10 ⁻¹ |
| NVT2125 | 8.22×10 ⁻² | 7.88×10 ⁻² | 1.69×10 ⁻¹ |
| NVT2140 | 7.13×10 ⁻² | 6.94×10 ⁻² | 1.59×10 ⁻¹ |
| NVT2155 | 6.48×10 ⁻² | 6.26×10 ⁻² | 1.69×10 ⁻¹ |
| NVT2170 | 6.10×10 ⁻² | 5.81×10 ⁻² | 1.76×10 ⁻¹ |
| NVT2185 | 5.77×10 ⁻² | 5.42×10 ⁻² | 1.82×10 ⁻¹ |
| NVT3055 | 3.41×10 ⁻¹ | 2.17×10 ⁻¹ | 1.97×10 ⁻¹ |
| NVT3080 | 9.64×10 ⁻² | 1.02×10 ⁻¹ | 7.86×10 ⁻² |
| NVT3105 | 8.55×10 ⁻² | 8.67×10 ⁻² | 8.90×10 ⁻² |
| NVT3130 | 8.00×10 ⁻² | 7.57×10 ⁻² | 1.16×10 ⁻¹ |
| NVT3155 | 5.56×10 ⁻² | 5.59×10 ⁻² | 8.78×10 ⁻² |
| NVT3180 | 5.12×10 ⁻² | 5.08×10 ⁻² | 9.25×10 ⁻² |
| NVT3205 | 4.76×10 ⁻² | 4.66×10 ⁻² | 9.65×10 ⁻² |
| NVT3230 | 4.45×10 ⁻² | 4.31×10 ⁻² | 9.99×10 ⁻² |
| NVT4085 | 1.01×10 ⁻¹ | 1.08×10 ⁻¹ | 5.63×10 ⁻² |
| NVT4125 | 9.48×10 ⁻² | 8.81×10 ⁻² | 8.72×10 ⁻² |
| NVT4165 | 6.01×10 ⁻² | 5.97×10 ⁻² | 6.56×10 ⁻² |
| NVT4205 | 4.34×10 ⁻² | 4.39×10 ⁻² | 6.03×10 ⁻² |
| NVT4245 | 4.06×10 ⁻² | 3.97×10 ⁻² | 7.11×10 ⁻² |
| NVT4285 | 3.30×10 ⁻² | 3.28×10 ⁻² | 6.38×10 ⁻² |
| NVT6110 | 1.74×10 ⁻¹ | 1.24×10 ⁻¹ | 1.10×10 ⁻¹ |
| NVT6160 | 6.02×10 ⁻² | 6.08×10 ⁻² | 5.66×10 ⁻² |
| NVT6210 | 4.82×10 ⁻² | 4.75×10 ⁻² | 6.63×10 ⁻² |
| NVT6260 | 4.21×10 ⁻² | 4.06×10 ⁻² | 6.85×10 ⁻² |
| NVT6310 | 2.95×10 ⁻² | 2.99×10 ⁻² | 5.28×10 ⁻² |
| NVT6360 | 2.70×10 ⁻² | 2.70×10 ⁻² | 5.53×10 ⁻² |
| NVT6410 | 2.53×10 ⁻² | 2.46×10 ⁻² | 6.37×10 ⁻² |

E_P: M_P equivalent coefficient E_Y: M_Y equivalent coefficient
E_R: M_R equivalent coefficient

Table 1-21 Slide Table NVT type (2) unit : 1/mm

| part number | equivalent coefficient | | |
|----------------|------------------------|-----------------------|-----------------------|
| | E _P | E _Y | E _R |
| NVT9210 | 7.51×10 ⁻² | 6.05×10 ⁻² | 5.66×10 ⁻² |
| NVT9310 | 3.26×10 ⁻² | 3.25×10 ⁻² | 4.00×10 ⁻² |
| NVT9410 | 2.36×10 ⁻² | 2.34×10 ⁻² | 3.84×10 ⁻² |
| NVT9510 | 1.82×10 ⁻² | 1.83×10 ⁻² | 3.34×10 ⁻² |

E_P: M_P equivalent coefficient E_Y: M_Y equivalent coefficient
E_R: M_R equivalent coefficient

Table 1-22 Slide Table NYT type unit : 1/mm

| part number | equivalent coefficient | | |
|----------------|------------------------|-----------------------|-----------------------|
| | E _P | E _Y | E _R |
| NYT1025 | 2.27×10 ⁻¹ | 2.67×10 ⁻¹ | 2.67×10 ⁻¹ |
| NYT1035 | 9.54×10 ⁻¹ | 3.98×10 ⁻¹ | 1.57×10 ⁻¹ |
| NYT1045 | 2.79×10 ⁻¹ | 2.46×10 ⁻¹ | 5.96×10 ⁻¹ |
| NYT1055 | 2.40×10 ⁻¹ | 2.03×10 ⁻¹ | 6.36×10 ⁻¹ |
| NYT1065 | 1.70×10 ⁻¹ | 1.58×10 ⁻¹ | 4.97×10 ⁻¹ |
| NYT1075 | 1.53×10 ⁻¹ | 1.38×10 ⁻¹ | 5.30×10 ⁻¹ |
| NYT1085 | 1.24×10 ⁻¹ | 1.17×10 ⁻¹ | 4.67×10 ⁻¹ |
| NYT2035 | 1.50×10 ⁻¹ | 1.73×10 ⁻¹ | 1.53×10 ⁻¹ |
| NYT2050 | 1.61×10 ⁻¹ | 1.63×10 ⁻¹ | 2.28×10 ⁻¹ |
| NYT2065 | 1.24×10 ⁻¹ | 1.28×10 ⁻¹ | 1.96×10 ⁻¹ |
| NYT2080 | 1.15×10 ⁻¹ | 1.14×10 ⁻¹ | 2.27×10 ⁻¹ |
| NYT2095 | 9.50×10 ⁻² | 9.55×10 ⁻² | 2.07×10 ⁻¹ |
| NYT2110 | 8.81×10 ⁻² | 8.64×10 ⁻² | 2.27×10 ⁻¹ |
| NYT2125 | 8.15×10 ⁻² | 7.85×10 ⁻² | 2.41×10 ⁻¹ |
| NYT3055 | 3.88×10 ⁻¹ | 2.17×10 ⁻¹ | 4.74×10 ⁻¹ |
| NYT3080 | 9.68×10 ⁻² | 1.02×10 ⁻¹ | 1.39×10 ⁻¹ |
| NYT3105 | 8.56×10 ⁻² | 8.66×10 ⁻² | 1.55×10 ⁻¹ |
| NYT3130 | 8.07×10 ⁻² | 7.59×10 ⁻² | 2.00×10 ⁻¹ |
| NYT3155 | 5.55×10 ⁻² | 5.58×10 ⁻² | 1.48×10 ⁻¹ |
| NYT3180 | 5.11×10 ⁻² | 5.07×10 ⁻² | 1.55×10 ⁻¹ |
| NYT3205 | 4.76×10 ⁻² | 4.66×10 ⁻² | 1.61×10 ⁻¹ |

E_P: M_P equivalent coefficient E_Y: M_Y equivalent coefficient
E_R: M_R equivalent coefficient

Table 1-23 Slide Table SVT type (1) unit : 1/mm

| part number | equivalent coefficient | | |
|----------------|------------------------|-----------------------|-----------------------|
| | E _P | E _Y | E _R |
| SVT1025 | 2.67×10 ⁻¹ | 3.25×10 ⁻¹ | 1.48×10 ⁻¹ |
| SVT1035 | 3.10×10 ⁻¹ | 2.73×10 ⁻¹ | 1.48×10 ⁻¹ |
| SVT1045 | 1.71×10 ⁻¹ | 1.87×10 ⁻¹ | 1.48×10 ⁻¹ |
| SVT1055 | 1.51×10 ⁻¹ | 1.63×10 ⁻¹ | 1.48×10 ⁻¹ |
| SVT1065 | 1.35×10 ⁻¹ | 1.44×10 ⁻¹ | 1.48×10 ⁻¹ |
| SVT1075 | 1.11×10 ⁻¹ | 1.17×10 ⁻¹ | 1.48×10 ⁻¹ |
| SVT1085 | 1.02×10 ⁻¹ | 1.07×10 ⁻¹ | 1.48×10 ⁻¹ |
| SVT2035 | 1.67×10 ⁻¹ | 2.03×10 ⁻¹ | 1.11×10 ⁻¹ |
| SVT2050 | 1.45×10 ⁻¹ | 1.64×10 ⁻¹ | 1.11×10 ⁻¹ |
| SVT2065 | 1.22×10 ⁻¹ | 1.37×10 ⁻¹ | 1.11×10 ⁻¹ |
| SVT2080 | 1.28×10 ⁻¹ | 1.19×10 ⁻¹ | 1.11×10 ⁻¹ |
| SVT2095 | 1.10×10 ⁻¹ | 1.03×10 ⁻¹ | 1.11×10 ⁻¹ |
| SVT2110 | 7.61×10 ⁻² | 8.08×10 ⁻² | 1.11×10 ⁻¹ |
| SVT2125 | 6.94×10 ⁻² | 7.33×10 ⁻² | 1.11×10 ⁻¹ |
| SVT2140 | 7.01×10 ⁻² | 6.73×10 ⁻² | 1.11×10 ⁻¹ |
| SVT2155 | 6.43×10 ⁻² | 6.19×10 ⁻² | 1.11×10 ⁻¹ |
| SVT2170 | 5.12×10 ⁻² | 5.33×10 ⁻² | 1.11×10 ⁻¹ |
| SVT2185 | 4.81×10 ⁻² | 4.99×10 ⁻² | 1.11×10 ⁻¹ |
| SVT3055 | 2.00×10 ⁻¹ | 1.75×10 ⁻¹ | 7.14×10 ⁻² |
| SVT3080 | 1.22×10 ⁻¹ | 1.12×10 ⁻¹ | 7.14×10 ⁻² |
| SVT3105 | 7.53×10 ⁻² | 8.14×10 ⁻² | 7.14×10 ⁻² |
| SVT3130 | 6.08×10 ⁻² | 6.47×10 ⁻² | 7.14×10 ⁻² |
| SVT3155 | 6.17×10 ⁻² | 5.89×10 ⁻² | 7.14×10 ⁻² |
| SVT3180 | 5.15×10 ⁻² | 4.96×10 ⁻² | 7.14×10 ⁻² |
| SVT3205 | 4.75×10 ⁻² | 4.59×10 ⁻² | 7.14×10 ⁻² |
| SVT3230 | 3.85×10 ⁻² | 3.99×10 ⁻² | 7.14×10 ⁻² |
| SVT3255 | 3.87×10 ⁻² | 3.76×10 ⁻² | 7.14×10 ⁻² |
| SVT3280 | 3.64×10 ⁻² | 3.54×10 ⁻² | 7.14×10 ⁻² |

E_P: M_P equivalent coefficient E_Y: M_Y equivalent coefficient
E_R: M_R equivalent coefficient

Table 1-23 Slide Table SVT type (2) unit : 1/mm

| part number | equivalent coefficient | | |
|-----------------|------------------------|-----------------------|-----------------------|
| | E _P | E _Y | E _R |
| SVT3305 | 3.09×10 ⁻² | 3.18×10 ⁻² | 7.14×10 ⁻² |
| SVT4085 | 8.29×10 ⁻² | 9.38×10 ⁻² | 5.00×10 ⁻² |
| SVT4125 | 6.11×10 ⁻² | 6.67×10 ⁻² | 5.00×10 ⁻² |
| SVT4165 | 6.27×10 ⁻² | 5.88×10 ⁻² | 5.00×10 ⁻² |
| SVT4205 | 4.89×10 ⁻² | 4.65×10 ⁻² | 5.00×10 ⁻² |
| SVT4245 | 4.01×10 ⁻² | 3.85×10 ⁻² | 5.00×10 ⁻² |
| SVT4285 | 3.39×10 ⁻² | 3.28×10 ⁻² | 5.00×10 ⁻² |
| SVT4325 | 2.94×10 ⁻² | 2.86×10 ⁻² | 5.00×10 ⁻² |
| SVT4365 | 2.60×10 ⁻² | 2.53×10 ⁻² | 5.00×10 ⁻² |
| SVT4405 | 2.20×10 ⁻² | 2.27×10 ⁻² | 5.00×10 ⁻² |
| SVT6110 | 6.83×10 ⁻² | 7.72×10 ⁻² | 4.44×10 ⁻² |
| SVT6160 | 5.03×10 ⁻² | 5.49×10 ⁻² | 4.44×10 ⁻² |
| SVT6210 | 3.97×10 ⁻² | 4.24×10 ⁻² | 4.44×10 ⁻² |
| SVT6260 | 3.27×10 ⁻² | 3.45×10 ⁻² | 4.44×10 ⁻² |
| SVT6310 | 2.78×10 ⁻² | 2.90×10 ⁻² | 4.44×10 ⁻² |
| SVT6360 | 2.79×10 ⁻² | 2.70×10 ⁻² | 4.44×10 ⁻² |
| SVT6410 | 2.42×10 ⁻² | 2.35×10 ⁻² | 4.44×10 ⁻² |
| SVT6460 | 2.14×10 ⁻² | 2.08×10 ⁻² | 4.44×10 ⁻² |
| SVT6510 | 1.92×10 ⁻² | 1.87×10 ⁻² | 4.44×10 ⁻² |
| SVT9210 | 3.50×10 ⁻² | 3.90×10 ⁻² | 2.78×10 ⁻² |
| SVT9310 | 3.14×10 ⁻² | 2.94×10 ⁻² | 2.78×10 ⁻² |
| SVT9410 | 2.41×10 ⁻² | 2.57×10 ⁻² | 2.78×10 ⁻² |
| SVT9510 | 1.98×10 ⁻² | 2.09×10 ⁻² | 2.78×10 ⁻² |
| SVT9610 | 2.00×10 ⁻² | 1.92×10 ⁻² | 2.78×10 ⁻² |
| SVT9710 | 1.70×10 ⁻² | 1.64×10 ⁻² | 2.78×10 ⁻² |
| SVT9810 | 1.37×10 ⁻² | 1.42×10 ⁻² | 2.78×10 ⁻² |
| SVT9910 | 1.22×10 ⁻² | 1.26×10 ⁻² | 2.78×10 ⁻² |
| SVT91010 | 1.10×10 ⁻² | 1.13×10 ⁻² | 2.78×10 ⁻² |

E_P: M_P equivalent coefficient E_Y: M_Y equivalent coefficient
E_R: M_R equivalent coefficient

Table 1-24 Slide Table SYT type unit : 1/mm

| part number | equivalent coefficient | | |
|-------------|------------------------|-----------------------|-----------------------|
| | E _P | E _V | E _R |
| SYT1025 | 2.67×10 ⁻¹ | 3.25×10 ⁻¹ | 2.67×10 ⁻¹ |
| SYT1035 | 3.10×10 ⁻¹ | 2.73×10 ⁻¹ | 2.67×10 ⁻¹ |
| SYT1045 | 1.71×10 ⁻¹ | 1.87×10 ⁻¹ | 2.67×10 ⁻¹ |
| SYT1055 | 1.51×10 ⁻¹ | 1.63×10 ⁻¹ | 2.67×10 ⁻¹ |
| SYT1065 | 1.35×10 ⁻¹ | 1.44×10 ⁻¹ | 2.67×10 ⁻¹ |
| SYT1075 | 1.11×10 ⁻¹ | 1.17×10 ⁻¹ | 2.67×10 ⁻¹ |
| SYT1085 | 1.02×10 ⁻¹ | 1.07×10 ⁻¹ | 2.67×10 ⁻¹ |
| SYT2035 | 1.67×10 ⁻¹ | 2.03×10 ⁻¹ | 1.54×10 ⁻¹ |
| SYT2050 | 1.45×10 ⁻¹ | 1.64×10 ⁻¹ | 1.54×10 ⁻¹ |
| SYT2065 | 1.22×10 ⁻¹ | 1.37×10 ⁻¹ | 1.54×10 ⁻¹ |
| SYT2080 | 1.28×10 ⁻¹ | 1.19×10 ⁻¹ | 1.54×10 ⁻¹ |
| SYT2095 | 1.10×10 ⁻¹ | 1.03×10 ⁻¹ | 1.54×10 ⁻¹ |
| SYT2110 | 7.61×10 ⁻² | 8.08×10 ⁻² | 1.54×10 ⁻¹ |
| SYT2125 | 6.94×10 ⁻² | 7.33×10 ⁻² | 1.54×10 ⁻¹ |
| SYT3055 | 2.00×10 ⁻¹ | 1.75×10 ⁻¹ | 1.15×10 ⁻¹ |
| SYT3080 | 1.22×10 ⁻¹ | 1.12×10 ⁻¹ | 1.15×10 ⁻¹ |
| SYT3105 | 7.53×10 ⁻² | 8.14×10 ⁻² | 1.15×10 ⁻¹ |
| SYT3130 | 6.08×10 ⁻² | 6.47×10 ⁻² | 1.15×10 ⁻¹ |
| SYT3155 | 6.17×10 ⁻² | 5.89×10 ⁻² | 1.15×10 ⁻¹ |
| SYT3180 | 5.15×10 ⁻² | 4.96×10 ⁻² | 1.15×10 ⁻¹ |
| SYT3205 | 4.75×10 ⁻² | 4.59×10 ⁻² | 1.15×10 ⁻¹ |

E_P: M_P equivalent coefficient E_V: M_V equivalent coefficient
E_R: M_R equivalent coefficient

Table 1-25 Miniature Slide SYBS type unit : 1/mm

| part number | equivalent coefficient | | |
|-------------|------------------------|-----------------------|-----------------------|
| | E _P | E _V | E _R |
| SYBS 6-13 | 8.35×10 ⁻¹ | 7.01×10 ⁻¹ | 8.51×10 ⁻¹ |
| SYBS 6-21 | 5.45×10 ⁻¹ | 4.57×10 ⁻¹ | 8.51×10 ⁻¹ |
| SYBS 8-11 | 8.82×10 ⁻¹ | 7.40×10 ⁻¹ | 5.88×10 ⁻¹ |
| SYBS 8-21 | 4.81×10 ⁻¹ | 4.04×10 ⁻¹ | 5.88×10 ⁻¹ |
| SYBS 8-31 | 3.57×10 ⁻¹ | 2.99×10 ⁻¹ | 5.88×10 ⁻¹ |
| SYBS12-23 | 4.31×10 ⁻¹ | 3.62×10 ⁻¹ | 3.13×10 ⁻¹ |
| SYBS12-31 | 3.57×10 ⁻¹ | 2.99×10 ⁻¹ | 3.13×10 ⁻¹ |
| SYBS12-46 | 2.35×10 ⁻¹ | 1.97×10 ⁻¹ | 3.13×10 ⁻¹ |
| SYBS17-23 | 4.25×10 ⁻¹ | 3.57×10 ⁻¹ | 2.67×10 ⁻¹ |
| SYBS17-31 | 3.26×10 ⁻¹ | 2.74×10 ⁻¹ | 2.66×10 ⁻¹ |
| SYBS17-46 | 2.23×10 ⁻¹ | 1.88×10 ⁻¹ | 2.66×10 ⁻¹ |

E_P: M_P equivalent coefficient E_V: M_V equivalent coefficient
E_R: M_R equivalent coefficient

Average Applied Load

The load applied to a linear system generally varies with the travel distance depending on how the system is operated. This includes the start/stop processes of the reciprocating motion and work on the system. The average applied load is used to compute the life corresponding to the actual application conditions.

① When the load varies in a step manner with the travel distance (Figure 1-7).

ℓ₁ is the travel distance under load P₁

ℓ₂ is the travel distance under load P₂

⋮

ℓ_n is the travel distance under load P_n

The average applied load P_m is obtained by the following equation.

$$P_m = \sqrt[3]{\frac{1}{\ell} (P_1^3 \ell_1 + P_2^3 \ell_2 + \dots + P_n^3 \ell_n)} \dots (10)$$

P_m: average applied load (N) ℓ: total travel distance (m)

② When the applied load varies linearly with the travel distance (Figure 1-8), the average applied load P_m is approximated by the following equation.

$$P_m \doteq \frac{1}{3} (P_{min} + 2P_{max}) \dots (11)$$

P_{min}: minimum applied load (N)
P_{max}: maximum applied load (N)

③ When the applied load draws a sine-curve as shown by Figures 1-9 (a) and (b), the average applied load P_m is approximated by the following equations.

Figure1-9(a) $P_m \doteq 0.65P_{max}$ ⋯⋯⋯ (12)

Figure1-9(b) $P_m \doteq 0.75P_{max}$ ⋯⋯⋯ (13)

Figure 1-7 Applied Load Varies Stepwise




Figure 1-8 Applied Load Varies Linearly





Figure 1-9 Applied Load Varies Sine-Curve

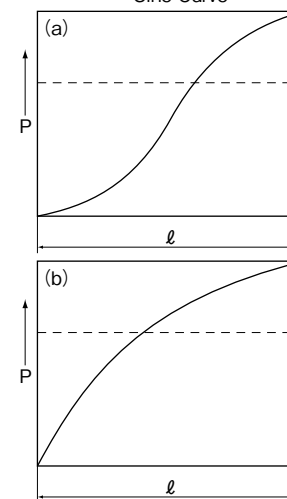

RATED LIFE CALCULATION EXAMPLE 1

2 Horizontal Axes, 2 Blocks each, Considering Acceleration/Deceleration

Operating Conditions

part number: SGL15F/E
 basic dynamic load rating $C=7.29\text{kN}$
 basic static load rating $C_0=9.45\text{kN}$
 guide block span: $L_{\text{unit}}=100\text{mm}$
 guide rail span: $L_{\text{rail}}=100\text{mm}$
 drive: $Y_d=10\text{mm}$
 $Z_d=-10\text{mm}$
 mass: $m_1=30\text{kg}$ $X_1=15\text{mm}$
 $Y_1=-20\text{mm}$
 $Z_1=20\text{mm}$
 $m_2=15\text{kg}$ $X_2=80\text{mm}$
 $Y_2=50\text{mm}$
 $Z_2=100\text{mm}$
 velocity: $V_{\text{max}}=200\text{mm/s}$
 time: $t_1=0.2\text{s}$
 $t_2=3.3\text{s}$
 $t_3=0.2\text{s}$
 acceleration: $a_1=1.0\text{m/s}^2$
 $a_3=1.0\text{m/s}^2$
 stroke: $l_s=700\text{mm}$
 number of cycles per minute: $n_1=8\text{cpm}$

Figure 1-10


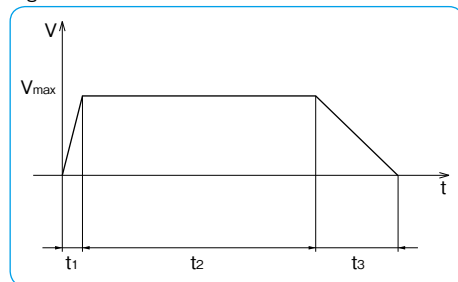


Figure 1-11

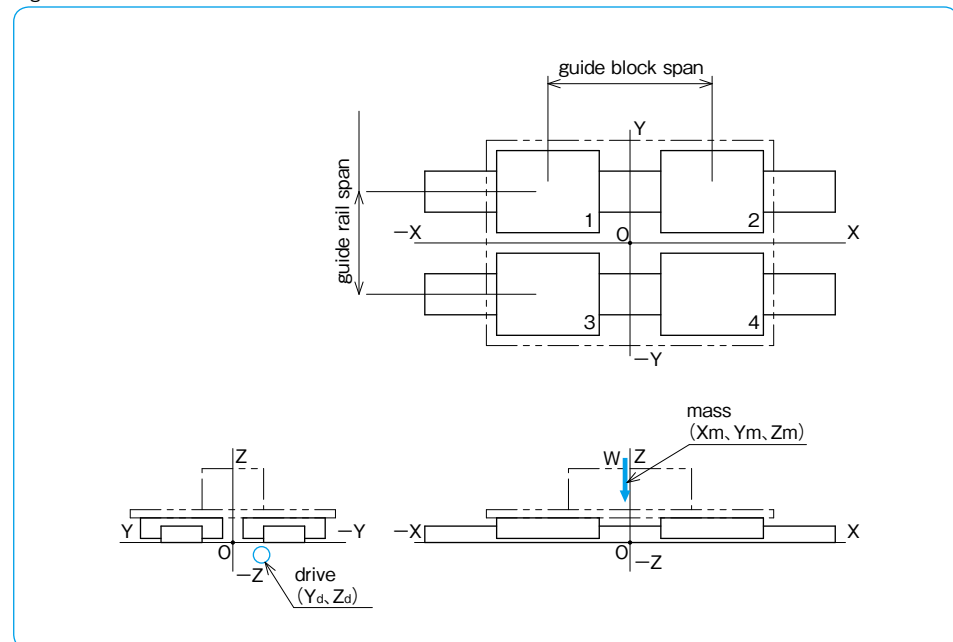

In case that some external force is applied to the system, please refer to "Slide Guide Travel Life Calculation Program" at NB website.

① Calculating Moment Applied to the Unit

<acceleration>

pitching $Ma_1 = m \cdot g \cdot X_m - m \cdot a_1 \cdot (Z_m - Z_d)$

$Ma_1 = 30 \times 9.8 \times (15) - 30 \times 1 \times \{(20) - (-10)\} + 15 \times 9.8 \times (80) - 15 \times 1 \times \{(100) - (-10)\} = 13620\text{N} \cdot \text{mm}$

yawing $Ma_2 = -m \cdot a_1 \cdot (Y_m - Y_d)$

$Ma_2 = -30 \times 1 \times \{(-20) - (10)\} - 15 \times 1 \times \{(50) - (10)\} = 300\text{N} \cdot \text{mm}$

rolling $Ma_3 = m \cdot g \cdot Y_m$

$Ma_3 = 30 \times 9.8 \times (-20) + 15 \times 9.8 \times (50) = 1470\text{N} \cdot \text{mm}$

<constant>

pitching $M_1 = m \cdot g \cdot X_m$

$M_1 = 30 \times 9.8 \times (15) + 15 \times 9.8 \times (80) = 16170\text{N} \cdot \text{mm}$

yawing $M_2 = 0$

rolling $M_3 = m \cdot g \cdot Y_m$

$M_3 = 30 \times 9.8 \times (-20) + 15 \times 9.8 \times (50) = 1470\text{N} \cdot \text{mm}$

<deceleration>

pitching $Md_1 = m \cdot g \cdot X_m + m \cdot a_3 \cdot (Z_m - Z_d)$

$Md_1 = 30 \times 9.8 \times (15) + 30 \times 1 \times \{(20) - (-10)\} + 15 \times 9.8 \times (80) + 15 \times 1 \times \{(100) - (-10)\} = 18720\text{N} \cdot \text{mm}$

yawing $Md_2 = m \cdot a_3 \cdot (Y_m - Y_d)$

$Md_2 = 30 \times 1 \times \{(-20) - (10)\} + 15 \times 1 \times \{(50) - (10)\} = -300\text{N} \cdot \text{mm}$

rolling $Md_3 = m \cdot g \cdot Y_m$

$Md_3 = 30 \times 9.8 \times (-20) + 15 \times 9.8 \times (50) = 1470\text{N} \cdot \text{mm}$

② Calculating Load Applied to the Guide Block

<acceleration>

Block 1

vertical direction $F_{ra1} = \frac{m \cdot g}{4} - \frac{Ma_1}{2 \cdot L_{\text{unit}}} + \frac{Ma_3}{2 \cdot L_{\text{rail}}}$

$F_{ra1} = \frac{30 \times 9.8}{4} + \frac{15 \times 9.8}{4} - \frac{13620}{2 \times 100} + \frac{1470}{2 \times 100} = 49.5\text{N}$

horizontal direction $F_{sa1} = \frac{Ma_2}{2 \cdot L_{\text{unit}}}$

$F_{sa1} = \frac{300}{2 \times 100} = 1.5\text{N}$

Block 2

vertical direction $F_{ra2} = \frac{m \cdot g}{4} + \frac{Ma_1}{2 \cdot L_{\text{unit}}} + \frac{Ma_3}{2 \cdot L_{\text{rail}}}$

$F_{ra2} = \frac{30 \times 9.8}{4} + \frac{15 \times 9.8}{4} + \frac{13620}{2 \times 100} + \frac{1470}{2 \times 100} = 185.7\text{N}$

horizontal direction $F_{sa2} = -\frac{Ma_2}{2 \cdot L_{\text{unit}}}$

$F_{sa2} = -\frac{300}{2 \times 100} = -1.5\text{N}$

Block 3

vertical direction
$$F_{ra3} = \frac{m \cdot g}{4} - \frac{Ma_1}{2 \cdot L_{unit}} - \frac{Ma_3}{2 \cdot L_{rail}}$$

$$F_{ra3} = \frac{30 \times 9.8}{4} + \frac{15 \times 9.8}{4} - \frac{13620}{2 \times 100} - \frac{1470}{2 \times 100} = 34.8N$$

horizontal direction
$$F_{sa3} = \frac{Ma_2}{2 \cdot L_{unit}}$$

$$F_{sa3} = \frac{300}{2 \times 100} = 1.5N$$

Block 4

vertical direction
$$F_{ra4} = \frac{m \cdot g}{4} + \frac{Ma_1}{2 \cdot L_{unit}} - \frac{Ma_3}{2 \cdot L_{rail}}$$

$$F_{ra4} = \frac{30 \times 9.8}{4} + \frac{15 \times 9.8}{4} + \frac{13620}{2 \times 100} - \frac{1470}{2 \times 100} = 171.0N$$

horizontal direction
$$F_{sa4} = -\frac{Ma_2}{2 \cdot L_{unit}}$$

$$F_{sa4} = -\frac{300}{2 \times 100} = -1.5N$$

(constant)

Block 1

vertical direction
$$F_{r1} = \frac{m \cdot g}{4} - \frac{M_1}{2 \cdot L_{unit}} + \frac{M_3}{2 \cdot L_{rail}}$$

$$F_{r1} = \frac{30 \times 9.8}{4} + \frac{15 \times 9.8}{4} - \frac{16170}{2 \times 100} + \frac{1470}{2 \times 100} = 36.8N$$

horizontal direction
$$F_{s1} = \frac{M_2}{2 \cdot L_{unit}}$$

Block 2

vertical direction
$$F_{r2} = \frac{m \cdot g}{4} + \frac{M_1}{2 \cdot L_{unit}} + \frac{M_3}{2 \cdot L_{rail}}$$

$$F_{r2} = \frac{30 \times 9.8}{4} + \frac{15 \times 9.8}{4} + \frac{16170}{2 \times 100} + \frac{1470}{2 \times 100} = 198.5N$$

horizontal direction
$$F_{s2} = -\frac{M_2}{2 \cdot L_{unit}}$$

Block 3

vertical direction
$$F_{r3} = \frac{m \cdot g}{4} - \frac{M_1}{2 \cdot L_{unit}} - \frac{M_3}{2 \cdot L_{rail}}$$

$$F_{r3} = \frac{30 \times 9.8}{4} + \frac{15 \times 9.8}{4} - \frac{16170}{2 \times 100} - \frac{1470}{2 \times 100} = 22.1N$$

horizontal direction
$$F_{s3} = \frac{M_2}{2 \cdot L_{unit}}$$

Block 4

vertical direction
$$F_{r4} = \frac{m \cdot g}{4} + \frac{M_1}{2 \cdot L_{unit}} - \frac{M_3}{2 \cdot L_{rail}}$$

$$F_{r4} = \frac{30 \times 9.8}{4} + \frac{15 \times 9.8}{4} + \frac{16170}{2 \times 100} - \frac{1470}{2 \times 100} = 183.8N$$

horizontal direction
$$F_{s4} = -\frac{M_2}{2 \cdot L_{unit}}$$

(deceleration)

Block 1

vertical direction
$$F_{rd1} = \frac{m \cdot g}{4} - \frac{Md_1}{2 \cdot L_{unit}} + \frac{Md_3}{2 \cdot L_{rail}}$$

$$F_{rd1} = \frac{30 \times 9.8}{4} + \frac{15 \times 9.8}{4} - \frac{18720}{2 \times 100} + \frac{1470}{2 \times 100} = 24.0N$$

horizontal direction
$$F_{sd1} = \frac{Md_2}{2 \cdot L_{unit}}$$

$$F_{sd1} = \frac{-300}{2 \times 100} = -1.5N$$

Block 2

vertical direction
$$F_{rd2} = \frac{m \cdot g}{4} + \frac{Md_1}{2 \cdot L_{unit}} + \frac{Md_3}{2 \cdot L_{rail}}$$

$$F_{rd2} = \frac{30 \times 9.8}{4} + \frac{15 \times 9.8}{4} + \frac{18720}{2 \times 100} + \frac{1470}{2 \times 100} = 211.2N$$

horizontal direction
$$F_{sd2} = -\frac{Md_2}{2 \cdot L_{unit}}$$

$$F_{sd2} = -\frac{-300}{2 \times 100} = 1.5N$$

Block 3

vertical direction
$$F_{rd3} = \frac{m \cdot g}{4} - \frac{Md_1}{2 \cdot L_{unit}} - \frac{Md_3}{2 \cdot L_{rail}}$$

$$F_{rd3} = \frac{30 \times 9.8}{4} + \frac{15 \times 9.8}{4} - \frac{18720}{2 \times 100} - \frac{1470}{2 \times 100} = 9.3N$$

horizontal direction
$$F_{sd3} = \frac{Md_2}{2 \cdot L_{unit}}$$

$$F_{sd3} = \frac{-300}{2 \times 100} = -1.5N$$

Block 4

vertical direction
$$F_{rd4} = \frac{m \cdot g}{4} + \frac{Md_1}{2 \cdot L_{unit}} - \frac{Md_3}{2 \cdot L_{rail}}$$

$$F_{rd4} = \frac{30 \times 9.8}{4} + \frac{15 \times 9.8}{4} + \frac{18720}{2 \times 100} - \frac{1470}{2 \times 100} = 196.5N$$

horizontal direction
$$F_{sd4} = -\frac{Md_2}{2 \cdot L_{unit}}$$

$$F_{sd4} = -\frac{-300}{2 \times 100} = 1.5N$$

③ Calculating Equivalent Load

Pr in the vertical direction and Ps in the horizontal direction are calculated by the following equations.

$$Pr = |Fr|$$

$$Ps = |k \cdot Fs| \quad k=1 \text{ for SGL guide}$$

Table 1-26

| | acceleration | constant | deceleration |
|---------|--------------|-----------|--------------|
| block 1 | Pra1=49.5 | Pr1=36.8 | Prd1=24.0 |
| | Ps a1=1.5 | Ps1=0 | Ps d1=1.5 |
| block 2 | Pra2=185.7 | Pr2=198.5 | Prd2=211.2 |
| | Ps a2=1.5 | Ps2=0 | Ps d2=1.5 |
| block 3 | Pra3=34.8 | Pr3=22.1 | Prd3=9.3 |
| | Ps a3=1.5 | Ps3=0 | Ps d3=1.5 |
| block 4 | Pra4=171.0 | Pr4=183.8 | Prd4=196.5 |
| | Ps a4=1.5 | Ps4=0 | Ps d4=1.5 |

◎Equation for Dynamic Equivalent Load

$$P = Pr + Ps$$

$$Pa_1 = Pra_1 + Psa_1 = 49.5 + 1.5 = 51.0 \text{ (N)}$$

calculating in the same manner

Table 1-27

| | acceleration | constant | deceleration |
|---------|----------------|---------------|----------------|
| block 1 | $Pa_1 = 51.0$ | $P_1 = 36.8$ | $Pd_1 = 25.5$ |
| block 2 | $Pa_2 = 187.2$ | $P_2 = 198.5$ | $Pd_2 = 212.7$ |
| block 3 | $Pa_3 = 36.3$ | $P_3 = 22.1$ | $Pd_3 = 10.8$ |
| block 4 | $Pa_4 = 172.5$ | $P_4 = 183.8$ | $Pd_4 = 198.0$ |

◎Calculating Average Equivalent Load

$$P_m = \sqrt[3]{\frac{1}{\ell_s} \times \left\{ (Pa^3 \times \frac{V_{max} \times t_1}{2}) + (P^3 \times V_{max} \times t_2) + (Pd^3 \times \frac{V_{max} \times t_3}{2}) \right\}}$$

$$P_{m1} = \sqrt[3]{\frac{1}{700} \times \left\{ (51.0^3 \times \frac{200 \times 0.2}{2}) + (36.8^3 \times 200 \times 3.3) + (25.5^3 \times \frac{200 \times 0.2}{2}) \right\}} = 37.1 \text{ (N)}$$

$$P_{m2} = \sqrt[3]{\frac{1}{700} \times \left\{ (187.2^3 \times \frac{200 \times 0.2}{2}) + (198.5^3 \times 200 \times 3.3) + (212.7^3 \times \frac{200 \times 0.2}{2}) \right\}} = 198.6 \text{ (N)}$$

$$P_{m3} = \sqrt[3]{\frac{1}{700} \times \left\{ (36.3^3 \times \frac{200 \times 0.2}{2}) + (22.1^3 \times 200 \times 3.3) + (10.8^3 \times \frac{200 \times 0.2}{2}) \right\}} = 22.6 \text{ (N)}$$

$$P_{m4} = \sqrt[3]{\frac{1}{700} \times \left\{ (172.5^3 \times \frac{200 \times 0.2}{2}) + (183.8^3 \times 200 \times 3.3) + (198.0^3 \times \frac{200 \times 0.2}{2}) \right\}} = 183.9 \text{ (N)}$$

④Calculating Rated Life

Decide each coefficient

f_H : hardness coefficient $f_H=1$ for hardness of guide is 58HRC or more

f_T : temperature coefficient $f_T=1$ operating temperature is below 100°C (80°C is maximum for SGL guide)

f_C : contact coefficient $f_C=1$ for blocks are not in close contact

f_W : applied load coefficient $f_W=1.5$ for $V_{max}=200\text{mm/s}$

◎Calculating Rated Life

Selecting Block 2 that carries the maximum dynamic equivalent load

$$L = \left(\frac{f_H \times f_T \times f_C}{f_W} \times \frac{C}{P_m} \right)^3 \times 50$$

$$L = \left(\frac{1 \times 1 \times 1}{1.5} \times \frac{7290}{198.6} \right)^3 \times 50 = 732725 \text{ (km)}$$

◎Calculating Life Time

$$L_h = \frac{L \times 10^3}{2 \times \ell_s \times n_1 \times 60}$$

$$L_h = \frac{732725 \times 10^3}{2 \times 0.7 \times 8 \times 60} = 1090364 \text{ (hour)}$$

⑤Calculating Static Safety Factor

◎Equation for Static Equivalent Load

$$P_o = Pr + Ps$$

$$Po_1 = Pra_1 + Psa_1 = 49.5 + 1.5 = 51.0 \text{ (N)}$$

calculating in the same manner

Table 1-28

| | acceleration | constant | deceleration |
|---------|----------------|------------------|-----------------|
| block 1 | $Po_1 = 51.0$ | $P_{o1} = 36.8$ | $Pod_1 = 25.5$ |
| block 2 | $Po_2 = 187.2$ | $P_{o2} = 198.5$ | $Pod_2 = 212.7$ |
| block 3 | $Po_3 = 36.3$ | $P_{o3} = 22.1$ | $Pod_3 = 10.8$ |
| block 4 | $Po_4 = 172.5$ | $P_{o4} = 183.8$ | $Pod_4 = 198.0$ |

Selecting Block 2 that carries the maximum static equivalent load

$$f_s = \frac{C_o}{P_o}$$

$$f_s = \frac{C_o}{Pod_2} = \frac{9450}{212.7} = 44$$

RATED LIFE CALCULATION EXAMPLE 2

1 Horizontal Axis, 2 Blocks, Considering Acceleration/Deceleration

Operating Conditions

- part number: SEB9A
- basic dynamic load rating $C=1.92\text{kN}$
- basic static load rating $C_0=2.53\text{kN}$
- guide block span: $L_{\text{unit}}=70\text{mm}$
- drive: $Y_d=30\text{mm}$
- $Z_d=-10\text{mm}$
- mass: $m_1=5\text{kg}$ $X_1=0\text{mm}$
- $Y_1=0\text{mm}$
- $Z_1=10\text{mm}$
- $m_2=20\text{kg}$ $X_2=-20\text{mm}$
- $Y_2=-10\text{mm}$
- $Z_2=20\text{mm}$
- velocity: $V_{\text{max}}=150\text{mm/s}$
- time: $t_1=0.1\text{s}$
- $t_2=1.9\text{s}$
- $t_3=0.1\text{s}$
- acceleration: $a_1=1.5\text{m/s}^2$
- $a_3=1.5\text{m/s}^2$
- stroke: $l_s=300\text{mm}$
- number of cycles per minute: $n_1=14\text{cpm}$

Figure 1-12


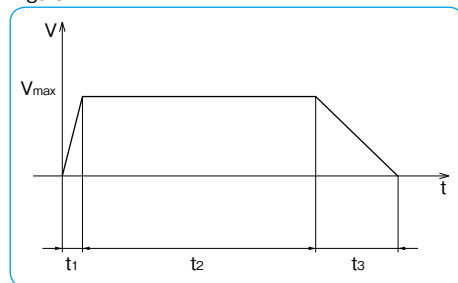


Figure 1-13

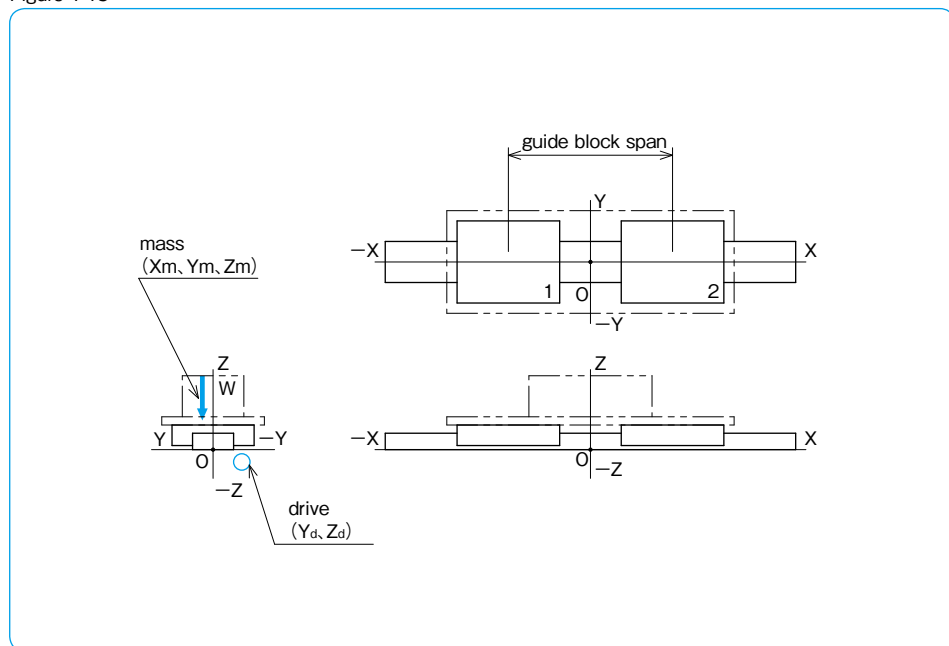

① Calculating Moment Applied to the Unit

(acceleration)

pitching $M_{a1} = m \cdot g \cdot X_m - m \cdot a_1 \cdot (Z_m - Z_d)$

$M_{a1} = 5 \times 9.8 \times (0) - 5 \times 1.5 \times \{(10) - (-10)\} + 20 \times 9.8 \times (-20) - 20 \times 1.5 \times \{(20) - (-10)\} = -4970\text{N} \cdot \text{mm}$

yawing $M_{a2} = -m \cdot a_1 \cdot (Y_m - Y_d)$

$M_{a2} = -5 \times 1.5 \times \{(0) - (-30)\} - 20 \times 1.5 \times \{(-10) - (-30)\} = -825\text{N} \cdot \text{mm}$

rolling $M_{a3} = m \cdot g \cdot Y_m$

$M_{a3} = 5 \times 9.8 \times (0) + 20 \times 9.8 \times (-10) = -1960\text{N} \cdot \text{mm}$

(constant)

pitching $M_1 = m \cdot g \cdot X_m$

$M_1 = 5 \times 9.8 \times (0) + 20 \times 9.8 \times (-20) = -3920\text{N} \cdot \text{mm}$

yawing $M_2 = 0$

$M_2 = 0\text{N} \cdot \text{mm}$

rolling $M_3 = m \cdot g \cdot Y_m$

$M_3 = 5 \times 9.8 \times (0) + 20 \times 9.8 \times (-10) = -1960\text{N} \cdot \text{mm}$

(deceleration)

pitching $M_{d1} = m \cdot g \cdot X_m + m \cdot a_3 \cdot (Z_m - Z_d)$

$M_{d1} = 5 \times 9.8 \times (0) + 5 \times 1.5 \times \{(10) - (-10)\} + 20 \times 9.8 \times (-20) + 20 \times 1.5 \times \{(20) - (-10)\} = -2870\text{N} \cdot \text{mm}$

yawing $M_{d2} = m \cdot a_3 \cdot (Y_m - Y_d)$

$M_{d2} = 5 \times 1.5 \times \{(0) - (-30)\} + 20 \times 1.5 \times \{(-10) - (-30)\} = 825\text{N} \cdot \text{mm}$

rolling $M_{d3} = m \cdot g \cdot Y_m$

$M_{d3} = 5 \times 9.8 \times (0) + 20 \times 9.8 \times (-10) = -1960\text{N} \cdot \text{mm}$

② Calculating Load Applied to the Guide Block

〈acceleration〉

Block 1

$$\begin{aligned} \text{vertical} & \quad \mathbf{F_{ra1}} = \frac{m \cdot g}{2} - \frac{Ma_1}{L_{\text{unit}}} \\ \text{direction} & \\ F_{ra1} & = \frac{5 \times 9.8}{2} + \frac{20 \times 9.8}{2} - \frac{-4970}{70} = 193.5\text{N} \end{aligned}$$

$$\begin{aligned} \text{horizontal} & \quad \mathbf{F_{sa1}} = \frac{Ma_2}{L_{\text{unit}}} \\ \text{direction} & \\ F_{sa1} & = \frac{-825}{70} = -11.8\text{N} \end{aligned}$$

$$\begin{aligned} \text{rolling} & \quad \mathbf{M_{ra1}} = \frac{Ma_3}{2} \\ \text{moment} & \\ M_{ra1} & = \frac{-1960}{2} = -980\text{N} \cdot \text{mm} \end{aligned}$$

Block 2

$$\begin{aligned} \text{vertical} & \quad \mathbf{F_{ra2}} = \frac{m \cdot g}{2} + \frac{Ma_1}{L_{\text{unit}}} \\ \text{direction} & \\ F_{ra2} & = \frac{5 \times 9.8}{2} + \frac{20 \times 9.8}{2} + \frac{-4970}{70} = 51.5\text{N} \end{aligned}$$

$$\begin{aligned} \text{horizontal} & \quad \mathbf{F_{sa2}} = \frac{Ma_2}{L_{\text{unit}}} \\ \text{direction} & \\ F_{sa2} & = \frac{-825}{70} = -11.8\text{N} \end{aligned}$$

$$\begin{aligned} \text{rolling} & \quad \mathbf{M_{ra2}} = \frac{Ma_3}{2} \\ \text{moment} & \\ M_{ra2} & = \frac{-1960}{2} = -980\text{N} \cdot \text{mm} \end{aligned}$$

〈constant〉

Block 1

$$\begin{aligned} \text{vertical} & \quad \mathbf{F_{r1}} = \frac{m \cdot g}{2} - \frac{M_1}{L_{\text{unit}}} \\ \text{direction} & \\ F_{r1} & = \frac{5 \times 9.8}{2} + \frac{20 \times 9.8}{2} - \frac{-3920}{70} = 178.5\text{N} \end{aligned}$$

$$\begin{aligned} \text{horizontal} & \quad \mathbf{F_{s1}} = \frac{M_2}{L_{\text{unit}}} \\ \text{direction} & \end{aligned}$$

$$\begin{aligned} \text{rolling} & \quad \mathbf{M_{r1}} = \frac{M_3}{2} \\ \text{moment} & \\ M_{r1} & = \frac{-1960}{2} = -980\text{N} \cdot \text{mm} \end{aligned}$$

Block 2

$$\begin{aligned} \text{vertical} & \quad \mathbf{F_{r2}} = \frac{m \cdot g}{2} + \frac{M_1}{L_{\text{unit}}} \\ \text{direction} & \\ F_{r2} & = \frac{5 \times 9.8}{2} + \frac{20 \times 9.8}{2} + \frac{-3920}{70} = 66.5\text{N} \end{aligned}$$

$$\begin{aligned} \text{horizontal} & \quad \mathbf{F_{s2}} = -\frac{M_2}{L_{\text{unit}}} \\ \text{direction} & \end{aligned}$$

$$\begin{aligned} \text{rolling} & \quad \mathbf{M_{r2}} = \frac{M_3}{2} \\ \text{moment} & \\ M_{r2} & = \frac{-1960}{2} = -980\text{N} \cdot \text{mm} \end{aligned}$$

〈deceleration〉

Block 1

$$\begin{aligned} \text{vertical} & \quad \mathbf{F_{rd1}} = \frac{m \cdot g}{2} - \frac{Md_1}{L_{\text{unit}}} \\ \text{direction} & \\ F_{rd1} & = \frac{5 \times 9.8}{2} + \frac{20 \times 9.8}{2} - \frac{-2870}{70} = 163.5\text{N} \end{aligned}$$

$$\begin{aligned} \text{horizontal} & \quad \mathbf{F_{sd1}} = \frac{Md_2}{L_{\text{unit}}} \\ \text{direction} & \\ F_{sd1} & = \frac{825}{70} = 11.8\text{N} \end{aligned}$$

$$\begin{aligned} \text{rolling} & \quad \mathbf{M_{rd1}} = \frac{Md_3}{2} \\ \text{moment} & \\ M_{rd1} & = \frac{-1960}{2} = -980\text{N} \cdot \text{mm} \end{aligned}$$

Block 2

$$\begin{aligned} \text{vertical} & \quad \mathbf{F_{rd2}} = \frac{m \cdot g}{2} + \frac{Md_1}{L_{\text{unit}}} \\ \text{direction} & \\ F_{rd2} & = \frac{5 \times 9.8}{2} + \frac{20 \times 9.8}{2} + \frac{-2870}{70} = 81.5\text{N} \end{aligned}$$

$$\begin{aligned} \text{horizontal} & \quad \mathbf{F_{sd2}} = -\frac{Md_2}{L_{\text{unit}}} \\ \text{direction} & \\ F_{sd2} & = -\frac{825}{70} = -11.8\text{N} \end{aligned}$$

$$\begin{aligned} \text{rolling} & \quad \mathbf{M_{rd2}} = \frac{Md_3}{2} \\ \text{moment} & \\ M_{rd2} & = \frac{-1960}{2} = -980\text{N} \cdot \text{mm} \end{aligned}$$

③ Calculating Equivalent Load

Pr in the vertical direction and Ps in the horizontal direction are calculated by the following equations.

$$Pr = |Fr| + |Er \cdot Mr|$$

$$Ps = |k \cdot Fs|$$

Er=0.220 for SEB9A
k=0.84 for SEB-A guide

$Pr_1 = |Fra_1| + |Er \cdot Mra_1| = |193.5| + |0.220 \times (-980)| = 409.1$ (N)
calculating in the same manner

Table 1-29

| | acceleration | constant | deceleration |
|---------|-----------------|----------------|-----------------|
| block 1 | $Pr_1 = 409.1$ | $Pr_1 = 394.1$ | $Prd_1 = 379.1$ |
| | $Ps_{a1} = 9.9$ | $Ps_1 = 0$ | $Ps_{d1} = 9.9$ |
| block 2 | $Pr_2 = 267.1$ | $Pr_2 = 282.1$ | $Prd_2 = 297.1$ |
| | $Ps_{a2} = 9.9$ | $Ps_2 = 0$ | $Ps_{d2} = 9.9$ |

Equation for Dynamic Equivalent Load

$$P = Pr + Ps$$

$Pa_1 = Pr_1 + Ps_{a1} = 409.1 + 9.9 = 419.0$ (N)
calculating in the same manner

Table 1-30

| | acceleration | constant | deceleration |
|---------|----------------|---------------|----------------|
| block 1 | $Pa_1 = 419.0$ | $P_1 = 394.1$ | $Pd_1 = 389.0$ |
| block 2 | $Pa_2 = 277.0$ | $P_2 = 282.1$ | $Pd_2 = 307.0$ |

Calculating Average Equivalent Load

$$P_m = \sqrt[3]{\frac{1}{l_s} \times \left\{ (Pa^3 \times \frac{V_{max} \times t_1}{2}) + (P^3 \times V_{max} \times t_2) + (Pd^3 \times \frac{V_{max} \times t_3}{2}) \right\}}$$

$$P_{m1} = \sqrt[3]{\frac{1}{300} \times \left\{ (419.0^3 \times \frac{150 \times 0.1}{2}) + (394.1^3 \times 150 \times 1.9) + (389.0^3 \times \frac{150 \times 0.1}{2}) \right\}} = 394.6$$
 (N)

$$P_{m2} = \sqrt[3]{\frac{1}{300} \times \left\{ (277.0^3 \times \frac{150 \times 0.1}{2}) + (282.1^3 \times 150 \times 1.9) + (307.0^3 \times \frac{150 \times 0.1}{2}) \right\}} = 282.7$$
 (N)

④ Calculating Rated Life

Decide each coefficient

f_H : hardness coefficient $f_H = 1$ for hardness of guide is 58HRC or more

f_T : temperature coefficient $f_T = 1$ operating temperature is below 100°C
(80°C is maximum for SEB-A guide)

f_C : contact coefficient $f_C = 1$ for blocks are not in close contact

f_W : applied load coefficient $f_W = 1.5$ for $V_{max} = 150$ mm/s

Calculating Rated Life

Selecting Block 1 that carries the maximum dynamic equivalent load

$$L = \left(\frac{f_H \times f_T \times f_C}{f_W} \times \frac{C}{P_m} \right)^3 \times 50$$

$$L = \left(\frac{1 \times 1 \times 1}{1.5} \times \frac{1920}{394.6} \right)^3 \times 50 = 1706$$
 (km)

Calculating Life Time

$$L_h = \frac{L \times 10^3}{2 \times l_s \times n_1 \times 60}$$

$$L_h = \frac{1706 \times 10^3}{2 \times 0.3 \times 14 \times 60} = 3384$$
 (hour)

⑤ Calculating Static Safety Factor

Equation for Static Equivalent Load

$$P_o = Pr + Ps$$

$P_{oa1} = Pr_1 + Ps_{a1} = 409.1 + 9.9 = 419.0$ (N)
calculating in the same manner

Table 1-31

| | acceleration | constant | deceleration |
|---------|-------------------|------------------|-------------------|
| block 1 | $P_{oa1} = 419.0$ | $P_{o1} = 394.1$ | $P_{od1} = 389.0$ |
| block 2 | $P_{oa2} = 277.0$ | $P_{o2} = 282.1$ | $P_{od2} = 307.0$ |

Selecting Block 1 that carries the maximum static equivalent load

$$f_s = \frac{C_o}{P_o}$$

$$f_s = \frac{C_o}{P_{oa1}} = \frac{2530}{419.0} = 6.0$$

RATED LIFE CALCULATION EXAMPLE 3

2 Vertical Axes, 1 Bush each, Considering Acceleration/Deceleration

Operating Conditions

- part number: SM30W
- basic dynamic load rating $C = 2.49\text{kN}$
- basic static load rating $C_0 = 5.49\text{kN}$
- shaft span: $L_{\text{rail}} = 80\text{mm}$
- drive: $Y_d = 20\text{mm}$
- $Z_d = -20\text{mm}$
- mass: $m_1 = 5\text{kg}$ $X_1 = 0\text{mm}$
- $Y_1 = 0\text{mm}$
- $Z_1 = 30\text{mm}$
- $m_2 = 20\text{kg}$ $X_2 = 40\text{mm}$
- $Y_2 = 50\text{mm}$
- $Z_2 = 20\text{mm}$
- velocity: $V_{\text{max}} = 150\text{mm/s}$
- time: $t_1 = 0.1\text{s}$
- $t_2 = 0.7\text{s}$
- $t_3 = 0.1\text{s}$
- acceleration: $a_1 = 1.5\text{m/s}^2$
- $a_3 = 1.5\text{m/s}^2$
- stroke: $l_s = 120\text{mm}$
- number of cycles per minute: $n_1 = 33\text{cpm}$

Figure 1-14


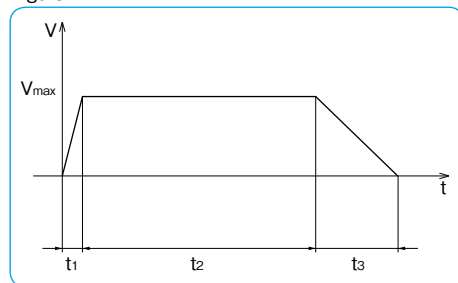


Figure 1-15

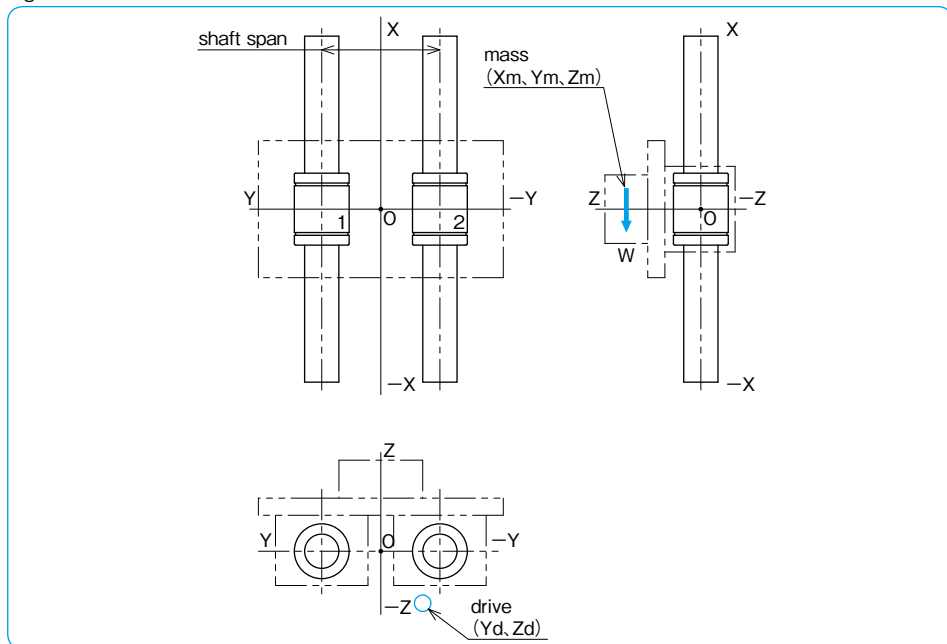

① Calculating Moment Applied to the Unit

<acceleration>

pitching $Ma_1 = m \cdot g \cdot (Z_m - Z_d) + m \cdot a_1 \cdot (Z_m - Z_d)$

$Ma_1 = 5 \times 9.8 \times \{(30) - (-20)\} + 5 \times 1.5 \times \{(30) - (-20)\} + 20 \times 9.8 \times \{(20) - (-20)\} + 20 \times 1.5 \times \{(20) - (-20)\} = 11865\text{N} \cdot \text{mm}$

yawing $Ma_2 = m \cdot g \cdot (Y_m - Y_d) + m \cdot a_1 \cdot (Y_m - Y_d)$

$Ma_2 = 5 \times 9.8 \times \{(0) - (20)\} + 5 \times 1.5 \times \{(0) - (20)\} + 20 \times 9.8 \times \{(50) - (20)\} + 20 \times 1.5 \times \{(50) - (20)\} = 5650\text{N} \cdot \text{mm}$

rolling $Ma_3 = 0$

<constant>

pitching $M_1 = m \cdot g \cdot (Z_m - Z_d)$

$M_1 = 5 \times 9.8 \times \{(30) - (-20)\} + 20 \times 9.8 \times \{(20) - (-20)\} = 10290\text{N} \cdot \text{mm}$

yawing $M_2 = m \cdot g \cdot (Y_m - Y_d)$

$M_2 = 5 \times 9.8 \times \{(0) - (20)\} + 20 \times 9.8 \times \{(50) - (20)\} = 4900\text{N} \cdot \text{mm}$

rolling $M_3 = 0$

<deceleration>

pitching $Md_1 = m \cdot g \cdot (Z_m - Z_d) - m \cdot a_3 \cdot (Z_m - Z_d)$

$Md_1 = 5 \times 9.8 \times \{(30) - (-20)\} - 5 \times 1.5 \times \{(30) - (-20)\} + 20 \times 9.8 \times \{(20) - (-20)\} - 20 \times 1.5 \times \{(20) - (-20)\} = 8715\text{N} \cdot \text{mm}$

yawing $Md_2 = m \cdot g \cdot (Y_m - Y_d) - m \cdot a_3 \cdot (Y_m - Y_d)$

$Md_2 = 5 \times 9.8 \times \{(0) - (20)\} - 5 \times 1.5 \times \{(0) - (20)\} + 20 \times 9.8 \times \{(50) - (20)\} - 20 \times 1.5 \times \{(50) - (20)\} = 4150\text{N} \cdot \text{mm}$

rolling $Md_3 = 0$

② Calculating Load Applied to the Slide Bush

<acceleration>

Bush 1

vertical direction $Fra_1 = \frac{Ma_3}{L_{\text{rail}}} = 0$

horizontal direction $Fsa_1 = 0$

pitching $Mpa_1 = \frac{Ma_1}{2}$

$Mpa_1 = \frac{11865}{2} = 5932.5\text{N} \cdot \text{mm}$

yawing $Mya_1 = \frac{Ma_2}{2}$

$Mya_1 = \frac{5650}{2} = 2825\text{N} \cdot \text{mm}$

Bush 2

$$\text{vertical direction } Fr_2 = \frac{Ma_3}{L_{\text{rail}}} = 0$$

$$\text{horizontal direction } Fsa_2 = 0$$

$$\text{pitching } Mpa_2 = \frac{Ma_1}{2}$$

$$Mpa_2 = \frac{11865}{2} = 5932.5 \text{ N} \cdot \text{mm}$$

$$\text{yawing } Mya_2 = \frac{Ma_2}{2}$$

$$Mya_2 = \frac{5650}{2} = 2825 \text{ N} \cdot \text{mm}$$

<constant>

Bush 1

$$\text{vertical direction } Fr_1 = \frac{M_3}{L_{\text{rail}}} = 0$$

$$\text{horizontal direction } Fs_1 = 0$$

$$\text{pitching } Mp_1 = \frac{M_1}{2}$$

$$Mp_1 = \frac{10290}{2} = 5145 \text{ N} \cdot \text{mm}$$

$$\text{yawing } My_1 = \frac{M_2}{2}$$

$$My_1 = \frac{4900}{2} = 2450 \text{ N} \cdot \text{mm}$$

Bush 2

$$\text{vertical direction } Fr_2 = \frac{M_3}{L_{\text{rail}}} = 0$$

$$\text{horizontal direction } Fs_2 = 0$$

$$\text{pitching } Mp_2 = \frac{M_1}{2}$$

$$Mp_2 = \frac{10290}{2} = 5145 \text{ N} \cdot \text{mm}$$

$$\text{yawing } My_2 = \frac{M_2}{2}$$

$$My_2 = \frac{4900}{2} = 2450 \text{ N} \cdot \text{mm}$$

<deceleration>

Bush 1

$$\text{vertical direction } Frd_1 = \frac{Md_3}{L_{\text{rail}}} = 0$$

$$\text{horizontal direction } Fsd_1 = 0$$

$$\text{pitching } Mpd_1 = \frac{Md_1}{2}$$

$$Mpd_1 = \frac{8715}{2} = 4357.5 \text{ N} \cdot \text{mm}$$

$$\text{yawing } Myd_1 = \frac{Md_2}{2}$$

$$Myd_1 = \frac{4150}{2} = 2075 \text{ N} \cdot \text{mm}$$

Bush 2

$$\text{vertical direction } Frd_2 = \frac{Md_3}{L_{\text{rail}}} = 0$$

$$\text{horizontal direction } Fsd_2 = 0$$

$$\text{pitching } Mpd_2 = \frac{Md_1}{2}$$

$$Mpd_2 = \frac{8715}{2} = 4357.5 \text{ N} \cdot \text{mm}$$

$$\text{yawing } Myd_2 = \frac{Md_2}{2}$$

$$Myd_2 = \frac{4150}{2} = 2075 \text{ N} \cdot \text{mm}$$

③ Calculating Equivalent Load

©Pr in the vertical direction and Ps in the horizontal direction are calculated by the following equations.

$$Pr = |Fr| + |E_1 \cdot Mp|$$

$$Ps = |k \cdot Fs| + |E_1 \cdot My|$$

$E_1 = 6.63 \times 10^{-2}$ for SM30W

$k=1$ for Slide Bush

Table 1-32

| | acceleration | constant | deceleration |
|--------|-------------------|----------------|-------------------|
| bush 1 | $Pr_{a1} = 393.3$ | $Pr_1 = 341.1$ | $Pr_{d1} = 288.9$ |
| | $Ps_{a1} = 187.3$ | $Ps_1 = 162.4$ | $Ps_{d1} = 137.6$ |
| bush 2 | $Pr_{a2} = 393.3$ | $Pr_2 = 341.1$ | $Pr_{d2} = 288.9$ |
| | $Ps_{a2} = 187.3$ | $Ps_2 = 162.4$ | $Ps_{d2} = 137.6$ |

©Equation for Dynamic Equivalent Load

$$P = Pr + Ps$$

$Pa_1 = Pr_{a1} + Ps_{a1} = 393.3 + 187.3 = 580.6(N)$

calculating in the same manner

Table 1-33

| | acceleration | constant | deceleration |
|--------|----------------|---------------|----------------|
| bush 1 | $Pa_1 = 580.6$ | $P_1 = 503.5$ | $Pd_1 = 426.5$ |
| bush 2 | $Pa_2 = 580.6$ | $P_2 = 503.5$ | $Pd_2 = 426.5$ |

©Calculating Average Equivalent Load

$$Pm = \sqrt[3]{\frac{1}{\ell_s} \times \left\{ (Pa^3 \times \frac{V_{max} \times t_1}{2}) + (P^3 \times V_{max} \times t_2) + (Pd^3 \times \frac{V_{max} \times t_3}{2}) \right\}}$$

$$Pm_1 = \sqrt[3]{\frac{1}{120} \times \left\{ (580.6^3 \times \frac{150 \times 0.1}{2}) + (503.5^3 \times 150 \times 0.7) + (426.5^3 \times \frac{150 \times 0.1}{2}) \right\}} = 505.0(N)$$

$$Pm_2 = \sqrt[3]{\frac{1}{120} \times \left\{ (580.6^3 \times \frac{150 \times 0.1}{2}) + (503.5^3 \times 150 \times 0.7) + (426.5^3 \times \frac{150 \times 0.1}{2}) \right\}} = 505.0(N)$$

④ Calculating Rated Life

Decide each coefficient

f_H : hardness coefficient $f_H=1$ for hardness of bush is 58HRC or more

f_T : temperature coefficient $f_T=1$ operating temperature is below 100°C
(80°C is maximum for Bush with resin retainer)

f_C : contact coefficient $f_C=1$ for bushes are not in close contact

f_W : applied load coefficient $f_W=1.5$ for $V_{max}=150mm/s$

©Calculating Rated Life

Selecting Bush 1 that carries the maximum equivalent load

$$L = \left(\frac{f_H \times f_T \times f_C}{f_W} \times \frac{C}{P_m} \right)^3 \times 50$$

$$L = \left(\frac{1 \times 1 \times 1}{1.5} \times \frac{2490}{505.0} \right)^3 \times 50 = 1775(km)$$

©Calculating Life Time

$$L_h = \frac{L \times 10^3}{2 \times \ell_s \times n_1 \times 60}$$

$$L_h = \frac{1775 \times 10^3}{2 \times 0.120 \times 33 \times 60} = 3735(\text{hour})$$

⑤ Calculating Static Safety Factor

©Equation for Static Equivalent Load

$$P_o = Pr + Ps$$

$Po_{a1} = Pr_{a1} + Ps_{a1} = 393.3 + 187.3 = 580.6(N)$

calculating in the same manner

Table 1-34

| | acceleration | constant | deceleration |
|--------|-------------------|----------------|-----------------|
| bush 1 | $Po_{a1} = 580.6$ | $Po_1 = 503.5$ | $Pod_1 = 426.5$ |
| bush 2 | $Po_{a2} = 580.6$ | $Po_2 = 503.5$ | $Pod_2 = 426.5$ |

Selecting Bush 1 that carries the maximum static equivalent load

$$f_s = \frac{C_o}{P_o}$$

$$f_s = \frac{C_o}{Po_{a1}} = \frac{5490}{580.6} = 9.4$$

RIGIDITY AND PRELOAD

Effect of Preload and Rigidity

The rigidity of a linear system must be taken into consideration when it is to be used in high-precision positioning devices or high-precision machinery. Preloaded slide guides and ball splines, which use balls as the rolling elements, are available upon request to meet the need for greater rigidity.


If a force is applied to the ball elements without preload, an elastic deformation proportional to the applied force to the 2/3 power will result. Therefore, the elastic deformation is relatively large during the initial loading stage, however then becomes smaller as the load increases.

Preloading on the rolling elements absorbs the deformation of the block under the same loading. Please contact NB for available data in regard to rigidity.

Types of Preload and its Specification

Preload is categorized into three ranges: standard, light, and medium for option. In the NB linear system, preload is applied by installing rolling elements that are slightly larger than standard. Therefore, the specification of the preload is expressed by a negative value.

Figure 1-16 Applied Load versus Block Deformation

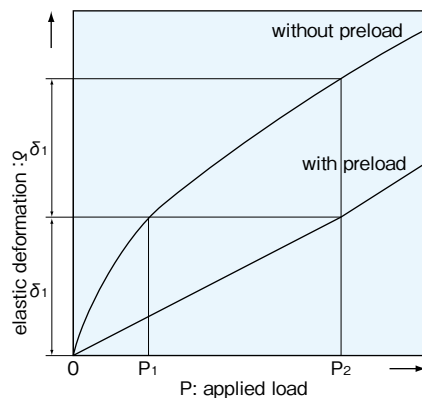

FRICTIONAL RESISTANCE AND REQUIRED THRUST

The static friction of a linear system is extremely low. Since the difference between the static and dynamic friction is marginal, stable motion can be achieved from low to high speed. The frictional resistance (required thrust) can be obtained from the load and the seal resistance unique to each type of system using the following equation:

$$F = \mu \cdot W + f \dots\dots\dots (14)$$


F: frictional resistance (N) μ: dynamic friction coefficient
W: applied load (N) f: seal resistance (N)

The dynamic friction coefficient varies with the applied load, preload, viscosity of the lubricant, and other factors. However, the values given in Table 1-35 are used for the normal loading condition (20% of basic dynamic load rating) without any preload. The seal resistance depends on the seal-lip condition as well as on the condition of the lubricant, however, it does not change proportionally with the applied load, which commonly is expressed by a constant value of 2 to 5 N.

Table 1-35 Dynamic Friction Coefficient

| product | type | dynamic friction coefficient (μ) |
|--------------------|-----------------------|----------------------------------|
| Slide Guide | SGL · SGW | 0.002~0.003 |
| | SEB | 0.004~0.006 |
| | SER | 0.004~0.006 |
| Ball Spline | SSP | 0.004~0.006 |
| Rotary Ball Spline | SPR · SPB SPBR | 0.004~0.006 |
| Stroke Ball Spline | SPLFS | 0.001~0.003 |
| Slide Bush | SM · KB | 0.002~0.003 |
| | SW · GM | |
| | SMA · SME | |
| Top Ball | TK · TKA | 0.002~0.003 |
| | TKE · TKD | |
| | TW · TWA | |
| | TWJ · TWD | |
| Stroke Bush | SR | 0.0006~0.0012 |
| Slide Rotary Bush | SRE | 0.002~0.003 |
| | RK | 0.002~0.003 |
| Slide Way | NV · SV · RV | 0.001~0.003 |
| Slide Table | NVT · NYT · SVT · SYT | 0.001~0.003 |
| Miniature Slide | SYBS | 0.001~0.003 |

Figure 1-17 Applied Load versus Dynamic Friction Coefficient

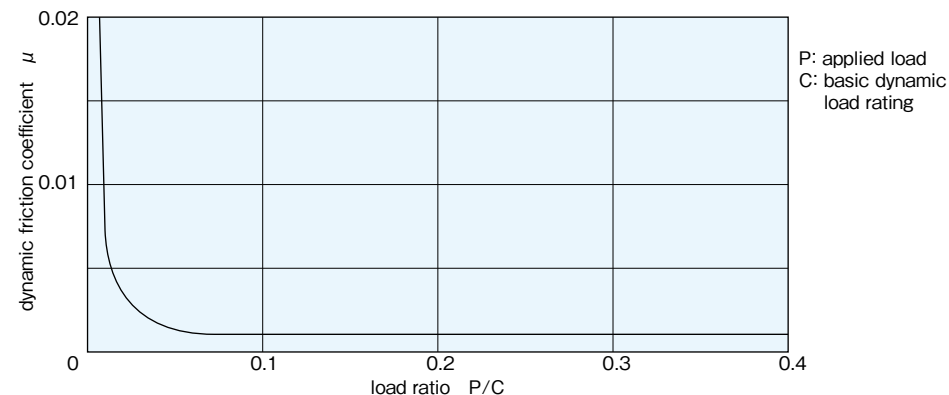

OPERATING ENVIRONMENT

Temperature Range

The NB linear systems are heat-treated in order to harden the surface. Therefore, if the temperature of the linear system exceeds 100°C, the hardness and load rating will be reduced (refer to page Eng-5, hardness coefficient). If resin is used in any one of the components, the system cannot be used in a high-temperature environment. The recommended operating temperature ranges for each type of linear system are listed in Table 1-36.

Table 1-36 Major Types and Recommended Temperature Range

| component material | includes resin | steel | stainless | other |
|-----------------------------|--|-----------------------------|------------------------|--------|
| operating temperature range | -20°C~80°C | -20°C~110°C | -20°C~140°C* | |
| Slide Guide | SEB-A/SEBS-B SGL/SGW | SER | SEBS-BM SERS | |
| Ball Spline | SSP/SSPF/SPBF | | SPLFS | |
| Rotary Ball Spline | SPR/SPB/SPBR | | | |
| Slide Bush | SM G/KB G/ SW G/SMS G/ KBS G/SWS G/GM SMA G/SMSA-W/ AK G/RBW/CE/CD | SM/KB/SW SMA/AK/SMSA | SMS/KBS/SWS AKS | |
| Top Ball | TK/TKA TKE/TKD TW/TWA TWJ/TWD | | | |
| Stroke Bush | | SR/SRB | | |
| Slide Rotary Bush | RK | SRE | | |
| Slide Way | NV/NVS | SV/RV | SVS/NVS-RNS | |
| Slide Table | NVT/NYT | SVT/SYT | SYTS | SVTS** |
| Miniature Slide | | | SYBS | |
| Slide Screw | | SS | | |

* If the system is made of stainless steel and has a seal, the temperature range is up to 120°C
 ** Please contact NB if the system is to be used out of room temperatures.


Temperature Conversion Equation:

$$C = \frac{5}{9}(F - 32) \quad F = \frac{9}{5}C + 32$$

Operating Environment

Foreign particles or dust in the linear system affects the motion accuracy and shortens the life time. Standard seals will perform well for dust prevention under normal operating conditions, however, in a harsh environment it is necessary to attach bellows or protective covers as Figure 1-18 shows.

Figure 1-18 Example of Dust Prevention

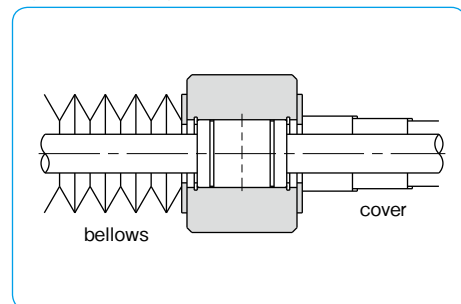

LUBRICATION

The objective of lubrication includes the reduction of friction among the rolling elements as well as between the rolling elements and the raceway, prevention of sintering, reduction of wear, and the prevention of rust by forming a film over the surfaces. To maximize the performance of a linear system, the lubricant type and a lubrication method appropriate for the operating environment should be selected.

There are two types of lubrication; oil lubrication and grease lubrication. For oil lubrication, turbine oil conforming to ISO standard VG32 to 68 is recommended.

For grease lubrication, lithium soap based grease No.2 is recommended. For slide bush and some other products, anti-rust oil that does not adversely affect the lubricant is applied prior to shipment. Please apply lubricant before using these products. (see Table 1-37) Products with raceway grooves, such as slide guide, are delivered pre-lubricated with grease for immediate use. Please relubricate with a similar type of grease periodically depending on the operating conditions. The recommended relubrication period is about 6 months or 1,000km of travel distance under normal conditions.

Table 1-37 Grease and Anti-rust oil

| type | grease application |
|--------------------|--------------------|
| Slide Guide | grease pre-applied |
| Ball Spline | grease pre-applied |
| Rotary Ball Spline | grease pre-applied |
| Slide Bush | anti-rust oil only |
| Stroke Bush | anti-rust oil only |
| Slide Rotary Bush | anti-rust oil only |
| Slide Way | grease pre-applied |
| Slide Table | grease pre-applied |
| Miniature Slide | grease pre-applied |

NB provides the following optional greases. Please select one in accordance with the use conditions of your linear system.

● **KGLA Grease (Low Dust Generation Grease)**

KGLA Grease has an excellent property of low dust generation with a lithium-type thickening agent used. It is ideal for use in a clean room.

● **KGU Grease (Low Dust Generation Grease)**

With urea-type thickening agent used, KGU Grease has features including a superior low dust generation property and the reduced dynamic frictional resistance during low-speed operation.

Table 1-38 Main Property

| item | grease name | |
|--|-------------------------------------|-------------------------------------|
| | KGLA Grease | KGU Grease |
| appearance | whitish-yellow | light brown |
| base oil | synthetic oil and refined oil mixed | synthetic oil and refined oil mixed |
| kinematic viscosity of base oil (mm ² /s, 40°C) | 25 | 100 |
| thickening agent | lithium soap | urea |
| mixture viscosity | 260 | 248 |
| drop point (°C) | 195 | 280 or higher |
| copper plate corrosion (100°C, 24hrs) | passed | passed |
| evaporation (mass%) | 0.3 (99°C 22h) | 0.09 (99°C 22h) |
| oil separation (mass%100°C, 24hrs) | 4.6 | 0.5 |
| oxidation stability (MPa99°C, 100hrs) | 0.025 | 0.015 |
| bearing corrosion prevention (52°C, 48hrs) | passed | passed |
| operating temperature range (°C) | -40~120 | -30~160 |

Figure 1-19 Dust Level Measurement Data


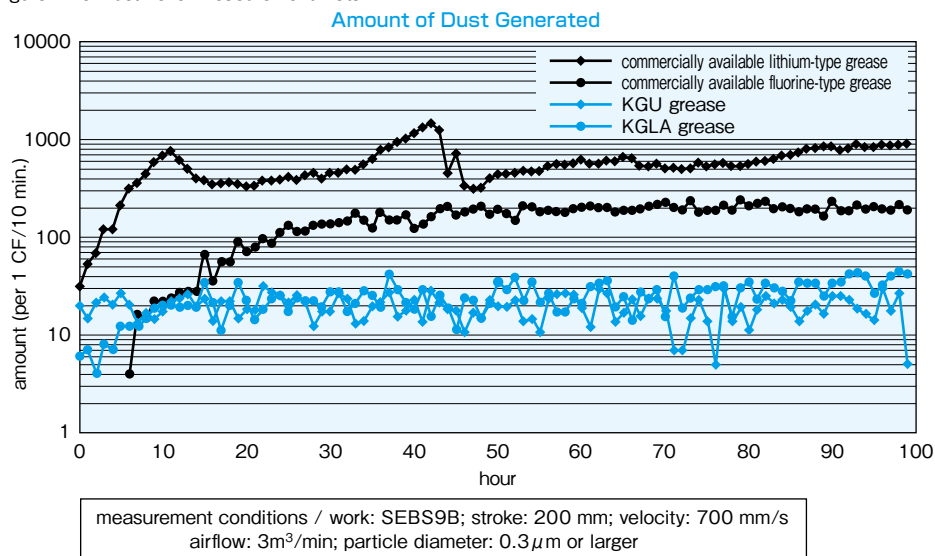


Figure 1-20 Dynamic Frictional Resistance Measurement Data

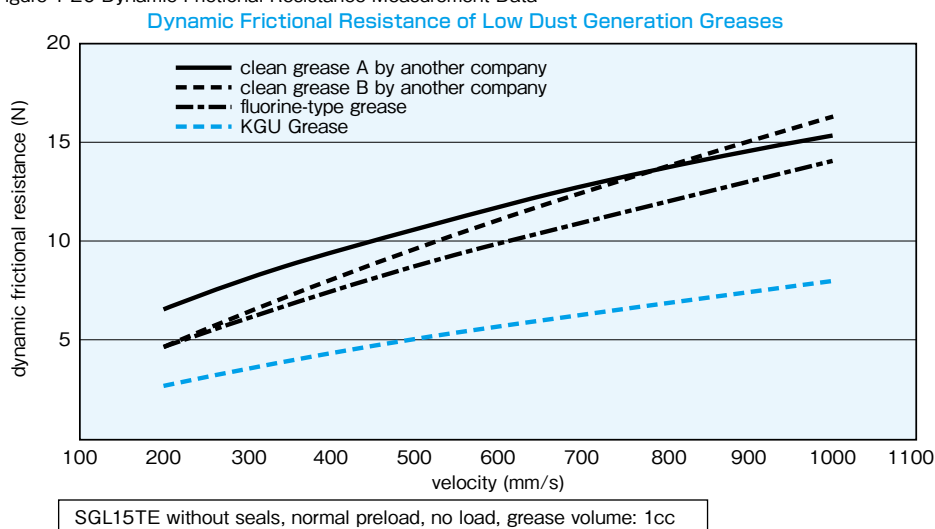

● **KGF Grease (Anti-fretting/Anti-corrosion Grease)**

With urea-type thickening agent used, KGF Grease is very effective to prevent fretting and corrosion.

Table 1-39 Main Property


| item | grease name |
|--|-----------------|
| | KGF Grease |
| appearance | brown |
| base oil | synthetic oil |
| kinematic viscosity of base oil (mm ² /s, 40°C) | approx. 25 |
| thickening agent | urea |
| mixture viscosity | 292 |
| drop point (°C) | 250 or higher |
| copper plate corrosion (100°C, 24 hrs) | passed |
| evaporation (mass%) | 0.27 (99°C 22h) |
| oil separation (mass%100°C, 24 hrs) | 1.1 |
| oxidation stability (MPa99°C, 100 hrs) | 0.085 |
| bearing corrosion prevention (52°C, 48 hrs) | passed |
| rinsing water resistance (38°C, 1 hr) | 1.7 |
| operating temperature range (°C) | -20~150 |

Anti-fretting/Anti-corrosion Test Data

Table 1-40 Test Conditions

| item | content |
|-------------------------|-------------------|
| tested item | NVT4165 |
| stroke | 2 mm |
| acceleration | 2.4G |
| average acceleration | 0.1 m/s |
| cycle per minute | 1,450 cpm |
| grease injection volume | 0.5 cc |
| total travel distance | 184 km |
| total cycles | 46 million cycles |

Figure 1-21 Raceway Condition after Testing

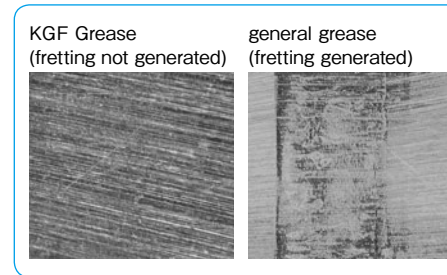

● **Grease for the food processing industry (NSF H1 certified) is available.**


It is the most suitable combination for the food processing applications to use this type of grease with stainless steel products. Please contact NB for details.

NB MAINTENANCE KIT

There are two types of maintenance kit available at NB.

1. Grease Gun Set: GG1

Different types of nozzles are adaptable to a variety of products including Actuators and products with grease-fitting.

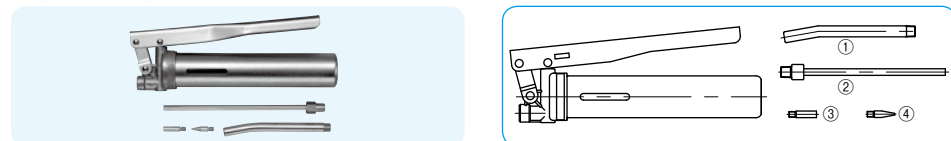


- ① Lubricant Nozzle (φ10)
Slide Guide SGL, SGW (except for #17)
Actuator BG (#46 or larger)
Slide Bush SM, TR
- ②+Lubricant Nozzle ③(φ5)
Slide Guide SGW (#17 only)
Actuator BG (#33 or smaller)
Others
- ②+Lubricant Nozzle ④
Ball Screw
Products with Oil Hole

In the case of difficulty in pumping, due to internal grease adhesion or shape of the bearing, please use nozzle ④ to apply grease directly onto running grooves.

2. Grease Dispenser: TU1

Syringe dispenser is recommended for miniature guide (SEBS-B type) and for limited space applications.

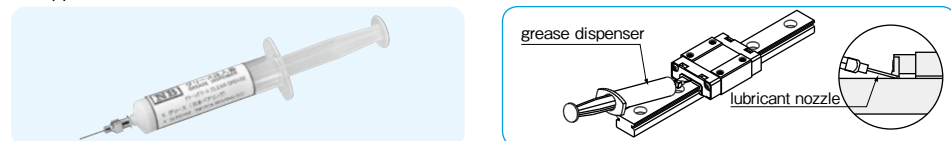

- ① Lubricant Nozzle (19G)
Needle Diameter : φ1.00
Needle Inner Diameter : φ0.67 (for KGF Grease)
- ② Lubricant Nozzle (17G)
Needle Diameter : φ1.50
Needle Inner Diameter : φ1.03 (for KGLA·KGU Grease)

PRECAUTIONS FOR HANDLING AND USE

Please follow the instructions below to maintain the accuracy of NB linear system as a precision part and for a safety use.

- ⚠ (1) Notes on Handling
 - ① Any shock load caused by rough handling (such as dropping or hitting with hammer) may cause a scar or dent on the raceway which will hinder smooth movement and shorten expected travel life. Also be aware that such impact may damage the resin parts.
 - ② Never try to disassemble the product. Doing so may cause an entry of contamination or deterioration of assembly accuracy.
 - ③ The blocks or the outer cylinders may move just by tilting the rail or the shaft. Be careful not to let them fall off from the rail or the shaft by mistake.
 - ④ The accuracy on the mounting surface and parallelism of the rails or the shafts after assembly are important factors to optimize the performance of the linear system. Exercise adequate care for mounting accuracy.
- ⚠ (2) Notes on Use
 - ① Be careful not to let dust or foreign particles enter the linear system during use.
 - ② When using the linear system under an environment where dust or coolant may scatter, protect the system with a cover or bellows.
 - ③ When the NB linear system is used in a manner that its rail is fixed to the ceiling and downward load is applied to the block (s) or the outer cylinder (s), if the block or the outer cylinder breaks, it may fall off from the rail and drop to the floor. Provide additional measures for preventing dropping of the block or the outer cylinder, such as a safety catch.
- ⚠ (3) Instructions in considering the "Life Time" of a Linear System
 - ① When the load applied to a block or an outer cylinder exceeds 0.5 time of the basic dynamic load rating ($P > 0.5C$), the actual life of the system may become shorter than a calculated life time. Therefore, it is recommended to use the system with 0.5C or lower.
 - ② In the repetition of very minute stroke, where the rolling element, a steel ball or a cylindrical roller, makes only less than a half turn, early wear called fretting occurs at the contact points between the rolling elements and the raceway. There is no perfect measure to avoid this, but the life of the system can be extended by using anti-fretting grease and moving the blocks or the outer cylinders for the full stroke length once in a few thousand times of use.
Anti-fretting grease is available as an option. Please select it for applications with very minute stroke length.

SLIDE GUIDE

SLIDE GUIDE

| | |
|--------------------------------------|------|
| TYPES | A-3 |
| ACCURACY MEASUREMENT METHOD | A-4 |
| RIGIDITY AND PRELOAD | A-5 |
| LOAD RATING AND RATED LIFE | A-6 |
| MOUNTING | A-7 |
| USE AND HANDLING PRECAUTIONS | A-12 |
| JOINT RAILS | A-13 |
| DUST PREVENTION | A-14 |
| ANTI-CORROSION | A-15 |
| LUBRICATION | A-15 |
| FIBER SHEET | A-16 |
| REVERSE-SEAL | A-17 |
| BELLOWS | A-18 |
| SEB TYPE AD PROFILE (ANTI-DEFORMING) | A-19 |

SLIDE GUIDE Miniature SEB Type

| | |
|--------------------------|-------|
| STRUCTURE AND ADVANTAGES | A-20 |
| TYPES | A-21 |
| ACCURACY | A-22 |
| PRELOAD | A-22 |
| LOAD RATING | A-23 |
| EQUIVALENT LOAD | A-23 |
| RAIL LENGTH | A-23 |
| MOUNTING | A-24 |
| MOUNTING SCREW | A-25 |
| LUBRICATION | A-25 |
| DIMENSION TABLE | A-26~ |

SLIDE GUIDE Miniature SER Type

| | |
|--------------------------|-------|
| STRUCTURE AND ADVANTAGES | A-42 |
| TYPES | A-43 |
| ACCURACY | A-43 |
| PRELOAD | A-44 |
| RAIL LENGTH | A-44 |
| MOUNTING | A-44 |
| MOUNTING SCREW | A-45 |
| LUBRICATION | A-45 |
| DIMENSION TABLE | A-46~ |

SLIDE GUIDE SGL Type


| | |
|--------------------------|-------|
| STRUCTURE AND ADVANTAGES | A-50 |
| BLOCK TYPES | A-51 |
| ACCURACY | A-51 |
| PRELOAD | A-52 |
| RAIL LENGTH | A-52 |
| MOUNTING | A-52 |
| GREASE FITTING | A-53 |
| LUBRICATION | A-53 |
| DIMENSION TABLE | A-54~ |

SLIDE GUIDE SGW Type

| | |
|--------------------------|-------|
| STRUCTURE AND ADVANTAGES | A-72 |
| BLOCK TYPES | A-73 |
| ACCURACY | A-73 |
| PRELOAD | A-74 |
| RAIL LENGTH | A-75 |
| MOUNTING | A-75 |
| GREASE FITTING | A-75 |
| DIMENSION TABLE | A-76~ |

SLIDE GUIDE

NB slide guides are high-precision and high-rigidity linear bearings designed to utilize the motion of rolling elements. They have numerous advantageous characteristics including low friction, no stick-slip, and smooth linear motion even under high load conditions. Since they can maintain their high-efficiency and high-functionality characteristics for an extended period of time, they meet a wide range of needs, from general industrial to precision machinery.

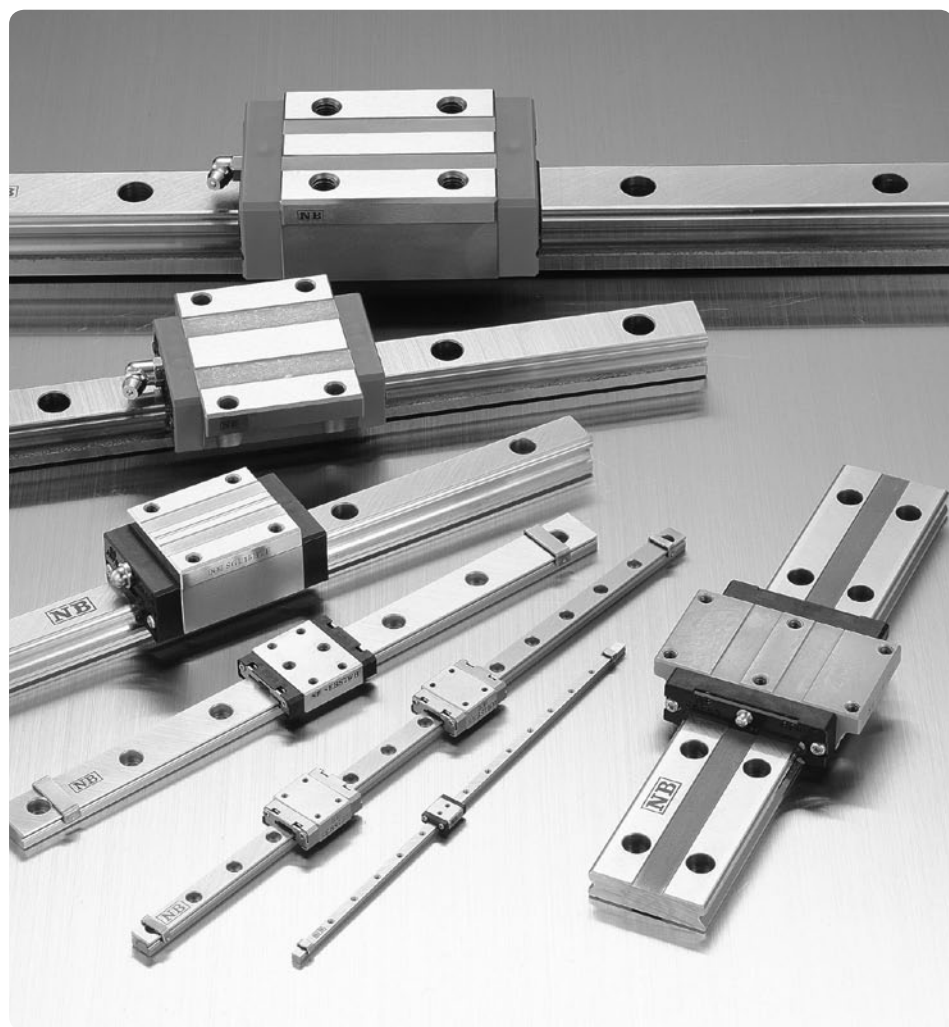

TYPES

Table A-1 Types

| | rolling element | cross section and contact structure | advantages | page |
|--------------------|-----------------|---|---|--------|
| miniature type | ball | retained ball, 2-row, 4-point contact (SEBS-B type) | <ul style="list-style-type: none"> ● retained ball type ● available with all stainless steel components ● 2-row, compact ● small, light, cost effective | P.A-20 |
| | ball | 2-row, 4-point contact (SEB-A type) | <ul style="list-style-type: none"> ● 2-row, compact ● small, light, cost effective ● available in various types ● available in stainless steel | P.A-20 |
| | roller | cross roller (SER type) | <ul style="list-style-type: none"> ● miniature roller guide ● cross roller, high precision ● available with all stainless steel components | P.A-42 |
| high-rigidity type | ball | 4-row, 2-point contact (SGL type) | <ul style="list-style-type: none"> ● high self-centering characteristics ● high load capacity due to relatively large ball elements ● high dust preventive control with side-seals and under-seals ● available in stainless steel | P.A-50 |
| | ball | 4-row, 2-point contact (SGW type) | <ul style="list-style-type: none"> ● high-moment resistant ● low-height design ● smooth motion due to large number of effective balls ● high dust preventive control with side-seals and under-seals | P.A-72 |

ACCURACY MEASUREMENT METHOD

The accuracy of slide guides is measured by fixing the rail to the reference base. The accuracy is expressed in terms of the average value at the center portion.

Dimensional Tolerance and Paired Difference

The accuracy of the slide guide is obtained by measuring the height H, and width W, as shown in Figure A-1. The dimensional tolerance is measured for each of the blocks attached to the rail and is expressed in terms of the deviation from the basic dimension. The paired difference is obtained by measuring the blocks attached to the rail and is expressed in terms of the difference between the maximum and minimum values.


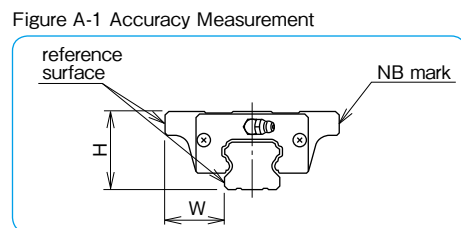


Figure A-1 Accuracy Measurement


Motion Accuracy

The rail is first fixed to the reference base. The motion accuracy is obtained by measuring the difference in the indicator readings when the block is moved along the entire span of the rail.

Note: Gauge head is placed on the center of the block reference surface.

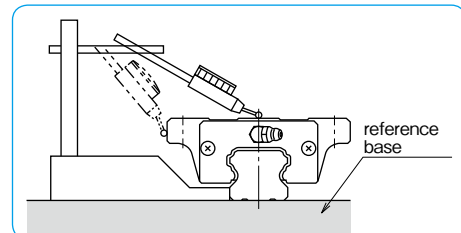

part number example
SGL25TF2-350/W2
 symbol for number of axes
 W2: 2 parallel axes
 W3: 3 parallel axes

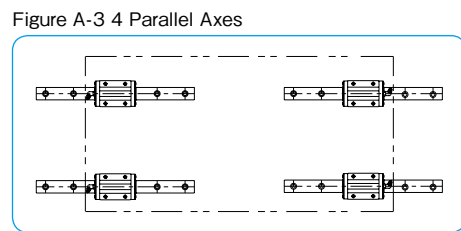

Notation for Number of Axes and Paired Difference

When more than one rail is used in parallel, the dimensional difference must be measured on more than one block on more than one rail. For measuring the paired difference for height H, please specify the number of axes (W2, W3) as the part number example shows. For measuring the paired difference for width W, please contact NB.

Note : When four rails are used as illustrated in Figure A-3, W4 should be specified in the part number. Please indicate the number of axes when ordering.

RIGIDITY AND PRELOAD

The rolling elements of the slide guide deform elastically due to the applied load. The amount of deformation depends on the type of rolling element. It is proportional to the 2/3 power for ball elements. For rollers, it is proportional to the 9/10 power. In either case, the rate of deformation decreases as the applied load increases. Greater rigidity is achieved by applying a preload.

A preload causes internal stress within the slide guide block, resulting in some reduction in lifetime. However, when the guide is used under shock or vibration loading conditions, a preload will absorb the load and will actually help lengthen the life time. Because the preload causes elastic deformation of the rolling elements, it becomes less tolerable to the installation dimensional errors. Extreme care should be exercised in machining the installation surface.

Four levels of preload are available: clearance, standard, light, and medium. This allows the user to select the appropriate level for the application.

Figure A-4 Elastic Deformation of Rolling Elements

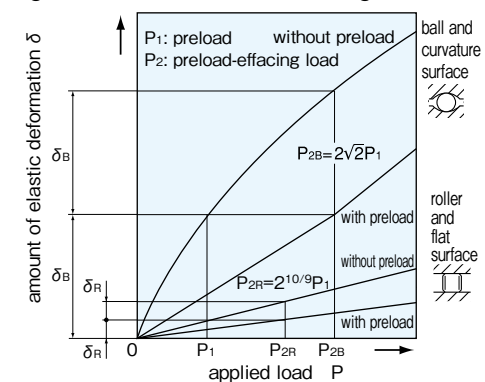


Table A-2 Level of Preload


| preload | symbol | effect of preload | | | | | operating conditions | applicable part number |
|-----------|--------|------------------------------|-----------------------|----------|-----------|-----------------------|---|------------------------|
| | | vibration absorption ability | self-aligning ability | lifetime | rigidity | frictional resistance | | |
| clearance | T0 | increases | reduces | reduces | increases | increases | light motion is required. installation errors to be absorbed. | SEB |
| standard | blank | increases | reduces | reduces | increases | increases | minute vibration is applied. accurate motion is required. moment is applied in a given direction. | SEB,SGL SGW |
| light | T1 | increases | reduces | reduces | increases | increases | light vibration is applied. light torsional load is applied. moment is applied. | SEB,SGL SGW |
| medium | T2 | increases | reduces | reduces | increases | increases | shock and vibration are applied. over-hang load is applied. torsional load is applied. | SGL,SGW |

LOAD RATING AND RATED LIFE

Loading Direction and Load Rating

A slide guide experiences load and moment, as shown in Figure A-5. For each load and moment, the basic load ratings and allowable static moments are defined.

Figure A-5 Direction of Load

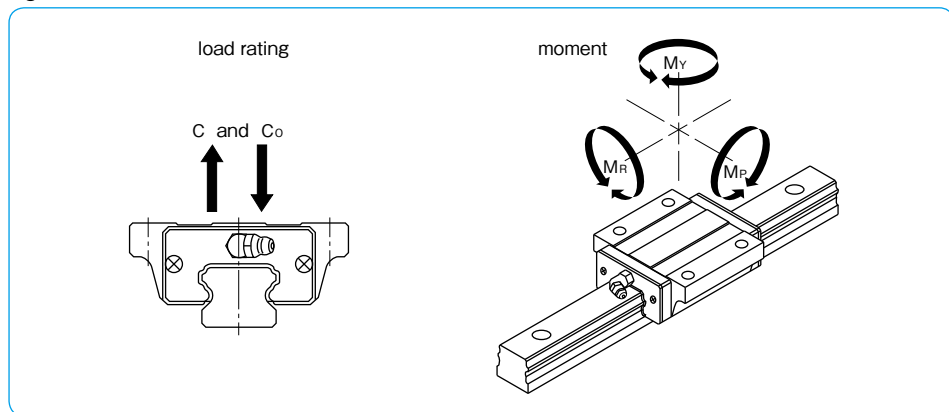

Rated Life Calculation

Two types of rolling elements are used in NB slide guides: ball and roller elements. There is a different equation for calculating the rated life of each type.

For ball elements (SEB, SGL, and SGW types), the equation is

$$L = \left(\frac{f_c \cdot f_T}{f_w} \cdot \frac{C}{P} \right)^3 \cdot 50$$

For roller elements (SER type), the equation is

$$L = \left(\frac{f_c \cdot f_T}{f_w} \cdot \frac{C}{P} \right)^{10/3} \cdot 50$$

If the stroke length and cycles are constant, life can be expressed in terms of time, the equation is

$$L_h = \frac{L \cdot 10^3}{2 \cdot \ell_s \cdot n \cdot 60}$$


L_h: life time (hr) ℓ_s: stroke length (m)
L: rated life (km) n: number of cycles per minute (cpm)

L: rated life (km) f_c: contact coefficient
f_r: temperature coefficient f_w: applied load coefficient
C: basic dynamic load rating (N) P: applied load (N)
※ Refer to page Eng-5 for the coefficients.
※ The contact coefficient is applied when two or more blocks are used in close contact.

MOUNTING

Slide guides have high load ratings in spite of their compact size. They can be used in various types of machinery and other equipment in various configurations. Figure A-6 shows some typical slide guide arrangements.

Figure A-6 Slide Guide Arrangements

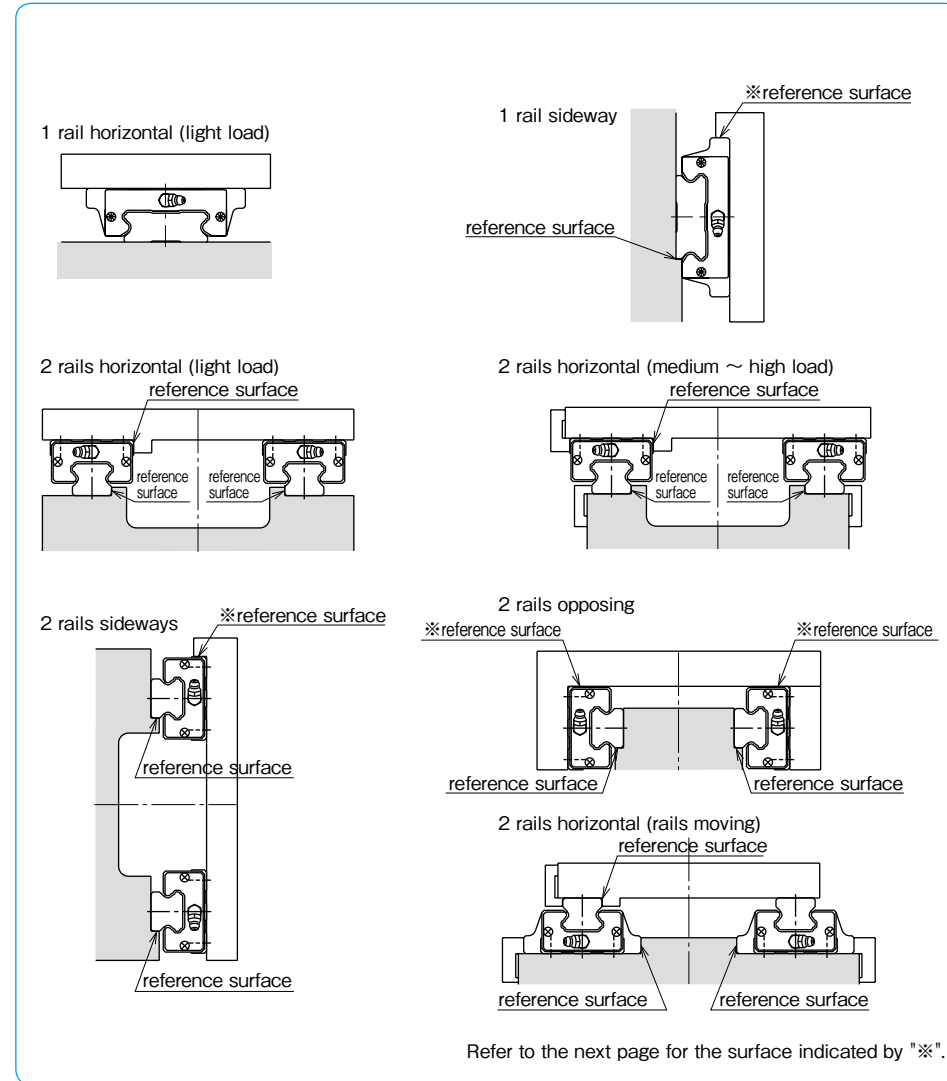

SLIDE GUIDE

Mounting Surface and Accuracy

NB slide guides are designed and fabricated to achieve high accuracy after mounting them to a machined mounting base. One typical way is to provide a shoulder on the mounting surface and align the reference surface of the rail or block against the shoulder (Figure A-7). To avoid corner interference, an undercut should be provided at the shoulder corner. Alternatively, the radius of the shoulder corner should be smaller than the radius of the slide guide block/rail corner.

The accuracy of the rail mounting surface affects the accuracy of the machinery or equipment along with the slide guide motion accuracy.

The accuracy of the mounting surface should be equivalent to that of the slide guide motion accuracy. The specified preload may not be achieved due to deformation of the block, for example, the mounted block surface is not flat (Figure A-8). Careful attention should therefore be given to achieve the specified flatness.

Note: Please contact NB for the rail straightness in case the mounting shoulder cannot be provided or the rigidity of the mounting surface is not enough.

Reference Surface Indication

Reference surfaces are provided to enable accurate and simplified mounting. They are located on the same side, as shown in Figure A-9, opposite to the NB mark.

Depending on the mounting arrangement, the standard reference surface may not ensure mounting accuracy (for example, 1 rail sideways or 2 rails opposing, Figure A-6, page A-7). In such cases, NB can provide a reference surface on the opposite side. Please specify the side when ordering.

Figure A-7 Profile of Mounting Reference Surface

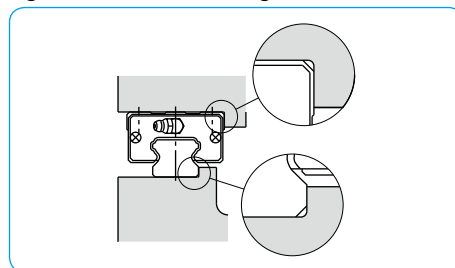


Figure A-8 Effect of Flatness


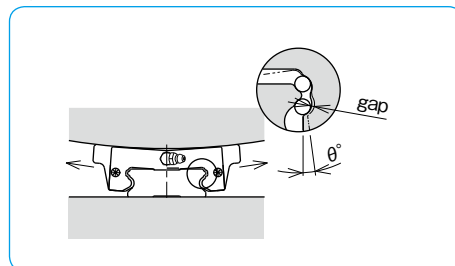


Figure A-9 Reference Surface

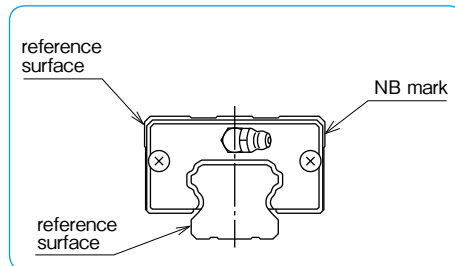

Mounting

In general, slide guides are used with 2 rails in parallel. In that case, one rail is on the so-called reference side and the other is on the so-called adjustable side.

- Applications where shock/vibration and high load are involved/high accuracy is required. The effect of shock and vibration on accuracy is eliminated by using side pieces such as side plates (Figure A-10), tightening set screws (Figure A-11), or tapered gibs (Figure A-12).

Figure A-11 Using Tightening Set Screw

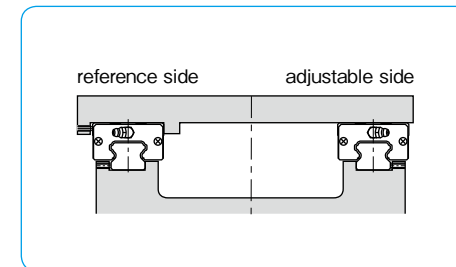


Figure A-10 Using Side Plate


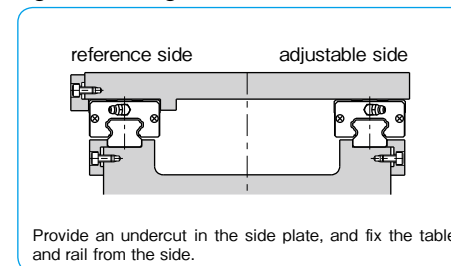


Figure A-12 Using Tapered Gib

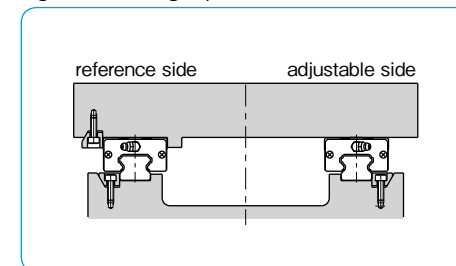

- Applications where light load and low speed are involved.

Figures A-13~15 show the mounting methods when high accuracy is not required or the load capacity of the slide guide is sufficient due to a light load or low speed. In these cases, side pieces or reference surface may not be required.

Figure A-14 No Reference Surface on Adjustable Side

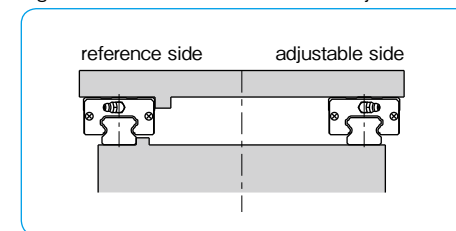


Figure A-13 Without Side Piece


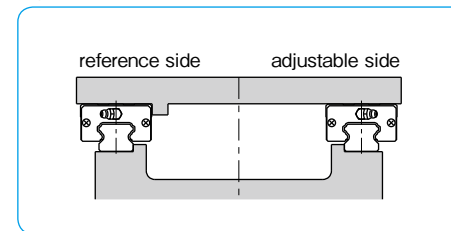


Figure A-15 Without Reference Surface

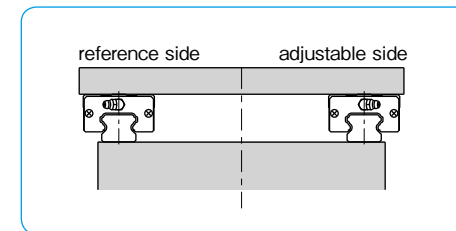

Mounting Procedure

When reference surfaces are provided for both the table and the base, please follow the following procedure to mount the slide guide.

1. Remove burrs, scratches, dust, etc. from the base and table. Apply a low viscosity oil to the base and the table. Place the slide guide on the base carefully. Temporarily fix the rail mounting screws. (Figure A-16a)

2. Tighten the screw for the side piece so that the installation reference surface and the rail reference surface are in close contact. (Figure A-16b) If a side piece is not provided, use a C clamp to position the mounting reference surface and the rail reference surface so that they contact each other. (Figure A-16d)

3. Tighten the mounting screws to the specified torque, and complete the mounting of the rail. The rail is designed so that its accuracy is optimum when the screws are tightened to the specified value. Please refer to the recommended torque table for each product type. (Figure A-16c)

4. Repeat steps 2 and 3 for the rail on the adjustable side.


5. Move the blocks at the mounting location of the table, and place the table gently. Then slightly tighten the screws. (Figure A-16e)

6. Fix the reference surface of the block against the table by the side piece. Tighten the mounting screws in a diagonal sequence. (Figure A-16f)

7. In the same manner, tighten the mounting screws for the blocks on the adjustable side. (Figure A-16g)

8. Finally, move the table through the stroke length to check if thrust is even. Please repeat 5 and 6 (2 to 6 when necessary) if thrust is not even. If thrust is even, please do a final tightening of the screws.


Figure A-16 Mounting Method

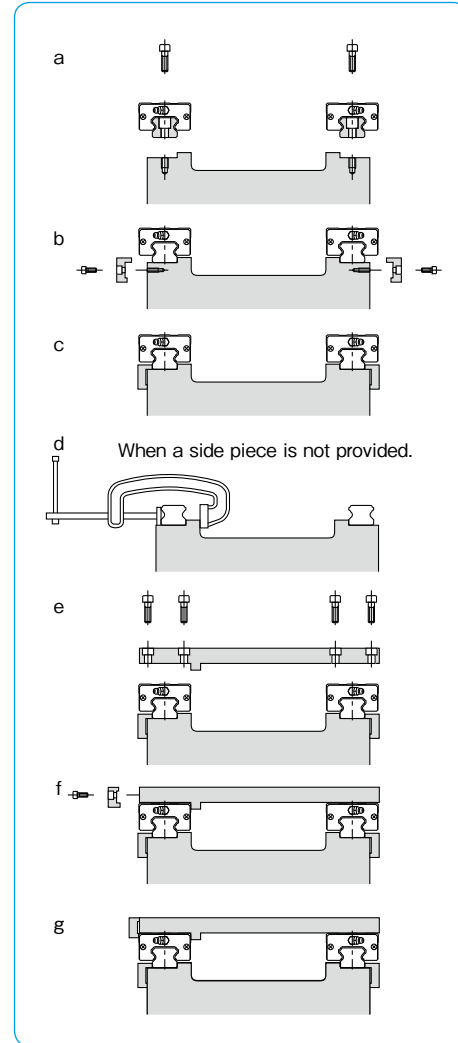

When the Reference Surface is Not Provided on the Adjustable Side

When a reference surface is not provided on the adjustable side, mount the 2 rails in parallel by using a jig, as mounted in Figure A-17. After mounting the reference-side guide, install the adjustable-side guide by moving the table to achieve parallelism.

Figure A-17 Using a Jig

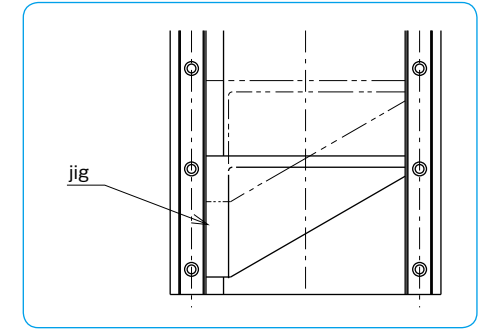

When the Reference Surface is Not Provided on the Reference Side

When a reference surface is not provided on the reference side, mount the 2 rails by using a reference surface close to the slide guide. Temporarily fix the slide guide to the base, and mount an indicator on a measurement plate. Please fix the measurement plate on two or more blocks. (Figure A-18)

Place the indicator against the reference surface of the base. Tighten the screws from one end of the rail to ensure straightness.

If there is no reference surface close-by, use a straight edge to achieve straightness. (Figure A-19)

Figure A-18 Using Base Reference Surface


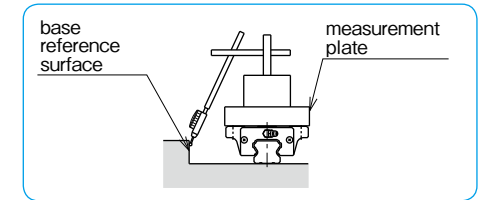


Figure A-19 Using a Straight Edge

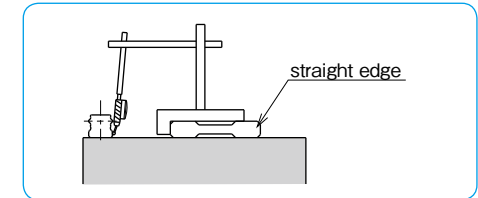


USE AND HANDLING PRECAUTIONS

NB Slide Guides are accurately tuned precision components. Please pay special attention to the following notes.

- Please install the Slide Guide as a set. It is not recommended to remove the block for installation.
- When block removal is necessary, please use a temporary (plastic dummy) rail to prevent balls from dropping out.
- To put a guide block on the rail, as the pictures below show, align the reference surface and the height between the rail and a temporary rail. It is very important to maintain the original combination of block(s) and rail.

Figure A-20 How to Put Guide Block on

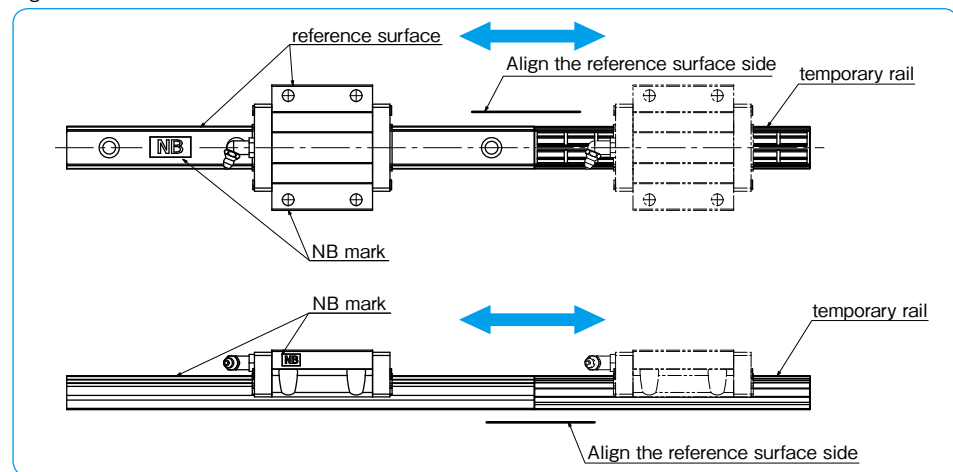

- Please do not turn around a block on the rail to change the grease-fitting orientation. Relocate fitting to the opposite end by removing red plug, and re-insert red plug to where fitting was originally.
- Never try to disassemble the block. This will most assuredly void warranty of the product.
- Please remove burrs, dust, or any other debris from the base and table before installation.
- Slide Guides are pre-lubricated for immediate use. Please relubricate with a similar type of grease regularly. Special lubricants must be matched with the same type of grease to prevent contamination.
- The SEB(S) and SER(S) Slide Guides have metal clip stoppers (picture below) to avoid a block fall-out during shipment and assembly. Please remove the stoppers only after installation is finished with a screwdriver as these clips should not be used as 'mechanical' stoppers.

JOINT RAILS

Rails can be joined together to obtain a length which exceeds the maximum length. There are two ways to do this.


- Place the joints at the same location for the right and left rails so as to make the design and maintenance simple (Figure A-21 ①).
- Place the joints for the right and left rails at different locations so that the block does not move over the two joints at the same time so as to minimize the effect of the joint on accuracy (Figure A-21 ②).

Please keep the following points in mind when using joint rails.

- To avoid dislocation at joints due to shock loading, provide a shoulder at the joint on the installation side.
- If a shoulder cannot be provided, make sure that any excess load does not change the rail position.
- Use the joint marks provided for installation.
- Tightly butt the rails to be joined so that there is no gap between them.
- Make sure the reference surface side of the joint rails to be aligned.

Note: Joined rails are available for SGL and SGW series with standard grade, high grade, and with standard preload. For joined rails on SEB series, please contact NB. Joined rails are not available for SER series.

Figure A-21 Examples of Joined Guide Rails

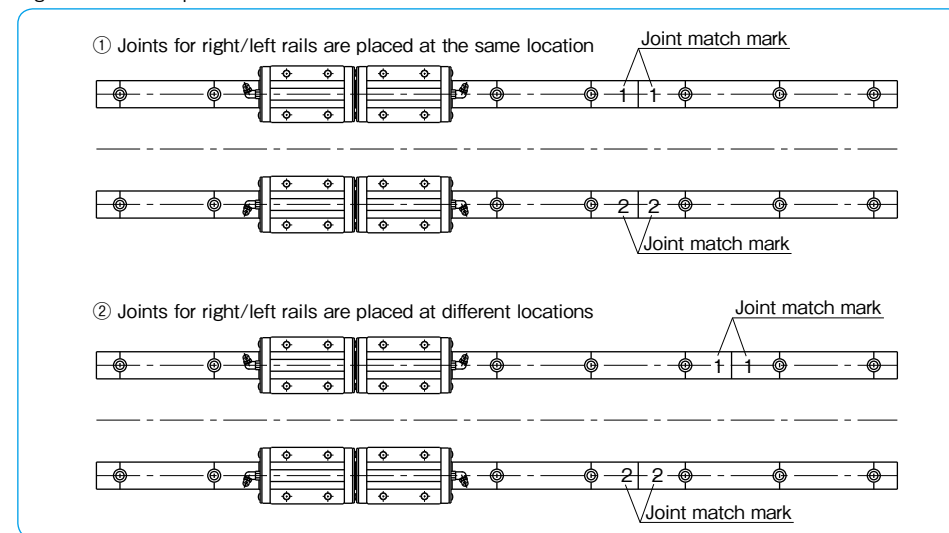

DUST PREVENTION

Seals

Side-Seal


(Series: SEB, SER, SGL, and SGW)

The side-seals prevent foreign particles and dust from entering the guide block in order to retain the motion accuracy, resulting in a long lifetime.

Under-Seal (Series: SGL and SGW)

Slide guides with side and under-seals are used in harsh environments or to prevent dust entering from below.


Figure A-22 Side-Seal and Under-Seal

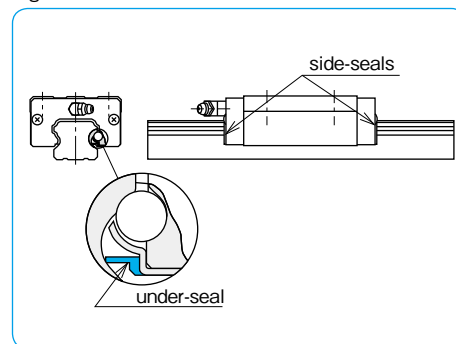

Double Side-Seal Option (Series: SGL)

With this option, the prevention against dust is greatly improved. This option is ideal for use in applications where bellows or covers are not able to be fitted over the slide guide system.


Figure A-23 Double Side-Seal

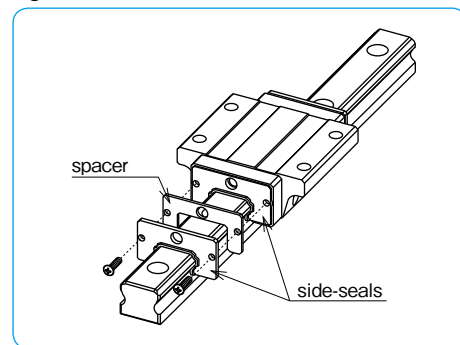

Scraper Option (Series: SGL)

When the application environment has unfavorable foreign matter or debris such as welding splatter or cutting debris, the scraper option provides an effective protective measure for the slide guide system.

Figure A-24 Scraper

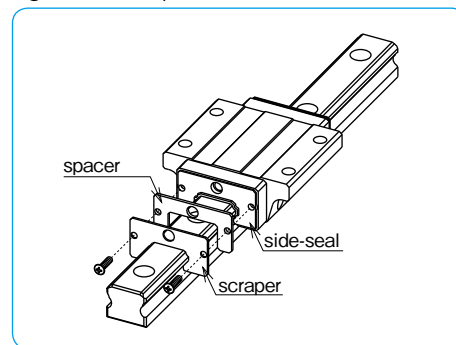

No Side-Seal (Series: SEB and SER)

When the presence of dust or debris is extremely low and only minor motion resistance is desired, a no side-seal option is available. Be aware that, with this option, dust prevention can not be expected.


Double Side-Seal + Scraper Option (Series: SGL)

Double side-seal plus scraper is available. Please contact NB for details.

Bellows Option (Series: SGL)

This option fully covers the guide rail preventing dust, debris, and other foreign particles from disrupting the smooth linear motion. (Refer to page A-18 for further details)

Figure A-25 Bellows

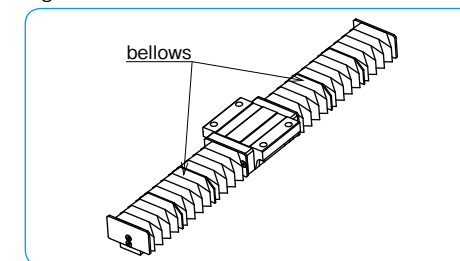

Special Rail Mounting Caps

For SGL and SGW guides, special rail mounting caps are available to prevent dust from entering the mounting holes.

These caps are installed, after the rail is fixed to the base, by using a jig and slowly inserting them into the holes until their top surface is flush with the rail surface.

Figure A-26 Special Cap

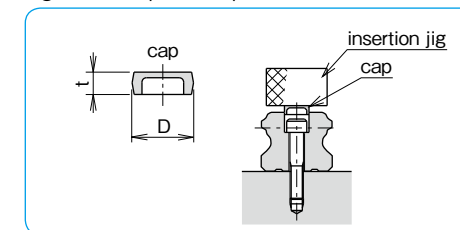


Table A-3 Special Cap

| part number | dimensions | | | applicable part number | | |
|-------------|------------|------|------|------------------------|--------------------------|----------|
| | size | D mm | t mm | SGL-F,E, TF,TE | SGL-HTF,HYF HTE,HYE,HTEX | SGW |
| F 3 | M 3 | 6 | 1.3 | 15 | — | — |
| F 4 | M 4 | 7.5 | 1.25 | 15D | 15 | 17,21,27 |
| F 5 | M 5 | 9.5 | 2.5 | 20 | 20 | — |
| F 6 | M 6 | 11 | 2.7 | 25,30 | 25 | 35 |
| F 8 | M 8 | 14 | 3.65 | 30D,35 | 30,35 | — |
| F12 | M12 | 20 | 4.65 | — | 45 | — |

ANTI-CORROSION

For anti-corrosion, the SEB/SER series and SGL-F/TF types are available in stainless steel material. Low temperature black chrome treatment can be specified for the SGL and SGW series. This treatment (LB) is suitable for applications where corrosion resistance is a requirement.

LUBRICATION

Lithium soap based grease is applied to NB slide guides prior to shipment for immediate use. Please relubricate with a similar type of grease periodically depending on the operating conditions.

The **Fiber Sheet** and Reverse-Seal are available which significantly extends relubrication period (refer to page A-16, A-17).


For use in clean rooms or vacuum environments, slide guides without grease or slide guides with customer specified grease are also available. Please contact NB.

NB also provides low dust generation grease. Please refer to page Eng-40 for details.

FIBER SHEET

The Fiber Sheet for the SGL and SGW types, significantly extends lubricant replenishment intervals and has an excellent durability even under harsh conditions with dust and debris that absorb lubricant. Embedded in a block body, as shown in Figure A-27, it does not change the length of the block. In addition, the Fiber Sheet does not require any change in mounting dimensions, which allows replacement with existing products without a design change.


Figure A-27 Magnified View of the Fiber Sheet

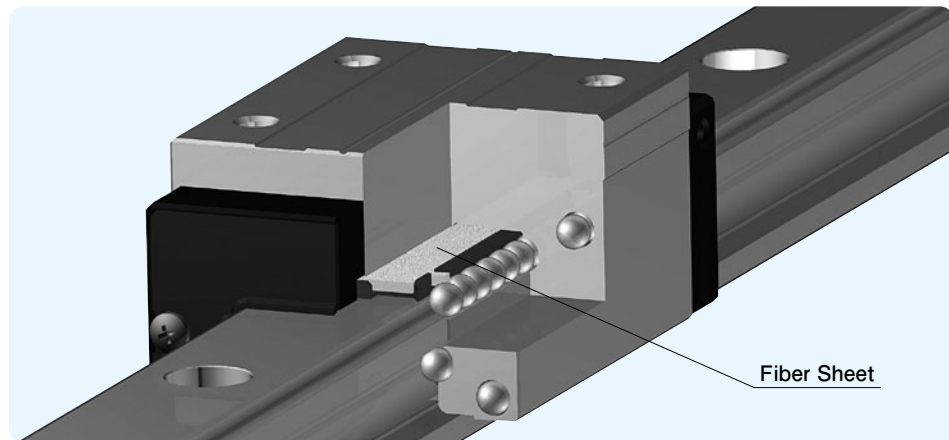

Simplified Lubrication Management

NB's Fiber Sheet is a fiber material with a porous structure containing the lubricant oil. The oil is supplied to the ball elements at the proper time and with the proper amount by the principle of capillarity, greatly increasing the relubrication period.


Figure A-28 Durability Test

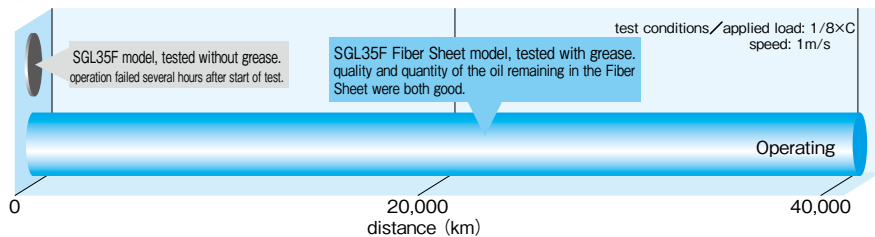

Outstanding Durability Even Under Poor Operating Conditions

An acceleration test was performed with oil absorbing material sprayed on the units to validate the SGL type's lubrication performance and durability even under poor operating conditions.


Figure A-29 Lubrication Acceleration Test

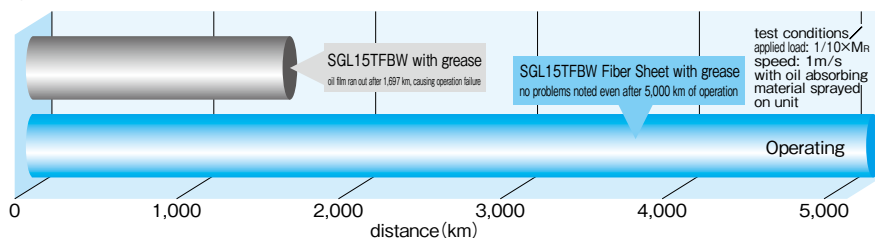

REVERSE-SEAL

NB's Reverse-Seal is a seal unit that consists of reverse plate, seal, and cover. This seal unit has another side-seal in the reverse orientation to the block, which achieves maintenance free by reducing grease loss.


Figure A-30 Reverse-Seal

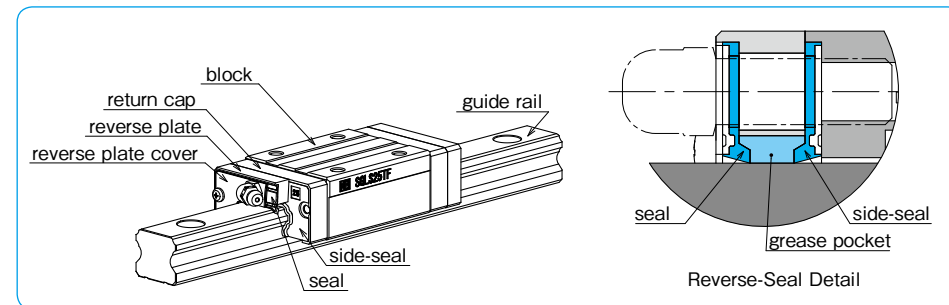

Reducing Grease Leakage

The space between two seals holds grease to minimize a grease leakage from the block.


Figure A-31 Grease-leak Test Data

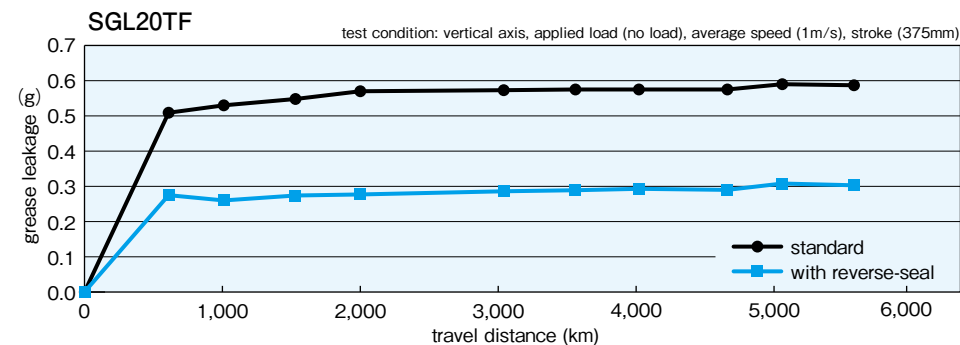

Maintenance Free

Reverse-seal makes a "grease pocket" between two seals that realizes maintenance free by reducing grease leakage and loss.

Figure A-32 Grease Dry-up Test Data

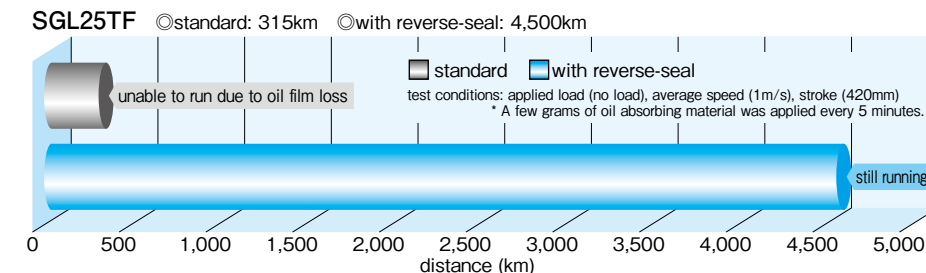


Applicable Part Number

Reverse-Seal (BR option) is available on SGL Type.

BELLOWS

By protecting the entire length of the guide rail, dust prevention is greatly enhanced. Please refer to Figure A-33 for dimensions. External dimensions and the stroke length of slide guide will change with use of bellows.

Figure A-33 Dimensions of Slide Guide with Bellows

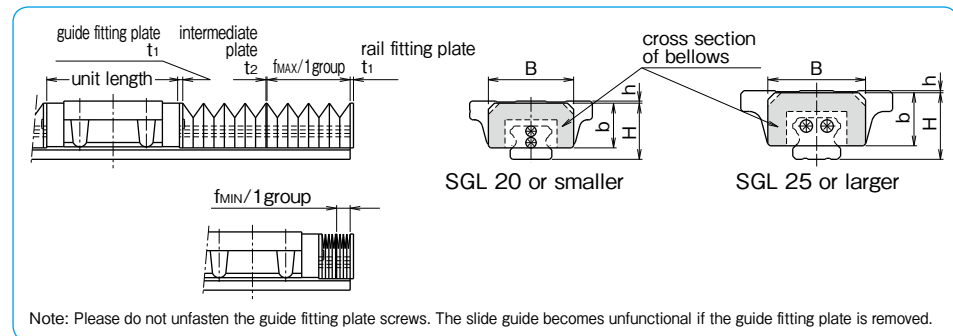

| part number | unit length | | | | | B | H | h | b | t1 | t2 | f _{MAX} /1group | f _{MIN} /1group |
|-------------|---|--|--|--|---|--------|----|----|----|------|-----|-----------------------------|-----------------------------|
| | symbol: B side-seals +under-seals | symbol: BW double-seals +under-seals | symbol: BS side-seals +under-seals +scraper | symbol: BR side-seals +under-seals +reverse-seals | symbol: BWS double-seals +under-seals +scraper | | | | | | | | |
| SGL15 | F TF E TE | L1-2 | L3-2 | L4-3.4 | L5-3.4 | L6-3.4 | 33 | 23 | 5 | 19 | | 32 | |
| | HTF HYF | | | | | | | | | | | | |
| | HTE HYE HTEX | | | | | | | | | | | | |
| SGL20 | F TF E TE | L1-2 | L3-2 | L4-3.4 | L5-3.4 | L6-3.4 | 41 | 27 | 3 | 21.5 | | 40 | |
| | HTF HYF | | | | | | | | | | | | |
| | HTE HYE HTEX | | | | | | | | | | | | |
| SGL25 | F TF E TE | L1-2.2 | L3-2.2 | L4-4 | L5-4 | L6-4 | 47 | 32 | 8 | 25.5 | 1.5 | 44 | 6.5 |
| | HTF HYF | | | | | | | | | | | | |
| | HTE HYE HTEX | | | | | | | | | | | | |
| SGL30 | F TF E TE | L1-3 | L3-3 | L4-4 | L5-4 | L6-4 | 58 | 40 | 5 | 31 | | 56 | |
| | HTF HYF | | | | | | | | | | | | |
| | HTE HYE HTEX | | | | | | | | | | | | |
| SGL35 | F TF E TE | L1-3 | L3-3 | L4-4 | L5-4 | L6-4 | 68 | 46 | 9 | 37 | | 68 | |
| | HTF HYF | | | | | | | | | | | | |
| | HTE HYE HTEX | | | | | | | | | | | | |
| SGL45 | HTF HYF | L1-3 | L3-3 | L4-5.5 | L5-5.5 | L6-5.5 | 84 | 59 | 11 | 50 | 2 | 72 | |
| | HTE HYE HTEX | | | | | | | | | | | | |

Note: 1 group indicates the minimum unit of bellows. Please specify the required stroke length. When bellows are fitted to the guide block, the grease fitting cannot be installed. The allowable temperature is up to 60°C if the system has a bellows option. Please contact NB for details on the installation of bellows, as well as for special application usage.

Calculation Method of Length of Bellows and Slide Guide Rail

Example: In this case, one(1) piece of SGL15TE guide block is mounted on a rail with bellows; the required stroke is 440mm.

Number of groups required for a stroke of 440mm is calculated as follows.

$$\frac{\text{Stroke}}{f_{\text{MAX}} - f_{\text{MIN}}} = \frac{440}{32 - 6.5} = 17.2 \approx 18 \text{ groups (round up)}$$


When 18 groups of bellows are fitted, the minimum length f is calculated:

$$f = \text{guide fitting plate} + 1 \text{ group } f_{\text{MIN}} \times \text{number of groups} + \text{intermediate plate} \times (\text{number of groups} - 1) = 1.5 + 6.5 \times 18 + 1.0 \times (18 - 1) = 135.5$$

With these calculation results, length of the guide rail needed (L) is obtained as follows:

$$L = 2 \times f + \text{the required stroke} + \text{unit length} = 2 \times 135.5 + 440 + (56.5 - 2) = 765.5 \approx 766 \text{ (round up)}$$


Figure A-34 External Diagram of Slide Guide with Bellows Attached

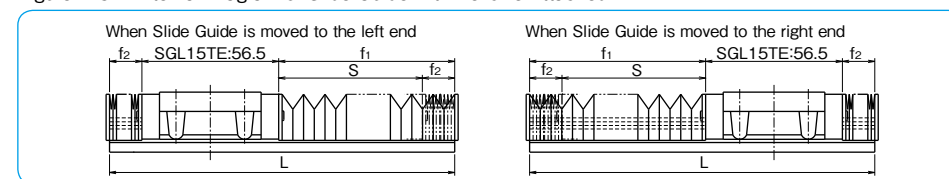

SEB TYPE AD PROFILE (Anti-Deforming)

The AD profile guide block can dissipate possible deformation by improved installation plane profile.

Figure A-35 SEB type AD profile

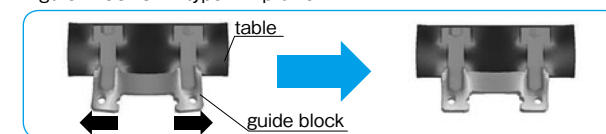

Note:

When NB's unique AD Profile type miniature guide block is selected, the following precautions should be taken into consideration to perform to its utmost advantage.

- To obtain maximum AD (Anti-Deforming) effect, flatness of the mounting surface should be finished the same as motion accuracy of the slide guide.
- When the table is designed with one guide block on one guide rail, the utmost AD effect is anticipated.
- All screws on the slide guide block should be tightened to the equal torque value.
- The AD profile type guide block is available only with standard preload.
- AD profile type guide blocks are available only with following part numbers of slide guide block.

Applicable Part Number

Table A-4 AD profile Applicable Part Number

| part number | | | |
|-------------|-----------|----------|--|
| SEBS 7B | SEBS 7BM | SEBS 7A | |
| SEBS 7BY | SEBS 7BYM | SEBS 7AY | |
| SEBS 9B | SEBS 9BM | SEBS 9A | |
| SEBS 9BY | SEBS 9BYM | SEBS 9AY | |
| SEBS12B | SEBS12BM | SEBS12A | |
| SEBS12BY | SEBS12BYM | SEBS12AY | |
| SEBS15B | SEBS15BM | SEBS15A | |
| SEBS15BY | SEBS15BYM | SEBS15AY | |
| SEBS20B | SEBS20BM | SEBS20A | |
| SEBS20BY | SEBS20BYM | SEBS20AY | |

part number structure

SEBS 15B UU 2-589 N P AD

AD profile

※Please contact NB for details.

SLIDE GUIDE Miniature SEB Type

The NB slide guide SEB type is a linear motion bearing in which the ball elements roll along two raceway grooves. This is the smallest and lightest slide guide series offered by Nippon Bearing. The compact design allows for the size and weight of machinery and other equipment to be reduced.

STRUCTURE AND ADVANTAGES

The SEB type slide guide consists of a rail with precisely machined raceway grooves and a block assembly consisting of the main body, return caps and ball elements.

Retained Ball

Because of the ball retainers, the SEBS-B type is able to be removed from the guide rail, simplifying its installation and resulting in lower assembly costs.

All Stainless Steel Type

By using stainless steel for the return caps, the SEBS-BM type is made from all stainless steel components, making it the ideal choice for special environments such as high temperature, clean room, or vacuum applications.

Moment Resistant

A wide block (WB/WA) type, a long block (BY/AY) type, and a wide/long block (WBY/WAY) type are moment resistant slide guide types. The most

suitable type can be selected for any demanding operating condition.

Tapped Hole Rail Type

For the SEB rails, counterbore (standard) and optional tapped hole (N) types are available enabling various installation methods.


Compact Design

SEB type has a 2-row, 4-point contact structure. This structure minimizes the installation height, which contributes to light-weight and miniaturization of machinery and equipment.

AD Profile

AD profile dissipates guide block deformation caused by installation. (refer to page A-19)

Figure A-36 Structure of SEB type Slide Guide

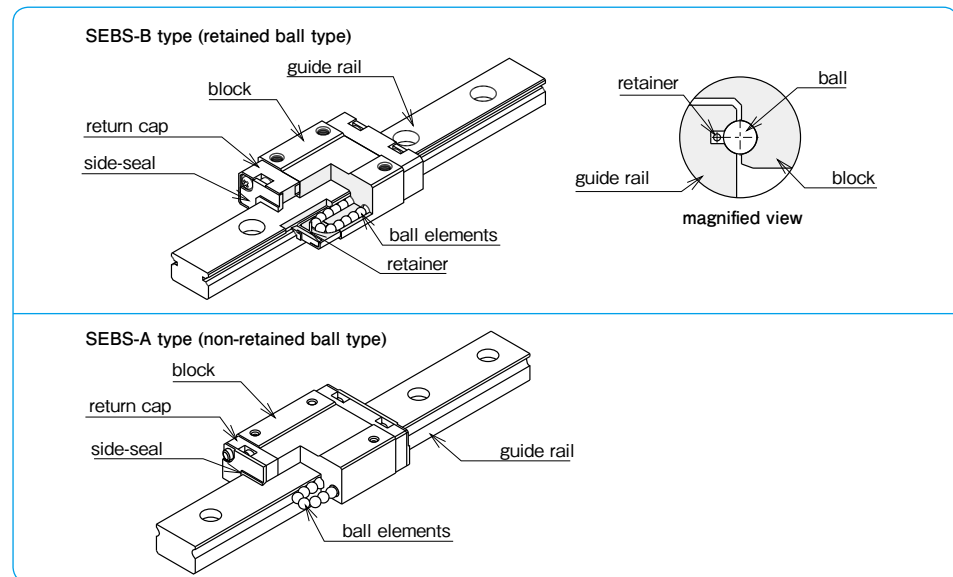

TYPES

The SEB(S) type slide guides are categorized according to their block shape and the rail installation method.

Table A-5 Type ※All the SEB blocks are made of stainless steel (SEBS marking).

| | | short block standard type rail(counterbore) N type rail(tapped hole) | standard block standard type rail(counterbore) N type rail(tapped hole) | long block standard type rail(counterbore) N type rail(tapped hole) |
|------------------------|---------------------|--|---|---|
| retained ball type | all stainless steel | SEBS-BS type SEBS-BS-N type P.A-26~ | SEBS-B type SEBS-B-N type P.A-26~ | SEBS-BY type SEBS-BY-N type P.A-26~ |
| | wide type | SEBS-BSM type SEBS-BSM-N type P.A-26~ | SEBS-BM type SEBS-BM-N type P.A-26~ | SEBS-BYM type SEBS-BYM-N type P.A-26~ |
| | | SEBS-WBS type SEBS-WBS-N type P.A-30~ | SEBS-WB type SEBS-WB-N type P.A-30~ | SEBS-WBY type SEBS-WBY-N type P.A-30~ |
| non-retained ball type | | | SEB-A type SEB-A-N type P.A-34~ | SEB-AY type SEB-AY-N type P.A-34~ |
| | wide type | | SEB-WA type SEB-WA-N type P.A-38~ | SEB-WAY type SEB-WAY-N type P.A-38~ |

ACCURACY

The SEB(S) slide guides are available in two grades of accuracy: high grade and precision grade (P).

Table A-6 Accuracy unit : mm

| accuracy grade | high | precision |
|---|-------------------------|-----------|
| accuracy symbol | blank | P |
| allowable dimensional difference in height H | ±0.020 | ±0.010 |
| paired difference for height H | 0.015 | 0.007 |
| allowable dimensional difference in width W | ±0.025 | ±0.015 |
| paired difference for width W | 0.020 | 0.010 |
| running parallelism of surface C to surface A | refer to figure A-39,40 | |
| running parallelism of surface D to surface B | refer to figure A-39,40 | |

Figure A-37 Accuracy


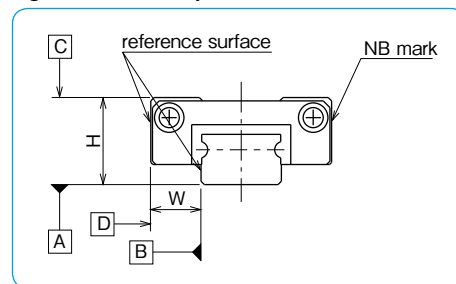


Figure A-38 Motion Accuracy

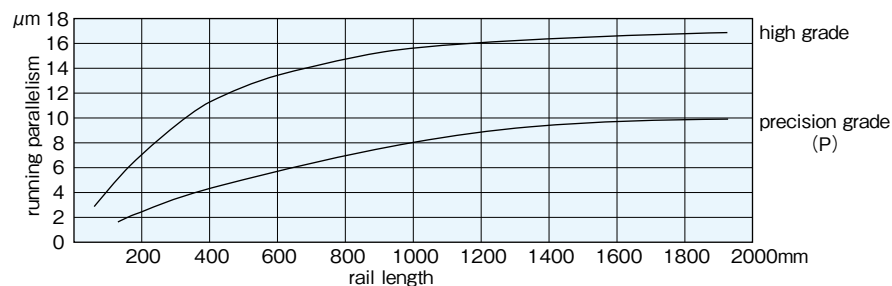

PRELOAD

SEB(S) slide guides are available with a standard preload (blank), light preload (T1), and a positive-clearance (T0).

Table A-7 Preload Symbol and Radial Clearance unit : μm

| size | preload and symbol | | |
|------|--------------------|----------------|-----------|
| | clearance T0 | standard blank | light* T1 |
| 2 | +1~+3 | - | - |
| 3 | | | |
| 5 | | | |
| 7 | +3~+6 | -3~0 | -4~-2 |
| 9 | | | |
| 12 | | | |
| 15 | +4~+8 | -3~0 | -7~-3 |
| 20 | | | |
| 3W | | | |
| 5W | +1~+3 | -1~0 | - |
| 7W | +3~+6 | -3~0 | -4~-2 |
| 9W | | | |
| 12W | | | |
| 15W | | | |

Table A-8 Operating Conditions and Preload

| preload | symbol | operating conditions |
|-----------|--------|---|
| clearance | T0 | light motion is required. installation errors to be absorbed. |
| standard | blank | minute vibration is applied. accurate motion is required. moment is applied in a given direction. |
| light* | T1 | light vibration is applied. light torsional load is applied. moment is applied. |

* Frictional resistance may be affected by preload.

LOAD RATING

The load rating for SEB(S) slide guides depends on the direction of load.

Table A-9 Load Rating


| | | retained ball type | non-retained ball type |
|---------------------------|------------|---------------------|------------------------|
| basic dynamic load rating | vertical | 1.00×C | 1.00×C |
| | horizontal | 0.89×C | 1.13×C |
| basic static load rating | vertical | 1.00×C ₀ | 1.00×C ₀ |
| | horizontal | 0.84×C ₀ | 1.19×C ₀ |

EQUIVALENT LOAD

For a guide to which vertical load and horizontal load are applied at the same time, calculate its static equivalent load using the following equation.

$$P = P_a + X \cdot P_s$$

Figure A-39 Direction of Load

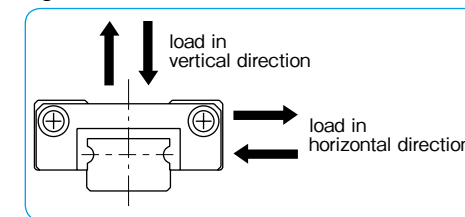

P: equivalent load P_a: vertical load P_s: horizontal load
X: 0.84 for SEB-A type; 1.19 for SEBS-B type

RAIL LENGTH

Slide guides with most commonly used lengths are available as standard. For slide guides with a non-standard length, unless otherwise specified, the distance from one end of the rail to the first hole center (N) will be within the ranges listed in Tables A-10 and A-11, satisfying the following equation.

$$L = M \cdot P + 2N$$

L: length (mm) M: number of pitches P: hole pitch (mm)
N: distance from the end of the rail to the first hole center (mm)

Figure A-40 Rail

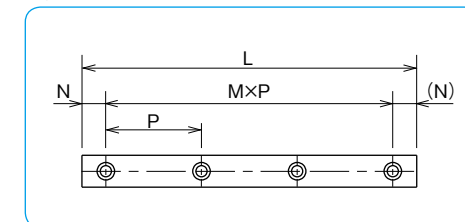


Table A-10 N Dimension (standard type) unit : mm

| size | N | |
|------|----------|-----------|
| | and over | less than |
| 2 | 3 | 7 |
| 3 | | 8 |
| 5 | | 10.5 |
| 7 | | 14 |
| 9 | 4 | 16.5 |
| 12 | | 24 |
| 15 | | 36 |
| 20 | | 36 |

Table A-11 N Dimension (wide type) unit : mm

| size | N | |
|------|----------|-----------|
| | and over | less than |
| 3W | 3 | 10.5 |
| 5W | | 14 |
| 7W | 4 | 19 |
| 9W | | 19 |
| 12W | 5 | 25 |
| 15W | | 25 |

MOUNTING

Mounting Surface Profile

Slide guides are mounted by pushing the reference surface of the rail and the block against the shoulder provided on the mounting surface. An undercut or a radius corner should be provided at the corner of the shoulder to prevent interference. The recommended shoulder height values on the mounting reference surface are shown in Table A-12. (Table A-13 for corner radius)

Figure A-41 Mounting Surface Profile-1

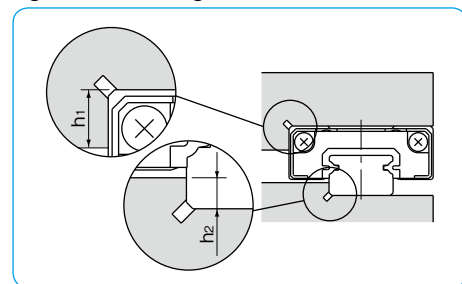


Figure A-42 Mounting Surface Profile-2

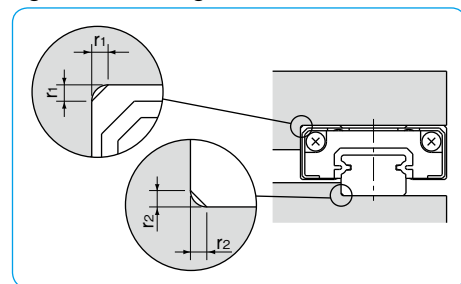


Table A-12 Shoulder Height on the Mounting Reference Surface unit : mm

| size | shoulder height on the block side h ₁ | shoulder height on the rail side h ₂ |
|------|---|--|
| 2 | 1 | 0.5 |
| 3 | 1.2 | 0.8 |
| 5 | 2 | 1 |
| 7 | 2.5 | 1.5 |
| 9 | 3 | 2 |
| 12 | 4 | 3.5 |
| 15 | 5 | 5 |
| 20 | | |
| 3W | 1.5 | 0.8 |
| 5W | 2 | 1 |
| 7W | 3 | 1.5 |
| 9W | | 2.5 |
| 12W | 4 | |
| 15W | 5 | |

Table A-13 Maximum Corner Radius Values unit : mm

| size | block mounting part r ₁ | rail mounting part r ₂ |
|------|---------------------------------------|--------------------------------------|
| 2 | 0.1 | 0.1 |
| 3 | 0.15 | |
| 5 | | |
| 7 | | |
| 9 | 0.3 | 0.3 |
| 12 | | |
| 15 | | |
| 20 | | 0.5 |
| 3W | 0.15 | 0.1 |
| 5W | | |
| 7W | | |
| 9W | 0.3 | 0.3 |
| 12W | | |
| 15W | | |

Recommended Torque Values

The screws to fasten the rail should be tightened to an equal torque using a torque wrench in order to secure the motion accuracy. The recommended torque values are given in Table A-14. Please adjust the torque depending on the operating conditions.

Table A-14 Recommended Torque unit : N · m

| size | M1 | M1.4 | M1.6 | M2 | M2.6 | M3 | M4 | M5 | M6 |
|--------------------|------|------|------|-----|------|-----|-----|-----|-----|
| recommended torque | 0.03 | 0.10 | 0.15 | 0.3 | 0.65 | 1.0 | 2.3 | 4.7 | 8.0 |

(when using stainless steel screw A2-70)


MOUNTING SCREW

Extremely small custom screws are available from NB.

Table A-15 Mounting Screw (stainless steel)

| type | shape | size | D mm | H mm | pitch mm | f mm |
|--------------|--------------|------|------|------|----------|----------------|
| custom screw | Figure A-43① | M1 | 1.8 | 0.45 | 0.25 | 3, 4, 5 |
| | | M1.4 | 2.5 | 0.8 | 0.3 | 2.5, 3, 4 |
| | | M1.6 | 2.3 | 0.5 | 0.35 | 4, 5, 6 |
| | | M2 | 3 | 0.6 | 0.4 | 6 |
| cap screw | Figure A-43② | M2 | 3.8 | 2 | 0.4 | 4, 5, 6, 8, 10 |
| | | M2.6 | 4.5 | 2.6 | 0.45 | 4, 5, 6, 8, 10 |

Figure A-43 Mounting Screw

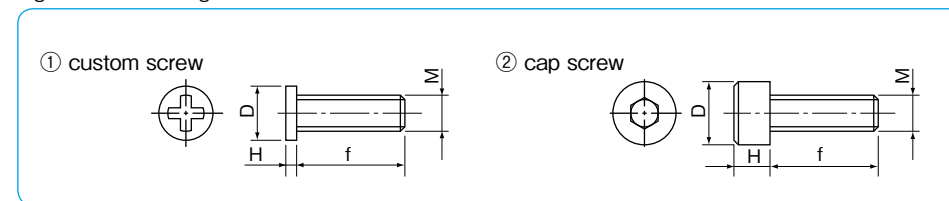

LUBRICATION

A high grade lithium soap based grease is applied to the NB slide guides prior to shipment for immediate use.


Please relubricate with a similar type of grease periodically depending on the operating conditions. For use in clean rooms or vacuum environments, NB slide guides without grease are available upon request.

Please contact NB for customer specified grease types.

A special syringe lubricant dispenser (refer to Figure A-44) is available from NB as an option. In particular, the SEBS-B retained ball type has a special structure that allows the user to replenish lubricant easily (refer to page Eng-43), as the magnified view of Figure A-44 shows.


Please refer to page Eng-40 for details on the low dust generation grease.

Figure A-44 Greasing Method

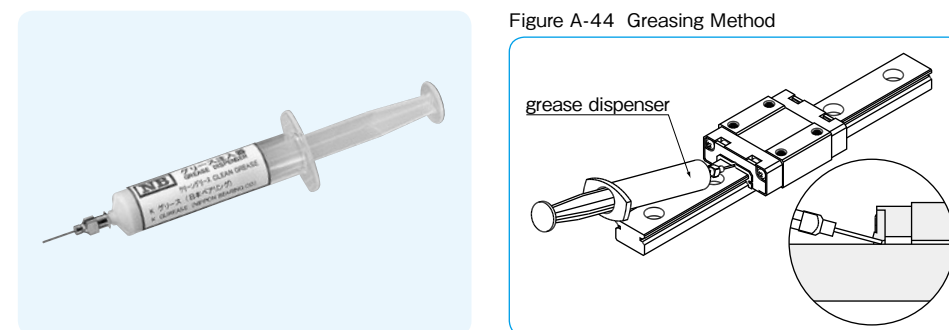

SEBS-BS/B/BY TYPE SEBS-BSM/BM/BYM TYPE

— Retained Ball Type —

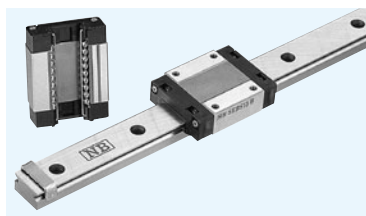

part number structure

example **SEBS 7B Y M UU 2 T1 -289 N P/W2**

SEBS: anti-corrosion

size

block
S: short
blank: standard
Y: long

return cap
blank: resin
M: stainless steel

seal
blank: without side-seal
UU: with side-seals

number of blocks attached to one rail

preload symbol (refer to page A-22)

TO: clearance
blank: standard
T1: light

symbol for number of axes*
blank: single axis
W2: 2 parallel axes
W3: 3 parallel axes

accuracy grade (refer to page A-22)
blank: high
P: precision

rail mounting hole
blank: counterbore
N: tapped hole


total length of rail

* The symbol for the number of axes does not mean the number of rails ordered.

| part number | | assembly dimensions | | block dimensions | | | | | | | | |
|------------------|----------------------|---------------------|-----|------------------|----------------|----------------|----------------|----------------|----------------|-----|----------------|-----|
| resin return cap | stainless return cap | H | W | B | L ₁ | L ₂ | P ₁ | P ₂ | S ₁ | f | L ₃ | b |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SEBS 5B | SEBS 5BM | 6 | 3.5 | 12 | 16.5 | 16.9 | 8 | — | M2 | 1.5 | 9.3 | 4.5 |
| SEBS 5BY | SEBS 5BYM | | | | 19.5 | 19.9 | — | 7 | M2.6 | 1.8 | 12.3 | |
| SEBS 5BYD | SEBS 5BYDM | | | | 8 | — | M2 | 1.5 | | | | |
| SEBS 7BS | SEBS 7BSM | 8 | 5 | 17 | 18.2 | 19 | — | — | — | — | 8.8 | 6.5 |
| SEBS 7B | SEBS 7BM | | | | 22.2 | 23 | 12 | 8 | M2 | 2.5 | 12.8 | |
| SEBS 7BY | SEBS 7BYM | | | | 31.7 | 32.5 | — | 13 | — | — | 22.3 | |
| SEBS 9BS | SEBS 9BSM | 10 | 5.5 | 20 | 20.5 | 21.3 | — | — | — | — | 10.1 | 7.8 |
| SEBS 9B | SEBS 9BM | | | | 30 | 30.8 | 15 | 10 | M3 | 3 | 19.6 | |
| SEBS 9BY | SEBS 9BYM | | | | 39.5 | 40.3 | — | 16 | — | — | 29.1 | |

| part number | standard rail length L mm | | | | | | | | | | | | | | | |
|-------------|---------------------------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| SEBS 5B | 40 | 55 | 70 | 85 | 100 | 115 | 130 | 145 | 160 | | | | | | | |
| SEBS 7B | 40 | 55 | 70 | 85 | 100 | 115 | 130 | 145 | 160 | 175 | 190 | 205 | 220 | 235 | 250 | 265 |
| SEBS 9B | 55 | 75 | 95 | 115 | 135 | 155 | 175 | 195 | 215 | 235 | 255 | 275 | 295 | 315 | 335 | 355 |


Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.

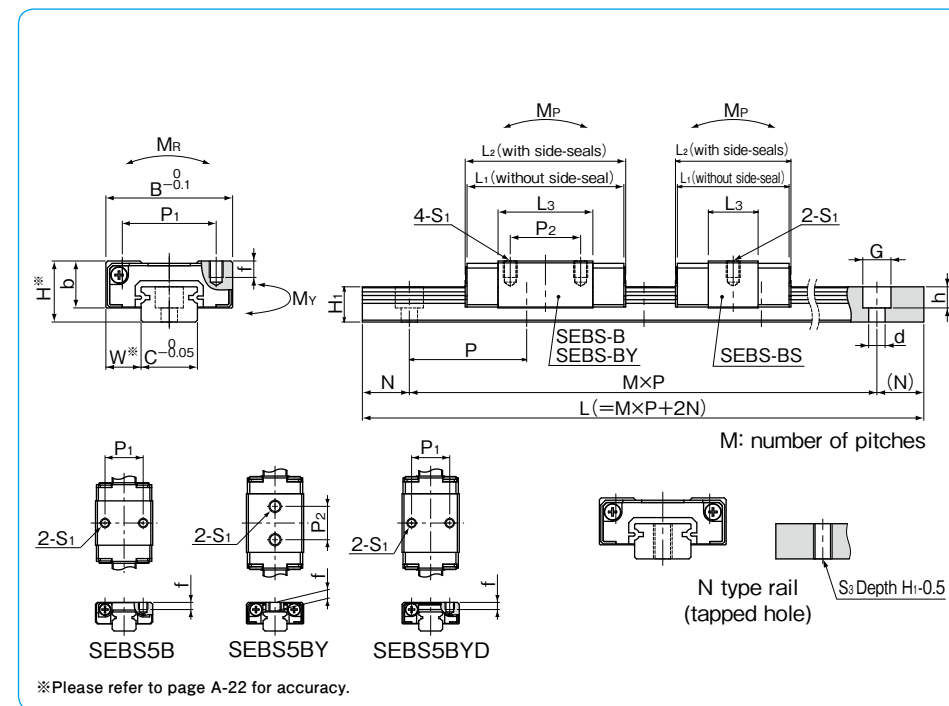

| guide rail dimensions | | | | | | basic load rating | | allowable static moment | | | mass | | guide rail | block size |
|-----------------------|----|-------------|----------------|-----|----|-------------------|-----------|-------------------------|----------------|----------------|--------------------------|------------------------------|------------|------------|
| H ₁ | C | d×G×h | S ₃ | N | P | dynamic C | static Co | M _P | M _Y | M _R | block g resin return cap | block g stainless return cap | g/100mm | block size |
| mm | mm | mm | mm | mm | mm | kN | kN | N·m | N·m | N·m | mm | mm | | |
| 4 | 5 | 2.4×3.5×0.8 | M2.6 | 5 | 15 | 0.52 | 0.75 | 1.13 7.86 | 0.95 6.59 | 1.96 | 3 | 4 | 13 | 5B |
| | | | | | | 0.64 | 1.00 | 1.94 12.0 | 1.63 10.0 | 2.62 | 4 | 5 | 13 | 5BY |
| 4.7 | 7 | 2.4×4.2×2.3 | M3 | 5 | 15 | 0.92 | 1.05 | 1.57 13.6 | 1.32 11.4 | 3.86 | 7 | 10 | 21 | 7BS |
| | | | | | | 1.28 | 1.69 | 3.66 25.4 | 3.07 21.3 | 6.18 | 9 | 12 | 21 | 7B |
| | | | | | | 1.90 | 2.95 | 10.4 59.1 | 8.74 49.6 | 10.8 | 15 | 18 | 21 | 7BY |
| 5.5 | 9 | 3.5×6×3.5 | M4 | 7.5 | 20 | 1.05 | 1.26 | 2.17 18.2 | 1.82 15.2 | 5.90 | 11 | 15 | 31 | 9BS |
| | | | | | | 1.70 | 2.53 | 7.78 48.2 | 6.53 40.4 | 11.8 | 18 | 22 | 31 | 9B |
| | | | | | | 2.26 | 3.80 | 16.8 91.7 | 14.1 77.0 | 17.7 | 27 | 31 | 31 | 9BY |


M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN≒102kgf 1N·m≒0.102kgf·m

| | | | maximum length mm | |
|-----|-----|-----|-------------------|----------------------|
| | | | counterbore | tapped hole (N type) |
| 280 | 295 | 310 | 600 | 300 |
| 375 | 395 | 415 | 1,300 | 700 |
| | | | 1,480 | 1,000 |



SEBS-BS/B/BY TYPE SEBS-BSM/BM/BYM TYPE

— Retained Ball Type —

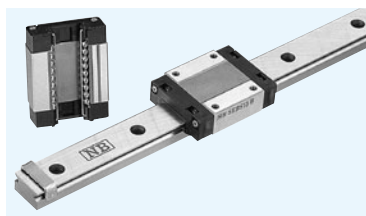

part number structure

example **SEBS 15B Y M UU 2 T1 - 589 N P/W2**


| | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------|------|-------|----------|-----------------|---------|------------|--------------|--------------------|------|--------------------------|---------------------|---------------------------------------|-------------------------------------|---------------|-----------------|-----------|----------------------------|--------------------|---------------------|---------------------|----------------|----------------------|-------------|--------------|--------------------|--------------------|----------------|----------------------|
| SEBS: anti-corrosion | size | block | S: short | blank: standard | Y: long | return cap | blank: resin | M: stainless steel | seal | blank: without side-seal | UU: with side-seals | number of blocks attached to one rail | preload symbol (refer to page A-22) | TO: clearance | blank: standard | T1: light | symbol for number of axes* | blank: single axis | W2: 2 parallel axes | W3: 3 parallel axes | accuracy grade | (refer to page A-22) | blank: high | P: precision | rail mounting hole | blank: counterbore | N: tapped hole | total length of rail |
|----------------------|------|-------|----------|-----------------|---------|------------|--------------|--------------------|------|--------------------------|---------------------|---------------------------------------|-------------------------------------|---------------|-----------------|-----------|----------------------------|--------------------|---------------------|---------------------|----------------|----------------------|-------------|--------------|--------------------|--------------------|----------------|----------------------|

* The symbol for the number of axes does not mean the number of rails ordered.

| part number | | assembly dimensions | | block dimensions | | | | | | | | | | |
|-------------|------------|---------------------|-----|------------------|----------------|----------------|----------------|----------------|----------------|-----|----------------|------|--|--|
| resin | stainless | H | W | B | L ₁ | L ₂ | P ₁ | P ₂ | S ₁ | f | L ₃ | b | | |
| return cap | return cap | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | | |
| SEBS12BS | SEBS12BSM | 13 | 7.5 | 27 | 24.2 | 24.6 | 20 | — | M3 | 3.5 | 10.6 | 10 | | |
| SEBS12B | SEBS12BM | | | | 33.8 | 34.2 | | 15 | | | 20.2 | | | |
| SEBS12BY | SEBS12BYM | | | | 45.7 | 46.1 | | 20 | | | 32.1 | | | |
| SEBS15BS | SEBS15BSM | 16 | 8.5 | 32 | 30 | 30.4 | 25 | — | M3 | 4 | 15 | 12 | | |
| SEBS15B | SEBS15BM | | | | 42.6 | 43 | | 20 | | | 27.6 | | | |
| SEBS15BY | SEBS15BYM | | | | 58.6 | 59 | | 25 | | | 43.6 | | | |
| SEBS20B | SEBS20BM | 25 | 13 | 46 | 65.9 | 65.9 | 38 | 38 | M4 | 6 | 44.7 | 17.5 | | |
| SEBS20BY | SEBS20BYM | | | | 85.7 | 85.7 | | | | | 64.5 | | | |

| part number | standard rail length L mm | | | | | | | | | | | | | | | |
|-------------|------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------|-----|-----|
| SEBS12B | 70 | 95 | 120 | 145 | 170 | 195 | 220 | 245 | 270 | 295 | 320 | 345 | 370 | 395 | 420 | 445 |
| SEBS15B | 70 | 110 | 150 | 190 | 230 | 270 | 310 | 350 | 390 | 430 | 470 | 510 | 550 | 590 | 630 | 670 |
| SEBS20B | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | | |

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.

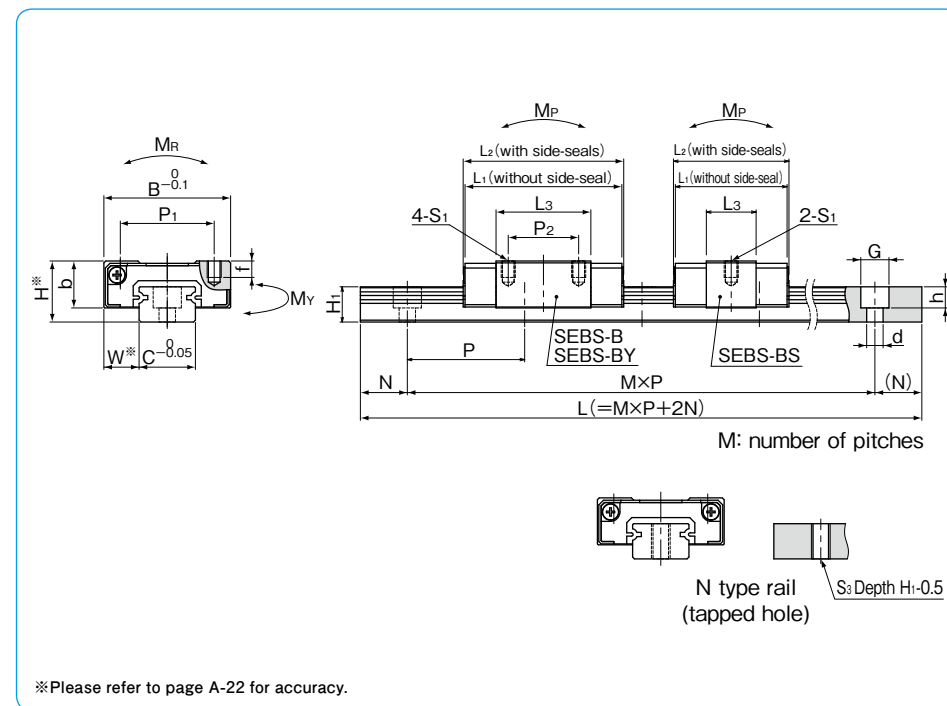

*Please refer to page A-22 for accuracy.


| guide rail dimensions | | | | | | basic load rating | | allowable static moment | | | mass | | guide rail | block size | |
|-----------------------|----|---------------|----------------|----|----|-------------------|-----------|-------------------------|----------------|----------------|--------------------------|------------------------------|------------|------------|------|
| H ₁ | C | d × G × h | S ₃ | N | P | dynamic C | static Co | M _P | M _Y | M _R | block g resin return cap | block g stainless return cap | g/100mm | block size | |
| mm | mm | mm | | mm | mm | kN | kN | N · m | N · m | N · m | | | | | |
| 7.5 | 12 | 3.5 × 6 × 4.5 | M4 | 10 | 25 | 1.90 | 1.91 | 3.63 | 3.04 | 11.9 | 21 | 30 | 59 | 12BS | |
| | | | | | | 3.09 | 3.82 | 12.4 | 10.4 | 23.9 | 35 | 44 | | | 12B |
| | | | | | | 4.34 | 6.21 | 81.3 | 68.2 | 38.8 | 53 | 62 | | | |
| 9.5 | 15 | 3.5 × 6 × 4.5 | M5 | 15 | 40 | 3.49 | 3.38 | 8.56 | 7.18 | 26.2 | 40 | 53 | 97 | 15BS | |
| | | | | | | 5.65 | 6.76 | 67.5 | 56.6 | 52.4 | 64 | 77 | | | 15BY |
| | | | | | | 7.93 | 10.9 | 29.2 | 24.5 | 85.1 | 98 | 110 | | | |
| 15 | 20 | 6 × 9.5 × 8.5 | M6 | 20 | 60 | 11.4 | 14.5 | 103 | 87.0 | 149 | 228 | 266 | 205 | 20B | |
| | | | | | | 14.8 | 21.2 | 591 | 496 | 323 | 360 | 20BY | | | |
| | | | | | | | | 210 | 176 | 323 | 360 | | | | 20BY |

M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN ≒ 102kgf 1N · m ≒ 0.102kgf · m

| | | maximum length mm | |
|-----|-----|-------------------|----------------------|
| | | counterbore | tapped hole (N type) |
| 470 | 495 | 1,480 | 1,000 |

SEBS-WBS/WB/WBY TYPE

– Retained Ball · Wide Type –

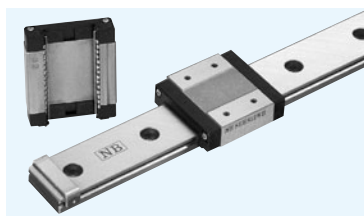

part number structure

example **SEBS 7WB Y UU 2 T1 - 289 N P / W2**

SEBS: anti-corrosion

size

block
S: short
blank: standard
Y: long

seal
blank: without side-seal
UU: with side-seals

number of blocks attached to one rail


preload symbol (refer to page A-22)
TO: clearance
blank: standard
T1: light

symbol for number of axes*
blank: single axis
W2: 2 parallel axes
W3: 3 parallel axes

accuracy grade (refer to page A-22)
blank: high
P: precision

rail mounting hole
blank: counterbore
N: tapped hole

total length of rail

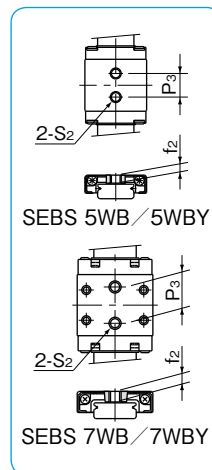


* The symbol for the number of axes does not mean the number of rails ordered.

| part number | assembly dimensions | | | block dimensions | | | | | | | | | | | |
|------------------|---------------------|-----|----|------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|----|
| | H | W | B | L ₁ | L ₂ | P ₁ | P ₂ | S ₁ | f ₁ | L ₃ | P ₃ | S ₂ | f ₂ | b | |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | |
| SEBS 5WB | 6.5 | 3.5 | 17 | 21.5 | 21.9 | — | — | — | — | 14.3 | 6.5 | M3 | 2.3 | 5 | |
| SEBS 5WBY | | | | 27.5 | 27.9 | | | | | 20.3 | 11 | | | | |
| SEBS 7WBS | 9 | 5.5 | 25 | 21.1 | 21.9 | 19 | 10 | M3 | 2.8 | 10.7 | — | M4 | 3.5 | 7 | |
| SEBS 7WB | | | | 30.6 | 31.4 | | | | | 20.2 | 12 | | | | |
| SEBS 7WBY | | | | 39.3 | 40.1 | | | | | 28.9 | 18 | | | | |
| SEBS 9WBS | 12 | 6 | 30 | 24.2 | 25 | 21 | — | M3 | 2.8 | 13 | — | — | — | 9 | |
| SEBS 9WB | | | | 37.5 | 38.3 | | | | | 26.3 | | | | | — |
| SEBS 9WBY | | | | 49.5 | 50.3 | | | | | 23 | | | | | 24 |

| part number | standard rail length | | | | | | | | | | | | | | |
|-----------------|----------------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | L mm | | | | | | | | | | | | | | |
| SEBS 5WB | 50 | 70 | 90 | 110 | 130 | 150 | 170 | 190 | | | | | | | |
| SEBS 7WB | 50 | 80 | 110 | 140 | 170 | 200 | 230 | 260 | 290 | 320 | 350 | 380 | 410 | 440 | 470 |
| SEBS 9WB | 50 | 80 | 110 | 140 | 170 | 200 | 230 | 260 | 290 | 320 | 350 | 380 | 410 | 440 | 470 |

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance. The minimum standard rail can not be used for SEBS 9 WBY.

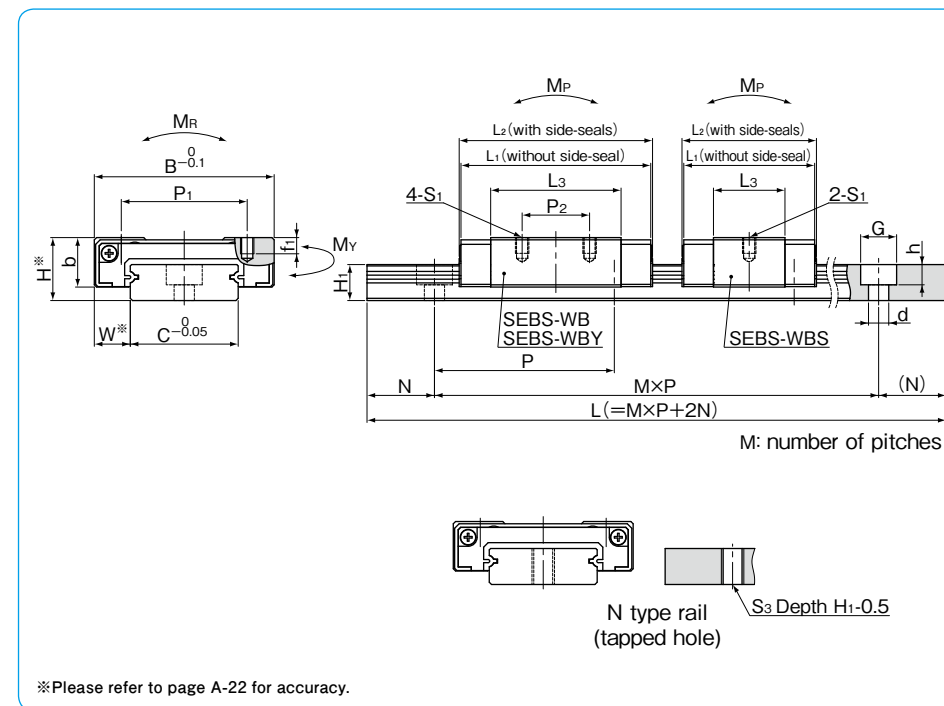


| guide rail dimensions | | | | | | | basic load rating | | | allowable static moment | | | mass | | block size |
|-----------------------|----|----------------|---------------|----------------|----|----|-------------------|-----------------------|-----------------|-------------------------|----------------|---------|--------------------|----|------------|
| H ₁ | C | B ₁ | d × G × h | S ₃ | N | P | dynamic C | static C ₀ | M _{P2} | M _{Y2} | M _R | block g | guide rail g/100mm | | |
| mm | mm | mm | mm | | mm | mm | kN | kN | N · m | N · m | N · m | | | | |
| 4 | 10 | — | 3 × 5.5 × 3 | M3 | 5 | 20 | 0.71 | 1.17 | 2.60 | 2.18 | 5.99 | 7 | 26 | | |
| | | | | | | | 0.91 | 1.68 | 5.16 | 4.33 | 8.56 | | | 10 | |
| 5.2 | 14 | — | 3.5 × 6 × 3.2 | M4 | 10 | 30 | 1.05 | 1.26 | 2.17 | 1.82 | 9.07 | 12 | 51 | | |
| | | | | | | | 1.71 | 2.53 | 7.78 | 6.53 | 18.1 | | | 20 | |
| | | | | | | | 2.26 | 3.80 | 16.8 | 14.1 | 27.2 | | | 28 | |
| 7.5 | 18 | — | 3.5 × 6 × 4.5 | M4 | 10 | 30 | 1.73 | 2.01 | 4.35 | 3.65 | 18.6 | 21 | 96 | | |
| | | | | | | | 2.96 | 4.36 | 18.1 | 15.2 | 40.4 | | | 37 | |
| | | | | | | | 3.87 | 6.38 | 37.4 | 31.4 | 59.0 | | | 52 | |

M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN ≃ 102kgf 1N · m ≃ 0.102kgf · m

| | maximum length mm | |
|---------|-------------------|----------------------|
| | counterbore | tapped hole (N type) |
| | 600 | 500 |
| | 1,300 | 700 |
| 500 530 | 1,480 | 1,000 |

SEBS-WBS/WB/WBY TYPE

— Retained Ball · Wide Type —

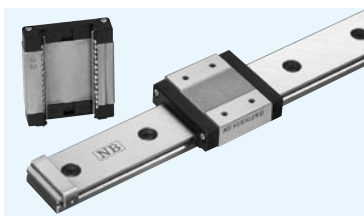

part number structure

example **SEBS 15WB Y UU 2 T1 -539 N P /W2**


| | | | | | | | | | | | | |
|----------------------|------|-------|--|------|---|---------------------------------------|-------------------------------------|---|--|--|----------------------|--|
| SEBS: anti-corrosion | size | block | S: short blank: standard Y: long | seal | blank: without side-seal UU: with side-seals | number of blocks attached to one rail | preload symbol (refer to page A-22) | TO: clearance blank: standard T1: light | symbol for number of axes* blank: single axis W2: 2 parallel axes W3: 3 parallel axes | accuracy grade (refer to page A-22) blank: high P: precision | total length of rail | rail mounting hole blank: counterbore N: tapped hole |
|----------------------|------|-------|--|------|---|---------------------------------------|-------------------------------------|---|--|--|----------------------|--|

* The symbol for the number of axes does not mean the number of rails ordered.

| part number | assembly dimensions | | block dimensions | | | | | | | | | | | |
|-------------|---------------------|----|------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|
| | H | W | B | L ₁ | L ₂ | P ₁ | P ₂ | S ₁ | f ₁ | L ₃ | P ₃ | S ₂ | f ₂ | b |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SEBS12WBS | | | | 29.7 | 30.1 | | — | | | 15.9 | | | | |
| SEBS12WB | 14 | 8 | 40 | 42.8 | 43.2 | 28 | 15 | M3 | 3.5 | 29 | — | — | — | 11 |
| SEBS12WBY | | | | 58.3 | 58.7 | | 28 | | | 44.5 | | | | |
| SEBS15WBS | | | | 39.4 | 39.8 | | — | | | 24 | | | | |
| SEBS15WB | 16 | 9 | 60 | 54.2 | 54.6 | 45 | 20 | M4 | 4.5 | 38.8 | — | — | — | 13 |
| SEBS15WBY | | | | 73.3 | 73.7 | | 35 | | | 57.9 | | | | |

| part number | standard rail length L mm | | | | | | | | | | | | | | |
|-------------|------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| SEBS12WB | 70 | 110 | 150 | 190 | 230 | 270 | 310 | 350 | 390 | 430 | 470 | 510 | 550 | 590 | 630 |
| SEBS15WB | 70 | 110 | 150 | 190 | 230 | 270 | 310 | 350 | 390 | 430 | 470 | 510 | 550 | 590 | 630 |

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.
The minimum standard rail can not be used for SEBS 15 WBY.

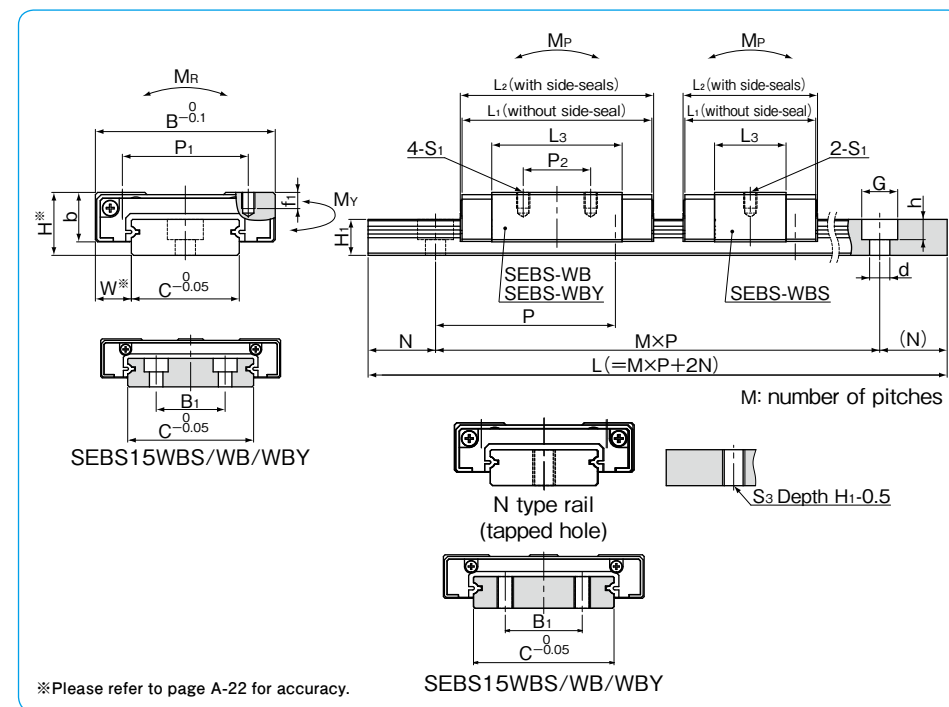


| guide rail dimensions | | | | | | | basic load rating | | | allowable static moment | | | mass | | block size |
|-----------------------|----|----------------|---------------|----------------|----|----|-------------------|-----------------------|-----------------|-------------------------|----------------|---------|--------------------|-------|------------|
| H ₁ | C | B ₁ | d × G × h | S ₃ | N | P | dynamic C | static C ₀ | M _{P2} | M _{Y2} | M _R | block g | guide rail g/100mm | | |
| mm | mm | mm | mm | | mm | mm | kN | kN | N · m | N · m | N · m | | | | |
| 8 | 24 | — | 4.5 × 8 × 4.5 | M5 | 15 | 40 | 2.53 | 2.86 | 7.38 | 6.19 | 35.1 | 43 | 137 | 12WBS | |
| | | | | | | | 4.10 | 5.73 | 26.4 | 22.1 | 70.2 | 71 | | 12WB | |
| | | | | | | | 5.45 | 8.60 | 57.1 | 47.9 | 105 | 106 | | 12WBY | |
| 9.5 | 42 | 23 | 4.5 × 8 × 4.5 | M5 | 15 | 40 | 5.15 | 5.91 | 22.9 | 19.2 | 125 | 98 | 286 | 15WBS | |
| | | | | | | | 7.49 | 10.1 | 62.2 | 52.2 | 215 | 148 | | 15WB | |
| | | | | | | | 9.95 | 15.2 | 134 | 113 | 323 | 216 | | 15WBY | |

M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN ≒ 102kgf 1N · m ≒ 0.102kgf · m

| | | maximum counterbore | length mm |
|-----|-----|---------------------|----------------------|
| | | | tapped hole (N type) |
| 670 | 710 | | |
| 670 | 710 | 1,480 | 1,000 |
| 670 | 710 | 750 | 790 |
| 670 | 710 | 830 | 870 |

SEB-A/AY TYPE

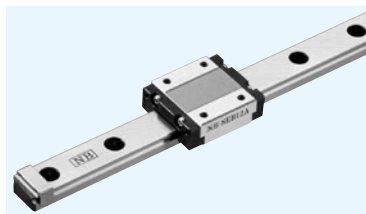

part number structure

example **SEBS 7A Y UU 2 T1 - 289 N P / W2**

specification
SEB: standard
SEBS: anti-corrosion

size

block
blank: standard
Y: long

seal
blank: without side-seal
UU: with side-seals

number of blocks attached to one rail


preload symbol (refer to page A-22)
TO: clearance
blank: standard
T1: light

symbol for number of axes*
blank: single axis
W2: 2 parallel axes
W3: 3 parallel axes

accuracy grade (refer to page A-22)
blank: high
P: precision

rail mounting hole
blank: counterbore
N: tapped hole

total length of rail

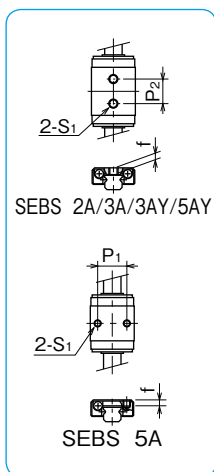


* The symbol for the number of axes does not mean the number of rails ordered.

| part number | | assembly dimensions | | block dimensions | | | | | | | | |
|-------------|-----------------|---------------------|-----|------------------|------|------|----|-----|------|------|------|-----|
| standard | anti-corrosion | H | W | B | L1 | L2 | P1 | P2 | S1 | f | L3 | b |
| | | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| — | SEBS 2A | 3.2 | 2 | 6 | 12.9 | 14.3 | — | 4 | M1.4 | 1.05 | 9.3 | 2.5 |
| — | SEBS 3A | 4 | 2.5 | 8 | 10.5 | 11.8 | — | 3.5 | M1.6 | 1.3 | 6.5 | 3 |
| | SEBS 3AY | | | | 14.5 | 15.8 | — | 5.5 | M2 | | 10.5 | |
| — | SEBS 5A | 6 | 3.5 | 12 | 15.6 | 17 | 8 | — | M2 | 1.5 | 9.8 | 4.5 |
| | SEBS 5AY | | | | 19.2 | 20.6 | — | 7 | M2.6 | 1.8 | 13.4 | |
| — | SEBS 7A | 8 | 5 | 17 | 21.9 | 24 | 12 | 8 | M2 | 2.5 | 15.1 | 6.5 |
| | SEBS 7AY | | | | 31 | 33 | | 13 | | | 24.6 | |

| part number | | standard rail length L | | | | | | | | | | | | | | |
|-------------|----------------|------------------------|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| standard | anti-corrosion | mm | | | | | | | | | | | | | | |
| — | SEBS 2A | 32 | 40 | 56 | 80 | 104 | | | | | | | | | | |
| — | SEBS 3A | 30 | 40 | 60 | 80 | 100 | | | | | | | | | | |
| — | SEBS 5A | 40 | 55 | 70 | 85 | 100 | 115 | 130 | 145 | 160 | | | | | | |
| — | SEBS 7A | 40 | 55 | 70 | 85 | 100 | 115 | 130 | 145 | 160 | 175 | 190 | 205 | 220 | 235 | 250 |


Joint rails are used when the required length exceeds the maximum standard length listed in the dimension tables. Please contact NB for details. Only N type rail is available for SEBS 2A and SEBS 3A.

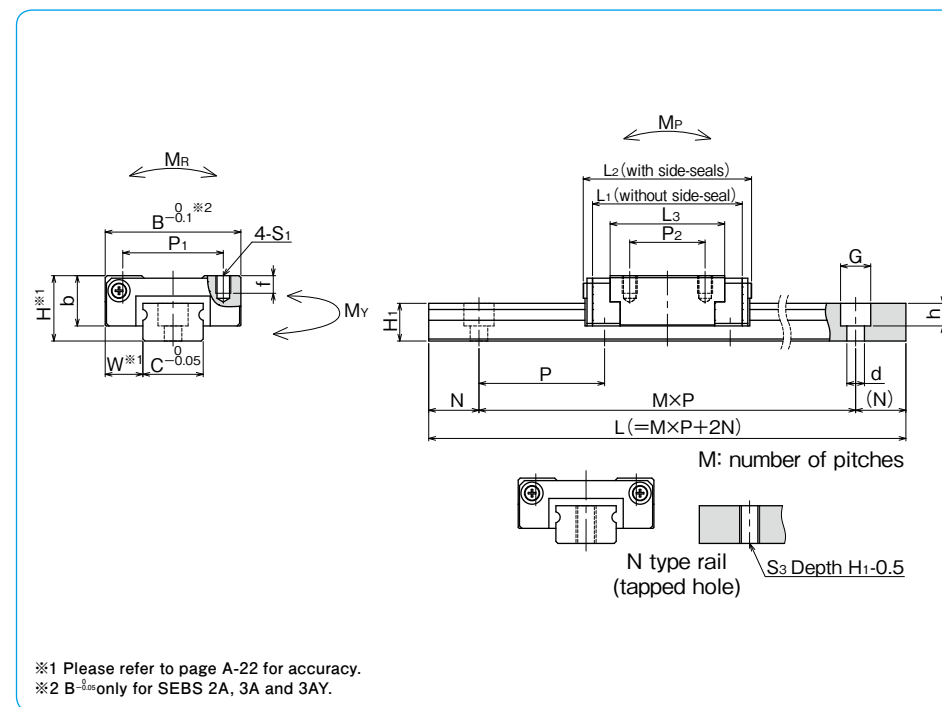


| guide rail dimensions | | | | basic load rating | | allowable static moment | | | mass | | block size | | |
|-----------------------|----|-------------|----------------|-------------------|----|-------------------------|-----------|----------------|----------------|----------------|------------|------------|------------|
| H ₁ | C | d×G×h | S ₃ | N | P | dynamic C | static Co | M _P | M _Y | M _R | block | guide rail | block size |
| mm | mm | mm | | mm | mm | kN | kN | N·m | N·m | N·m | g | g/100mm | |
| 2 | 2 | — | M1 | 4 | 8 | 0.21 | 0.38 | 0.53 2.77 | 0.64 3.30 | 0.41 | 0.8 | 2.8 | 2A |
| 2.6 | 3 | — | M1.6 | 10 | 10 | 0.25 | 0.36 | 0.39 2.42 | 0.46 2.88 | 0.57 | 1 | 5 | 3A |
| | | | | | | 0.35 | 0.58 | 0.97 5.18 | 1.16 6.18 | 0.93 | 2 | 3AY | |
| 4 | 5 | 2.4×3.5×1 | M2.6 | 5 | 15 | 0.59 | 0.81 | 1.32 8.05 | 1.58 9.60 | 2.11 | 4 | 13 | 5A |
| | | | | | | 0.74 | 1.11 | 2.39 13.2 | 2.86 15.7 | 2.90 | 5 | 5AY | |
| 4.7 | 7 | 2.4×4.2×2.3 | M3 | 15 | 15 | 1.08 | 1.41 | 3.07 18.9 | 3.66 22.6 | 5.18 | 11 | 21 | 7A |
| | | | | | | 1.59 | 2.48 | 8.74 45.1 | 10.4 53.8 | 9.07 | 16 | 7AY | |

M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN≒102kgf 1N·m≒0.102kgf·m

| | | maximum counterbore | | length mm | |
|-----|-------------|---------------------|----------------|-----------|----------------|
| | | standard | anti-corrosion | standard | anti-corrosion |
| | | — | — | — | 150 |
| | | — | — | — | 150 |
| | | — | 600 | — | 300 |
| 265 | 280 295 310 | — | 1,300 | — | 700 |



SEB-A/AY TYPE

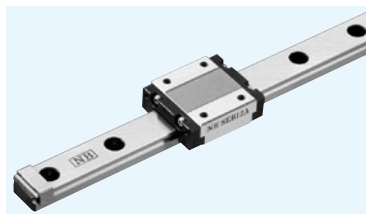

part number structure

example **SEBS 15A Y UU 2 T1 -539 N P /W2**

| | | | | | | | | | |
|--|------|-------------------------------------|---|---------------------------------------|--|--|--|--|----------------------|
| specification SEB: standard SEBS: anti-corrosion | size | block blank: standard Y: long | seal blank: without side-seal UU: with side-seals | number of blocks attached to one rail | preload symbol (refer to page A-22) TO: clearance blank: standard T1: light | symbol for number of axes* blank: single axis W2: 2 parallel axes W3: 3 parallel axes | accuracy grade (refer to page A-22) blank: high P: precision | rail mounting hole blank: counterbore N: tapped hole | total length of rail |
|--|------|-------------------------------------|---|---------------------------------------|--|--|--|--|----------------------|

* The symbol for the number of axes does not mean the number of rails ordered.

| part number | | assembly dimensions | | block dimensions | | | | | | | | | |
|-------------|----------------|---------------------|-----|------------------|----------------|----------------|----------------|----------------|----------------|-----|----------------|------|------|
| standard | anti-corrosion | H | W | B | L ₁ | L ₂ | P ₁ | P ₂ | S ₁ | f | L ₃ | b | |
| | | mm | mm | mm | mm | mm | mm | mm | | mm | mm | mm | |
| SEB 9A | SEBS 9A | 10 | 5.5 | 20 | 28.1 | 29.5 | 15 | 10 | M3 | 3 | 20.4 | 7.8 | |
| SEB 9AY | SEBS 9AY | | | | 38.1 | 40 | | 16 | | | 30.4 | | |
| SEB12A | SEBS12A | 13 | 7.5 | 27 | 30 | 33.5 | 20 | 15 | | 3.5 | 22.8 | 10 | |
| SEB12AY | SEBS12AY | | | | 42 | 45.5 | | 20 | | | 34.7 | | |
| SEB15A | SEBS15A | 16 | 8.5 | 32 | 38.5 | 42 | 25 | 20 | | 4 | 29.5 | 12 | |
| SEB15AY | SEBS15AY | | | | 54.5 | 58 | | 25 | | | 45.4 | | |
| SEB20A | SEBS20A | 25 | 13 | 46 | 55.7 | 61 | 38 | 38 | | M4 | 6 | 45.7 | 17.8 |
| SEB20AY | SEBS20AY | | | | 79.5 | 85 | | 38 | | | | 69.5 | |

All the SEB blocks are made of stainless steel (SEBS marking).

| part number | | standard rail length L | | | | | | | | | | | | | | |
|-------------|----------------|------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------|-----|
| standard | anti-corrosion | mm | | | | | | | | | | | | | | |
| SEB 9A | SEBS 9A | 55 | 75 | 95 | 115 | 135 | 155 | 175 | 195 | 215 | 235 | 255 | 275 | 295 | 315 | 335 |
| SEB12A | SEBS12A | 70 | 95 | 120 | 145 | 170 | 195 | 220 | 245 | 270 | 295 | 320 | 345 | 370 | 395 | 420 |
| SEB15A | SEBS15A | 70 | 110 | 150 | 190 | 230 | 270 | 310 | 350 | 390 | 430 | 470 | 510 | 550 | 590 | 630 |
| SEB20A | SEBS20A | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | |

Joint rails are used when the required length exceeds the maximum standard length listed in the dimension tables.

Technical diagrams showing cross-sections and side views of the slide guide. Dimensions include H₁, C, B^{0.1}, P₁, 4-S₁, W^{*1}, C^{0.05}, H, L₁ (without side-seal), L₂ (with side-seals), L₃, P₂, G, N, P, M×P, L (=M×P+2N), d, and S₃ Depth H₁-0.5. Load indicators M_R, M_P, and M_Y are shown. A note states: M: number of pitches. A reference note says: *Please refer to page A-22 for accuracy.


| guide rail dimensions | | | | | | basic load rating | | allowable static moment | | | mass | | block size |
|-----------------------|----|-----------|----------------|-----|----|-------------------|-----------------------|-------------------------|----------------|----------------|-------|------------|------------|
| H ₁ | C | d×G×h | S ₃ | N | P | dynamic C | static C ₀ | M _P | M _Y | M _R | block | guide rail | block size |
| mm | mm | mm | | mm | mm | kN | kN | N·m | N·m | N·m | g | g/100mm | |
| 5.5 | 9 | 3.5×6×3.5 | M4 | 7.5 | 20 | 1.92 | 2.53 | 7.64 | 9.11 | 11.5 | 19 | 30 | 9A |
| | | | | | | 2.62 | 3.94 | 43.1 | 51.3 | 17.9 | 28 | | 9AY |
| 7.5 | 12 | 3.5×6×4.5 | | 10 | 25 | 2.60 | 3.20 | 10.4 | 12.4 | 20.0 | 37 | 60 | 12A |
| | | | | | | 3.65 | 5.21 | 57.0 | 68.0 | 32.6 | 55 | | 12AY |
| 9.5 | 15 | 3.5×6×4.5 | | 15 | 40 | 4.74 | 5.67 | 24.5 | 29.2 | 43.9 | 68 | 100 | 15A |
| | | | | | | 6.65 | 9.22 | 131 | 157 | 71.4 | 101 | | 15AY |
| 15 | 20 | 6×9.5×8.5 | | M5 | 20 | 60 | 8.99 | 11.1 | 72.7 | 86.7 | 114 | 209 | 20A |
| | | | | | | | 12.4 | 17.8 | 367 | 437 | 182 | | 338 |

M_P and M_Y are allowable static moments when two blocks are used in close contact. 1kN≒102kgf 1N·m≒0.102kgf·m

| | | | | maximum length mm | |
|-----|-----|-------------|----------------------|-------------------|----------------|
| | | counterbore | tapped hole (N type) | | |
| | | standard | anti-corrosion | standard | anti-corrosion |
| 355 | 375 | 395 | 415 | 435 | 455 |
| 445 | 470 | 495 | | 500 | 500 |
| 670 | | | | 1,480 | 1,000 |
| | | | | 1,900 | 1,900 |

SEB-WA/WAY TYPE

— Wide block —

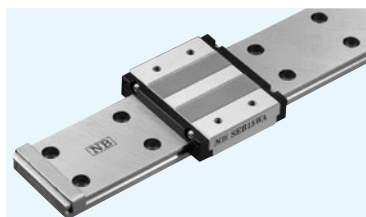

part number structure

example **SEBS 9WA Y UU 2 T1 - 289 N P / W2**

specification
SEB: standard
SEBS: anti-corrosion

size

block
blank: standard
Y: long

seal
blank: without side-seal
UU: with side-seals

number of blocks attached to one rail


preload symbol (refer to page A-22)
TO: clearance
blank: standard
T1: light

symbol for number of axes*
blank: single axis
W2: 2 parallel axes
W3: 3 parallel axes

accuracy grade (refer to page A-22)
blank: high
P: precision

rail mounting hole
blank: counterbore
N: tapped hole

total length of rail

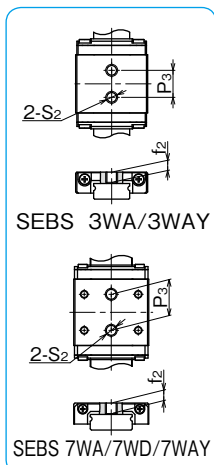


* The symbol for the number of axes does not mean the number of rails ordered.

| part number | | assembly dimensions | | block dimensions | | | | | | | | | | | | | | | | |
|-----------------|------------------|---------------------|-----|------------------|------|------|----|------|------|-----|------|-----|----|-----|-----|------|-----|----|-----|------|
| standard | anti-corrosion | H | W | B | L1 | L2 | P1 | P2 | S1 | f1 | L3 | P3 | S2 | f2 | b | | | | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | | | | | |
| — | SEBS 3WA | 4.5 | 3 | 12 | 14.2 | 15 | — | — | — | — | 9.7 | 4.5 | M2 | 1.7 | 3.5 | | | | | |
| | SEBS 3WAY | | | | 19 | 19.8 | | | | | | | | | | 14.5 | 8 | | | |
| — | SEBS 7WA | 9 | 5.5 | 25 | 30.1 | 32 | 18 | 12 | M2.6 | 2.5 | 22.1 | 12 | M4 | 3.5 | 7 | | | | | |
| | SEBS 7WD | | | | | | | | | | | | | | | 19 | 10 | M3 | 2.8 | 31.6 |
| | SEBS 7WAY | | | | 39.6 | 41 | 19 | 31.6 | 18 | | | | | | | | | | | |
| SEB 9WA | SEBS 9WA | 12 | 6 | 30 | 35.9 | 38 | 21 | 12 | M2.6 | 3 | 28.4 | — | — | — | 9 | | | | | |
| SEB 9WD | SEBS 9WD | | | | | | | | | | | | | | | M3 | 2.8 | — | — | — |
| SEB 9WAY | SEBS 9WAY | | | | | | | | | | | | | | | | | | | |

All the SEB blocks are made of stainless steel (SEBS marking).

| part number | | standard rail length L | | | | | | | | | | | | | | |
|----------------|-----------------|------------------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| standard | anti-corrosion | mm | | | | | | | | | | | | | | |
| — | SEBS 3WA | 40 | 55 | 70 | 85 | 100 | | | | | | | | | | |
| — | SEBS 7WA | 50 | 80 | 110 | 140 | 170 | 200 | 230 | 260 | 290 | 320 | 350 | 380 | 410 | 440 | 470 |
| SEB 9WA | SEBS 9WA | 50 | 80 | 110 | 140 | 170 | 200 | 230 | 260 | 290 | 320 | 350 | 380 | 410 | 440 | 470 |


Joint rails are used when the required length exceeds the maximum standard length listed in the dimension tables. Please contact NB for details. SEB9WAY block lengths exceed the minimum standard rail length.

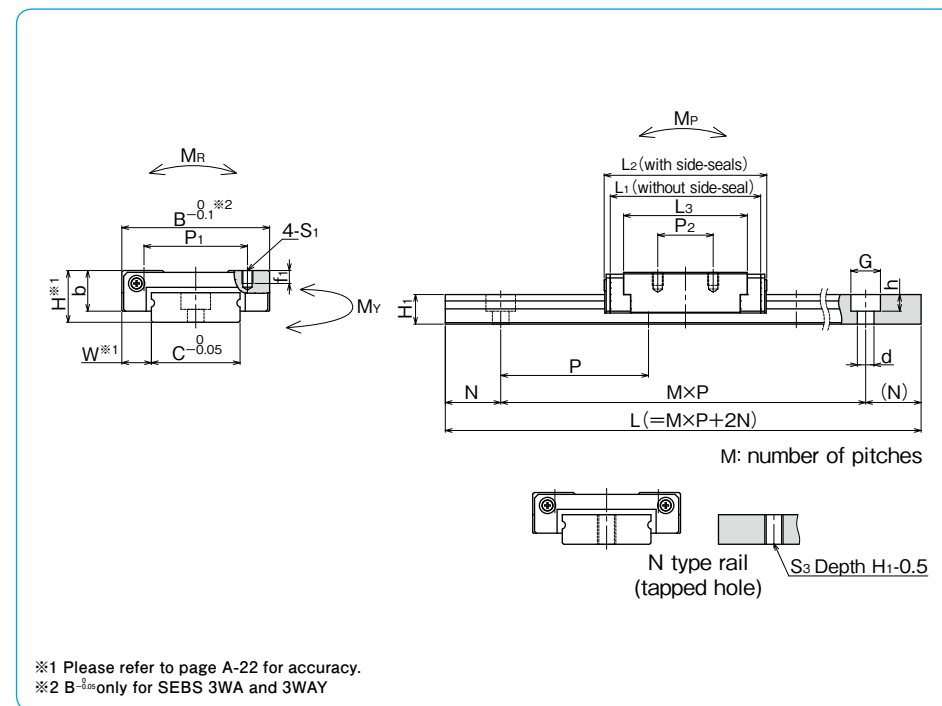

| guide rail dimensions | | | | | | | basic load rating | | allowable static moment | | | mass | | block size |
|-----------------------|----|----------------|---------------|----------------|----|----|-------------------|-----------------------|-------------------------|----------------|----------------|---------|--------------------|------------|
| H ₁ | C | B ₁ | d × G × h | S ₃ | N | P | dynamic C | static C ₀ | M _P | M _Y | M _R | block g | guide rail g/100mm | |
| mm | mm | mm | mm | mm | mm | mm | kN | kN | N · m | N · m | N · m | g | g/100mm | |
| 2.6 | 6 | — | 2.4 × 4 × 1.5 | M3 | 5 | 15 | 0.33 | 0.54 | 0.83 | 0.99 | 1.67 | 3 | 10 | |
| | | | | | | | 0.44 | 0.81 | 1.81 | 2.15 | 2.51 | | | 4 |
| 5.2 | 14 | — | 3.5 × 6 × 3.2 | M4 | 10 | 30 | 1.43 | 2.12 | 6.53 | 7.78 | 15.2 | 21 | 51 | |
| | | | | | | | 1.90 | 3.19 | 14.1 | 16.8 | 22.8 | | | 30 |
| | | | | | | | 2.49 | 3.66 | 15.2 | 18.1 | 33.9 | 38 | 96 | |
| 7.5 | 18 | — | 3.5 × 6 × 4.5 | M4 | 10 | 30 | 3.25 | 5.35 | 31.4 | 37.4 | 49.5 | 55 | 96 | |
| | | | | | | | — | — | 149 | 178 | — | | | — |


M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN = 102kgf 1N · m = 0.102kgf · m

| | | maximum length mm | | | |
|-----|-----|-------------------|----------------|----------------------|----------------|
| | | counterbore | | tapped hole (N type) | |
| | | standard | anti-corrosion | standard | anti-corrosion |
| — | — | — | 500 | — | 150 |
| — | — | — | 1,300 | — | 700 |
| 500 | 530 | 1,900 | 1,480 | 1,900 | 1,000 |



SEB-WA/WAY TYPE

— Wide block —

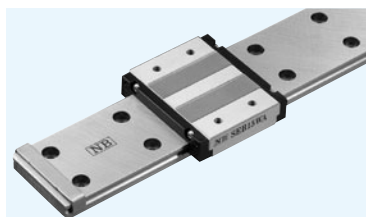

part number structure

example **SEBS 15WA Y UU 2 T1 -539 N P /W2**

| | | | | | | | | | |
|--|------|-------------------------------------|---|---------------------------------------|--|--|--|--|----------------------|
| specification SEB: standard SEBS: anti-corrosion | size | block blank: standard Y: long | seal blank: without side-seal UU: with side-seals | number of blocks attached to one rail | preload symbol (refer to page A-22) TO: clearance blank: standard T1: light | symbol for number of axes* blank: single axis W2: 2 parallel axes W3: 3 parallel axes | accuracy grade (refer to page A-22) blank: high P: precision | rail mounting hole blank: counterbore N: tapped hole | total length of rail |
|--|------|-------------------------------------|---|---------------------------------------|--|--|--|--|----------------------|

* The symbol for the number of axes does not mean the number of rails ordered.

| part number | | assembly dimensions | | block dimensions | | | | | | | | | | | |
|-------------|----------------|---------------------|----|------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|
| standard | anti-corrosion | H | W | B | L ₁ | L ₂ | P ₁ | P ₂ | S ₁ | f ₁ | L ₃ | P ₃ | S ₂ | f ₂ | b |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SEB12WA | SEBS12WA | 14 | 8 | 40 | 40.7 | 44 | 28 | 15 | M3 | 3.5 | 33.5 | — | — | — | 11 |
| SEB12WAY | SEBS12WAY | | | | 55 | 58.5 | | 28 | | | 47.8 | | | | |
| SEB15WA | SEBS15WA | 16 | 9 | 60 | 51.2 | 55 | 45 | 20 | M4 | 4.5 | 42 | — | — | — | 13 |
| SEB15WAY | SEBS15WAY | | | | 70.5 | 74 | | 35 | | | 61.1 | | | | |

All the SEB blocks are made of stainless steel (SEBS marking).

| part number | | standard rail length L mm | | | | | | | | | | | | | | |
|-------------|----------------|---------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| standard | anti-corrosion | 70 | 110 | 150 | 190 | 230 | 270 | 310 | 350 | 390 | 430 | 470 | 510 | 550 | 590 | 630 |
| SEB12WA | SEBS12WA | 70 | 110 | 150 | 190 | 230 | 270 | 310 | 350 | 390 | 430 | 470 | 510 | 550 | 590 | 630 |
| SEB15WA | SEBS15WA | 70 | 110 | 150 | 190 | 230 | 270 | 310 | 350 | 390 | 430 | 470 | 510 | 550 | 590 | 630 |

Joint rails are used when the required length exceeds the maximum standard length listed in the dimension tables. Please contact NB for details. SEB15WAY block lengths exceed the minimum standard rail length.

SEB 15WA/15WAY

SEB15WA/15WAY

SEB15WA/15WAY

SEB15WA/15WAY

※Please refer to page A-22 for accuracy.

| guide rail dimensions | | | | | | | basic load rating | | allowable static moment | | | mass | | block size |
|-----------------------|----|----------------|-----------|----------------|----|----|-------------------|-----------------------|-------------------------|----------------|----------------|---------|--------------------|------------|
| H ₁ | C | B ₁ | d×G×h | S ₃ | N | P | dynamic C | static C ₀ | M _P | M _Y | M _R | block g | guide rail g/100mm | |
| mm | mm | mm | mm | | mm | mm | kN | kN | N·m | N·m | N·m | g | g/100mm | |
| 8 | 24 | — | 4.5×8×4.5 | M5 | 15 | 40 | 3.64 | 5.21 | 25.7 | 30.7 | 63.8 | 77 | 138 | |
| | | | | | | | 4.75 | 7.62 | 53.2 | 63.4 | 93.3 | 109 | | |
| 9.5 | 42 | 23 | | | | | 6.29 | 8.51 | 52.2 | 62.2 | 180 | 154 | 294 | |
| | | | | | | | 8.35 | 12.7 | 113 | 134 | 271 | 222 | | |

M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN≒102kgf 1N·m≒0.102kgf·m

| part number | | maximum length mm | | | |
|-------------|----------------|----------------------|----------------------------|-------------------------------|-------------------------------------|
| standard | anti-corrosion | counterbore standard | counterbore anti-corrosion | tapped hole (N type) standard | tapped hole (N type) anti-corrosion |
| 670 | 710 | 1,900 | 1,480 | 1,900 | 1,000 |
| 670 | 710 | 750 | 790 | 830 | 870 |

SLIDE GUIDE Miniature SER Type

The NB slide guide SER type is a linear motion bearing utilizing the rolling motion of precision rollers placed in two rows. Despite its compactness, it can be used in various applications requiring high load capacity.

STRUCTURE AND ADVANTAGES

The SER type slide guide consists of a rail with two precision-machined raceway grooves and a block assembly. The block assembly consists of the main body, rollers, and bottom retainers. All of these components are made out of metallic materials.

High Load Capacity and Long Life

Since roller elements are used, the contact surface is large which provides a high load capacity and a long travel life.

Compactness

Since a cross roller method is utilized, only two raceway grooves are necessary and presents a very compact package.

Moment Resistant Type

The wide block design (WA type) has an extremely high moment loading capacity. This will allow for single guide designs in the most demanding and compact applications.


Tapped Hole Rail Type

For the SER rails, counterbore (standard) and optional tapped hole (N) types are available enabling various installation methods.

All Stainless Steel Type


The SERS type slide guide is made from all stainless steel components, making it ideal for high temperature, clean room or vacuum applications.

Figure A-45 Structure of SER type Slide Guide

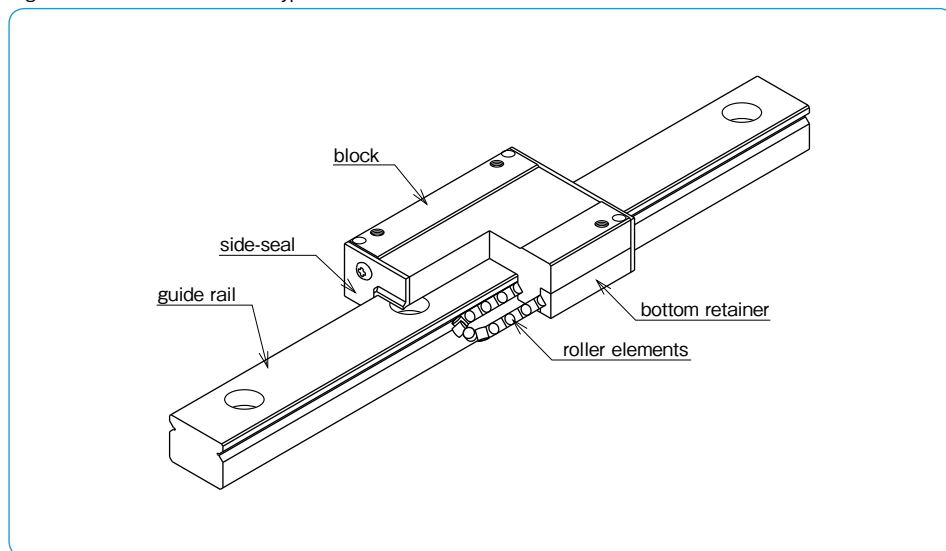

TYPES

The SER type slide guides are available with a standard block or a wide block (WA) configuration. Each type can be selected with standard rails of counterbore holes or the optional N-Type rails of tapped holes. For anti-corrosion, all stainless steel type is also available with all stainless steel components.

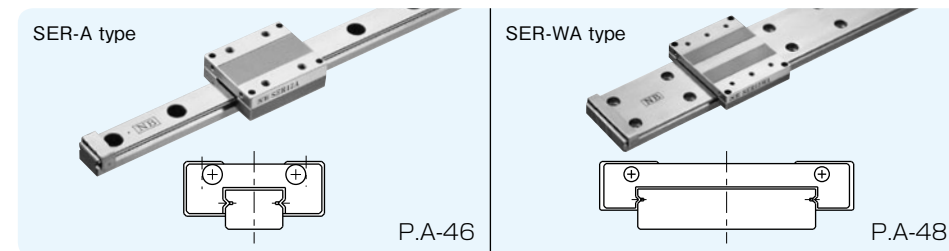

ACCURACY

The SER-type slide guides are available with high grade accuracy (blank) or precision grade accuracy (P).

Table A-16 Accuracy unit : mm

| accuracy grade | high | precision |
|---|-------------------------|-----------|
| accuracy symbol | blank | P |
| allowable dimensional difference in height H | ±0.015 | ±0.008 |
| paired difference for height H | 0.015 | 0.007 |
| allowable dimensional difference in width W | ±0.020 | ±0.010 |
| paired difference for width W | 0.020 | 0.010 |
| Running parallelism of surface C to surface A | refer to Figure A-48,49 | |
| Running parallelism of surface D to surface B | refer to Figure A-48,49 | |

Figure A-46 Accuracy


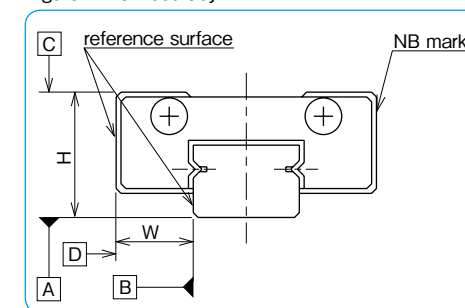


Figure A-47 Motion Accuracy

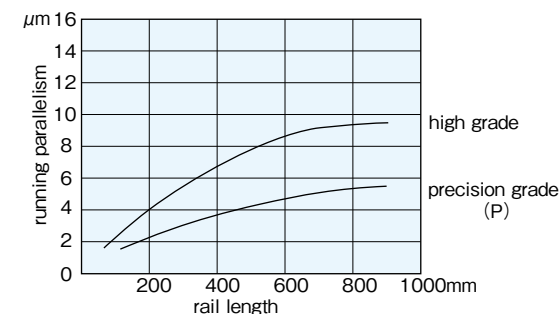

PRELOAD

The SER(S) type slide guides are available only with a standard (0 to minimal preload) preload.

RAIL LENGTH

Slide guides with most commonly used lengths are available as standard. For slide guides with a non-standard length, unless otherwise specified, the distance from one end of the rail to the first hole center (N) will be within the ranges listed in Tables A-17 and A-18, satisfying the following equation.

$$L = M \cdot P + 2N$$

L: total length of rail (mm)
N: distance from the end of the rail to the first hole center (mm)
P: hole pitch (mm) M: number of pitches

Figure A-48 Rail

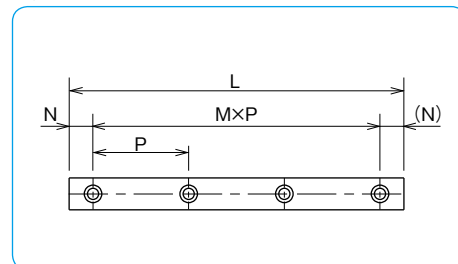


Table A-17 N Dimension (standard type) unit : mm

| part number | | N | |
|-------------|----------------|----------|-----------|
| standard | anti-corrosion | and over | less than |
| SER 9A | SERS 9A | 4 | 14 |
| SER12A | SERS12A | | 16.5 |
| SER15A | SERS15A | | 24 |
| SER20A | SERS20A | 6 | 36 |

Table A-18 N Dimension (wide type) unit : mm

| part number | | N | |
|-------------|----------------|----------|-----------|
| standard | anti-corrosion | and over | less than |
| SER 9WA | SERS 9WA | 4 | 19 |
| SER12WA | SERS12WA | 5 | 25 |
| SER15WA | SERS15WA | | |

MOUNTING

Mounting Surface Profile

Slide guides are mounted by pushing the reference surface of the rail and the block against the shoulder provided on the mounting surface. An undercut or a radius corner should be provided at the corner of the shoulder, as shown in Figures A-49 and A-50, to prevent interference. The recommended shoulder height and corner radius are shown in Table A-19 and Table A-20 respectively.

Figure A-49 Mounting Reference Surface Profile-1


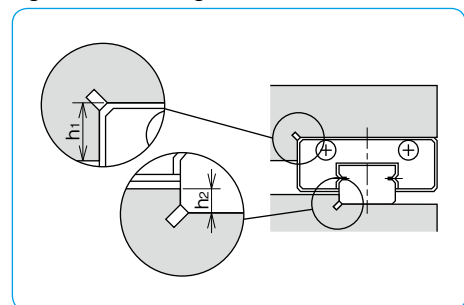


Table A-19 Shoulder Height Dimensions unit : mm

| size | shoulder height on the block side h ₁ | shoulder height on the rail side h ₂ |
|---------|---|--|
| SER 9A | 3 | 1.5 |
| SER12A | 4 | 2 |
| SER15A | 5 | 3.5 |
| SER20A | | 5 |
| SER 9WA | 3 | 2.5 |
| SER12WA | 4 | |
| SER15WA | 5 | |
| SER15WA | | |

Figure A-50 Mounting Reference Surface Profile-2

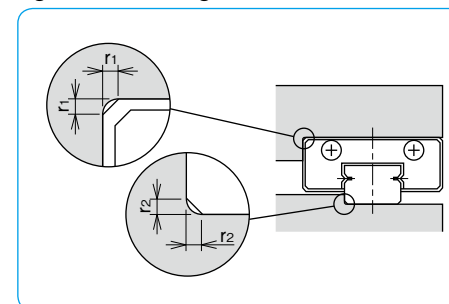

Recommended Torque Values

The screws to fasten the rail should be tightened to an equal torque using a torque wrench in order to secure the motion accuracy. The recommended torque values are given in Table A-21. Please adjust the torque depending on the operating conditions.

Table A-20 Maximum Corner Radius Values unit : mm

| size | block mounting part r ₁ | rail mounting part r ₂ |
|---------|---------------------------------------|--------------------------------------|
| SER 9A | 0.3 | 0.1 |
| SER12A | | 0.3 |
| SER15A | | |
| SER20A | | 0.5 |
| SER 9WA | | 0.3 |
| SER12WA | | |
| SER15WA | | |

Table A-21 Recommended Torque unit : N·m

| size | M2 | M3 | M4 | M5 | M6 |
|--------------------|-----|-----|-----|-----|-----|
| recommended torque | 0.3 | 1.0 | 2.3 | 4.7 | 8.0 |

(for stainless steel screw A2-70)

MOUNTING SCREW


Small screws for the SER(S) type slide guide are available from NB.

Table A-22 unit : mm

| size | pitch | length f | application |
|------|-------|------------|-------------|
| M2 | 0.4 | 4,5,6,8,10 | SER 9A |

(stainless steel)

Figure A-51 Mounting Screw

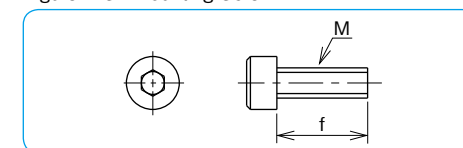

LUBRICATION


A high grade lithium soap based grease is applied to the NB slide guides prior to shipment for immediate use. Please relubricate with a similar type of grease periodically depending on the operating conditions. For use in clean rooms or vacuum environments, NB slide guides without grease are available upon request. Please contact NB for customer specified grease types.

Please refer to page Eng-40 for details on the low dust generation grease.

A special syringe lubricant dispenser is available from NB as an option (refer to page Eng-43).



SER-A TYPE

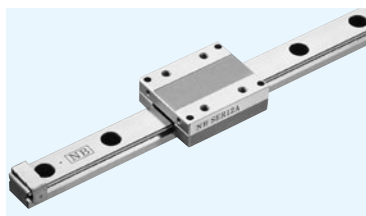

part number structure


example **SERS 15A UU 2 -589 N P /W2**

| | |
|---|---|
| specification SER: standard SERS: anti-corrosion | symbol for number of axes* blank: single axis W2: 2 parallel axes W3: 3 parallel axes |
| size | accuracy grade (refer to page A-43) blank: high P: precision |
| seal blank: without side-seal UU: with side-seals | rail mounting hole blank: counterbore N: tapped hole |
| number of blocks attached to one rail | total length of rail |

* The symbol for the number of axes does not mean the number of rails ordered.

| part number | | assembly dimensions | | block dimensions | | | | | | | |
|---------------|----------------|---------------------|-----|------------------|----------------|----------------|----------------|----------------|----------------|-----|------|
| standard | anti-corrosion | H | W | B | L ₁ | L ₂ | P ₁ | P ₂ | S ₁ | f | b |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SER 9A | SERS 9A | 10 | 5.7 | 20 | 28 | 32 | 15 | 13 | M2 | 2.5 | 7.8 |
| SER12A | SERS12A | 13 | 8 | 27 | 32 | 36 | 20 | 15 | M3 | 3 | 10.5 |
| SER15A | SERS15A | 16 | 8.5 | 32 | 40 | 44 | 25 | 20 | | 4 | 11.5 |
| SER20A | SERS20A | 25 | 13 | 46 | 60 | 66 | 38 | 38 | M4 | 6 | 17.5 |

| part number | | standard rail length | | | | | | | maximum length |
|---------------|----------------|----------------------|-----|-----|-----|-----|-----|-----|----------------|
| standard | anti-corrosion | L | | | | | | | mm |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | |
| SER 9A | SERS 9A | 55 | 75 | 95 | 115 | 155 | 195 | 275 | 275 |
| SER12A | SERS12A | 120 | 170 | 220 | 270 | 320 | 370 | 470 | 470 |
| SER15A | SERS15A | 150 | 230 | 310 | 430 | 550 | 670 | | 670 |
| SER20A | SERS20A | 220 | 280 | 340 | 460 | 640 | 880 | | 880 |

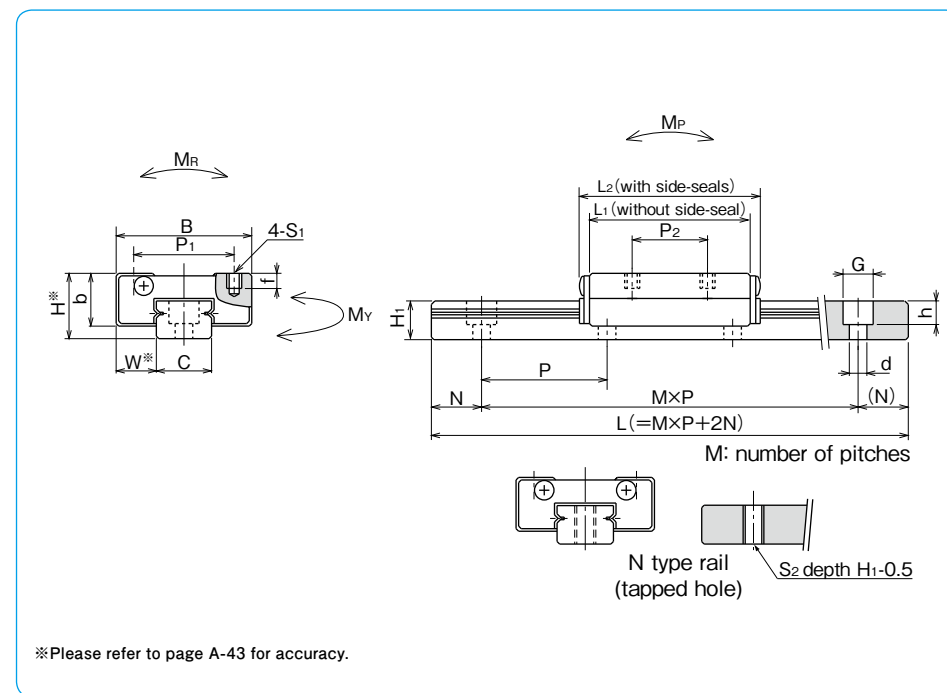

| part number | | guide rail dimensions | | | | basic load rating | | allowable static moment | | | mass | | block size |
|----------------|-----|-----------------------|-----------|-----------|----|-------------------|-----------|-------------------------|----------------|----------------|---------|--------------------|------------|
| H ₁ | C | S ₂ | d×G×h | N | P | dynamic C | static Co | M _P | M _Y | M _R | block g | guide rail g/100mm | block size |
| mm | mm | mm | mm | mm | mm | kN | kN | N·m | N·m | N·m | g | g/100mm | |
| 5.5 | 8.6 | M4 | 2.6×4.5×3 | 7.5 | 20 | 2.65 | 2.94 | 11.8 | 13.7 | 19.6 | 25 | 35 | 9A |
| 7.5 | 11 | | | 10 | 25 | 3.43 | 3.92 | 15.7 | 17.6 | 29.4 | 51 | 55 | 12A |
| 9.5 | 15 | M5 | 3.5×6×4.5 | 15 | 40 | 4.70 | 5.78 | 29.0 | 32.3 | 54.9 | 82 | 100 | 15A |
| 15 | 20 | M6 | | 6×9.5×8.5 | 20 | 60 | 8.82 | 9.80 | 59.0 | 66.6 | 151 | 280 | 230 |

1kN≒102kgf 1N·m≒0.102kgf·m

SER-WA TYPE


— Wide Type —



part number structure

example **SERS 15WA UU 2 -589 N P /W2**


| | |
|---|--|
| specification SER : standard SERS : anti-corrosion | symbol for number of axes* blank : single axis W2 : 2 parallel axes W3 : 3 parallel axes |
| size | accuracy grade (refer to page A-43) blank : high P : precision |
| seal blank : without side-seal UU : with side-seals | rail mounting hole blank : counterbore N : tapped hole |
| number of blocks attached to one rail | total length of rail |



* The symbol for the number of axes does not mean the number of rails ordered.

| part number | | assembly dimensions | | block dimensions | | | | | | | |
|-----------------|------------------|---------------------|-----|------------------|----------------|----------------|----------------|----------------|----------------|----|-----|
| standard | anti-corrosion | H | W | B | L ₁ | L ₂ | P ₁ | P ₂ | S ₁ | f | b |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | | mm | mm |
| SER 9WA | SERS 9WA | 12 | 6.5 | 30 | 35 | 39 | 21 | 10 | M3 | 3 | 8.8 |
| SER 12WA | SERS 12WA | 14 | 9 | 40 | 40 | 44 | 28 | 12.5 | | | 11 |
| SER 15WA | SERS 15WA | 16 | | 60 | 50 | 54 | 45 | 15 | | | M4 |

| part number | | standard rail length | | | | | | | maximum length |
|-----------------|------------------|----------------------|-----|-----|-----|-----|-----|-----|----------------|
| standard | anti-corrosion | L | | | | | | | mm |
| mm | mm | mm | | | | | | | mm |
| SER 9WA | SERS 9WA | 80 | 110 | 140 | 170 | 200 | 260 | 290 | 290 |
| SER 12WA | SERS 12WA | 110 | 150 | 190 | 230 | 310 | 390 | 470 | 470 |
| SER 15WA | SERS 15WA | 150 | 230 | 310 | 430 | 550 | 670 | | 670 |

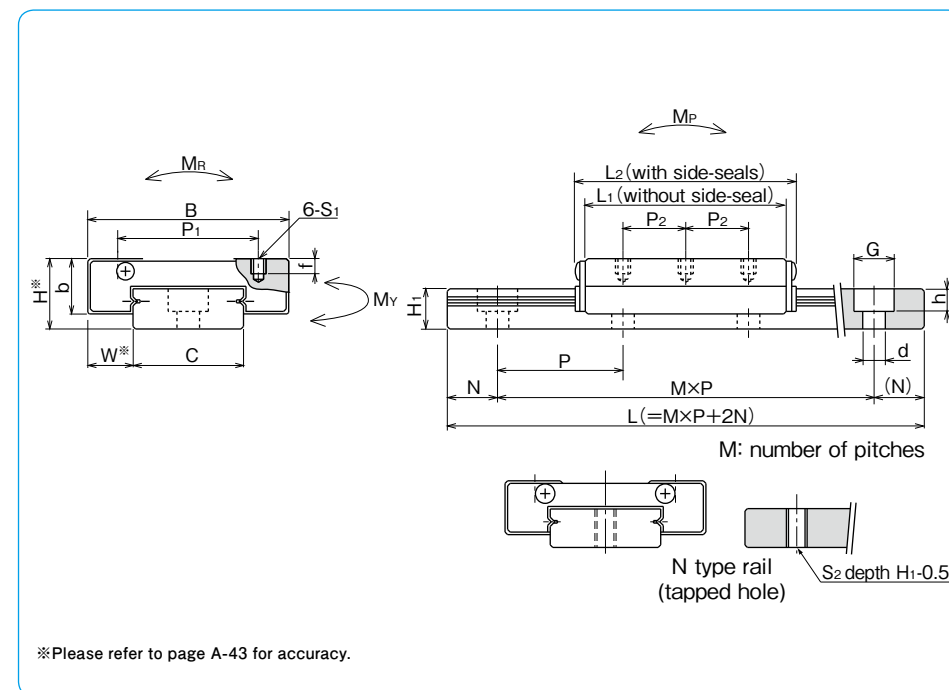

| guide rail dimensions | | basic load rating | | allowable static moment | | | mass | | block size | | | | | |
|-----------------------|----|-------------------|----------------|-------------------------|----|----|-----------|-----------|----------------|----------------|----------------|---------|--------------------|-------------|
| H ₁ | C | B ₁ | S ₂ | d × G × h | N | P | dynamic C | static Co | M _P | M _Y | M _R | block g | guide rail g/100mm | block size |
| mm | mm | mm | | mm | mm | mm | kN | kN | N · m | N · m | N · m | | | |
| 7.5 | 17 | — | M4 | 3.5 × 6 × 4.5 | 10 | 30 | 3.43 | 3.72 | 24.5 | 27.4 | 51.9 | 46 | 90 | 9WA |
| 8 | 22 | — | M5 | 4.5 × 8 × 4.5 | 15 | 40 | 4.41 | 5.00 | 35.3 | 39.2 | 85.3 | 92 | 122 | 12WA |
| 9.5 | 42 | 23 | | | | | 7.35 | 8.92 | 55.9 | 61.7 | 215.0 | 165 | 280 | 15WA |

1kN≒102kgf 1N · m≒0.102kgf · m

SLIDE GUIDE SGL TYPE

The NB slide guide SGL type is a linear motion bearing utilizing the rolling motion of ball elements along four rows of raceway grooves. It can be used in various applications due to its compactness and high load capacity.

STRUCTURE AND ADVANTAGES

The NB slide guide SGL type consists of a rail with 4 rows of precisely machined raceway grooves and a block assembly. The block assembly consists of the main body, ball elements, retainers, and return caps.

High Load Capacity and Long Life

The use of relatively large ball elements and raceway grooves machined to a radius close to that of the ball elements increases the contact area resulting in a high load capacity and a long travel life.

Low Friction

Because a 4-row/2-point contact design is used, low friction and stable motion characteristics are achieved even under a preloaded conditions.

Omni-Directional Load Capacity

The ball elements are positioned at 45° contact angle so that the load capacity is equal in four directions (above, below, right and left).

Absorption of Mounting Dimensional Error

Because the ball elements are positioned to increase their self-aligning characteristics, the dimensional error caused during installation is absorbed.

Anti-corrosion Specification

The rail and block assembly can be treated with low temperature black chrome treatment to increase the

corrosion resistance. This treatment is standardized with the symbol "LB". Stainless steel SGLS type is suitable for use in clean room application.

Dust Prevention

Side-seals are provided as a standard. To improve the dust prevention characteristics, under-seals, double-seals, scrapers, bellows and special rail mounting caps are also available.


Fiber Sheet Extends Lubricant Replenishment Intervals

A lubricant-containing Fiber Sheet incorporated in the block supplies appropriate amount of lubricant to the raceway grooves at appropriate intervals, which can significantly extend the lubricant replenishment interval. (refer to page A-16)

REVERSE-SEAL

NB Reverse-seal realizes maintenance free by reducing grease leakage and loss. (refer to page A-17)

Figure A-52 Structure of SGL type Slide Guide

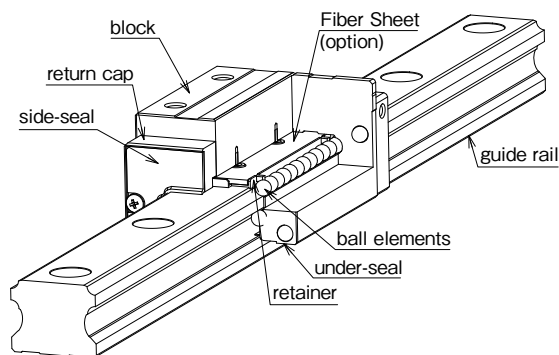

BLOCK TYPES

Eleven SGL block types are available depending on the material and mounting method.

| | | | | |
|---|---|---------------------------|--------------------------------|-------------------------------------|
| SGL-F type P.A-54 SGLS-F type P.A-54 | SGL-TF type P.A-56 SGLS-TF type P.A-56 | SGL-HTF type P.A-58 | SGL-HYF type P.A-60 | |
| | | | | |
| high-rigidity short type | high-rigidity | high-rigidity | high-rigidity long type | |
| SGL-E type P.A-62 | SGL-TE type P.A-64 | SGL-HTE type P.A-66 | SGL-HYE type P.A-68 | SGL-HTEX type P.A-70 |
| | | | | |
| high-rigidity short flange type | high-rigidity flange type | high-rigidity flange type | high-rigidity long flange type | high-rigidity six holes flange type |

ACCURACY

Three accuracy grades are available: standard grade (blank), high grade (H), and precision grade (P).

Table A-23 Accuracy

unit : mm

| part number | SGL15,20 | | | SGL25,30,35 | | | SGL45 | | |
|---|--------------------------|-------|-----------|-------------|-------|-----------|----------|-------|-----------|
| | standard | high | precision | standard | high | precision | standard | high | precision |
| accuracy grade | standard | high | precision | standard | high | precision | standard | high | precision |
| accuracy symbol | blank | H | P | blank | H | P | blank | H | P |
| allowable dimensional tolerance for height H | ±0.1 | ±0.03 | -0.03~0 | ±0.1 | ±0.04 | -0.04~0 | ±0.1 | ±0.05 | -0.05~0 |
| paired difference for height H | 0.02 | 0.01 | 0.006 | 0.02 | 0.015 | 0.007 | 0.03 | 0.015 | 0.007 |
| allowable dimensional tolerance for width W | ±0.1 | ±0.03 | -0.03~0 | ±0.1 | ±0.04 | -0.04~0 | ±0.1 | ±0.05 | -0.05~0 |
| paired difference for width W | 0.02 | 0.01 | 0.006 | 0.03 | 0.015 | 0.007 | 0.03 | 0.02 | 0.01 |
| Running parallelism of surface C to surface A | refer to Figure A-53, 54 | | | | | | | | |
| Running parallelism of surface D to surface B | | | | | | | | | |

Figure A-53 Motion Accuracy


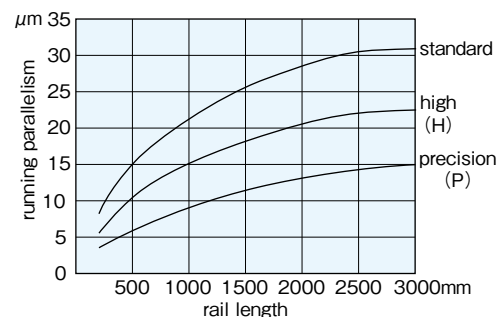


Figure A-54 Accuracy

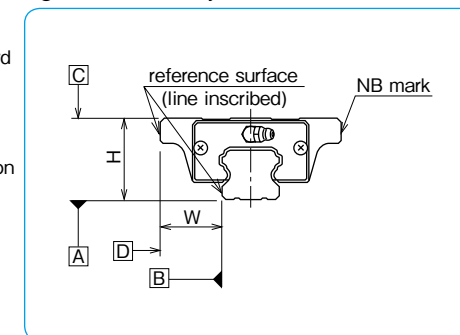

PRELOAD

SGL type slide guides are available with a standard preload (blank), light preload (T1), and medium preload (T2).

Table A-24 Preload Symbol and Radial Clearance unit : μm

| preload | standard | light | medium* |
|----------------|----------|---------|---------|
| preload symbol | blank | T1 | T2 |
| SGL15 | - 4~+2 | -12~- 4 | - |
| SGL20 | - 5~+2 | -14~- 5 | -23~-14 |
| SGL25 | - 6~+3 | -16~- 6 | -26~-16 |
| SGL30 | - 7~+4 | -19~- 7 | -31~-19 |
| SGL35 | - 8~+4 | -22~- 8 | -35~-22 |
| SGL45 | -10~+5 | -25~-10 | -40~-25 |

Table A-25 Operating Conditions and Preload

| preload | symbol | operating conditions |
|----------|--------|---|
| standard | blank | minute vibration is applied. accurate motion is required. moment is applied in a given direction. |
| light | T1 | light vibration is applied. light torsional load is applied. moment is applied. |
| medium* | T2 | shock and vibration are applied. over-hang load is applied. torsional load is applied. |

* Frictional resistance may be affected by preload.

RAIL LENGTH

Slide guides with most commonly used lengths are available as standard. For slide guides with a non-standard length, unless otherwise specified, the distance from one end of the rail to the first hole center (N) will be within the range listed in Table A-26, satisfying the following equation.


$$L = M \cdot P + 2N$$

L: length (mm) M: number of pitches P: hole pitch (mm)
N: distance from the end of the rail to the first hole center (mm)

Table A-26 N Dimension unit : mm

| part number | N | |
|-------------|----------|-----------|
| | and over | less than |
| SGL15 | 6 | 36 |
| SGL20 | 10 | 40 |
| SGL25 | 11 | 41 |
| SGL30 | 12 | 52 |
| SGL35 | 16 | 56 |
| SGL45 | 20 | 72.5 |

Figure A-55 Rail

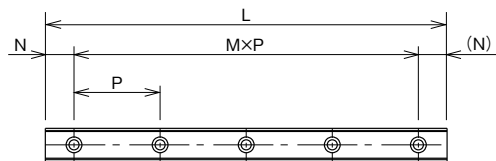

MOUNTING

Slide guides are generally mounted by pushing the reference surface of the rail and block against the shoulder of the mounting surface. An undercut should be provided at the corner of the shoulder in order to avoid interference with the corner of the rail or block. The recommended shoulder height values are shown in Table A-28.

The screws to fasten the rail should be tightened equally using a torque wrench in order to secure the motion accuracy. The recommended torque values are listed in Table A-27. Please adjust the torque depending on the operating conditions.

Figure A-56 Mounting Reference Surface Profile

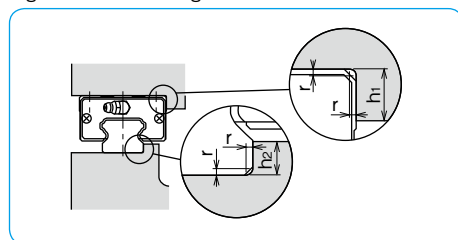


Table A-27 Recommended Torque unit : N · m

| size | M3 | M4 | M5 | M6 | M8 | M12 |
|--------------------|-----|-----|-----|------|------|------|
| recommended torque | 1.4 | 3.2 | 6.6 | 11.2 | 27.6 | 96.4 |

(for steel alloy screws)


Table A-28 Shoulder Height Dimensions unit : mm

| part number | h ₁ | h ₂ | r _{max.} |
|-------------|----------------|----------------|-------------------|
| SGL15 | 4 | 3.5 | 0.5 |
| SGL20 | 5 | 5 | 0.5 |
| SGL25 | 5 | 5.5 | 1 |
| SGL30 | 6 | 7.5 | 1 |
| SGL35 | 6 | 8 | 1 |
| SGL45 | 8 | 8 | 1 |

GREASE FITTING

A grease fitting is attached to the return cap of SGL type guide blocks for lubrication purposes. Unless otherwise specified, the orientation of the grease fitting is as shown in Figure A-57. When more than 6 blocks are used on one rail, the orientation of the grease fitting is same as the orientation of 3 to 5 block used on one rail.

Figure A-57 Grease Fitting Orientation

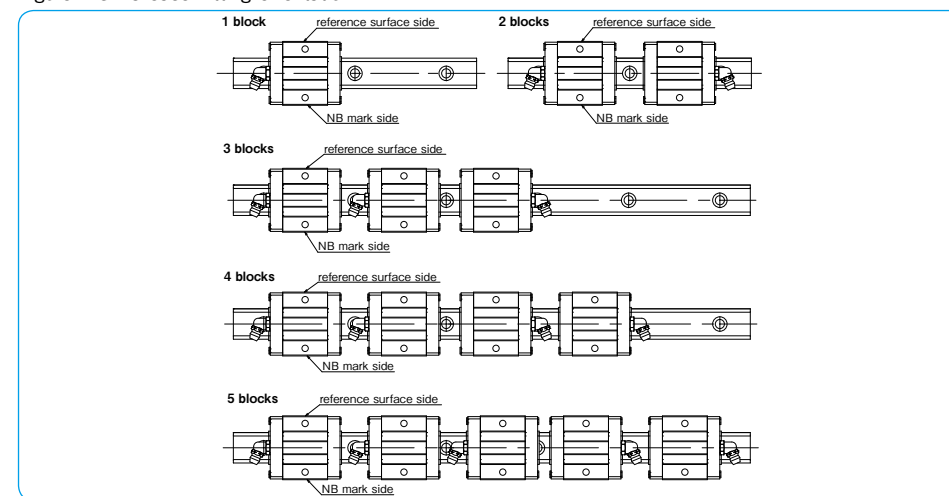


LUBRICATION


A high grade lithium soap based grease is applied to the NB slide guides prior to shipment for immediate use. Please relubricate with a similar type of grease periodically depending on the operating conditions. For use in clean rooms or vacuum environments, NB slide guides without grease are available upon request. Please contact NB for customer specified grease types.

Please refer to page Eng-40 for details on the low dust generation grease.

A Grease Gun Set is available as a maintenance kit (refer to page Eng-43).

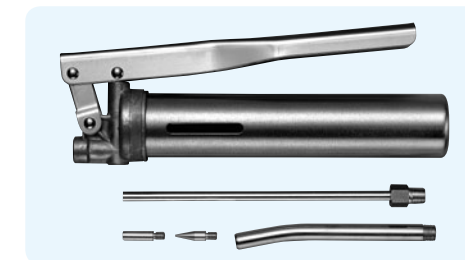

SGL-F TYPE

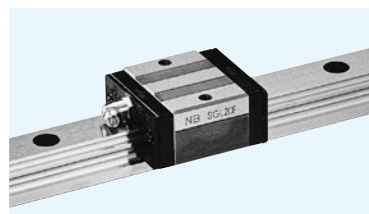

part number structure

example **SGL 15 F B 2 T1 -589 D P/W2 FS LB F J -KGL**


specification
SGL: standard
SGLS: anti-corrosion
 size
15
 block style
F
 seal (refer to page A-14)
B: with side-seals
BW: with double-seals + under-seals
BS: B + scraper
BR: B + reverse-seals
BWS: BW + scraper
 number of blocks attached to one rail
2
 preload symbol (refer to page A-52)
T1: light
T2: medium
 total length of rail
589
 size of rail installation hole (D type rail is available only for SGL 15 and 30)
D
 symbol for grease
blank: standard grease
KGLA: lithium-based grease
KGU: urea-based grease
KGF: anti-fretting grease refer to page Eng-40~
 with bellows (refer to page A-18)
 with rail mounting hole caps
 with low temperature black chrome treatment
 with Fiber Sheet (refer to page A-16)
 symbol for number of axes*
blank: single axis
W2: 2 parallel axes
W3: 3 parallel axes
 accuracy grade (refer to page A-51)
blank: standard
H: high
P: precision

*The symbol for the number of axes does not mean the number of rails ordered.

| part number | | assembly dimensions | | block dimensions | | | | | | | | | | | | |
|-----------------|------------------|---------------------|------|------------------|------|------|------|------|------|------|----|----|----|-----|------|----|
| standard | anti-corrosion | H | W | B | L1 | L2 | L3 | L4 | L5 | L6 | P1 | S1 | f | T | b | E1 |
| | | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SGL15F | SGLS15F | 24 | 9.5 | 34 | 40.7 | 22.7 | 46.9 | 47.3 | 54.3 | 53.5 | 26 | M4 | 7 | 6 | 19.5 | 6 |
| SGL15F-D | SGLS15F-D | | | | | | | | | | | | | | | |
| SGL20F | SGLS20F | 28 | 11 | 42 | 47.9 | 29.5 | 54.1 | 54.5 | 65.5 | 60.7 | 32 | M5 | 8 | 7.5 | 22 | 12 |
| SGL25F | SGLS25F | 33 | 12.5 | 48 | 58.7 | 37.7 | 65.1 | 65.9 | 76.9 | 72.1 | 35 | M6 | 9 | 8 | 26 | |
| SGL30F | — | 42 | 16 | 60 | 68 | 40 | 76.6 | 75.6 | 86.2 | 84.2 | 40 | M8 | 12 | 9 | 32.5 | 12 |
| SGL30F-D | — | | | | | | | | | | | | | | | |
| SGL35F | — | 48 | 18 | 70 | 77 | 46 | 85.6 | 84.6 | 95.2 | 93.2 | 50 | | | 13 | 38 | |

| part number | | standard rail length | | | | | | | | | | | | | | |
|--------------|----------------|----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-------|-------|-------|-------|-------|-------|
| standard | anti-corrosion | L mm | | | | | | | | | | | | | | |
| SGL15 | SGLS15 | 160 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 |
| SGL20 | SGLS20 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 |
| SGL25 | SGLS25 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 |
| SGL30 | — | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 |
| SGL35 | — | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 |

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.

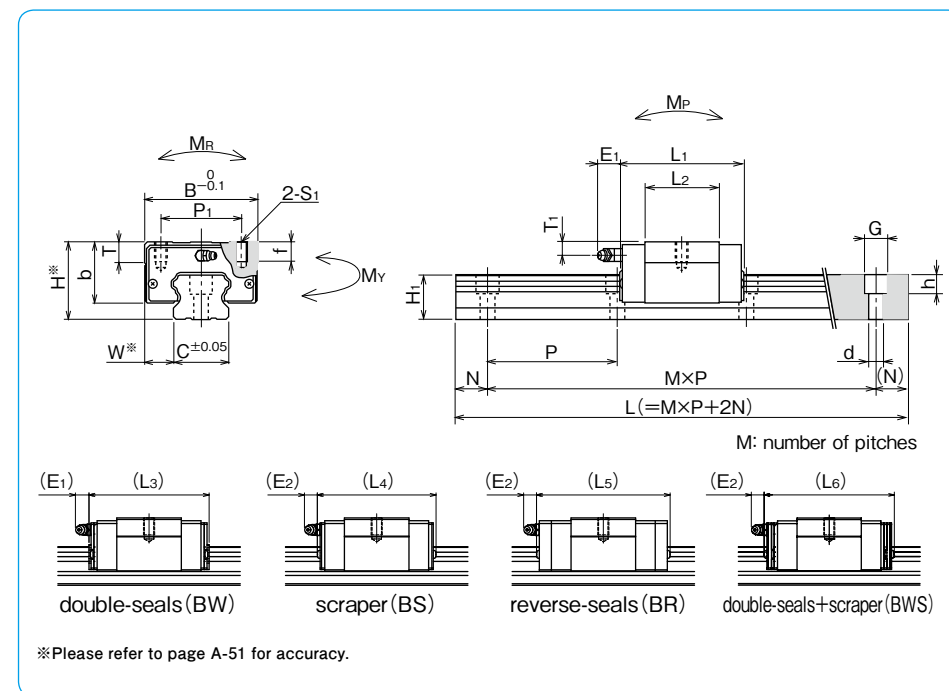


| E2 | | T1 | grease fitting | guide rail dimensions | | | | basic load rating | | allowable static moment | | | mass | | block size | |
|-----|-----|-----------------|----------------|-----------------------|-----------|-------------|----|-------------------|-----------|-------------------------|------|------|------|----------|-----------------|-----------|
| mm | mm | mm | mm | H1 | C | d×G×h | N | P | dynamic C | static Co | Mp | My | Mr | block kg | guide rail kg/m | |
| | | mm | mm | mm | mm | mm | mm | mm | kN | kN | N·m | N·m | N·m | | | |
| 5.4 | 5 | pressed fitting | 13.5 | 15 | 3.5×6×4.5 | 4.5×7.5×5.3 | 20 | 60 | 7.29 | 9.45 | 36.7 | 36.7 | 73.9 | 0.1 | 1.3 | 15 |
| | | | | | | | | | 252 | 252 | | | | | | |
| 11 | 6 | B-M6F | 16 | 20 | 6×9.5×8.5 | 20 | 80 | 11.9 | 14.8 | 71.9 | 71.9 | 159 | 0.2 | 2.1 | 20 | |
| | | | | | | | | 447 | 447 | | | | | | | |
| | | | | | | | | 6.5 | 21.1 | 123 | 123 | 254 | 0.3 | 3.0 | 25 | |
| | | | | | | | | 751 | 751 | | | | | | | |
| 8.5 | 9 | B-M6F | 24 | 28 | 7×11×9 | 20 | 80 | 23.0 | 28.7 | 195 | 195 | 417 | 0.5 | 4.6 | 30 | |
| | | | | | | | | 1,260 | 1,260 | | | | | | | |
| 8.5 | 8.5 | B-M6F | 27.5 | 34 | 9×14×12 | 20 | 80 | 32.0 | 37.8 | 293 | 293 | 693 | 0.8 | 6.2 | 35 | |
| | | | | | | | | 1,870 | 1,870 | | | | | | | |

Mp2 and My2 are allowable static moments when two blocks are used in close contact. 1kN≒102kgf 1N·m≒0.102kgf·m

| | | maximum length | |
|-------|-------|----------------|----------------|
| | | standard | anti-corrosion |
| | | mm | |
| 1,120 | 1,240 | 1,360 | 1,480 |
| 1,240 | 1,360 | 1,480 | 1,600 |
| 1,240 | 1,360 | 1,480 | 1,600 |
| 1,240 | 1,360 | 1,480 | 1,600 |
| 1,480 | 1,640 | 1,720 | 1,880 |
| 1,480 | 1,640 | 1,720 | 1,880 |

SGL-TF TYPE

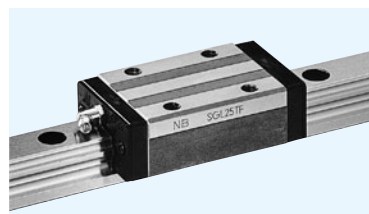

part number structure

example **SGL 15 TF B 2 T1 -589 D P/W2 FS LB F J -KGL**

specification
SGL: standard
SGLS: anti-corrosion

size

block style

seal (refer to page A-14)
blank: with side-seals
B: with side-seals + under-seals
BW: with double-seals + under-seals
BS: B + scraper
BR: B + reverse-seals
BWS: BW + scraper

number of blocks attached to one rail

preload symbol (refer to page A-52)
blank: standard
T1: light
T2: medium

total length of rail

size of rail installation hole (D type rail is available only for SGL 15 and 30)

symbol for grease
blank: standard grease
KGLA: lithium-based grease
KGU: urea-based grease
KGF: anti-fretting grease
 refer to page Eng-40~

with bellows (refer to page A-18)

with rail mounting hole caps

with low temperature black chrome treatment

with Fiber Sheet (refer to page A-16)

symbol for number of axes*
blank: single axis
W2: 2 parallel axes
W3: 3 parallel axes


accuracy grade (refer to page A-51)
blank: standard
H: high
P: precision

*The symbol for the number of axes does not mean the number of rails ordered.

| part number | | assembly dimensions | | block dimensions | | | | | | | | | | | | | |
|------------------|-------------------|---------------------|------|------------------|------|------|-------|-------|-------|-------|----|----|----|----|-----|------|----|
| standard | anti-corrosion | H | W | B | L1 | L2 | L3 | L4 | L5 | L6 | P1 | P2 | S1 | f | T | b | E1 |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SGL15TF | SGLS15TF | 24 | 9.5 | 34 | 56.5 | 38.5 | 62.7 | 63.1 | 70.1 | 69.3 | 26 | 26 | M4 | 7 | 6 | 19.5 | 6 |
| SGL15TF-D | SGLS15TF-D | | | | | | | | | | | | | | | | |
| SGL20TF | SGLS20TF | 28 | 11 | 42 | 65.8 | 47.4 | 72 | 72.4 | 83.4 | 78.6 | 32 | 32 | M5 | 8 | 7.5 | 22 | 12 |
| SGL25TF | SGLS25TF | 33 | 12.5 | 48 | 80 | 59 | 86.4 | 87.2 | 98.2 | 93.4 | 35 | 35 | M6 | 9 | 8 | 26 | |
| SGL30TF | — | 42 | 16 | 60 | 95.7 | 67.7 | 104.3 | 103.3 | 113.9 | 111.9 | 40 | 40 | M8 | 12 | 9 | 32.5 | 12 |
| SGL30TF-D | — | | | | | | | | | | | | | | | | |
| SGL35TF | — | 48 | 18 | 70 | 109 | 78 | 117.6 | 116.6 | 127.2 | 125.2 | 50 | 50 | | | 13 | 38 | |

| part number | | standard rail length | | | | | | | | | | | | | | |
|--------------|----------------|----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-------|-------|-------|-------|-------|-------|
| standard | anti-corrosion | L mm | | | | | | | | | | | | | | |
| SGL15 | SGLS15 | 160 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 |
| SGL20 | SGLS20 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 |
| SGL25 | SGLS25 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 |
| SGL30 | — | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 |
| SGL35 | — | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 |

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.

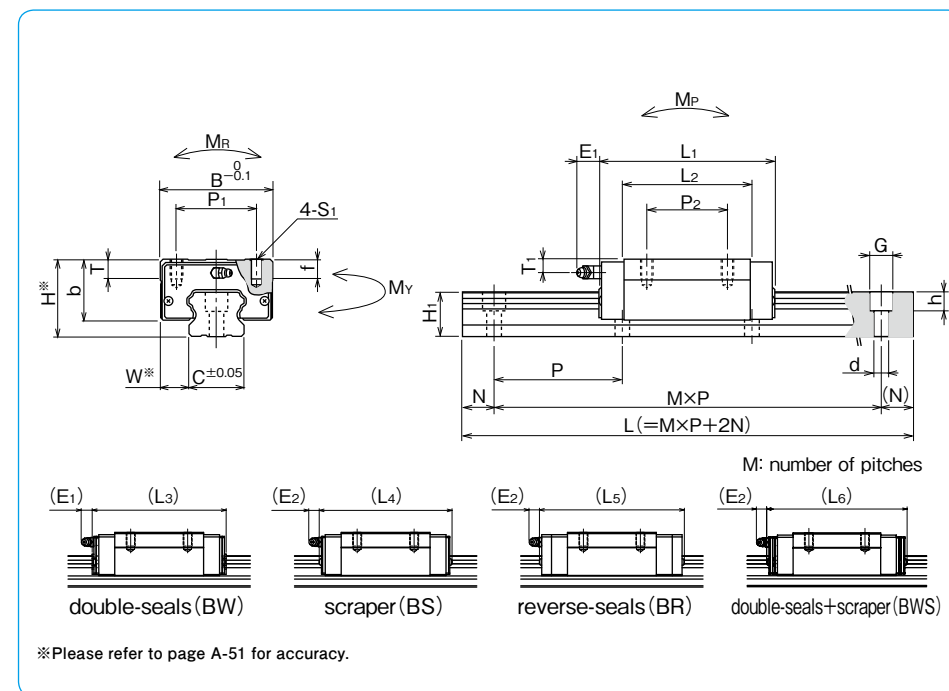


| E2 | | T1 | grease fitting | guide rail dimensions | | | | basic load rating | | allowable static moment | | | mass | | block size |
|-----|----|-----------------|----------------|-----------------------|-----------------|----|----|-------------------|-----------|-------------------------|----------------|----------------|----------|-----------------|------------|
| mm | mm | mm | H1 | C | d × G × h | N | P | dynamic C | static Co | M _P | M _Y | M _R | block kg | guide rail kg/m | block size |
| mm | mm | mm | mm | mm | mm | mm | mm | kN | kN | N · m | N · m | N · m | kg | kg/m | |
| 5.4 | 5 | pressed fitting | 13.5 | 15 | 3.5 × 6 × 4.5 | 20 | 60 | 10.6 | 16.2 | 99.5 | 99.5 | 126 | 0.2 | 1.3 | 15 |
| | | | | | 4.5 × 7.5 × 5.3 | | | 16.3 | 23.2 | 165 | 165 | 250 | 0.3 | 2.1 | 20 |
| 11 | 6 | B-M6F | 16 | 20 | 6 × 9.5 × 8.5 | 20 | 80 | 24.7 | 36.3 | 334 | 334 | 437 | 0.4 | 3.0 | 25 |
| | | | | | 7 × 11 × 9 | | | 33.6 | 49.2 | 528 | 528 | 716 | 0.8 | 4.6 | 30 |
| | | | | | 9 × 14 × 12 | | | 46.6 | 64.8 | 796 | 796 | 1,180 | 1.3 | 6.2 | 35 |
| | | | | | 9 × 14 × 12 | | | 46.6 | 64.8 | 4,290 | 4,290 | 1,180 | 1.3 | 6.2 | 35 |

M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN ≅ 102kgf 1N · m ≅ 0.102kgf · m

| | | | | maximum length | |
|-------|-------|-------|-------|----------------|----------------|
| | | | | standard | anti-corrosion |
| | | | | mm | mm |
| 1,120 | 1,240 | 1,360 | 1,480 | 2,000 | 1,480 |
| 1,240 | 1,360 | 1,480 | 1,600 | 1,660 | 1,720 |
| 1,240 | 1,360 | 1,480 | 1,600 | 1,660 | 1,720 |
| 1,480 | 1,640 | 1,720 | 1,800 | 1,880 | 1,960 |
| 1,480 | 1,640 | 1,720 | 1,800 | 1,880 | 1,960 |

SGL-HTF TYPE

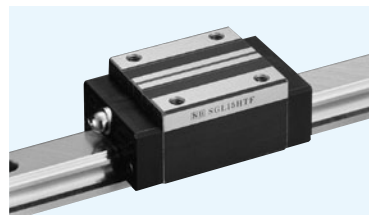

part number structure

example **SGL 15 HTF B 2 T1 -589 P/W2 FS LB F J -KGL**


SGL type: symbol for grease
 size: blank: standard grease
 block style: KGLA: lithium-based grease
 seal (refer to page A-14): KGU: urea-based grease
 blank: with side-seals KGF: anti-fretting grease refer to page Eng-40~
 B: with side-seals + under-seals
 BW: with double-seals + under-seals
 BS: B + scraper
 BR: B + reverse-seals
 BWS: BW + scraper
 with bellows (refer to page A-18)
 with rail mounting hole caps
 with low temperature black chrome treatment
 with Fiber Sheet (refer to page A-16)
 number of blocks attached to one rail: symbol for number of axes*
 blank: single axis
 W2: 2 parallel axes
 W3: 3 parallel axes
 preload symbol (refer to page A-52): accuracy grade (refer to page A-51)
 blank: standard
 T1: light
 T2: medium
 total length of rail: H: high
 P: precision

*The symbol for the number of axes does not mean the number of rails ordered.

| part number | assembly dimensions | | block dimensions | | | | | | | | | | | | | | | |
|-----------------|---------------------|------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|-----|------|----------------|----------------|----|
| | H | W | B | L ₁ | L ₂ | L ₃ | L ₄ | L ₅ | L ₆ | P ₁ | P ₂ | S ₁ | f | T | b | E ₁ | E ₂ | |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SGL15HTF | 28 | 9.5 | 34 | 56.5 | 38.5 | 62.7 | 63.1 | 70.1 | 69.3 | 26 | 26 | M4 | 5 | 6 | 23.7 | 6 | 5.4 | |
| SGL20HTF | 30 | 12 | 44 | 71.6 | 53.2 | 77.8 | 78.2 | 89.2 | 84.4 | 32 | 36 | M5 | 6 | 9.5 | 24 | | | |
| SGL25HTF | 40 | 12.5 | 48 | 80 | 59 | 86.4 | 87.2 | 98.2 | 93.4 | 35 | 35 | M6 | 8 | 9 | 33 | 12 | 11 | |
| SGL30HTF | 45 | 16 | 60 | 95.7 | 67.7 | 104.3 | 103.3 | 113.9 | 111.9 | 40 | 40 | M8 | 10 | | 35.5 | | | |
| SGL35HTF | 55 | 18 | 70 | 109 | 78 | 117.6 | 116.6 | 127.2 | 125.2 | 50 | 50 | | 12 | 13 | 45 | | | |
| SGL45HTF | 70 | 20.5 | 86 | 139 | 102 | 147.5 | 148 | 158.7 | 156.6 | 60 | 60 | M10 | 17 | 15 | 60 | 15 | 15 | |

| part number | standard rail length L mm | | | | | | | | | | | | | | | |
|--------------|------------------------------|-----|-----|-----|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| SGL15 | 160 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 |
| SGL20 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 | 1,240 |
| SGL25 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 | 1,240 |
| SGL30 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 | 1,480 |
| SGL35 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 | 1,480 |
| SGL45 | 570 | 675 | 780 | 885 | 990 | 1,095 | 1,200 | 1,305 | 1,410 | 1,515 | 1,620 | 1,725 | 1,830 | 1,935 | 2,040 | 2,145 |

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.

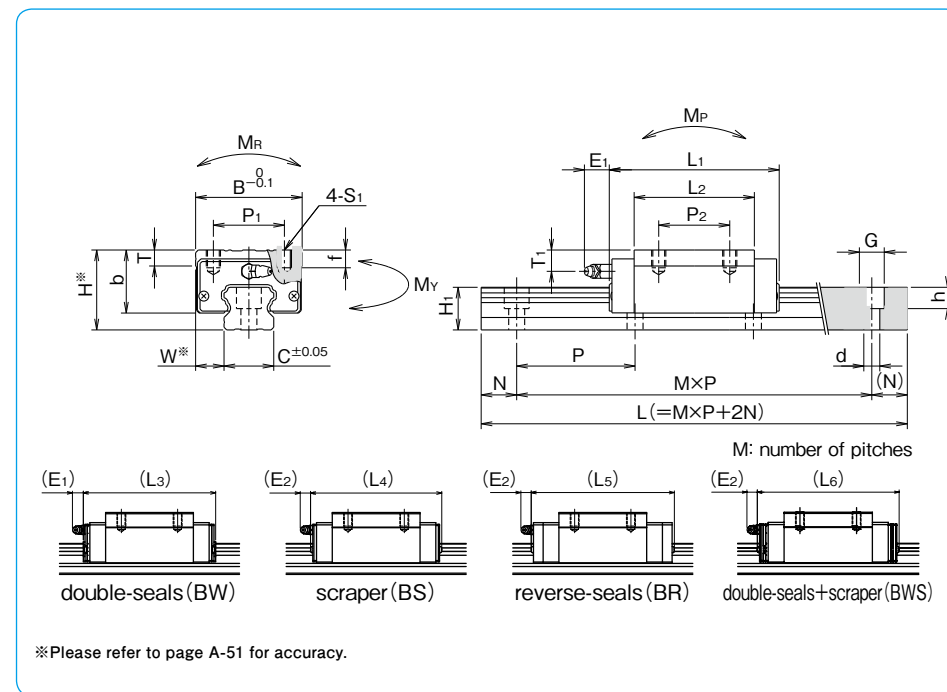


| T ₁ | grease fitting | guide rail dimensions | | | | basic load rating | | allowable static moment | | | mass | | block size | |
|----------------|-----------------|-----------------------|----|-------------|------|-------------------|-----------|-------------------------|----------------|----------------|----------------|-----------|------------|-----------------|
| | | H ₁ | C | d×G×h | N | P | dynamic C | static C ₀ | M _P | M _Y | M _R | block kg | | guide rail kg/m |
| mm | | mm | mm | mm | mm | mm | kN | kN | N·m | N·m | N·m | kg | kg/m | |
| 9 | pressed fitting | 13.5 | 15 | 4.5×7.5×5.3 | | | 10.6 | 16.2 | 99.5/565 | 99.5/565 | 126 | 0.2 | 1.3 | 15 |
| 8 | B-M6F | 16 | 20 | 6×9.5×8.5 | | 60 | 18.3 | 27.5 | 226/1,180 | 226/1,180 | 296 | 0.4 | 2.1 | 20 |
| 13.5 | | 20 | 23 | 7×11×9 | 20 | 80 | 24.7 | 36.3 | 334/1,740 | 334/1,740 | 437 | 0.6 | 3.0 | 25 |
| 12 | | 24 | 28 | 9×14×12 | | | 33.6 | 49.2 | 528/2,880 | 528/2,880 | 716 | 0.9 | 4.6 | 30 |
| 15.5 | | 27.5 | 34 | | 46.6 | 64.8 | 796/4,290 | 796/4,290 | 1,180 | 1.5 | 6.2 | 35 | | |
| 20 | B-PT1/8 | 36.5 | 45 | 14×20×17 | 22.5 | 105 | 74.7 | 101 | 1,550/8,250 | 1,550/8,250 | 2,310 | 3.1 | 10.5 | 45 |

M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN≒102kgf 1N·m≒0.102kgf·m

| | | | | | | maximum length mm | | |
|-------|-------|-------|-------|-------|-------|----------------------|-------|-------|
| 1,240 | 1,360 | 1,480 | | | | 2,000 | | |
| 1,360 | 1,480 | 1,600 | 1,660 | 1,720 | 1,840 | 1,960 | 3,000 | |
| 1,360 | 1,480 | 1,600 | 1,660 | 1,720 | 1,840 | 1,960 | 3,000 | |
| 1,640 | 1,720 | 1,800 | 1,880 | 1,960 | | | 3,000 | |
| 1,640 | 1,720 | 1,800 | 1,880 | 1,960 | | | 3,000 | |
| 2,250 | 2,355 | 2,460 | 2,565 | 2,670 | 2,775 | 2,880 | 2,985 | 3,000 |

SGL-HYF TYPE

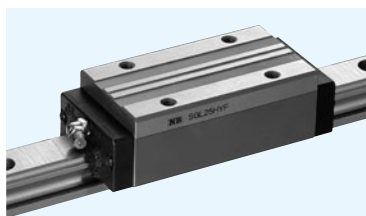

part number structure

example **SGL 15 HYF B 2 T1 -589 P/W2 FS LB F J -KGL**

SGL type: symbol for grease
 size: blank: standard grease
 block style: KGLA: lithium-based grease
 seal (refer to page A-14): KGU: urea-based grease
 blank: with side-seals
B: with side-seals + under-seals
BW: with double-seals + under-seals
BS: B + scraper
BR: B + reverse-seals
BWS: BW + scraper
 number of blocks attached to one rail: symbol for number of axes*
 blank: single axis
W2: 2 parallel axes
W3: 3 parallel axes
 preload symbol (refer to page A-52): accuracy grade (refer to page A-51)
 blank: standard
T1: light
T2: medium
 total length of rail: P: precision


with bellows (refer to page A-18)
 with rail mounting hole caps
 with low temperature black chrome treatment
 with Fiber Sheet (refer to page A-16)

*The symbol for the number of axes does not mean the number of rails ordered.

| part number | assembly dimensions | | block dimensions | | | | | | | | | | | | | | | |
|-----------------|---------------------|------|------------------|-----|------|-------|-------|-------|-------|----|----|-----|-----|----|------|----|-----|----|
| | H | W | B | L1 | L2 | L3 | L4 | L5 | L6 | P1 | P2 | S1 | f | T | b | E1 | E2 | |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SGL15HYF | 28 | 9.5 | 34 | 79 | 61 | 85.2 | 85.6 | 92.6 | 91.8 | 26 | 26 | M4 | 5 | 6 | 23.7 | 6 | 5.4 | |
| SGL20HYF | 30 | 12 | 44 | 96 | 77.6 | 102.2 | 102.6 | 113.6 | 108.8 | 50 | M5 | 6 | 9.5 | 24 | 12 | 11 | | |
| SGL25HYF | 40 | 12.5 | 48 | 109 | 88 | 115.4 | 116.2 | 127.2 | 122.4 | | | | | | | | 35 | M6 |
| SGL30HYF | 45 | 16 | 60 | 129 | 101 | 137.6 | 136.6 | 147.2 | 145.2 | 40 | 60 | M8 | 10 | 9 | 35.5 | 12 | 11 | |
| SGL35HYF | 55 | 18 | 70 | 147 | 116 | 155.6 | 154.6 | 165.2 | 163.2 | 50 | 72 | | 12 | 13 | 45 | | | |
| SGL45HYF | 70 | 20.5 | 86 | 171 | 134 | 179.5 | 180 | 190.7 | 188.6 | 60 | 80 | M10 | 17 | 15 | 60 | 15 | 15 | |

| part number | standard rail length L mm | | | | | | | | | | | | | | | |
|--------------|------------------------------|-----|-----|-----|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| SGL15 | 160 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 |
| SGL20 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 | 1,240 |
| SGL25 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 | 1,240 |
| SGL30 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 | 1,480 |
| SGL35 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 | 1,480 |
| SGL45 | 570 | 675 | 780 | 885 | 990 | 1,095 | 1,200 | 1,305 | 1,410 | 1,515 | 1,620 | 1,725 | 1,830 | 1,935 | 2,040 | 2,145 |

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.

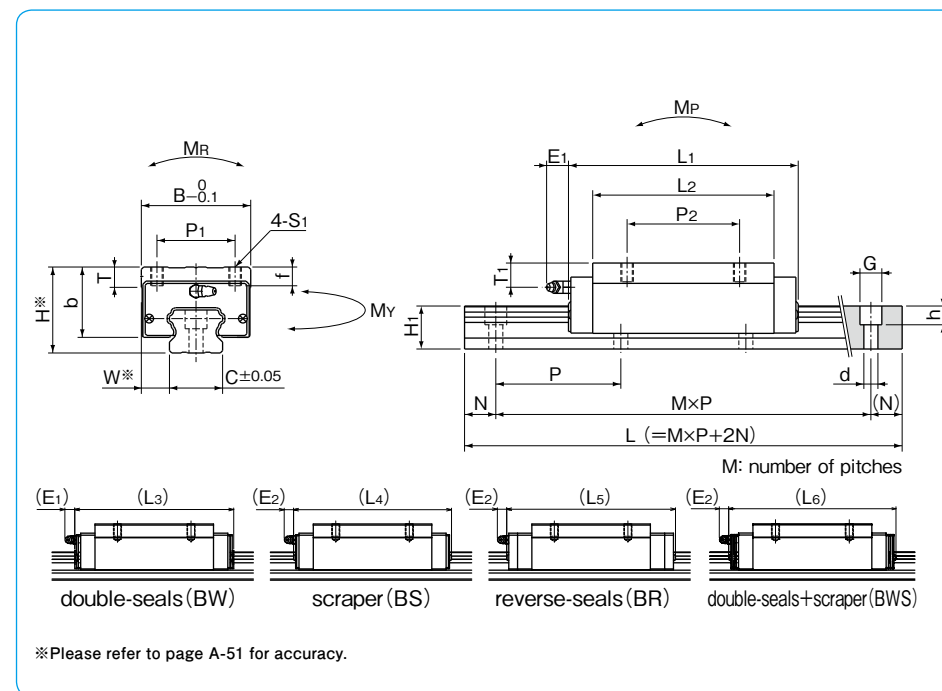


| T1 | grease fitting | guide rail dimensions | | | | basic load rating | | allowable static moment | | | mass | | block size | |
|------|-----------------|-----------------------|----|-------------|------|-------------------|-----------|-------------------------|-----------------|-----------------|--------------|----------|------------|-----------------|
| | | H1 | C | d×G×h | N | P | dynamic C | static Co | Mp | My | Mr | block kg | | guide rail kg/m |
| mm | | mm | mm | mm | mm | mm | kN | kN | N·m | N·m | N·m | kg | kg/m | |
| 9 | pressed fitting | 13.5 | 15 | 4.5×7.5×5.3 | 20 | 60 | 14.6 | 25.6 | 238 1,200 | 238 1,200 | 200 | 0.3 | 1.3 | 15 |
| 8 | B-M6F | 16 | 20 | 6×9.5×8.5 | | | 60 | 23.9 | 40.2 | 467 2,250 | 467 2,250 | 432 | 0.5 | 2.1 |
| 13.5 | | 20 | 23 | 7×11×9 | 20 | 32.8 | 54.5 | 723 3,480 | 723 3,480 | 655 | 0.9 | 3.0 | 25 | |
| 12 | | 24 | 28 | 9×14×12 | 80 | 44.6 | 73.8 | 1,140 5,680 | 1,140 5,680 | 1,070 | 1.3 | 4.6 | 30 | |
| 15.5 | | 27.5 | 34 | | | 61.9 | 97.2 | 1,720 8,480 | 1,720 8,480 | 1,780 | 2.2 | 6.2 | 35 | |
| 20 | B-PT1/8 | 36.5 | 45 | 14×20×17 | 22.5 | 105 | 91.4 | 134 | 2,680 13,300 | 2,680 13,300 | 3,080 | 4.0 | 10.5 | 45 |

Mp2 and My2 are allowable static moments when two blocks are used in close contact. 1kN≒102kgf 1N·m≒0.102kgf·m

| | | | | | | | | | | | maximum length mm |
|-------|-------|-------|-------|-------|-------|-------|-------|--|--|--|----------------------|
| 1,240 | 1,360 | 1,480 | | | | | | | | | 2,000 |
| 1,360 | 1,480 | 1,600 | 1,660 | 1,720 | 1,840 | 1,960 | | | | | 3,000 |
| 1,360 | 1,480 | 1,600 | 1,660 | 1,720 | 1,840 | 1,960 | | | | | 3,000 |
| 1,640 | 1,720 | 1,800 | 1,880 | 1,960 | | | | | | | 3,000 |
| 1,640 | 1,720 | 1,800 | 1,880 | 1,960 | | | | | | | 3,000 |
| 2,250 | 2,355 | 2,460 | 2,565 | 2,670 | 2,775 | 2,880 | 2,985 | | | | 3,000 |

SGL-E TYPE

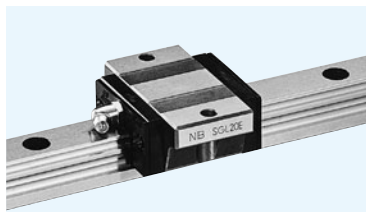

part number structure

example **SGL15EB2T1-589DP/W2FSLBFJKGL**


| | |
|--|--|
| <p>example</p> <p>SGL type</p> <p>size</p> <p>block style</p> <p>seal (refer to page A-14)</p> <p>blank: with side-seals</p> <p>B: with side-seals + under-seals</p> <p>BW: with double-seals + under-seals</p> <p>BS: B + scraper</p> <p>BR: B + reverse-seals</p> <p>BWS: BW + scraper</p> <p>number of blocks attached to one rail</p> <p>preload symbol (refer to page A-52)</p> <p>blank: standard</p> <p>T1: light</p> <p>T2: medium</p> <p>total length of rail</p> <p>size of rail installation hole (D type rail is available only for SGL 15 and 30)</p> | <p>symbol for grease</p> <p>blank: standard grease</p> <p>KGLA: lithium-based grease</p> <p>KGU: urea-based grease</p> <p>KGF: anti-fretting grease</p> <p>refer to page Eng-40~</p> <p>with bellows (refer to page A-18)</p> <p>with rail mounting hole caps</p> <p>with low temperature black chrome treatment</p> <p>with Fiber Sheet (refer to page A-16)</p> <p>symbol for number of axes*</p> <p>blank: single axis</p> <p>W2: 2 parallel axes</p> <p>W3: 3 parallel axes</p> <p>accuracy grade (refer to page A-51)</p> <p>blank: standard</p> <p>H: high</p> <p>P: precision</p> |
|--|--|

*The symbol for the number of axes does not mean the number of rails ordered.

| part number | assembly dimensions | | block dimensions | | | | | | | | | | | | |
|----------------------------------|---------------------|------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|------|----------------|----------------|
| | H | W | B | L ₁ | L ₂ | L ₃ | L ₄ | L ₅ | L ₆ | P ₁ | S ₁ | T | b | E ₁ | E ₂ |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SGL15E SGL15E-D | 24 | 18.5 | 52 | 40.7 | 22.7 | 46.9 | 47.3 | 54.3 | 53.5 | 41 | 4.5 | 7 | 19.5 | 6 | 5.4 |
| SGL20E | 28 | 19.5 | 59 | 47.9 | 29.5 | 54.1 | 54.5 | 65.5 | 60.7 | 49 | 5.5 | 9 | 22 | | |
| SGL25E | 33 | 25 | 73 | 58.7 | 37.7 | 65.1 | 65.9 | 76.9 | 72.1 | 60 | 7 | 10 | 26 | 12 | 11 |
| SGL30E SGL30E-D | 42 | 31 | 90 | 68 | 40 | 76.6 | 75.6 | 86.2 | 84.2 | 72 | 9 | | 32.5 | | |
| SGL35E | 48 | 33 | 100 | 77 | 46 | 85.6 | 84.6 | 95.2 | 93.2 | 82 | | 13 | 38 | | |

| part number | standard rail length L mm | | | | | | | | | | | | | | | |
|--------------|------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-------|-------|-------|-------|-------|-------|-------|
| SGL15 | 160 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 |
| SGL20 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 | 1,240 |
| SGL25 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 | 1,240 |
| SGL30 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 | 1,480 |
| SGL35 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 | 1,480 |

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.

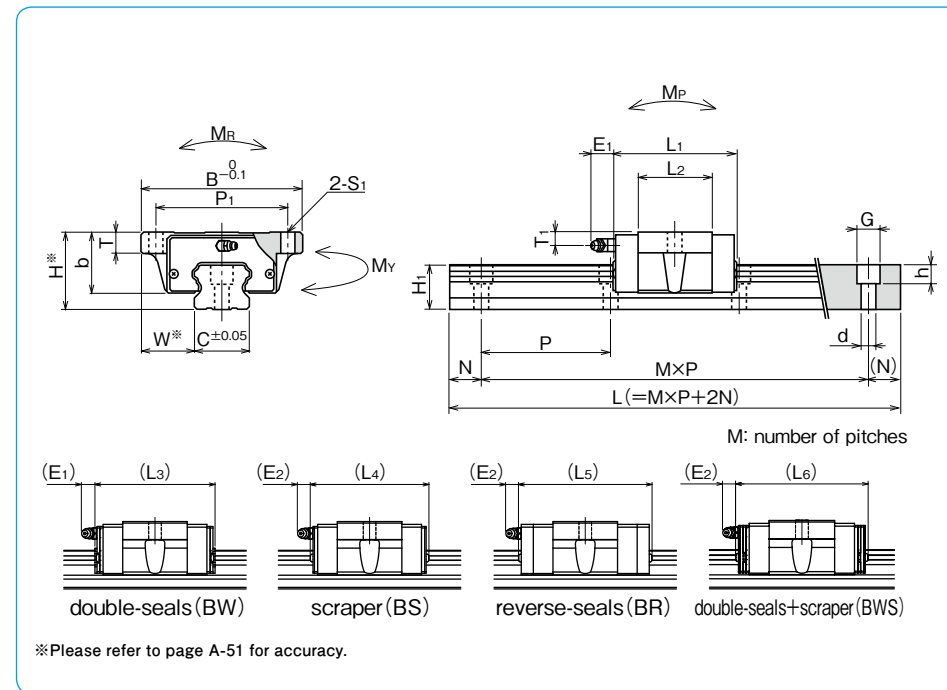


| T ₁ | grease fitting | guide rail dimensions | | | | basic load rating | | | allowable static moment | | | mass | | block size |
|----------------|-----------------|-----------------------|----|----------------------------------|----|-------------------|-----------|-----------------------|-------------------------|----------------|----------------|-------------|-----------------|------------|
| | | H ₁ | C | d × G × h | N | P | dynamic C | static C ₀ | M _P | M _Y | M _R | block kg | guide rail kg/m | |
| mm | | mm | mm | mm | mm | mm | kN | kN | N · m | N · m | N · m | kg | kg/m | |
| 5 | pressed fitting | 13.5 | 15 | 3.5 × 6 × 4.5 4.5 × 7.5 × 5.3 | 20 | 60 | 7.29 | 9.45 | 36.7 252 | 36.7 252 | 73.9 | 0.1 | 1.3 | 15 |
| 6 | B-M6F | 16 | 20 | 6 × 9.5 × 8.5 | | | 20 | 80 | 11.9 | 14.8 | 71.9 447 | 71.9 447 | 159 | 0.2 |
| 6.5 | | 20 | 23 | 7 × 11 × 9 | 20 | 80 | 17.0 | 21.1 | 123 751 | 123 751 | 254 | 0.4 | 3.0 | 25 |
| 9 | | 24 | 28 | 7 × 11 × 9 9 × 14 × 12 | 20 | 80 | 23.0 | 28.7 | 195 1,260 | 195 1,260 | 417 | 0.6 | 4.6 | 30 |
| 8.5 | | 27.5 | 34 | 9 × 14 × 12 | 20 | 80 | 32.0 | 37.8 | 293 1,870 | 293 1,870 | 693 | 0.9 | 6.2 | 35 |

M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN ≃ 102kgf 1N · m ≃ 0.102kgf · m

| | maximum length mm |
|---|----------------------|
| 1,240 1,360 1,480 | 2,000 |
| 1,360 1,480 1,600 1,660 1,720 1,840 1,960 | 3,000 |
| 1,360 1,480 1,600 1,660 1,720 1,840 1,960 | 3,000 |
| 1,640 1,720 1,800 1,880 1,960 | 3,000 |
| 1,640 1,720 1,800 1,880 1,960 | 3,000 |

SGL-TE TYPE

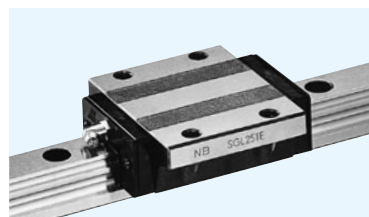

part number structure

example **SGL 15 TE B 2 T1 -589 D P/W2 FS LB F J -KGL**


| | |
|--|---|
| <p>SGL type</p> <p>size</p> <p>block style</p> <p>seal (refer to page A-14)</p> <p>blank: with side-seals</p> <p>B: with side-seals + under-seals</p> <p>BW: with double-seals + under-seals</p> <p>BS: B + scraper</p> <p>BR: B + reverse-seals</p> <p>BWS: BW + scraper</p> <p>number of blocks attached to one rail</p> <p>preload symbol (refer to page A-52)</p> <p>blank: standard</p> <p>T1: light</p> <p>T2: medium</p> <p>total length of rail</p> <p>size of rail installation hole (D type rail is available only for SGL 15 and 30)</p> | <p>symbol for grease</p> <p>blank: standard grease</p> <p>KGLA: lithium-based grease</p> <p>KGU: urea-based grease</p> <p>KGF: anti-fretting grease</p> <p>refer to page Eng-40~</p> <p>with bellows (refer to page A-18)</p> <p>with rail mounting hole caps</p> <p>with low temperature black chrome treatment</p> <p>with Fiber Sheet (refer to page A-16)</p> <p>symbol for number of axes*</p> <p>blank: single axis</p> <p>W2: 2 parallel axes</p> <p>W3: 3 parallel axes</p> <p>accuracy grade (refer to page A-51)</p> <p>blank: standard</p> <p>H: high</p> <p>P: precision</p> |
|--|---|

*The symbol for the number of axes does not mean the number of rails ordered.

| part number | assembly dimensions | | block dimensions | | | | | | | | | | | | | | |
|------------------------------------|---------------------|------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|------|----------------|----------------|----|
| | H | W | B | L ₁ | L ₂ | L ₃ | L ₄ | L ₅ | L ₆ | P ₁ | P ₂ | S ₁ | T | b | E ₁ | E ₂ | |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SGL15TE SGL15TE-D | 24 | 18.5 | 52 | 56.5 | 38.5 | 62.7 | 63.1 | 70.1 | 69.3 | 41 | 26 | 4.5 | 7 | 19.5 | 6 | 5.4 | |
| SGL20TE | 28 | 19.5 | 59 | 65.8 | 47.4 | 72 | 72.4 | 83.4 | 78.6 | 49 | 32 | 5.5 | 9 | 22 | | | |
| SGL25TE | 33 | 25 | 73 | 80 | 59 | 86.4 | 87.2 | 98.2 | 93.4 | 60 | 35 | 7 | 10 | 26 | 12 | 11 | |
| SGL30TE SGL30TE-D | 42 | 31 | 90 | 95.7 | 67.7 | 104.3 | 103.3 | 113.9 | 111.9 | 72 | 40 | 9 | 10 | 32.5 | | | |
| SGL35TE | 48 | 33 | 100 | 109 | 78 | 117.6 | 116.6 | 127.2 | 125.2 | 82 | 50 | 9 | 13 | 38 | | | |

| part number | standard rail length L mm | | | | | | | | | | | | | | | |
|---------------|------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-------|-------|-------|-------|-------|-------|-------|
| SGL 15 | 160 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 |
| SGL20 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 | 1,240 |
| SGL25 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 | 1,240 |
| SGL30 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 | 1,480 |
| SGL35 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 | 1,480 |

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.

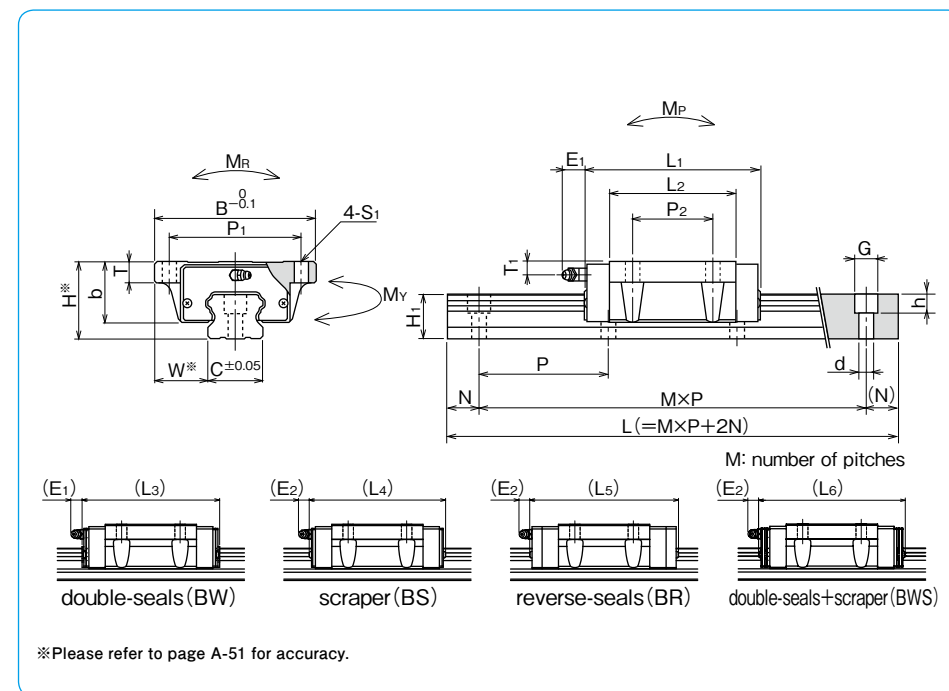


*Please refer to page A-51 for accuracy.

| T ₁ | grease fitting | guide rail dimensions | | | | basic load rating | | | allowable static moment | | | mass | | block size |
|----------------|-----------------|-----------------------|----|----------------------------------|----|-------------------|-----------|-----------------------|-------------------------|----------------|----------------|----------|-----------------|------------|
| | | H ₁ | C | d × G × h | N | P | dynamic C | static C ₀ | M _P | M _Y | M _R | block kg | guide rail kg/m | |
| mm | | mm | mm | mm | mm | mm | kN | kN | N · m | N · m | N · m | kg | kg/m | |
| 5 | pressed fitting | 13.5 | 15 | 3.5 × 6 × 4.5 4.5 × 7.5 × 5.3 | 20 | 60 | 10.6 | 16.2 | 99.5 565 | 99.5 565 | 126 | 0.2 | 1.3 | 15 |
| 6 | B-M6F | 16 | 20 | 6 × 9.5 × 8.5 | | | 60 | 16.3 | 23.2 | 165 897 | 165 897 | 250 | 0.3 | 2.1 |
| 6.5 | | 20 | 23 | 7 × 11 × 9 | 80 | 24.7 | 36.3 | 334 1,740 | 334 1,740 | 437 | 0.6 | 3.0 | 25 | |
| 9 | | 24 | 28 | 7 × 11 × 9 9 × 14 × 12 | 80 | 33.6 | 49.2 | 528 2,880 | 528 2,880 | 716 | 1.0 | 4.6 | 30 | |
| 8.5 | | 27.5 | 34 | 9 × 14 × 12 | 80 | 46.6 | 64.8 | 796 4,290 | 796 4,290 | 1,180 | 1.5 | 6.2 | 35 | |

M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN ≅ 102kgf 1N · m ≅ 0.102kgf · m

| | maximum length mm |
|---|----------------------|
| 1,240 1,360 1,480 | 2,000 |
| 1,360 1,480 1,600 1,660 1,720 1,840 1,960 | 3,000 |
| 1,360 1,480 1,600 1,660 1,720 1,840 1,960 | 3,000 |
| 1,640 1,720 1,800 1,880 1,960 | 3,000 |
| 1,640 1,720 1,800 1,880 1,960 | 3,000 |

SGL-HTE TYPE

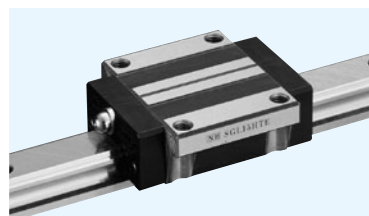

part number structure

example **SGL 15 HTE B 2 T1 -589 P/W2 FS LB F J -KGL**


| | |
|---|--|
| <p>example</p> <p>SGL type</p> <p>size</p> <p>block style</p> <p>seal (refer to page A-14)</p> <p>blank: with side-seals</p> <p>B: with side-seals + under-seals</p> <p>BW: with double-seals + under-seals</p> <p>BS: B + scraper</p> <p>BR: B + reverse-seals</p> <p>BWS: BW + scraper</p> <p>number of blocks attached to one rail</p> <p>preload symbol (refer to page A-52)</p> <p>blank: standard</p> <p>T1: light</p> <p>T2: medium</p> <p>total length of rail</p> | <p>symbol for grease</p> <p>blank: standard grease</p> <p>KGLA: lithium-based grease</p> <p>KGU: urea-based grease</p> <p>KGF: anti-fretting grease refer to page Eng-40~</p> <p>with bellows (refer to page A-18)</p> <p>with rail mounting hole caps</p> <p>with low temperature black chrome treatment</p> <p>with Fiber Sheet (refer to page A-16)</p> <p>symbol for number of axes*</p> <p>blank: single axis</p> <p>W2: 2 parallel axes</p> <p>W3: 3 parallel axes</p> <p>accuracy grade (refer to page A-51)</p> <p>blank: standard</p> <p>H: high</p> <p>P: precision</p> |
|---|--|

*The symbol for the number of axes does not mean the number of rails ordered.

| part number | block dimensions | | | | | | | | | | | | | | | | |
|-----------------|------------------|------|-----|------|------|-------|-------|-------|-------|-----|----|-----|------|------|------|----|-----|
| | H | W | B | L1 | L2 | L3 | L4 | L5 | L6 | P1 | P2 | S1 | D | T | b | E1 | E2 |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SGL15HTE | 24 | 16 | 47 | 56.5 | 38.5 | 62.7 | 63.1 | 70.1 | 69.3 | 38 | 30 | M5 | 4.4 | 7.5 | 19.7 | 6 | 5.4 |
| SGL20HTE | 30 | 21.5 | 63 | 71.6 | 53.2 | 77.8 | 78.2 | 89.2 | 84.4 | 53 | 40 | M6 | 5.4 | 10.5 | 24 | 12 | 11 |
| SGL25HTE | 36 | 23.5 | 70 | 80 | 59 | 86.4 | 87.2 | 98.2 | 93.4 | 57 | 45 | M8 | 6.8 | 12.5 | 29 | 12 | 11 |
| SGL30HTE | 42 | 31 | 90 | 95.7 | 67.7 | 104.3 | 103.3 | 113.9 | 111.9 | 72 | 52 | M10 | 8.5 | 10 | 32.5 | 12 | 11 |
| SGL35HTE | 48 | 33 | 100 | 109 | 78 | 117.6 | 116.6 | 127.2 | 125.2 | 82 | 62 | | | 13 | 38 | 12 | 11 |
| SGL45HTE | 60 | 37.5 | 120 | 139 | 102 | 147.5 | 148 | 158.7 | 156.6 | 100 | 80 | M12 | 10.5 | 15 | 50 | 15 | 15 |

| part number | standard rail length | | | | | | | | | | | | | | | |
|--------------|----------------------|-----|-----|-----|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | L mm | | | | | | | | | | | | | | | |
| SGL15 | 160 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 |
| SGL20 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 | 1,240 |
| SGL25 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 | 1,240 |
| SGL30 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 | 1,480 |
| SGL35 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 | 1,480 |
| SGL45 | 570 | 675 | 780 | 885 | 990 | 1,095 | 1,200 | 1,305 | 1,410 | 1,515 | 1,620 | 1,725 | 1,830 | 1,935 | 2,040 | 2,145 |

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.

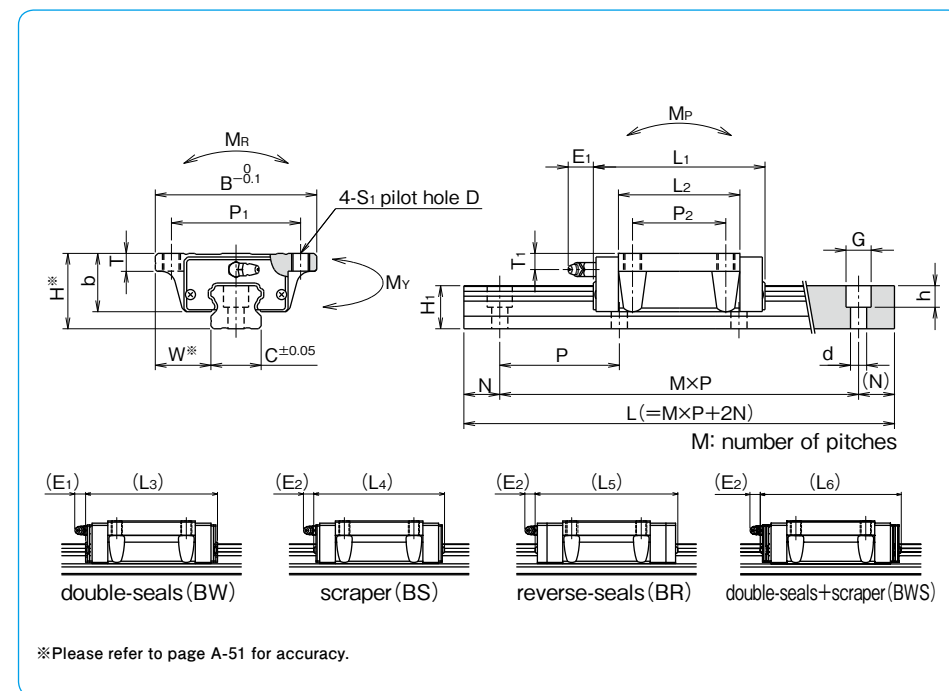


*Please refer to page A-51 for accuracy.

| T1 | grease fitting | guide rail dimensions | | | | | basic load rating | | allowable static moment | | | mass | | block size |
|-----|-----------------|-----------------------|----|-----------------|----|----|-------------------|-----------|-------------------------|--------------|----------------|----------------|------------|------------|
| | | H1 | C | d × G × h | N | P | dynamic C | static Co | MP | MY | MR | block | guide rail | |
| mm | | mm | mm | mm | mm | mm | kN | kN | MP2 | MY2 | MR | kg | kg/m | |
| 5 | pressed fitting | 13.5 | 15 | 4.5 × 7.5 × 5.3 | 20 | 60 | 10.6 | 16.2 | 99.5 565 | 99.5 565 | 126 | 0.2 | 1.3 | 15 |
| 8 | B-M6F | 16 | 20 | 6 × 9.5 × 8.5 | | | 18.3 | 27.5 | 226 1,180 | 226 1,180 | 296 | 0.4 | 2.1 | 20 |
| 9.5 | | 20 | 23 | 7 × 11 × 9 | | | 24.7 | 36.3 | 334 1,740 | 334 1,740 | 437 | 0.6 | 3.0 | 25 |
| 9 | | 24 | 28 | 9 × 14 × 12 | | | 33.6 | 49.2 | 528 2,880 | 528 2,880 | 716 | 1.0 | 4.6 | 30 |
| 8.5 | | 27.5 | 34 | | | | 46.6 | 64.8 | 796 4,290 | 796 4,290 | 1,180 | 1.5 | 6.2 | 35 |
| 10 | B-PT1/8 | 36.5 | 45 | 14 × 20 × 17 | | | 22.5 | 105 | 74.7 | 101 | 1,550 8,250 | 1,550 8,250 | 2,310 | 3.1 |

MP2 and MY2 are allowable static moments when two blocks are used in close contact. 1kN ≅ 102kgf 1N · m ≅ 0.102kgf · m

| | | | | | | | maximum length | |
|-------|-------|-------|-------|-------|-------|-------|----------------|-------|
| | | | | | | | mm | |
| 1,240 | 1,360 | 1,480 | | | | | 2,000 | |
| 1,360 | 1,480 | 1,600 | 1,660 | 1,720 | 1,840 | 1,960 | 3,000 | |
| 1,360 | 1,480 | 1,600 | 1,660 | 1,720 | 1,840 | 1,960 | 3,000 | |
| 1,640 | 1,720 | 1,800 | 1,880 | 1,960 | | | 3,000 | |
| 1,640 | 1,720 | 1,800 | 1,880 | 1,960 | | | 3,000 | |
| 2,250 | 2,355 | 2,460 | 2,565 | 2,670 | 2,775 | 2,880 | 2,985 | 3,000 |

SGL-HYE TYPE

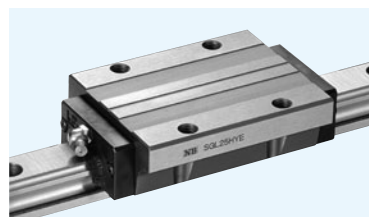

part number structure

example **SGL 15 HYE B 2 T1 -589 P/W2 FS LB F J -KGL**


| | |
|--|---|
| <p>SGL type</p> <p>size</p> <p>block style</p> <p>seal (refer to page A-14) blank: with side-seals B: with side-seals + under-seals BW: with double-seals + under-seals BS: B + scraper BR: B + reverse-seals BWS: BW + scraper</p> <p>number of blocks attached to one rail</p> <p>preload symbol (refer to page A-52) blank: standard T1: light T2: medium</p> <p>total length of rail</p> | <p>symbol for grease blank: standard grease KGLA: lithium-based grease KGU: urea-based grease KGF: anti-fretting grease refer to page Eng-40~</p> <p>with bellows (refer to page A-18)</p> <p>with rail mounting hole caps</p> <p>with low temperature black chrome treatment</p> <p>with Fiber Sheet (refer to page A-16)</p> <p>symbol for number of axes** blank: single axis W2: 2 parallel axes W3: 3 parallel axes</p> <p>accuracy grade (refer to page A-51) blank: standard H: high P: precision</p> |
|--|---|

*The symbol for the number of axes does not mean the number of rails ordered.

| part number | assembly dimensions | | block dimensions | | | | | | | | | | | | | | |
|-----------------|---------------------|------|------------------|-----|------|-------|-------|-------|-------|-----|----|-----|------|------|------|----|-----|
| | H | W | B | L1 | L2 | L3 | L4 | L5 | L6 | P1 | P2 | S1 | D | T | b | E1 | E2 |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SGL15HYE | 24 | 16 | 47 | 79 | 61 | 85.2 | 85.6 | 92.6 | 91.8 | 38 | 30 | M5 | 4.4 | 7.5 | 19.7 | 6 | 5.4 |
| SGL20HYE | 30 | 21.5 | 63 | 96 | 77.6 | 102.2 | 102.6 | 113.6 | 108.8 | 53 | 40 | M6 | 5.4 | 10.5 | 24 | 12 | 11 |
| SGL25HYE | 36 | 23.5 | 70 | 109 | 88 | 115.4 | 116.2 | 127.2 | 122.4 | 57 | 45 | M8 | 6.8 | 12.5 | 29 | | |
| SGL30HYE | 42 | 31 | 90 | 129 | 101 | 137.6 | 136.6 | 147.2 | 145.2 | 72 | 52 | M10 | 8.5 | 10 | 32.5 | 12 | 11 |
| SGL35HYE | 48 | 33 | 100 | 147 | 116 | 155.6 | 154.6 | 165.2 | 163.2 | 82 | 62 | | | | | | |
| SGL45HYE | 60 | 37.5 | 120 | 171 | 134 | 179.5 | 180 | 190.7 | 188.6 | 100 | 80 | M12 | 10.5 | 15 | 50 | 15 | 15 |

| part number | standard rail length L mm | | | | | | | | | | | | | | | |
|--------------|------------------------------|-----|-----|-----|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| SGL15 | 160 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 |
| SGL20 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 | 1,240 |
| SGL25 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 | 1,240 |
| SGL30 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 | 1,480 |
| SGL35 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 | 1,480 |
| SGL45 | 570 | 675 | 780 | 885 | 990 | 1,095 | 1,200 | 1,305 | 1,410 | 1,515 | 1,620 | 1,725 | 1,830 | 1,935 | 2,040 | 2,145 |

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.

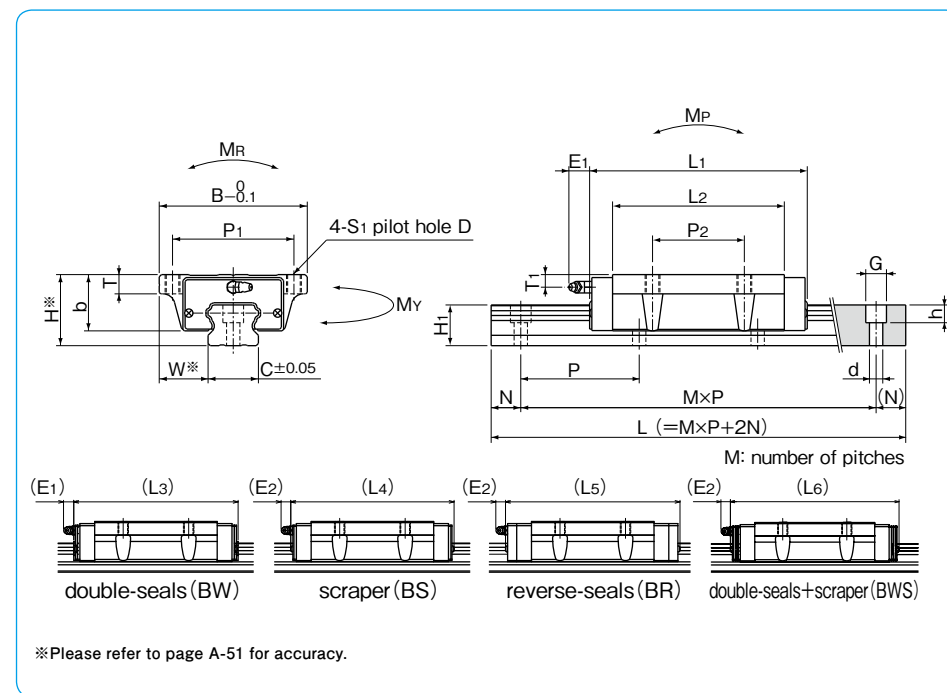


| T1 | grease fitting | guide rail dimensions | | | | | basic load rating | | allowable static moment | | | mass | | block size |
|-----|-----------------|-----------------------|----|-----------------|------|------|-------------------|-----------|-------------------------|----------------|----------------|-----------|-----------------|------------|
| | | H1 | C | d × G × h | N | P | dynamic C | static Co | M _P | M _Y | M _R | block kg | guide rail kg/m | |
| mm | | mm | mm | mm | mm | mm | kN | kN | N · m | N · m | N · m | kg | kg/m | |
| 5 | pressed fitting | 13.5 | 15 | 4.5 × 7.5 × 5.3 | 20 | 60 | 14.6 | 25.6 | 238 | 238 | 200 | 0.3 | 1.3 | 15 |
| 8 | B-M6F | 16 | 20 | 6 × 9.5 × 8.5 | | | 23.9 | 40.2 | 467 | 467 | 432 | 0.7 | 2.1 | 20 |
| 9.5 | | 20 | 23 | 7 × 11 × 9 | 32.8 | 54.5 | 723 | 723 | 655 | 1.0 | 3.0 | 25 | | |
| 9 | | 24 | 28 | 9 × 14 × 12 | 44.6 | 73.8 | 1,140 | 1,140 | 1,070 | 1.5 | 4.6 | 30 | | |
| 8.5 | | 27.5 | 34 | | 61.9 | 97.2 | 1,720 | 1,720 | 1,780 | 2.2 | 6.2 | 35 | | |
| 10 | B-PT1/8 | 36.5 | 45 | 14 × 20 × 17 | 22.5 | 105 | 91.4 | 134 | 2,680 | 2,680 | 3,080 | 4.0 | 10.5 | 45 |

M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN ≅ 102kgf 1N · m ≅ 0.102kgf · m

| | | | | | | | | | | | | | | maximum length | |
|-------|-------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|--|----------------|-------|
| | | | | | | | | | | | | | | mm | |
| 1,240 | 1,360 | 1,480 | | | | | | | | | | | | 2,000 | |
| 1,360 | 1,480 | 1,600 | 1,660 | 1,720 | 1,840 | 1,960 | | | | | | | | 3,000 | |
| 1,360 | 1,480 | 1,600 | 1,660 | 1,720 | 1,840 | 1,960 | | | | | | | | 3,000 | |
| 1,640 | 1,720 | 1,800 | 1,880 | 1,960 | | | | | | | | | | 3,000 | |
| 1,640 | 1,720 | 1,800 | 1,880 | 1,960 | | | | | | | | | | 3,000 | |
| 2,250 | 2,355 | 2,460 | 2,565 | 2,670 | 2,775 | 2,880 | 2,985 | | | | | | | | 3,000 |

SGL-HTEX TYPE

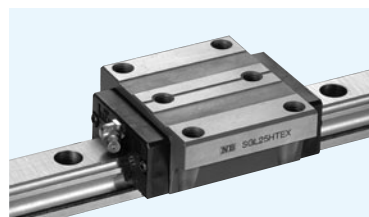

part number structure

example **SGL 15 HTEX B 2 T1 -589 P/W2 FS LB F J -KGL**


| | |
|--|--|
| <p>SGL type</p> <p>size</p> <p>block style</p> <p>seal (refer to page A-14) blank: with side-seals B: with side-seals + under-seals BW: with double-seals + under-seals BS: B + scraper BR: B + reverse-seals BWS: BW + scraper</p> <p>number of blocks attached to one rail</p> <p>preload symbol (refer to page A-52) blank: standard T1: light T2: medium</p> <p>total length of rail</p> | <p>symbol for grease blank: standard grease KGLA: lithium-based grease KGU: urea-based grease KGF: anti-fretting grease refer to page Eng-40~</p> <p>with bellows (refer to page A-18)</p> <p>with rail mounting hole caps</p> <p>with low temperature black chrome treatment</p> <p>with Fiber Sheet (refer to page A-16)</p> <p>symbol for number of axes* blank: single axis W2: 2 parallel axes W3: 3 parallel axes</p> <p>accuracy grade (refer to page A-51) blank: standard H: high P: precision</p> |
|--|--|

*The symbol for the number of axes does not mean the number of rails ordered.

| part number | assembly dimensions | | block dimensions | | | | | | | | | | | | | | | |
|------------------|---------------------|------|------------------|------|------|-------|-------|-------|-------|-----|----|-----|------|------|----|-----|----|------|
| | H | W | B | L1 | L2 | L3 | L4 | L5 | L6 | P1 | P2 | S1 | D | T | P3 | S2 | f | b |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SGL15HTEX | 24 | 16 | 47 | 56.5 | 38.5 | 62.7 | 63.1 | 70.1 | 69.3 | 38 | 30 | M5 | 4.4 | 7.5 | 26 | M5 | 6 | 19.7 |
| SGL20HTEX | 30 | 21.5 | 63 | 71.6 | 53.2 | 77.8 | 78.2 | 89.2 | 84.4 | 53 | 40 | M6 | 5.4 | 10.5 | 35 | M6 | 8 | 24 |
| SGL25HTEX | 36 | 23.5 | 70 | 80 | 59 | 86.4 | 87.2 | 98.2 | 93.4 | 57 | 45 | M8 | 6.8 | 12.5 | 40 | M8 | 10 | 29 |
| SGL30HTEX | 42 | 31 | 90 | 95.7 | 67.7 | 104.3 | 103.3 | 113.9 | 111.9 | 72 | 52 | M10 | 8.5 | 10 | 44 | M10 | 13 | 32.5 |
| SGL35HTEX | 48 | 33 | 100 | 109 | 78 | 117.6 | 116.6 | 127.2 | 125.2 | 82 | 62 | | 13 | 52 | 13 | | 38 | |
| SGL45HTEX | 60 | 37.5 | 120 | 139 | 102 | 147.5 | 148 | 158.7 | 156.6 | 100 | 80 | M12 | 10.5 | 15 | 60 | M12 | 14 | 50 |

| part number | standard rail length L mm | | | | | | | | | | | | | | | |
|--------------|------------------------------|-----|-----|-----|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| SGL15 | 160 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 |
| SGL20 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 | 1,240 |
| SGL25 | 220 | 280 | 340 | 400 | 460 | 520 | 580 | 640 | 700 | 760 | 820 | 880 | 940 | 1,000 | 1,120 | 1,240 |
| SGL30 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 | 1,480 |
| SGL35 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 840 | 920 | 1,000 | 1,080 | 1,160 | 1,240 | 1,320 | 1,400 | 1,480 |
| SGL45 | 570 | 675 | 780 | 885 | 990 | 1,095 | 1,200 | 1,305 | 1,410 | 1,515 | 1,620 | 1,725 | 1,830 | 1,935 | 2,040 | 2,145 |

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.

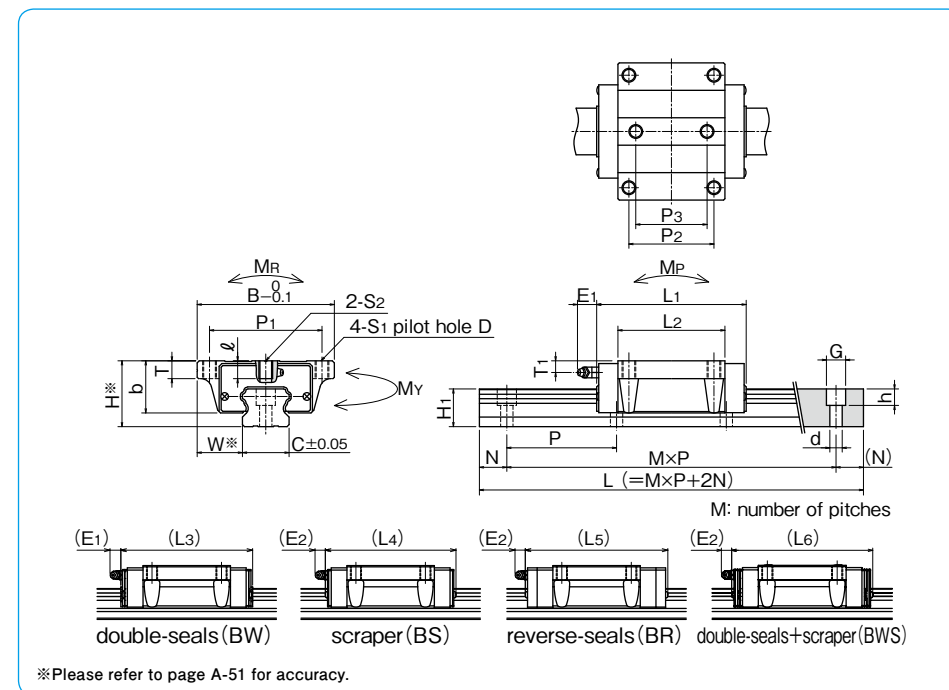

*Please refer to page A-51 for accuracy.

| E1 | E2 | T1 | grease fitting | guide rail dimensions | | | | N | P | basic load rating | | allowable static moment | | M _R | block mass | guide rail | block size |
|-----|------|-----|-----------------|-----------------------|--------------|-----------------|--------------|-------|------|-------------------|----------------|-------------------------|----------------|----------------|------------|------------|------------|
| | | | | H1 | C | d × G × h | mm | | | mm | C | Co | M _P | | | | |
| mm | mm | mm | | mm | mm | mm | mm | mm | kN | kN | N · m | N · m | N · m | | | | |
| 6 | 5.4 | 5 | pressed fitting | 13.5 | 15 | 4.5 × 7.5 × 5.3 | 20 | 60 | 10.6 | 16.2 | 99.5 565 | 99.5 565 | 126 | 0.2 | 1.3 | 15 | |
| 12 | 11 | 8 | B-M6F | 16 | 20 | 6 × 9.5 × 8.5 | | | 18.3 | 27.5 | 226 1,180 | 226 1,180 | 296 | 0.4 | 2.1 | 20 | |
| | | 9.5 | | 20 | 23 | 7 × 11 × 9 | | | 24.7 | 36.3 | 334 1,740 | 334 1,740 | 437 | 0.6 | 3.0 | 25 | |
| | | 9 | | 24 | 28 | 9 × 14 × 12 | | | 33.6 | 49.2 | 528 2,880 | 528 2,880 | 716 | 1.0 | 4.6 | 30 | |
| 8.5 | 27.5 | 34 | 46.6 | 64.8 | 796 4,290 | | 796 4,290 | 1,180 | 1.5 | 6.2 | 35 | | | | | | |
| 15 | 15 | 10 | B-PT1/8 | 36.5 | 45 | 14 × 20 × 17 | 22.5 | 105 | 74.7 | 101 | 1,550 8,250 | 1,550 8,250 | 2,310 | 3.1 | 10.5 | 45 | |

M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN ≅ 102kgf 1N · m ≅ 0.102kgf · m

| | | | maximum length mm |
|-------|-------|-------|----------------------|
| 1,240 | 1,360 | 1,480 | 2,000 |
| 1,360 | 1,480 | 1,600 | 3,000 |
| 1,360 | 1,480 | 1,600 | 3,000 |
| 1,360 | 1,480 | 1,600 | 3,000 |
| 1,640 | 1,720 | 1,800 | 3,000 |
| 1,640 | 1,720 | 1,800 | 3,000 |
| 2,250 | 2,355 | 2,460 | 3,000 |

SLIDE GUIDE SGW Type

The NB slide guide SGW type is a linear motion bearing utilizing the rolling motion of ball elements along four rows of raceway grooves. Its low height and wide profile makes it suitable for single-rail applications.

STRUCTURE AND ADVANTAGES

The NB slide guide SGW type consists of a rail with four precisely machined raceway grooves and a block assembly. The block assembly consists of the main body, ball elements, retainers, and return caps.

High Load Capacity and Long Life

The raceway grooves are machined to a radius close to that of the ball elements. The larger contact area resulting in a high load capacity and a long travel life.

High Allowable Moment

Its wide profile enables it to sustain high moment loads, making it suitable for single-rail applications.

Omni-Directional Load Capacity

The ball elements are positioned at 45° contact angle so that the load capacity is equal in four directions (above, below, right and left).

Smooth Motion

The large number of effective ball elements produce a smooth rolling motion.

Anti-Corrosion Specification

The rail and block assembly can be treated with low temperature black chrome treatment to increase the corrosion resistance. This treatment is standardized with the symbol "LB", and suitable for use in clean room applications.


Dust Prevention

Side-seals are provided as standard. To improve the dust prevention characteristics, under-seals and rail mounting caps are also available.

Extension of Relubrication Period by Fiber Sheet

A lubricant-containing Fiber Sheet incorporated in the block supplies appropriate amount of lubricant to the raceway grooves, which significantly extends the lubricant replenishment interval. (refer to page A-16)

Figure A-58 Structure of SGW type Slide Guide

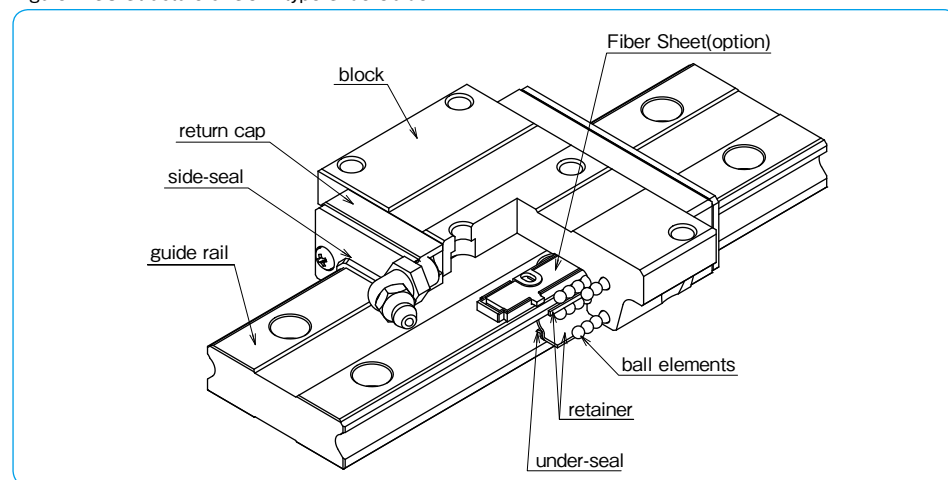


BLOCK TYPES

Two SGW block types are available depending on the mounting space and desired mounting method.

SGW-TF type


P.A-76

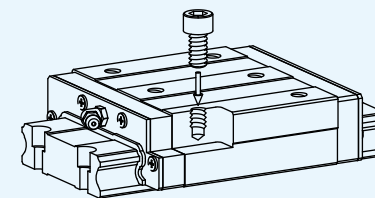

high-rigidity wide type

SGW-TE type

P.A-78

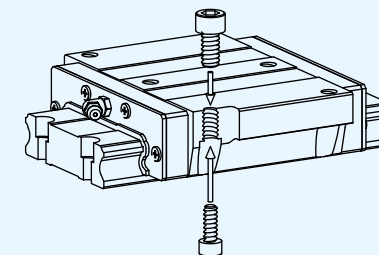

high-rigidity wide flange type

ACCURACY

Three accuracy grades are available: standard grade (blank), high grade (H), and precision grade (P).

Table A-29 Accuracy

unit : mm

| part number | SGW17,21 | | | SGW27,35 | | |
|---|-------------------------|-------|-----------|----------|-------|-----------|
| | standard | high | precision | standard | high | precision |
| accuracy grade | | | | | | |
| accuracy symbol | blank | H | P | blank | H | P |
| allowable dimensional tolerance for height H | ±0.1 | ±0.03 | -0.03~0 | ±0.1 | ±0.04 | -0.04~0 |
| paired difference for height H | 0.02 | 0.01 | 0.006 | 0.02 | 0.015 | 0.007 |
| allowable dimensional tolerance for width W | ±0.1 | ±0.03 | -0.03~0 | ±0.1 | ±0.04 | -0.04~0 |
| paired difference for width W | 0.02 | 0.01 | 0.006 | 0.03 | 0.015 | 0.007 |
| Running parallelism of surface C to surface A | refer to Figure A-61,62 | | | | | |
| Running parallelism of surface D to surface B | refer to Figure A-61,62 | | | | | |

Figure A-59 Motion Accuracy


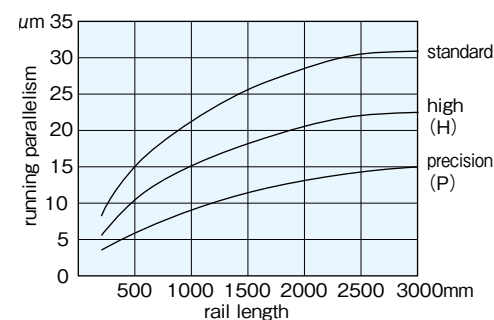


Figure A-60 Accuracy

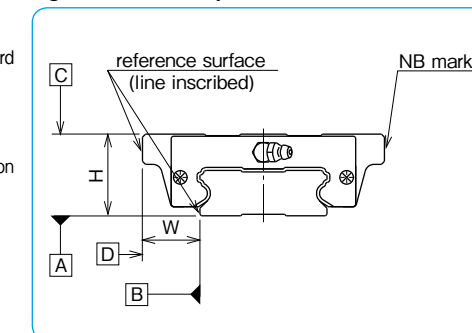

PRELOAD

Three levels of preload are available for SGW slide guides: standard (blank), light (T1), and medium (T2).

Table A-30 Preload symbol and Radial Clearance unit: μm

| preload | standard | light | medium* |
|---------|----------|--------|---------|
| symbol | blank | T1 | T2 |
| SGW17 | -3~+2 | -7~-3 | - |
| SGW21 | -4~+2 | -8~-4 | - |
| SGW27 | -5~+2 | -11~-5 | - |
| SGW35 | -8~+4 | -18~-8 | -28~-18 |

Table A-31 Operating Conditions and Preload

| preload | symbol | operating conditions |
|----------|--------|---|
| standard | blank | minute vibration is applied. accurate motion is required. moment is applied in a given direction. |
| light | T1 | light vibration is applied. light torsional load is applied. moment is applied. |
| medium* | T2 | shock and vibration are applied. over-hang load is applied. torsional load is applied. |

* Frictional resistance may be affected by preload.

RAIL LENGTH

Slide guides with most commonly used lengths are available as standard. For slide guides with a non-standard length, unless otherwise specified, the distance from one end of the rail to the first hole center (N) will be within the range listed in Table A-32, satisfying the following equation.


$$L = M \cdot P + 2N$$

L: length (mm) M: number of pitches P: hole pitch (mm)
N: distance from the end of the rail to the first hole center (mm)

Table A-32 N Dimension unit: mm

| part number | N | |
|-------------|----------|-----------|
| | and over | less than |
| SGW17 | 8 | 28 |
| SGW21 | | 33 |
| SGW27 | | 38 |
| SGW35 | | 52 |

Figure A-61 Rail

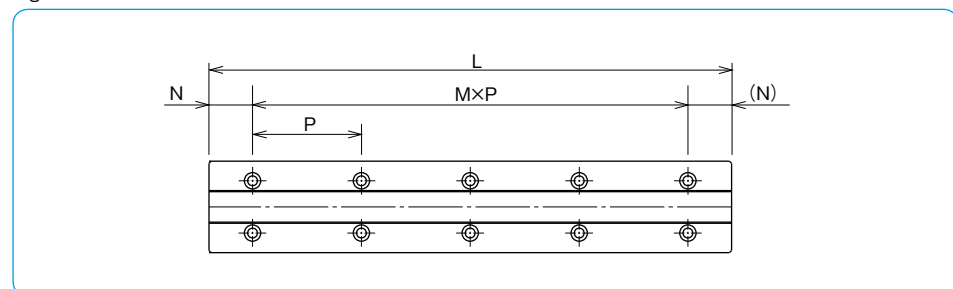

MOUNTING

Slide guides are generally mounted by pushing the reference surface of the rail and block against the shoulder of the mounting surface. To avoid interference between the shoulder and the corner of the rail or block, the recommended dimensions are listed in Table A-34.

The screws to fasten the rail should be tightened to an equal torque using a torque wrench in order to secure the motion accuracy. The recommended torque values are given in Table A-33. Please adjust the torque depending on the operating conditions.

Table A-33 Recommended Torque unit: N·m

| size | M4 | M6 |
|--------------------|-----|------|
| recommended torque | 3.2 | 11.2 |

(for alloy steel screw)

Figure A-62 Mounting Reference Surface Profile

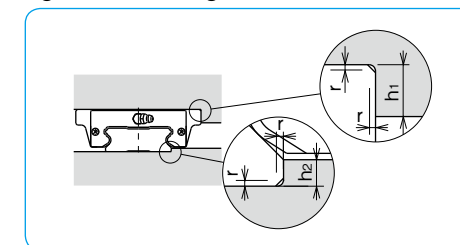



Table A-34 Shoulder Height and Radius Dimensions unit: mm

| part number | h1 | h2 | rmax. |
|-------------|----|-----|-------|
| SGW17 | 4 | 2 | 0.4 |
| SGW21 | 5 | 2.5 | |
| SGW27 | | 3.5 | |
| SGW35 | | 3.5 | 0.8 |

GREASE FITTING

A grease fitting is attached to the return cap of SGW type guide block for lubrication purposes. Unless otherwise specified, the orientation of the grease fitting is as shown in Figure A-63. When more than 2 blocks are used on one rail, please specify the grease fitting orientation.

Figure A-63 Grease Fitting Orientation

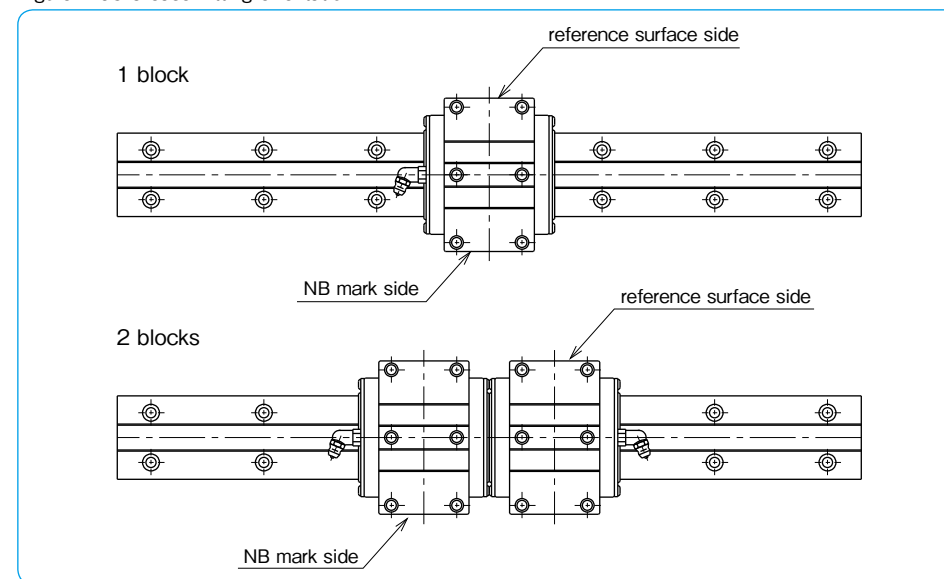

SGW-TF TYPE



part number structure

example **SGW21TFB2T1-589P/W2FSLB F-KGL**

| | | | | | | | | | | |
|----------|---------------------------------------|-------------------------------------|----------------------|-------------------------------------|-------------------|----------------------------|------------------------------|---|---------------------------------------|-------------------|
| SGW type | TF type/block | B | T1 | 589 | P | W2 | FS | LB | F | KGL |
| size | number of blocks attached to one rail | preload symbol (refer to page A-74) | total length of rail | accuracy grade (refer to page A-73) | symbol for grease | symbol for number of axes* | with rail mounting hole caps | with low temperature black chrome treatment | with Fiber Sheet (refer to page A-16) | symbol for grease |
| blank | blank | T1 | blank | blank | blank | blank | blank | blank | blank | blank |
| B | blank | T2 | blank | blank | blank | blank | blank | blank | blank | blank |
| 2 | blank | blank | blank | blank | blank | blank | blank | blank | blank | blank |
| T1 | blank | blank | blank | blank | blank | blank | blank | blank | blank | blank |
| 589 | blank | blank | blank | blank | blank | blank | blank | blank | blank | blank |
| P | blank | blank | blank | blank | blank | blank | blank | blank | blank | blank |
| W2 | blank | blank | blank | blank | blank | blank | blank | blank | blank | blank |
| FS | blank | blank | blank | blank | blank | blank | blank | blank | blank | blank |
| LB | blank | blank | blank | blank | blank | blank | blank | blank | blank | blank |
| F | blank | blank | blank | blank | blank | blank | blank | blank | blank | blank |
| KGL | blank | blank | blank | blank | blank | blank | blank | blank | blank | blank |

symbol for grease
blank: standard grease
KGLA: lithium-based grease
KGU: urea-based grease
KGF: anti-fretting grease refer to page Eng-40~

with rail mounting hole caps
 with low temperature black chrome treatment
 with Fiber Sheet (refer to page A-16)




symbol for number of axes*
blank: single axis
W2: 2 parallel axes
W3: 3 parallel axes

*The symbol for the number of axes does not mean the number of rails ordered.

| part number | assembly dimensions | | block dimensions | | | | | | | | | | | grease fitting |
|----------------|---------------------|------|------------------|-------|------|----|----|----|----|----|------|-----|-----|-----------------|
| | H | W | B | L1 | L2 | P1 | P2 | S | f | T | b | E | T1 | |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SGW17TF | 17 | 8.5 | 50 | 51 | 33.6 | 29 | 15 | M4 | 4 | — | 14.5 | 2.5 | 4 | pressed fitting |
| SGW21TF | 21 | 8.5 | 54 | 58 | 40 | 31 | 19 | M5 | 5 | — | 18 | 12 | 4.5 | B-M6F |
| SGW27TF | 27 | 10 | 62 | 71.8 | 51.8 | 46 | 32 | M6 | 6 | 10 | 24 | | 6 | |
| SGW35TF | 35 | 15.5 | 100 | 106.6 | 77.6 | 76 | 50 | M8 | 8 | 14 | 31 | | 8 | |

| part number | standard rail length L mm | | | | | | | | | | |
|--------------|---------------------------|-----|-----|-----|-----|-----|-----|-----|-------|-------|-------|
| SGW17 | 110 | 150 | 190 | 230 | 270 | 310 | 350 | 390 | 430 | 510 | 590 |
| SGW21 | 130 | 180 | 230 | 280 | 330 | 380 | 430 | 480 | 530 | 630 | 730 |
| SGW27 | 160 | 220 | 280 | 340 | 400 | 460 | 520 | 640 | 760 | 880 | 1,000 |
| SGW35 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 920 | 1,080 | 1,240 | 1,400 |

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.

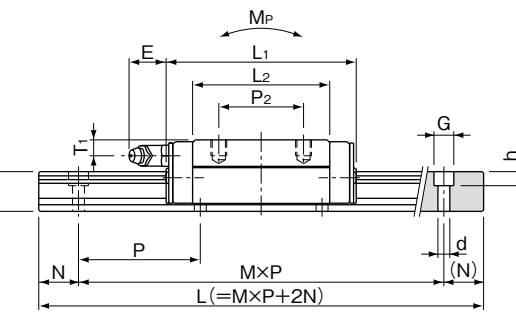

*Please refer to page A-73 for accuracy.


M: number of pitches

| H1 | C | B1 | d×G×h | N | P | basic load rating | | allowable static moment | | | mass | | block size |
|----|----|----|-------------|----|--------|-------------------|-----------|-------------------------|--------------|--------------|----------|-----------------|------------|
| | | | | | | dynamic C | static Co | Mp | My | Mr | block kg | guide rail kg/m | |
| mm | mm | mm | mm | mm | mm | kN | kN | N·m | N·m | N·m | kg | kg/m | |
| 9 | 33 | 18 | 4.5×7.5×5.3 | 15 | 40 | 4.82 | 8.56 | 42.8 261 | 42.8 261 | 160 | 0.13 | 2.05 | 17 |
| 11 | 37 | 22 | | | 50 | 7.01 | 12.1 | 72.3 418 | 72.3 418 | 253 | 0.20 | 2.84 | 21 |
| 15 | 42 | 24 | | 20 | 60 | 12.9 | 21.5 | 171 931 | 171 931 | 496 | 0.38 | 4.43 | 27 |
| 19 | 69 | 40 | | | 7×11×9 | 80 | 30.6 | 48.5 | 578 3,100 | 578 3,100 | 1,850 | 1.16 | 9.32 |

Mp2 and My2 are allowable static moments when two blocks are used in close contact. 1kN≒102kgf 1N·m≒0.102kgf·m

| | | | | | | | maximum length mm |
|-------|-------|-------|-------|-------|-------|-------|-------------------|
| 670 | 750 | 830 | 950 | 1,070 | 1,190 | 1,310 | 2,000 |
| 830 | 930 | 1,030 | 1,180 | 1,330 | 1,480 | | 2,000 |
| 1,180 | 1,360 | 1,540 | 1,720 | 1,900 | | | 3,000 |
| 1,640 | 1,880 | 2,120 | | | | | 3,000 |

SGW-TE TYPE

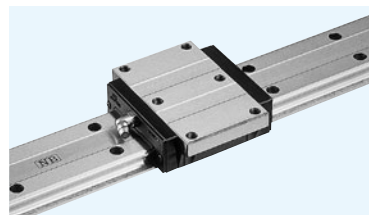

part number structure

example **SGW 21 TE B 2 T1 -589 P/W2 FS LB F-KGL**


- SGW type
- size
- TE typeblock
- seal (refer to page A-14)
 - blank: with side-seals
 - B: with side-seals + under-seals
- number of blocks attached to one rail
- preload symbol (refer to page A-74)
 - blank: standard
 - T1: light
 - T2: medium
- total length of rail
- accuracy grade (refer to page A-73)
 - blank: standard
 - H: high
 - P: precision
- symbol for grease
 - blank: standard grease
 - KGLA: lithium-based grease
 - KGU: urea-based grease
 - KGF: anti-fretting grease refer to page Eng-40~
- with rail mounting hole caps
- with low temperature black chrome treatment
- with Fiber Sheet (refer to page A-16)
- symbol for number of axes*
 - blank: single axis
 - W2: 2 parallel axes
 - W3: 3 parallel axes

*The symbol for the number of axes does not mean the number of rails ordered.

| part number | assembly dimensions | | block dimensions | | | | | | | | | | | grease fitting | |
|----------------|---------------------|------|------------------|----------------|----------------|----------------|----------------|----|-----|-----|----|------|-----|----------------|-----------------|
| | H | W | B | L ₁ | L ₂ | P ₁ | P ₂ | S | D | F | T | b | E | | T ₁ |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SGW17TE | 17 | 13.5 | 60 | 51 | 33.6 | 53 | 26 | M4 | 3.3 | 3.2 | 6 | 14.5 | 2.5 | 4 | pressed fitting |
| SGW21TE | 21 | 15.5 | 68 | 58 | 40 | 60 | 29 | M5 | 4.4 | 3.7 | 8 | 18 | 12 | 4.5 | B-M6F |
| SGW27TE | 27 | 19 | 80 | 71.8 | 51.8 | 70 | 40 | M6 | 5.3 | 6 | 10 | 24 | | 6 | |
| SGW35TE | 35 | 25.5 | 120 | 106.6 | 77.6 | 107 | 60 | M8 | 6.8 | 8 | 14 | 31 | | 8 | |

| part number | standard rail length L mm | | | | | | | | | | |
|--------------|------------------------------|-----|-----|-----|-----|-----|-----|-----|-------|-------|-------|
| SGW17 | 110 | 150 | 190 | 230 | 270 | 310 | 350 | 390 | 430 | 510 | 590 |
| SGW21 | 130 | 180 | 230 | 280 | 330 | 380 | 430 | 480 | 530 | 630 | 730 |
| SGW27 | 160 | 220 | 280 | 340 | 400 | 460 | 520 | 640 | 760 | 880 | 1,000 |
| SGW35 | 280 | 360 | 440 | 520 | 600 | 680 | 760 | 920 | 1,080 | 1,240 | 1,400 |

Rails exceeding the maximum specified length may be fabricated if joints are used. Please contact NB for assistance.

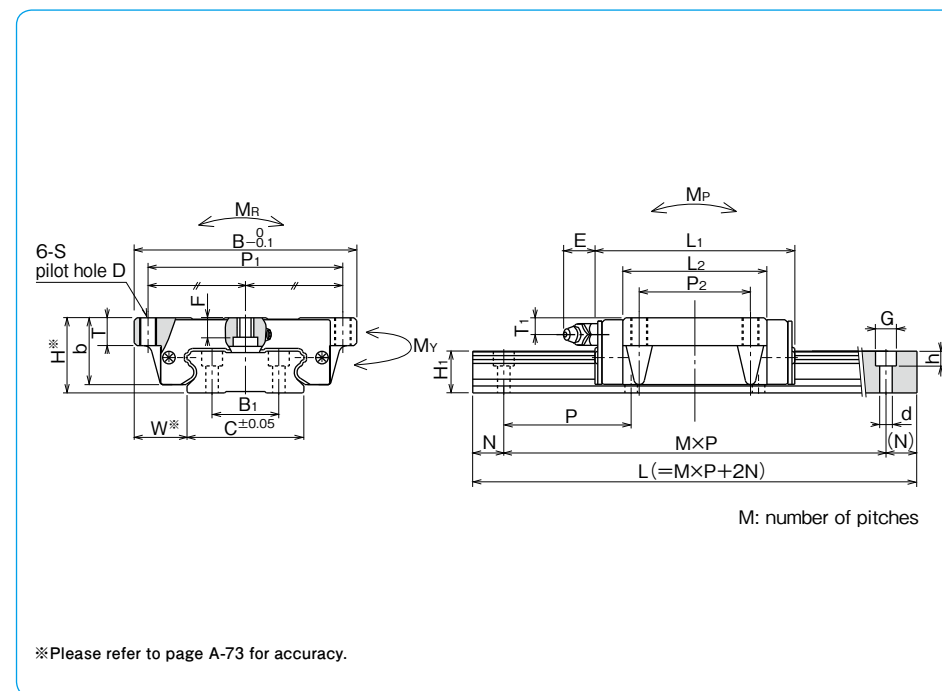

| H ₁ | C | B ₁ | d × G × h | N | P | basic load rating | | allowable static moment | | | mass | | block size |
|----------------|----|----------------|-----------------|----|------------|-------------------|--------------------------|-------------------------|----------------|----------------|-------|------------|------------|
| | | | | | | dynamic C | static C ₀ | M _P | M _Y | M _R | block | guide rail | |
| mm | mm | mm | mm | mm | mm | kN | kN | N · m | N · m | N · m | kg | kg/m | |
| 9 | 33 | 18 | 4.5 × 7.5 × 5.3 | 15 | 40 | 4.82 | 8.56 | 42.8 261 | 42.8 261 | 160 | 0.14 | 2.05 | 17 |
| 11 | 37 | 22 | | | 50 | 7.01 | 12.1 | 72.3 418 | 72.3 418 | 253 | 0.23 | 2.84 | 21 |
| 15 | 42 | 24 | | 20 | 60 | 12.9 | 21.5 | 171 931 | 171 931 | 496 | 0.46 | 4.43 | 27 |
| 19 | 69 | 40 | | | 7 × 11 × 9 | 80 | 30.6 | 48.5 | 578 3,100 | 578 3,100 | 1,850 | 1.35 | 9.32 |

M_{P2} and M_{Y2} are allowable static moments when two blocks are used in close contact. 1kN ≅ 102kgf 1N · m ≅ 0.102kgf · m

| | | | | | | | maximum length mm |
|-------|-------|-------|-------|-------|-------|-------|----------------------|
| 670 | 750 | 830 | 950 | 1,070 | 1,190 | 1,310 | 2,000 |
| 830 | 930 | 1,030 | 1,180 | 1,330 | 1,480 | | 2,000 |
| 1,180 | 1,360 | 1,540 | 1,720 | 1,900 | | | 3,000 |
| 1,640 | 1,880 | 2,120 | | | | | 3,000 |

BALL SPLINE ROTARY BALL SPLINE STROKE BALL SPLINE BALL SCREW SPLINE

BALL SPLINE

| | |
|--|-------|
| STRUCTURE AND ADVANTAGES | B-2 |
| TYPES | B-3 |
| ACCURACY | B-5 |
| PRELOAD AND CLEARANCE IN ROTATIONAL DIRECTION | B-6 |
| STRENGTH OF SPLINE SHAFT | B-7 |
| LOAD RATING | B-8 |
| CALCULATION OF DEFLECTION AND DEFLECTION ANGLE OF SPLINE SHAFT | B-9 |
| ALLOWABLE ROTATIONAL SPEED OF SPLINE SHAFT | B-10 |
| LIFE CALCULATION | B-11 |
| OPERATING CONDITIONS | B-11 |
| LUBRICATION | B-12 |
| HOLLOW SPLINE SHAFT | B-12 |
| SPECIAL REQUIREMENTS | B-12 |
| USE AND HANDLING PRECAUTIONS | B-13 |
| MOUNTING | B-14 |
| DIMENSION TABLE | B-18~ |

ROTARY BALL SPLINE

| | |
|---|-------|
| STRUCTURE AND ADVANTAGES | B-32 |
| ACCURACY OF SPR TYPE | B-33 |
| ACCURACY OF SPB TYPE | B-34 |
| PRELOAD AND CLEARANCE IN ROTATIONAL DIRECTION | B-35 |
| HOLLOW SPLINE SHAFT | B-35 |
| SPECIAL REQUIREMENTS | B-35 |
| MOUNTING | B-36 |
| LUBRICATION | B-37 |
| OPERATING CONDITIONS | B-38 |
| APPLICATION EXAMPLES | B-39 |
| DIMENSION TABLE | B-40~ |

STROKE BALL SPLINE

| | |
|---|-------|
| STRUCTURE AND ADVANTAGES | B-46 |
| ACCURACY | B-47 |
| PRELOAD AND CLEARANCE IN ROTATIONAL DIRECTION | B-48 |
| COMPARISON OF DYNAMIC FRICTIONAL RESISTANCE | B-48 |
| USE AND HANDLING PRECAUTIONS | B-49 |
| DIMENSION TABLE | B-50~ |

BALL SCREW SPLINE

| | |
|------------------------------|-------|
| STRUCTURE AND ADVANTAGES | B-52 |
| PRELOAD | B-52 |
| USE AND HANDLING PRECAUTIONS | B-52 |
| ACCURACY | B-53 |
| SPBR TYPE MOTION PATTERN | B-54 |
| SPBF TYPE MOTION PATTERN | B-55 |
| DIMENSION TABLE | B-56~ |

BALL SPLINE

The NB ball spline is a linear motion mechanism utilizing the rolling motion of ball elements that can sustain loads and transfer torque simultaneously. It can be used in a wide variety of applications including robotics and transport type equipment.

STRUCTURE AND ADVANTAGES

The NB ball spline consists of a spline shaft with raceway grooves and a spline nut. The spline nut consists of an outer cylinder (main body), retainer, side rings, and ball elements that is designed and manufactured to achieve a reliably smooth motion.

High Load Capacity and Long Travel Life

The raceway grooves are machined to a radius close to that of the ball elements. The large ball contact area results in high load capacity and long travel life.

Wide Variety of Configurations

Spline shaft sizes with diameters from 4mm to 100mm are available. Several types of Spline nut are available: cylindrical types (SSP/SSPM), and flange types (SSPF/SSPT). Material option of Stainless steel (SUS440C or equivalent) is also available. They can be specified to suit various applications.

High Accuracy Torque Transmission

Due to the effective contact angle between the raceway grooves and the balls, the NB ball spline can transfer large torque. By adjusting preload it is possible to obtain a higher rigidity and a higher positioning accuracy.

Ease of Additional Custom Machining

Since a round shaft with raceway grooves is used, NB ball spline shafts can be easily machined to customized specifications.

High-Speed Motion and High-Speed Rotation

The outer cylinder is compact and well balanced, resulting in good performance at high speed.

LIGHT WEIGHT and COMPACTNESS

The NB ball spline SSP-AM type has a smaller spline-nut diameter compared to the conventional SSP type nut on the same shaft diameter. The SSP-AM type is best suited for the chip-mounter head device and the multi-axial applications. Anti-corrosion type is also available.


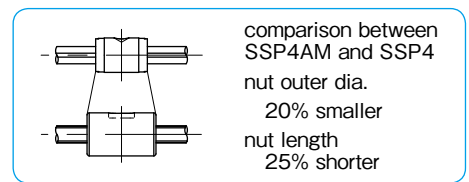


Figure B-1 Basic Structure of NB Ball Spline






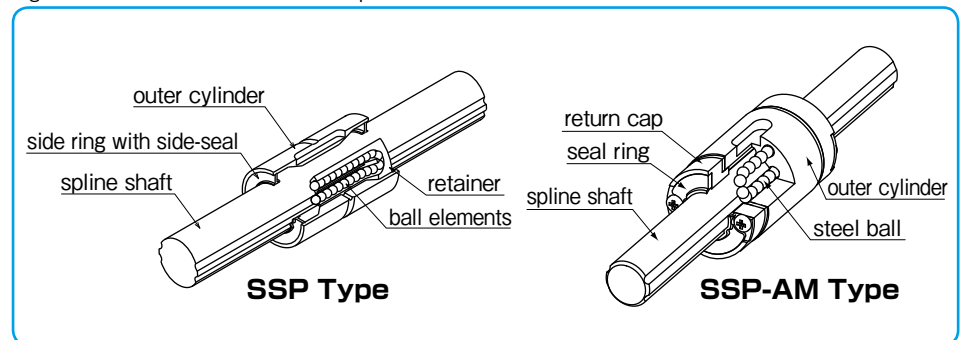


TYPES

TYPES OF SPLINE NUT

A wide variety of spline nut designs are available and all spline nuts come with side-seals as a standard feature.


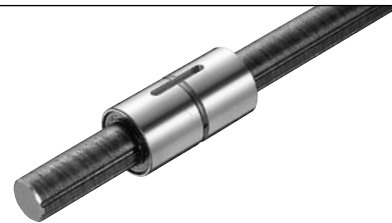
Table B-1 Types of Spline Nut
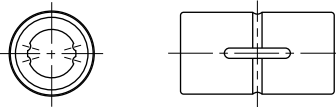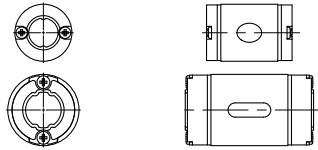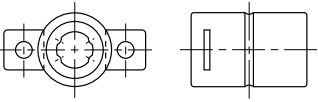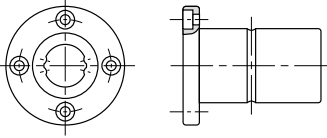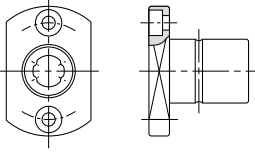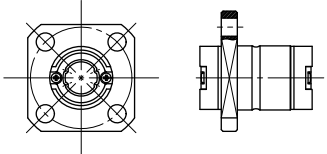
| type of nut | | shape and advantage | page |
|------------------|--|--|--------|
| cylindrical type | SSP SSPS |  <ul style="list-style-type: none"> cylindrical spline nut with key groove with special key nominal diameter: SSP4-100 : SSPS4-25 | P.B-18 |
| | SSP-AM SSPS-AM |  <ul style="list-style-type: none"> light and compact nut countersink for fixing (SSP4AM) with special key nominal diameter: 4-10 | P.B-20 |
| | SSPM |  <ul style="list-style-type: none"> cylindrical spline nut without key groove with two lock plates for fixing nominal diameter: 6-10 | P.B-22 |
| flange type | SSPF SSPFS |  <ul style="list-style-type: none"> spline nut with flange nominal diameter: SSPF6-60 : SSPFS6-25 | P.B-24 |
| | SSPT |  <ul style="list-style-type: none"> spline nut with a two side cut flange nominal diameter: 6-10 | P.B-26 |
| | SSPT-AM SSPK-AM SSPTS-AM SSPKS-AM |  <ul style="list-style-type: none"> light and compact nut with flange nominal diameter: 4-10 | P.B-28 |

TYPES OF SPLINE SHAFT

Depending on the application requirements, either a ground spline shaft or a non-ground (commercial grade) spline shaft is available.


Table B-2

| type of spline shaft | shape and advantage |
|-------------------------------|--|
| ground spline shaft |  <ul style="list-style-type: none"> • precision ground and precision machined surface finish • high precision • possible to machine ends of spline shaft and surface treatment • nominal diameter: 4-100 |
| commercial shaft (non-ground) |  <ul style="list-style-type: none"> • for general industrial use • cost effective • possible to machine ends of spline shaft and surface treatment • nominal diameter: 20-50 • maximum length: 5000mm (refer to page B-30) |

ACCURACY

The NB ball spline is measured for accuracy at the points shown in Figure B-2 and categorized as either high-grade (blank) or precision-grade (P). Contact NB for accuracy information on the commercial type ball spline.

Figure B-2 Accuracy Measurement Points

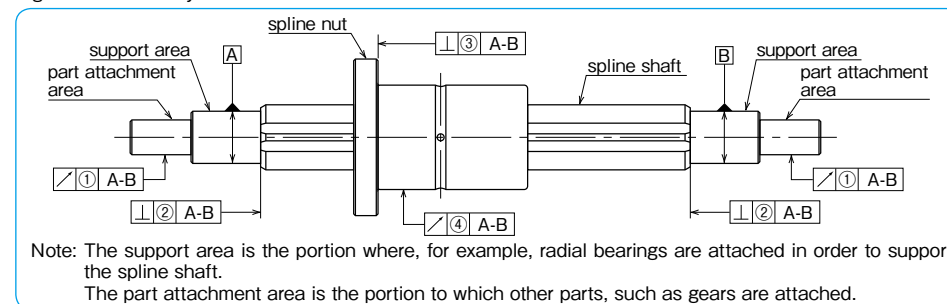

Tolerance of Spline Shaft Groove Torsion (Max.)

The groove torsion is indicated per 100mm, arbitrarily set as the effective length of the spline shaft section.

Table B-3

Tolerance of Spline Shaft Groove Torsion (Max.)

| type of shaft | ground shaft | |
|----------------|--------------|---------------|
| | high | precision (P) |
| accuracy grade | | |
| tolerance | 13μm/100mm | 6μm/100mm |

Table B-4 Tolerance Relative to Spline Support Area (Max.)

unit : μm

| part number | radial runout of part attachment area ① | | perpendicularity of the end of the spline shaft section ② (when grinding is requested on the drawing) | | perpendicularity of the flange ③ | |
|---------------|---|-----------------|---|-----------------|----------------------------------|-----------------|
| | high-grade | precision-grade | high-grade | precision-grade | high-grade | precision-grade |
| SSP 4 · 4AM | 14 | 8 | 9 | 6 | 11 | 8 |
| SSP 5AM | | | | | | |
| SSP 6 · 6AM | | | | | | |
| SSP 8 · 8AM | | | | | | |
| SSP 10 · 10AM | 17 | 10 | 11 | 8 | 13 | 9 |
| SSP 13A | | | | | | |
| SSP 16A | | | | | | |
| SSP 20A | 22 | 13 | 13 | 9 | 16 | 11 |
| SSP 25A | | | | | | |
| SSP 30A | | | | | | |
| SSP 40A | | | | | | |
| SSP 50A | 25 | 15 | 16 | 11 | 19 | 13 |
| SSP 60A | | | | | | |
| SSP 80 | | | | | | |
| SSP 80L | 29 | 17 | 19 | 13 | 22 | 15 |
| SSP 100 | | | | | | |
| SSP 100L | 34 | 20 | 22 | 15 | — | — |
| SSP 20 | | | | | | |
| SSP 25 | 22 | 13 | 13 | 9 | 16 | 11 |
| SSP 30 | | | | | | |
| SSP 40 | | | | | | |
| SSP 50 | 25 | 15 | 16 | 11 | 19 | 13 |
| SSP 60 | | | | | | |
| SSP 80 | 29 | 17 | 19 | 13 | 22 | 15 |
| SSP 100 | | | | | | |

Table B-5 ④ Radial Runout of Outer Surface of Spline Nut Relative to Spline Shaft Support Area (Max.) unit: μm

| total length of spline shaft (mm) | greater than | or less | SSP4 SSP4AM | | SSP5AM SSP6 SSP6AM | | SSP8 SSP8AM | | SSP10 SSP10AM | | part number | | | | | | | | | | | | | | | |
|-----------------------------------|--------------|---------|-------------|-----------------|--------------------|-----------------|-------------|-----------------|---------------|-----------------|-------------------------|------------|-----------------|------------|-----------------|------------|-----------------|------------|-----------------|------------|-----------------|------------|-----------------|--|--|--|
| | | | high-grade | precision grade | high-grade | precision grade | high-grade | precision grade | high-grade | precision grade | SSP13A SSP16A SSP20A·20 | high-grade | precision grade | high-grade | precision grade | high-grade | precision grade | high-grade | precision grade | high-grade | precision grade | high-grade | precision grade | | | |
| — | 200 | 46 | 26 | 46 | 26 | 46 | 26 | 36 | 20 | 34 | 18 | 32 | 18 | 32 | 16 | 30 | 16 | 30 | 16 | 30 | 16 | 30 | 16 | | | |
| 200 | 315 | 89 | — | 89 | 57 | 89 | 57 | 54 | 32 | 45 | 25 | 39 | 21 | 36 | 19 | 34 | 17 | 32 | 17 | 32 | 17 | 32 | 17 | | | |
| 315 | 400 | — | — | 126 | — | 126 | 82 | 68 | 41 | 53 | 31 | 44 | 25 | 39 | 21 | 36 | 19 | 34 | 17 | 34 | 17 | 34 | 17 | | | |
| 400 | 500 | — | — | — | — | 163 | — | 82 | 51 | 62 | 38 | 50 | 29 | 43 | 24 | 38 | 21 | 35 | 19 | 35 | 19 | 35 | 19 | | | |
| 500 | 630 | — | — | — | — | — | — | 102 | 65 | 75 | 46 | 57 | 34 | 47 | 27 | 41 | 23 | 37 | 20 | 37 | 20 | 37 | 20 | | | |
| 630 | 800 | — | — | — | — | — | — | — | — | 92 | 58 | 68 | 42 | 54 | 32 | 45 | 26 | 40 | 22 | 40 | 22 | 40 | 22 | | | |
| 800 | 1,000 | — | — | — | — | — | — | — | — | 115 | 75 | 83 | 52 | 63 | 38 | 51 | 30 | 43 | 24 | 43 | 24 | 43 | 24 | | | |
| 1,000 | 1,250 | — | — | — | — | — | — | — | — | 153 | 97 | 102 | 65 | 76 | 47 | 59 | 35 | 48 | 28 | 48 | 28 | 48 | 28 | | | |
| 1,250 | 1,600 | — | — | — | — | — | — | — | — | 195* | 127* | 130 | 85 | 93 | 59 | 70 | 43 | 55 | 33 | 55 | 33 | 55 | 33 | | | |
| 1,600 | 2,000 | — | — | — | — | — | — | — | — | — | — | 171 | 116 | 118 | 77 | 86 | 54 | 65 | 40 | 65 | 40 | 65 | 40 | | | |

★ SSP13A, 16A maximum length: 1500mm
 ★★ Please contact NB for shaft lengths exceeding 2000mm.

PRELOAD AND CLEARANCE IN ROTATIONAL DIRECTION

Both the clearance and preload are expressed in terms of clearance in the rotational direction. The preload is categorized into three different levels: standard, light (T1), and medium (T2). A preload cannot be specified with the commercial grade spline shaft.

Table B-6 Preload and Clearance in Rotational Direction unit: μm

| part number | standard | light (T1) | medium (T2) |
|-------------|----------|------------|-------------|
| SSP 4·4AM | 0~+3 | -3~-0 | - |
| SSP 5AM | | | |
| SSP 6·6AM | | | |
| SSP 8·8AM | | | |
| SSP 10·10AM | -3~+1 | -8~-3 | -13~-8 |
| SSP 13A | | | |
| SSP 16A | | | |
| SSP 20A·20 | | | |
| SSP 25A·25 | -4~+2 | -12~-4 | -20~-12 |
| SSP 30A·30 | | | |
| SSP 40A·40 | | | |
| SSP 50A·50 | | | |
| SSP 60A·60 | -6~+3 | -18~-6 | -30~-18 |
| SSP 80 | | | |
| SSP 80L | | | |
| SSP 80L | | | |
| SSP100 | -8~+4 | -24~-8 | -40~-24 |
| SSP100L | | | |

Table B-7 Preload and Operating Condition

| preload | preload symbol | operating conditions |
|----------|----------------|--|
| standard | blank | minute vibration is applied. a precise motion is required. a torque in a given direction is applied. |
| light | T1 | slight vibration is applied. slight torsional load is applied. cyclic torque is applied. |
| medium | T2 | shock/vibration is applied. over-hang load is applied. torsional load is applied. |

* Frictional resistance may be affected by preload.

STRENGTH OF SPLINE SHAFT

The ball spline has larger load ratings compared to ball bush. Also, the ball spline can sustain radial load, moment (bending moment) and torque (twisting moment) at the same time. Thus, it is necessary to consider the strength of ball spline shaft.

Using the following equations, select the size of ball spline.

$$\sigma \geq \frac{M}{Z} \dots\dots\dots (1)$$

σ : permissible bending stress of spline shaft (98N/mm²)
 M: bending moment onto spline shaft (N·mm)
 Z: modulus of section (mm³)
 (refer to Table B-8 on page B-8)

Twisting Moment Only

$$\tau_a \geq \frac{T}{Z_p} \dots\dots\dots (2)$$

τ_a : permissible twisting stress of spline shaft (49N/mm²)
 T: twisting moment onto spline shaft (N·mm)
 Z_p: polar modulus of section (mm³)
 (refer to Table B-8 on page B-8)

Bending Moment and Twisting Moment Combined

Calculate equivalent bending moment (Me) by using equation (3). Then, substitute Me into equation (1) for shaft size selection.

$$M_e = \frac{1}{2} \{ M + \sqrt{M^2 + T^2} \} \dots\dots\dots (3)$$

Me: equivalent bending moment (N·mm)
 M: bending moment onto spline shaft
 T: twisting moment onto spline shaft

Rigidity of Spline Shaft

The rigidity of spline shaft is expressed in the torsional angle (θ) caused by twisting moment. For high accuracy smooth motion, it is necessary to keep the torsional angle within 0.25° per 1,000mm.

$$\theta = \frac{T \cdot L}{G \cdot I_p} \cdot \frac{360}{2\pi} \dots\dots\dots (4)$$

$$\text{Rigidity} = 0.25 \geq \frac{1,000}{L} \theta \dots\dots\dots (5)$$

θ : torsional angle (°)
 T: twisting moment onto spline shaft (N·mm)
 L: spline shaft length (mm)
 G: shearing modulus (SUJ2) 7.9×10⁴ (N/mm²)
 (SUS) 7.69×10⁴ (N/mm²)
 I_p: polar moment of inertia of area (mm⁴)
 (refer to Table B-8 on page B-8)

Figure B-3 Bending Moment

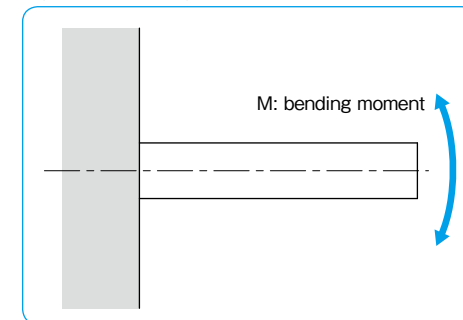


Figure B-4 Twisting Moment

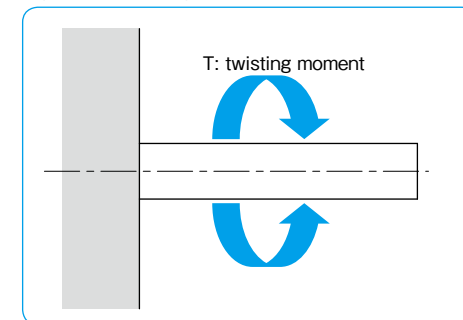


Figure B-5 Deformation of Spline Shaft by Twisting Moment

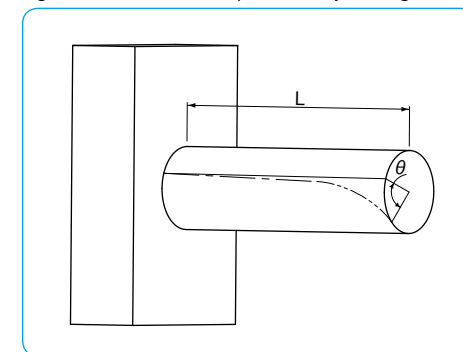


Table B-8 Cross-sectional Characteristics of Spline Shaft

| part number | I moment of inertia of area mm ⁴ | Z modulus of section mm ³ | I _p polar moment of inertia of area mm ⁴ | Z _p polar modulus of section mm ³ | C=1/48EI | |
|-------------|--|---|---|--|-----------------------------|------------------------|
| | | | | | SUJ2 1/N·mm ² | SUS440C |
| SSP 4 | 1.18×10 | 5.90 | 2.41×10 | 1.20×10 | 8.57×10 ⁻⁹ | 8.83×10 ⁻⁹ |
| SSP 6 | 5.91×10 | 1.97×10 | 1.21×10 ² | 4.04×10 | 1.71×10 ⁻⁹ | 1.76×10 ⁻⁹ |
| SSP 8 | 1.90×10 ² | 4.76×10 | 3.88×10 ² | 9.69×10 | 5.32×10 ⁻¹⁰ | 5.47×10 ⁻¹⁰ |
| SSP 10 | 4.61×10 ² | 9.22×10 | 9.42×10 ² | 1.88×10 ² | 2.19×10 ⁻¹⁰ | 2.26×10 ⁻¹⁰ |
| SSP 13A | 1.32×10 ³ | 2.03×10 ² | 2.70×10 ³ | 4.16×10 ² | 7.66×10 ⁻¹¹ | 7.89×10 ⁻¹¹ |
| SSP 16A | 2.98×10 ³ | 3.73×10 ² | 6.15×10 ³ | 7.68×10 ² | 3.39×10 ⁻¹¹ | 3.49×10 ⁻¹¹ |
| SSP 20A | 7.35×10 ³ | 7.35×10 ² | 1.51×10 ⁴ | 1.51×10 ³ | 1.38×10 ⁻¹¹ | 1.42×10 ⁻¹¹ |
| SSP 25A | 1.79×10 ⁴ | 1.43×10 ³ | 3.68×10 ⁴ | 2.94×10 ³ | 5.65×10 ⁻¹² | 5.82×10 ⁻¹² |
| SSP 30A | 3.63×10 ⁴ | 2.42×10 ³ | 7.57×10 ⁴ | 5.05×10 ³ | 2.79×10 ⁻¹² | — |
| SSP 40A | 1.15×10 ⁵ | 5.73×10 ³ | 2.39×10 ⁵ | 1.20×10 ⁴ | 8.83×10 ⁻¹³ | — |
| SSP 50A | 2.81×10 ⁵ | 1.12×10 ⁴ | 5.86×10 ⁵ | 2.34×10 ⁴ | 3.60×10 ⁻¹³ | — |
| SSP 60A | 5.91×10 ⁵ | 1.97×10 ⁴ | 1.22×10 ⁶ | 4.08×10 ⁴ | 1.71×10 ⁻¹³ | — |
| SSP 80 | 1.93×10 ⁶ | 4.83×10 ⁴ | 3.92×10 ⁶ | 9.81×10 ⁴ | 5.24×10 ⁻¹⁴ | — |
| SSP 80L | | | | | | |
| SSP100 | 4.69×10 ⁶ | 9.38×10 ⁴ | 9.55×10 ⁶ | 1.91×10 ⁵ | 2.16×10 ⁻¹⁴ | — |
| SSP100L | | | | | | |
| SSP 20 | 5.03×10 ³ | 5.53×10 ² | 1.04×10 ⁴ | 1.14×10 ³ | 2.01×10 ⁻¹¹ | 2.07×10 ⁻¹¹ |
| SSP 25 | 1.27×10 ⁴ | 1.10×10 ³ | 2.63×10 ⁴ | 2.29×10 ³ | 7.97×10 ⁻¹² | 8.21×10 ⁻¹² |
| SSP 30 | 2.74×10 ⁴ | 1.96×10 ³ | 5.73×10 ⁴ | 4.10×10 ³ | 3.69×10 ⁻¹² | — |
| SSP 40 | 8.71×10 ⁴ | 4.66×10 ³ | 1.82×10 ⁵ | 9.75×10 ³ | 1.16×10 ⁻¹² | — |
| SSP 50 | 2.16×10 ⁵ | 9.19×10 ³ | 4.53×10 ⁵ | 1.93×10 ⁴ | 4.69×10 ⁻¹³ | — |
| SSP 60 | 4.50×10 ⁵ | 1.59×10 ⁴ | 9.46×10 ⁵ | 3.35×10 ⁴ | 2.25×10 ⁻¹³ | — |
| SSP 4AM | 1.18×10 | 6.01 | 2.44×10 | 1.23×10 | 8.56×10 ⁻⁹ | 8.82×10 ⁻⁹ |
| SSP 5AM | 2.77×10 | 1.11×10 | 5.77×10 | 2.31×10 | 3.65×10 ⁻⁹ | 3.76×10 ⁻⁹ |
| SSP 6AM | 5.89×10 ² | 1.96×10 | 1.22×10 ² | 4.05×10 | 1.72×10 ⁻⁹ | 1.77×10 ⁻⁹ |
| SSP 8AM | 1.88×10 ² | 4.71×10 | 3.86×10 ² | 9.66×10 | 5.37×10 ⁻¹⁰ | 5.53×10 ⁻¹⁰ |
| SSP 10AM | 4.53×10 ² | 9.06×10 | 9.35×10 ² | 1.87×10 ² | 2.23×10 ⁻¹⁰ | 2.30×10 ⁻¹⁰ |


LOAD RATING

The load rating for SSP-AM type depends on the direction of load.

Table B-9 LOAD RATING

| | | SSP4AM | SSP5AM~10AM |
|---------------------------|------------|---------------------|---------------------|
| basic dynamic load rating | vertical | C | C |
| | horizontal | 1.73×C | 1.22×C |
| basic static load rating | vertical | C ₀ | C ₀ |
| | horizontal | 1.73×C ₀ | 1.22×C ₀ |

Figure B-6 Load Direction

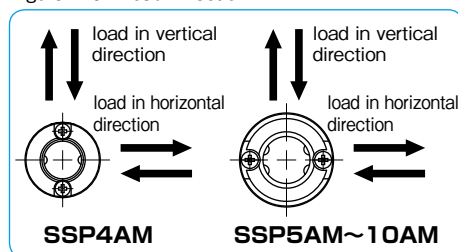

CALCULATION OF DEFLECTION AND DEFLECTION ANGLE OF SPLINE SHAFT

The following formulas are used to obtain the deflection and its angle of the ball spline shaft. Typical conditions are listed in Table B-10.

Table B-10 Formulas for Calculating Deflection and Deflection Angle

| support method | specification | formula for deflection | formula for deflection angle |
|------------------------|---------------|---|--|
| 1 support support | | $\delta_{max} = \frac{P\ell^3}{48EI} = P\ell^3C$ | $i_1 = 0$ $i_2 = \frac{P\ell^2}{16EI} = 3P\ell^2C$ |
| 2 fixed fixed | | $\delta_{max} = \frac{P\ell^3}{192EI} = \frac{1}{4}P\ell^3C$ | $i_1 = 0$ $i_2 = 0$ |
| 3 support support | | $\delta_{max} = \frac{5p\ell^4}{384EI} = \frac{5}{8}p\ell^4C$ | $i_2 = \frac{p\ell^3}{24EI} = 2p\ell^3C$ |
| 4 fixed fixed | | $\delta_{max} = \frac{p\ell^4}{384EI} = \frac{1}{8}p\ell^4C$ | $i_2 = 0$ |
| 5 support support | | $\delta_1 = \frac{Pa^3}{6EI} (2 + \frac{3b}{a}) = 8Pa^3 (2 + \frac{3b}{a})C$ $\delta_{max} = \frac{Pa^3}{24EI} (\frac{3\ell^2}{a^2} - 4) = 2Pa^3 (\frac{3\ell^2}{a^2} - 4)C$ | $i_1 = \frac{Pab}{2EI} = 24PabC$ $i_2 = \frac{Pa(a+b)}{2EI} = 24Pa(a+b)C$ |
| 6 fixed fixed | | $\delta_1 = \frac{Pa^3}{6EI} (2 - \frac{3a}{\ell}) = 8Pa^3 (2 - \frac{3a}{\ell})C$ $\delta_{max} = \frac{Pa^3}{24EI} (2 + \frac{3b}{a}) = 2Pa^3 (2 + \frac{3b}{a})C$ | $i_1 = \frac{Pa^2b}{2EI\ell} = \frac{24Pa^2bC}{\ell}$ $i_2 = 0$ |
| 7 fixed free | | $\delta_{max} = \frac{P\ell^3}{3EI} = 16P\ell^3C$ | $i_1 = \frac{P\ell^2}{2EI} = 24P\ell^2C$ $i_2 = 0$ |
| 8 fixed free | | $\delta_{max} = \frac{p\ell^4}{8EI} = 6p\ell^4C$ | $i_1 = \frac{p\ell^3}{6EI} = 8p\ell^3C$ $i_2 = 0$ |
| 9 support support | | $\delta_{max} = \frac{\sqrt{3}Mo\ell^2}{216EI} = \frac{2\sqrt{3}}{9}Mo\ell^2C$ | $i_1 = \frac{Mo\ell}{12EI} = 4Mo\ell C$ $i_2 = \frac{Mo\ell}{24EI} = 2Mo\ell C$ |
| 10 fixed fixed | | $\delta_{max} = \frac{Mo\ell^2}{216EI} = \frac{2}{9}Mo\ell^2C$ | $i_1 = \frac{Mo\ell}{16EI} = 3Mo\ell C$ $i_2 = 0$ |

δ_1 : deflection at the concentrated load point (mm) δ_{max} : maximum deflection (mm) i_1 : deflection angle at the concentrated load point (rad) i_2 : deflection angle at the support point (rad) Mo : moment (N·mm) P : concentrated load (N) p : uniformly distributed load (N/mm) a, b : concentrated load point distance (mm) ℓ : span (mm) I : moment of inertia of area (mm⁴) (refer to Table B-8 on page B-8) E : modulus of longitudinal elasticity (SUJ2) 2.06×10^5 (N/mm²) (SUS) 2.0×10^5 (N/mm²) C : $1/48EI$ (1/N·mm²)

ALLOWABLE ROTATIONAL SPEED OF SPLINE SHAFT

When the rotational speed is increased and approaches the spline shaft resonant frequency, the spline shaft is disabled from further operation. This speed is called the critical speed and can be obtained by the following equations. In order to leave a sufficient safety margin, the allowable operating speed should be set at about 80% of the calculated value.

Using the following equations, select the size of ball spline shaft. First, calculate λ and A by equation (8) and (9) then, substitute the values into equation (7).

$$N_c = 60 \cdot \frac{\lambda^2}{2\pi \cdot L^2} \cdot \sqrt{\frac{E \cdot I_d \times 10^3}{\gamma \cdot A}} \dots \dots \dots (7)$$

N_c : critical speed (rpm)
 L : support distance (mm)
 E : modulus of longitudinal elasticity (SUJ2) 2.06×10^5 (N/mm²)
 (SUS) 2.0×10^5 (N/mm²)
 γ : density (SUJ2) 7.85×10^{-6} (kg/mm³)
 (SUS) 7.75×10^{-6} (kg/mm³)

I_d : Minimum Moment of Inertia of Area (mm⁴)

$$I_d = \frac{\pi \cdot d^4}{64} \dots \dots \dots (8)$$

d : maximum machined-down diameter with no spline grooves left (refer to Table B-11)

A: Minimum Cross-sectional Area of the Spline Shaft (mm²)

$$A = \frac{\pi \cdot d^2}{4} \dots \dots \dots (9)$$

d : maximum machined-down diameter with no spline grooves left (refer to Table B-11)

λ : coefficient of mounting method (refer to Figure B-7)

- fixed-free $\lambda = 1.875$
- supported-supported $\lambda = 3.142$
- fixed-supported $\lambda = 3.927$
- fixed-fixed $\lambda = 4.730$

Figure B-7 Mounting Method


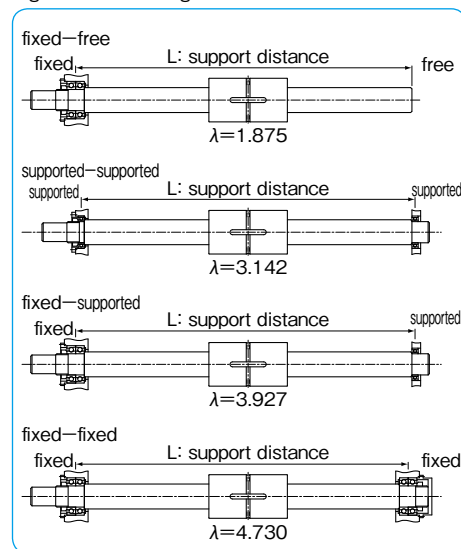


Table B-11 Spline Shaft Profile

| part number | d: maximum diameter with no spline grooves left mm | part number | d: maximum diameter with no spline grooves left mm |
|-------------|--|-------------|--|
| SSP 4 | 3.5 | SSP20 | 16.4 |
| SSP 6 | 5.3 | SSP25 | 20.6 |
| SSP 8 | 7.2 | SSP30 | 24.8 |
| SSP 10 | 9 | SSP40 | 33.1 |
| SSP 13A | 11.7 | SSP50 | 41.4 |
| SSP 16A | 14.2 | SSP60 | 49.7 |
| SSP 20A | 17.9 | | |
| SSP 25A | 22.4 | SSP 4AM | 3.4 |
| SSP 30A | 26.8 | SSP 5AM | 4.3 |
| SSP 40A | 35.5 | SSP 6AM | 5.2 |
| SSP 50A | 44.6 | SSP 8AM | 7.1 |
| SSP 60A | 54 | SSP10AM | 8.8 |
| SSP 80 | | | |
| SSP 80L | 73.9 | | |
| SSP100 | | | |
| SSP100L | 92 | | |

The maximum diameter (d) is recommended as the shaft diameter of the support area leaving no spline grooves after end-machining.

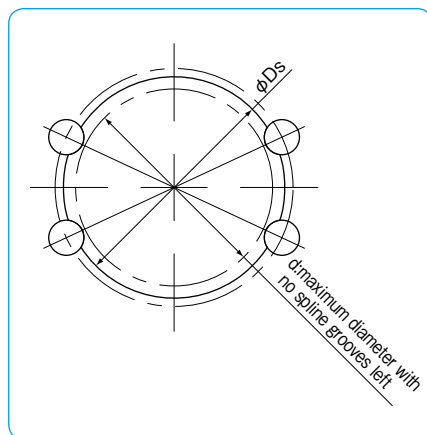

RATED LIFE CALCULATION

When the ball elements are used as the rolling elements in ball splines, the following equations are used to calculate the life of ball spline:

For radial load

$$L = \left(\frac{f_c \cdot C}{f_w \cdot P} \right)^3 \cdot 50$$

For torque load

$$L = \left(\frac{f_c \cdot C_T}{f_w \cdot T} \right)^3 \cdot 50$$

L : rated life (km) f_c : contact coefficient f_w : load coefficient
 C : basic dynamic load rating (N) P : applied load (N)
 C_T : basic dynamic torque rating (N·m) T : applied torque (N·m)
 * Refer to page Eng-5 for the coefficients
 ** The load rating of the commercial spline is approximately 70% of the standard ball spline.

$$L_h = \frac{L \cdot 10^3}{2 \cdot \ell_s \cdot n_1 \cdot 60}$$

L_h : life time (hr) ℓ_s : stroke length (m)
 L : rated life (km) n_1 : number of cycles per minute (cpm)

OPERATING CONDITIONS

The performance of the ball spline is affected by the operating conditions of the application. The operating conditions should, therefore be carefully taken into consideration.

Dust Prevention

Foreign particles or dust in the ball spline nut affects the motion accuracy and shortens the life time. Standard seals will perform well against dust prevention under normal operating conditions; however, in a harsh environment, it is necessary to attach bellows or protective covers. (refer to Figure B-9)

Operating Temperature

Since the retainer is made of resin, the operating temperature should never exceed 80°C.

Figure B-8 Radial Load and Torque Load


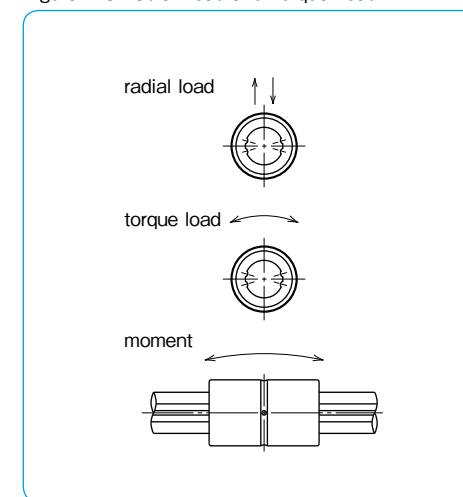



Figure B-9 Example of Dust Prevention

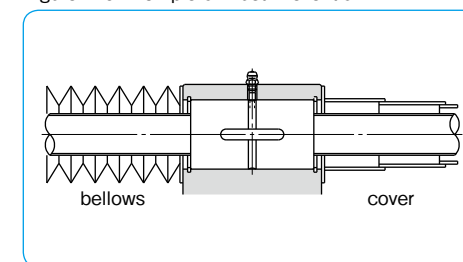

LUBRICATION

The spline nut is prelubricated with lithium soap based grease prior to shipment for immediate use. Please relubricate with a similar type of grease periodically depending on the operating conditions. Low dust generation grease is available from NB standard grease. (refer to page Eng-40) The NB spline nut has seals as standard. The seals work well to contain the grease inside the nut especially for the ground shaft, since the seal shape approximates the spline shaft profile.

Figure B-10 Example of Lubrication Mechanism

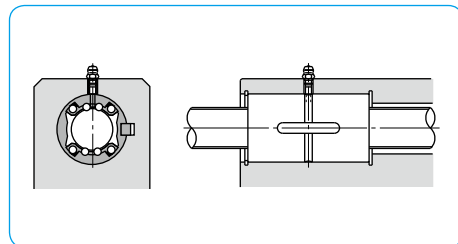

HOLLOW SPLINE SHAFT

NB provides hollow shafts. It can be used for running cable, air piping, and weight reduction. Table B-12 shows a list of recommended inner diameter for hollow spline shaft (SUJ2).

Table B-12 Recommended Inner Diameter for Hollow Spline Shaft

| part number | shaft diameter Ds mm | inner diameter d mm | cross-sectional coefficient Z mm ³ | second moment of inertia I mm ⁴ |
|-------------|----------------------|---------------------|---|--|
| SSP 4 | 4 | 1.5 | 11.5 | 5.6 |
| SSP 6 | 6 | 2 | 58.3 | 18.9 |
| SSP 8 | 8 | 3 | 186 | 44.9 |
| SSP10 | 10 | 4 | 448 | 85.9 |
| SSP13A | 13 | 6 | 1,260 | 182 |
| SSP16A | 16 | 8 | 2,780 | 323 |
| SSP20A | 20 | 10 | 6,860 | 637 |
| SSP25A | 25 | 15 | 15,400 | 1,100 |
| SSP 4AM | 4 | 1.5 | 11.6 | 5.7 |
| SSP 5AM | 5 | 2 | 26.9 | 10.3 |
| SSP 6AM | 6 | 2 | 58.1 | 18.8 |
| SSP 8AM | 8 | 3 | 184 | 44.4 |
| SSP10AM | 10 | 4 | 440 | 84.2 |


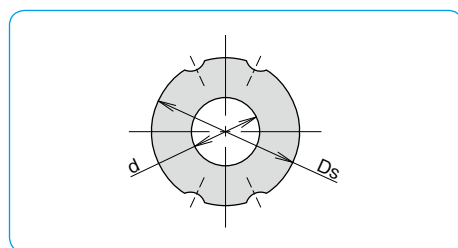


Figure B-11 Example of Shaft-end Machining

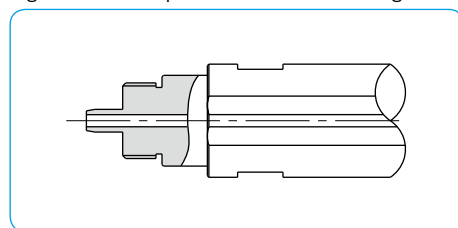

USE AND HANDLING PRECAUTIONS


NB ball spline must be handled with care as it is a precise component. Please note the following points.

A Set of Spline Nut and Spline Shaft

The ball spline's accuracy and preload is guaranteed when spline nut and shaft are aligned as shown in Figure B-12. Please make sure to align the NB marks when reinserting the shaft.

When inserting the spline shaft into the spline nut, ensure that the ball elements do not drop out. This is done by aligning the raceway grooves of the shaft with the rows of ball elements and the seal lip of the nut. Then, carefully insert the spline shaft through the spline nut. In case that the nut is preloaded, please exercise additional care.

Figure B-12 NB mark Alignment

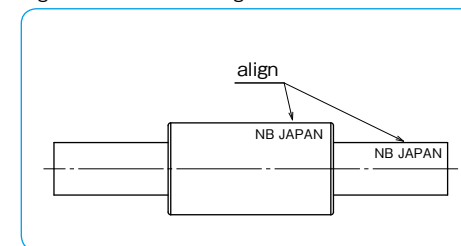

Fit between Spline Nut and Housing

A transition fit is used for the SSP/SSPM-type spline nut and its housing bore to minimize the clearance. If high accuracy is not required, then a clearance fit can be used. Regarding the SSPT/SSPF type spline nut, for a light load and little torque application a hole slightly larger than the outer diameter of the nut can suffice. The mounting surface for the flange influences the perpendicularity and parallelism. Please make sure that the accuracy of the mounting surface is correct.

Table B-13 Fit for the Spline Nut

| type of spline nut | clearance fit | transition fit |
|--------------------|---------------|----------------|
| SSP | H7 | J6 |
| SSP-AM | | |
| SSPM | | |

Insertion of Spline Nut

When inserting a spline nut into the housing, use a jig like the one shown in Figure B-13. Carefully insert the nut so as to not hit the side ring and seal.

Figure B-13 Insertion of Spline Nut into Housing

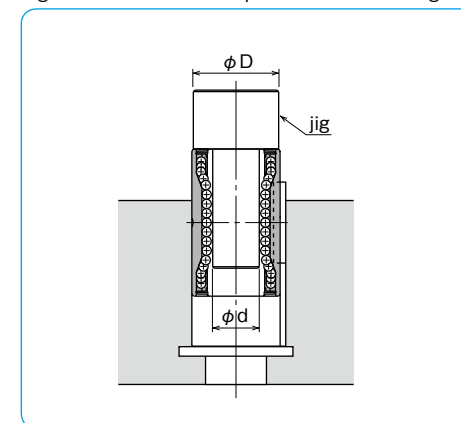


Table B-14 Recommended Jig Dimensions unit : mm

| part number | D | d | part number | D | d |
|-------------|------|------|-------------|------|------|
| SSP 4 | 9.5 | 3.5 | SSP20 | 31.5 | 16.5 |
| SSP 6 | 13.5 | 5 | SSP25 | 36.5 | 20.5 |
| SSP 8 | 15.5 | 7 | SSP30 | 44.5 | 25 |
| SSP 10 | 20.5 | 8.5 | SSP40 | 59.5 | 33 |
| SSP 13A | 23.5 | 12 | SSP50 | 74 | 41 |
| SSP 16A | 30.5 | 14.5 | SSP60 | 89 | 50 |
| SSP 20A | 34.5 | 18 | | | |
| SSP 25A | 41.5 | 22.5 | SSP 4AM | 7.5 | 3 |
| SSP 30A | 46.5 | 27 | SSP 5AM | 9.5 | 4 |
| SSP 40A | 63.5 | 35.6 | SSP 6AM | 11.5 | 5 |
| SSP 50A | 79 | 44 | SSP 8AM | 14.5 | 7 |
| SSP 60A | 89 | 53.5 | SSP10AM | 18.5 | 8.5 |
| SSP 80 | | | | | |
| SSP 80L | 119 | 74 | | | |
| SSP100 | | | | | |
| SSP100L | 149 | 92 | | | |

Excessive Moment

One spline nut can sustain high moments, however, excessive moment makes the spline nut unbalanced and unstable during motion. Please use more than one spline nut for high moment or high accuracy applications.

MOUNTING

Mounting of SSP Type

Examples of installing the SSP type are shown in Figures B-14 and B-15.

Figure B-14 Using a Retaining Ring


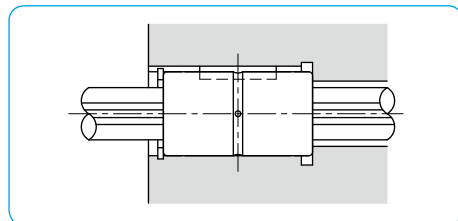


Figure B-15 Using a Push Plate

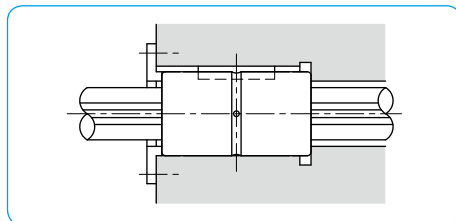

Key

The SSP type spline nut comes with a key shown in Figure B-16.

Figure B-16 Key for SSP Type

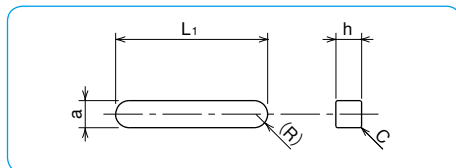


Table B-15 Major Dimensions of Key


| part number | a | | h | | L ₁ | C | |
|-------------|-----|-----------------|-----|-----------------|----------------|-----|-----|
| | mm | tolerance μm | mm | tolerance μm | | | |
| SSP 4 | 2 | +16 + 6 | 2 | 0 -25 | 6 | 0.2 | |
| SSP 6 | 2.5 | | 2.5 | | 10.5 | | |
| SSP 8 | 2.5 | | 2.5 | | 10.5 | | |
| SSP 10 | 3 | | 3 | | 13 | | |
| SSP 13A | 3 | +24 +12 | 3 | 0 -30 | 15 | | |
| SSP 16A | 3.5 | | 3.5 | | 17.5 | | |
| SSP 20A | 4 | | 4 | | 29 | | |
| SSP 25A | 4 | | 4 | | 36 | | |
| SSP 30A | 4 | +30/+15 | 4 | -36 | 42 | | 0.5 |
| SSP 40A | 6 | | 6 | | 52 | | |
| SSP 50A | 8 | | 7 | | 58 | | |
| SSP 60A | 12 | | 8 | | 67 | | |
| SSP 80 | 16 | +36 +18 | 10 | 0 -36 | 76 | 0.5 | |
| SSP 80L | | | | | 110 | | |
| SSP100 | | | | | 110 | | |
| SSP100L | 20 | +43 +22 | 13 | 0 -43 | 160 | 0.8 | |
| SSP 20 | 4 | +24 | 4 | 0 | 26 | 0.2 | |
| SSP 25 | 5 | +12 | 5 | -30 | 33 | 0.3 | |
| SSP 30 | 7 | +30 | 7 | 0 | 41 | 0.3 | |
| SSP 40 | 10 | +15 | 8 | -36 | 55 | 0.5 | |
| SSP 50 | 15 | +36 | 10 | 0/-43 | 60 | 0.5 | |
| SSP 60 | 18 | +18 | 11 | | 68 | 0.5 | |
| SSP 5AM | 2 | +16 + 6 | 2 | 0 -25 | 6 | 0.2 | |
| SSP 6AM | 2 | | 2 | | 8 | | |
| SSP 8AM | 2.5 | | 2.5 | | 8.5 | | |
| SSP 10AM | 3 | | 3 | | 11 | | |

For SSPs and SSP AM type, the material of key is stainless steel.

Mounting of SSP4AM Type

Example of installing the SSAM type are shown in Figure B-17. M2 screw is used for mounting. In process of mounting, please be careful with spline nut.


Figure B-17 Using SSP4AM Lock Plates

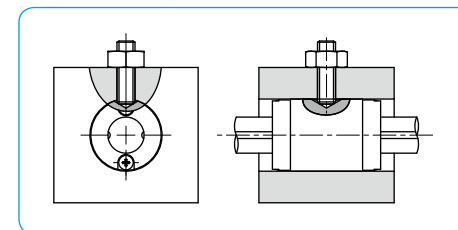

Mounting of SSPM Type

Examples of installing the SSPM type are shown in Figures B-18,19,22 and 23.

Figure B-18 Using F Type Lock Plates

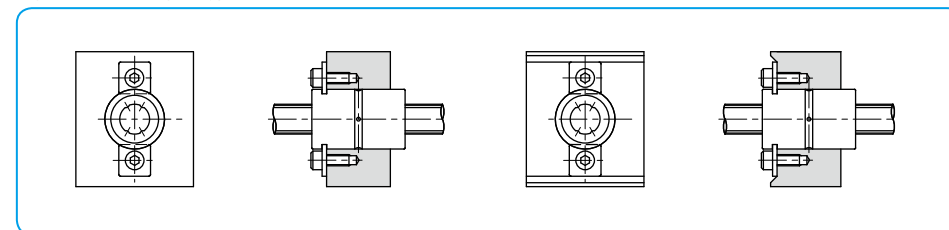

F Type Lock Plate (Standard Plate)

The lock plate shown in Figure B-19 is provided with the SSPM spline nut.
Material: SUS304CSP

Table B-16 F Type Lock Plate

| part number | K mm | G mm | t mm | R mm | applicable spline nut |
|-------------|------|------|------|------|-----------------------|
| FP 6 | 6.8 | 2.9 | 1.0 | 0.5 | SSPM 6 |
| FP 8 | 8.5 | 3.5 | 1.2 | 0.5 | SSPM 8 |
| FP10 | 8.5 | 3.5 | 1.2 | 0.5 | SSPM10 |

Figure B-19 F Type Lock Plate


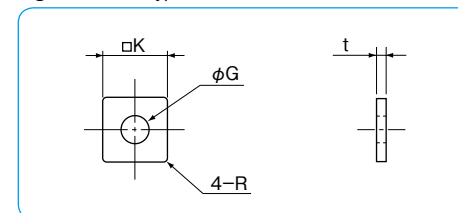


Figure B-20 Using LP Type Lock Plates

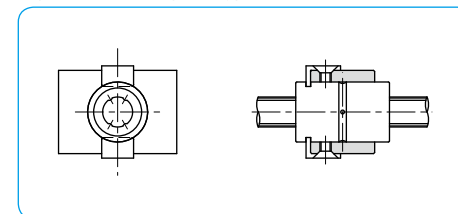

LP Type Lock Plate (Optional Plate)

The LP type lock plate is also available for purchase with the SSPM spline nut.

Material: SUS304CSP

Figure B-21 LP Type Lock Plate

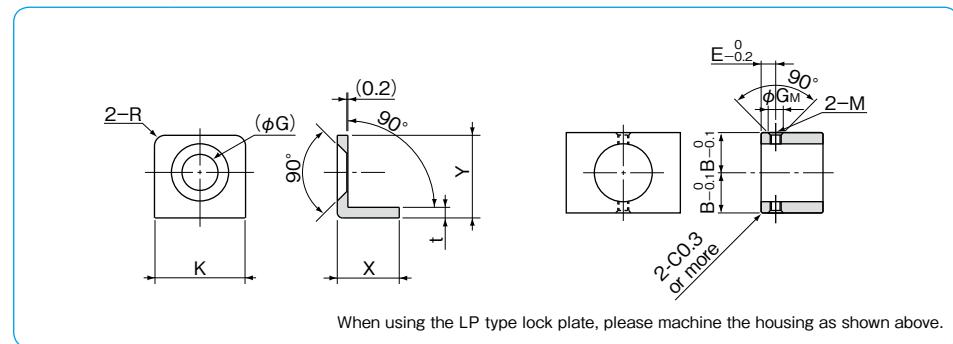


Table B-17 LP Type Lock Plate

| part number | lock plate major dimensions | | | | | | machined housing dimensions | | | | applicable spline nut |
|-------------|-----------------------------|------|------|------|------|------|-----------------------------|------|-------------------|------|-----------------------|
| | K mm | G mm | t mm | R mm | X mm | Y mm | B mm | E mm | G _M mm | M | |
| LP 6 | 8.6 | 3.8 | 1.0 | 1 | 5.85 | 7.8 | 11.1 | 3.3 | 3.5 | M2.5 | SSPM 6 |
| LP 8 | 9.15 | 4.5 | 1.2 | 1 | 6.45 | 9.2 | 12.3 | 4.0 | 4.2 | M3 | SSPM 8 |
| LP10 | 9.15 | 4.5 | 1.2 | 1 | 6.45 | 9.2 | 14.8 | 4.0 | 4.2 | M3 | SSPM10 |

Figure B-23 Using Special Lock Plates (2)


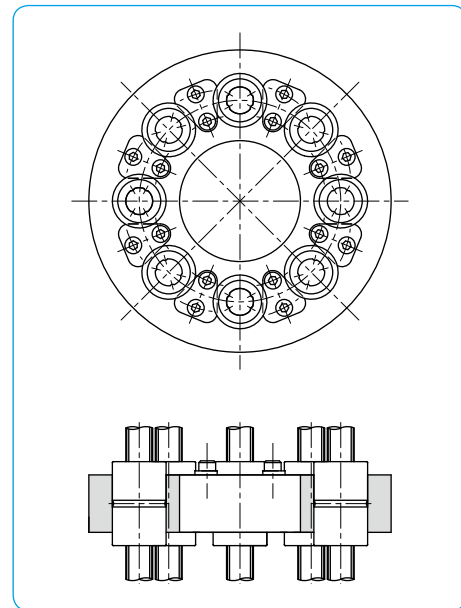



Figure B-22 Using Special Lock Plates (1)

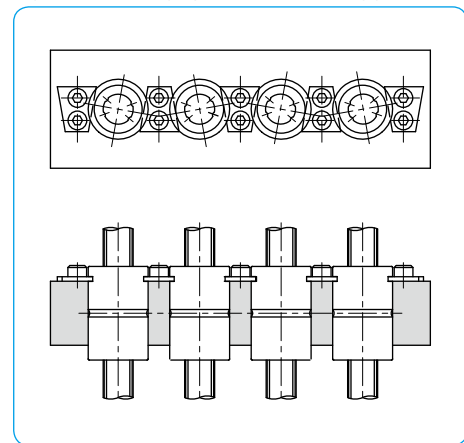

Mounting of SSPF Type

Examples of installing the SSPF type are shown in Figure B-24.


Figure B-24 Examples of installing SSPF Type

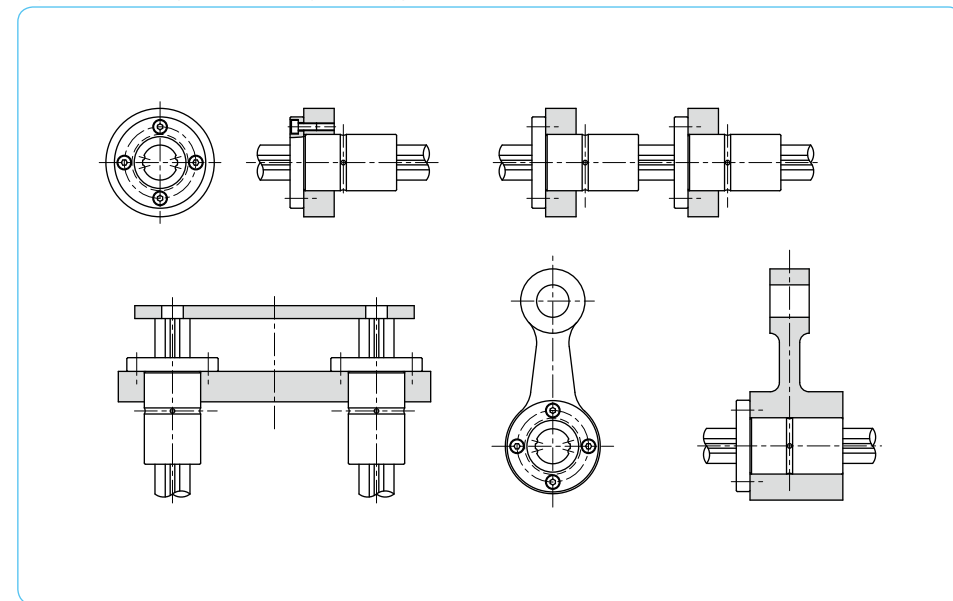

Mounting of SSPT Type


Examples of installing SSPT type are shown in Figure B-25.

Figure B-25 Examples of installing SSPT Type

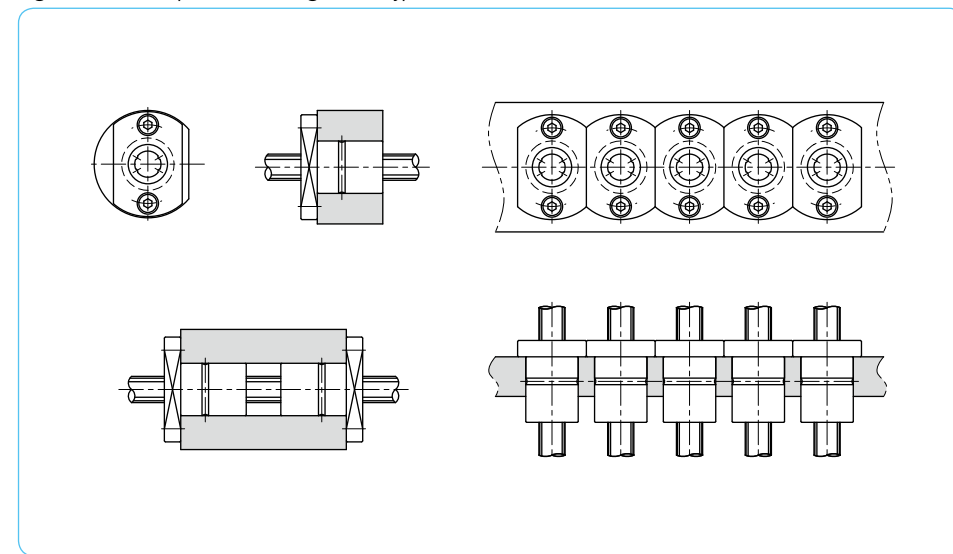

SSP TYPE

– Cylindrical Spline Nut –

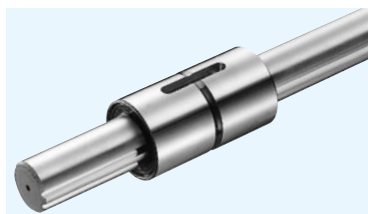

part number structure

example **SSP 80 L-2-T1-600-P/CU**

specification
SSP: standard
SSPS: anti-corrosion

nominal diameter

nut length
blank: standard
L: long

number of nuts attached to one shaft


Note: retainer material is resin.

with special specification

accuracy grade
blank: high
P: precision

spline shaft total length


preload symbol
blank: standard
T1: light
T2: medium



When two spline nuts are used in close contact.

| part number | | D mm | tolerance μm | L mm | tolerance mm | B mm | major dimensions | | | | |
|-------------|----------------|---------|-----------------|---------|-----------------|---------|------------------|-----------------|-----------------------|----------------------|---------|
| standard | anti-corrosion | | | | | | b mm | tolerance μm | t +0.05 0 mm | L ₁ mm | d mm |
| SSP 4 | SSPS 4 | 10 | 0/-9 | 16 | 0 | -0.2 | 2 | 1.2 | 6 | — | |
| SSP 6 | SSPS 6 | 14 | 0 | 25 | | | 2.5 | +14 | 1.2 | 10.5 | 1 |
| SSP 8 | SSPS 8 | 16 | -11 | 25 | | | 2.5 | 0 | 1.2 | 10.5 | 1.5 |
| SSP 10 | SSPS10 | 21 | 0 | 33 | | | 3 | 1.5 | 13 | 1.5 | |
| SSP 13A | SSPS13A | 24 | -13 | 36 | | | 3 | 1.5 | 15 | 1.5 | |
| SSP 16A | SSPS16A | 31 | 0 | 50 | | | 3.5 | 2 | 17.5 | 2 | |
| SSP 20A | SSPS20A | 35 | 0 | 63 | | | 4 | +18 | 2.5 | 29 | 2 |
| SSP 25A | SSPS25A | 42 | -16 | 71 | | | 4 | 0 | 2.5 | 36 | 3 |
| SSP 30A | — | 47 | 0 | 80 | | | 4 | 0 | 2.5 | 42 | 3 |
| SSP 40A | — | 64 | 0 | 100 | | | 6 | -0.3 | 3.5 | 52 | 4 |
| SSP 50A | — | 80 | -19 | 125 | 8 | +22/0 | 4 | 58 | 4 | | |
| SSP 60A | — | 90 | 0 | 140 | 12 | +27 | 5 | 67 | 4 | | |
| SSP 80 | — | 120 | -22 | 160 | 118.2 | 16 | 0 | 6 | 76 | 5 | |
| SSP 80L | — | 120 | 0 | 217 | | | | | 175.2 | | 110 |
| SSP100 | — | 150 | 0 | 185 | | | | | 132.6 | | 110 |
| SSP100L | — | 150 | -25 | 248 | 195.6 | 20 | +33 | 7 | 110 | 5 | |
| | | | | | | | 0 | 160 | | | |
| SSP 20 | SSPS20 | 32 | 0 | 60 | 0/-0.2 | — | 4 | +18 | 2.5 | 26 | 2 |
| SSP 25 | SSPS25 | 37 | -16 | 70 | 0 | | 5 | 0 | 3 | 33 | 3 |
| SSP 30 | — | 45 | 0 | 80 | | | 7 | +22 | 4 | 41 | 3 |
| SSP 40 | — | 60 | 0 | 100 | | | 10 | 0 | 4.5 | 55 | 4 |
| SSP 50 | — | 75 | -19 | 112 | | | 15 | +27 | 5 | 60 | 4 |
| SSP 60 | — | 90 | 0/-22 | 127 | | | 18 | 0 | 6 | 68 | 4 |

SSP type spline nut comes with a key (refer to page B-14).

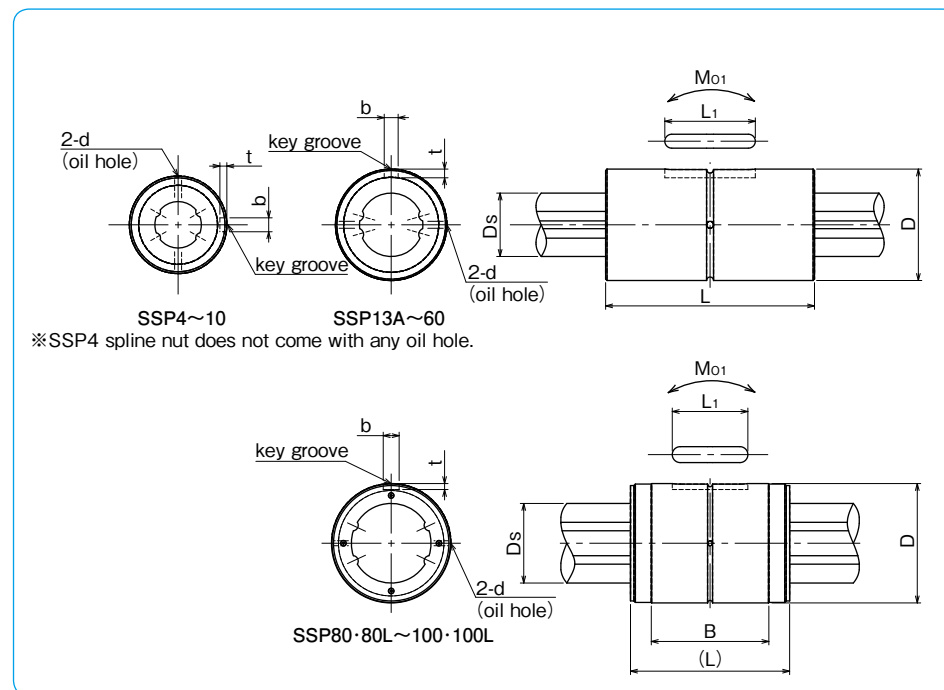


SSP4~10 SSP13A~60
 ※SSP4 spline nut does not come with any oil hole.

SSP80~80L~100~100L

| Ds mm | tolerance μm | basic torque rating | | basic load rating | | allowable static moment | | mass | | size |
|----------|-----------------|----------------------------------|----------------------------------|--------------------|--------------------------------|-------------------------|------------------------|-----------|---------------|------|
| | | dynamic C _T N·m | static C _{0T} N·m | dynamic C kN | static C ₀ kN | M ₀₁ N·m | M ₀₂ N·m | nut kg | shaft kg/m | |
| 4 | 0 | 0.74 | 1.05 | 0.86 | 1.22 | 1.97 | 10.3 | 0.0065 | 0.10 | 4 |
| 6 | -12 | 1.5 | 2.4 | 1.22 | 2.28 | 5.1 | 40 | 0.019 | 0.21 | 6 |
| 8 | 0 | 2.1 | 3.7 | 1.45 | 2.87 | 7.4 | 50 | 0.023 | 0.38 | 8 |
| 10 | -15 | 4.4 | 8.2 | 2.73 | 5.07 | 18.0 | 116 | 0.054 | 0.60 | 10 |
| 13 | 0 | 21 | 39.2 | 2.67 | 4.89 | 13.7 | 109 | 0.07 | 1.0 | 13A |
| 16 | -18 | 60 | 110 | 6.12 | 11.2 | 46 | 299 | 0.15 | 1.5 | 16A |
| 20 | 0 | 105 | 194 | 8.9 | 16.3 | 110 | 560 | 0.22 | 2.4 | 20A |
| 25 | -21 | 189 | 346 | 12.8 | 23.4 | 171 | 1,020 | 0.33 | 3.7 | 25A |
| 30 | 0 | 307 | 439 | 18.6 | 23.2 | 181 | 1,470 | 0.36 | 5.38 | 30A |
| 40 | 0 | 674 | 934 | 30.8 | 37.5 | 358 | 2,940 | 0.95 | 9.55 | 40A |
| 50 | -25 | 1,290 | 2,950 | 40.3 | 64.9 | 690 | 4,080 | 1.9 | 15.0 | 50A |
| 60 | 0 | 1,570 | 3,420 | 47.7 | 79.5 | 881 | 5,470 | 2.3 | 21.6 | 60A |
| 80 | -30 | 3,860 | 6,230 | 83.1 | 134 | 2,000 | 11,100 | 5.1 | 39 | 80 |
| | | 5,120 | 9,340 | 110 | 201 | 4,410 | 21,100 | 7.6 | | 80L |
| 100 | 0 | 6,750 | 11,500 | 135 | 199 | 3,360 | 19,300 | 9.7 | 61 | 100 |
| | -35 | 8,960 | 17,300 | 179 | 298 | 7,340 | 37,700 | 13.9 | | 100L |
| 18.2 | 0 | 83 | 133 | 7.84 | 11.3 | 63 | 500 | 0.2 | 2.0 | 20 |
| 23 | -21 | 162 | 239 | 12.3 | 16.1 | 104 | 830 | 0.22 | 3.1 | 25 |
| 28 | 0 | 289 | 412 | 18.6 | 23.2 | 181 | 1,470 | 0.35 | 4.8 | 30 |
| 37.4 | 0 | 637 | 882 | 30.8 | 37.5 | 358 | 2,940 | 0.81 | 8.6 | 40 |
| 47 | -25 | 1,390 | 3,180 | 46.1 | 74.2 | 696 | 4,400 | 1.5 | 13.1 | 50 |
| 56.5 | 0/-30 | 2,100 | 4,800 | 58.0 | 127 | 1,300 | 8,800 | 2.5 | 19 | 60 |

1kN ≅ 102kgf 1N · m ≅ 0.102kgf · m

SSP-AM TYPE


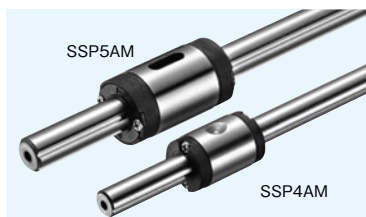


part number structure

example **SSP 4 AM-2 T1 -200 -P /CU**

- SSP: specification (SSP AM: standard, SSPS AM: anti-corrosion)
- 4: nominal diameter
- AM: accuracy grade (blank: high, P: precision)
- 2: number of nuts attached to one shaft
- T1: preload symbol (blank: standard, T1: light)
- 200: spline shaft total length
- P: with special specification
- CU: material of return cap (resin)

Note: SSP(S)4AM does not come with side-seals. Material of return cap is resin.

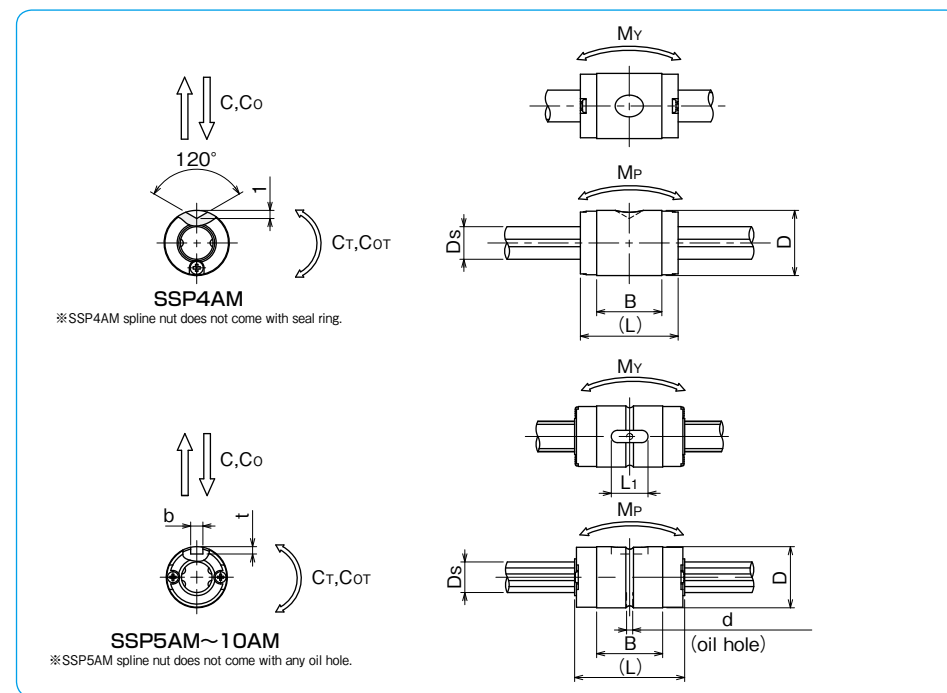

| part number | | major dimensions | | | | | | | | | | |
|-------------|----------------|------------------|----|------|-----|-----|-----|-----|----|-----|-----------|--|
| standard | anti-corrosion | D | L | B | b | t | L1 | d | Ds | h7 | tolerance | |
| | | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | |
| SSP 4AM | SSPS 4AM | 8 | 12 | 8 | - | - | - | - | 4 | 0 | - | |
| SSP 5AM | SSPS 5AM | 10 | 18 | 10.8 | 2 | 1.2 | 6 | - | 5 | -9 | -12 | |
| SSP 6AM | SSPS 6AM | 12 | 21 | 13 | 2 | 1.2 | 8 | 1 | 6 | 0 | - | |
| SSP 8AM | SSPS 8AM | 15 | 25 | 14.9 | 2.5 | 1.5 | 8.5 | 1.2 | 8 | -11 | 0 | |
| SSP10AM | SSPS10AM | 19 | 30 | 18 | 3 | 1.8 | 11 | 1.5 | 10 | 0 | -15 | |

SSP (S) 5AM-10AM type spline nut come with a key (refer to page B-14).


| basic torque rating | | basic load rating | | allowable static moment | | mass | | size |
|---------------------|-----------------|-------------------|----------------|-------------------------|------|------|---------|------|
| dynamic | static | dynamic | static | Mp | My | nut | shaft | |
| C _T | C _{oT} | C | C _o | N·m | N·m | g | g/100mm | |
| 0.72 | 1.00 | 314 | 438 | 0.59 | 1.03 | 2.5 | 9.7 | 4AM |
| 2.33 | 4.05 | 825 | 1,160 | 2.10 | 5.82 | 5.1 | 14.9 | 5AM |
| 2.95 | 5.27 | 890 | 1,290 | 2.55 | 3.11 | 9.2 | 21.6 | 6AM |
| 5.85 | 9.83 | 1,330 | 1,810 | 4.11 | 5.00 | 15.8 | 38.4 | 8AM |
| 12.4 | 19.4 | 2,270 | 2,870 | 7.84 | 9.53 | 30.7 | 59.8 | 10AM |

Allowable static moment M_{P2} and M_{V2} are the values when two spline nuts are used on close contact.

1kN≒102kgf 1N·m≒0.102kgf·m

SSPM TYPE

– Keyless Spline Nut –

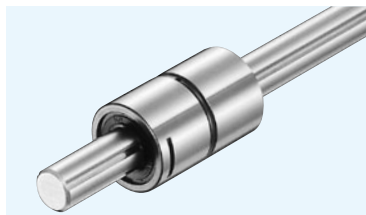

part number structure

example **SSPM 10-2-T1-200-P/CU**

SSPM type

nominal diameter

number of nuts attached to one shaft


Note: retainer material is resin.

spline shaft total length

with special specification

accuracy grade
blank: high
P: precision


preload symbol
blank: standard
T1: light



When two spline nuts are used in close contact.

| part number | major dimensions | | | | | | | | | | | |
|---------------|------------------|----------------------|---------|----------------------|---------|---------|---------|---------|---------|---------|---------|---------|
| | D mm | D tolerance μm | L mm | L tolerance mm | F mm | W mm | C mm | A mm | d mm | B mm | H mm | K mm |
| SSPM 6 | 14 | 0 | 25 | 0 | 2.2 | 1.1 | 1.0 | 12.0 | 1 | 9.4 | 25.6 | 6.8 |
| SSPM 8 | 16 | -11 | 25 | -0.2 | 2.7 | 1.3 | 1.2 | 13.6 | 1.5 | 11 | 30.6 | 8.5 |
| SSPM10 | 21 | 0/-13 | 33 | -0.2 | 2.7 | 1.3 | 1.2 | 18.6 | 1.5 | 13.5 | 35.6 | 8.5 |

Two F type lock plates per SSPM type spline nut are provided (refer to page B-15).

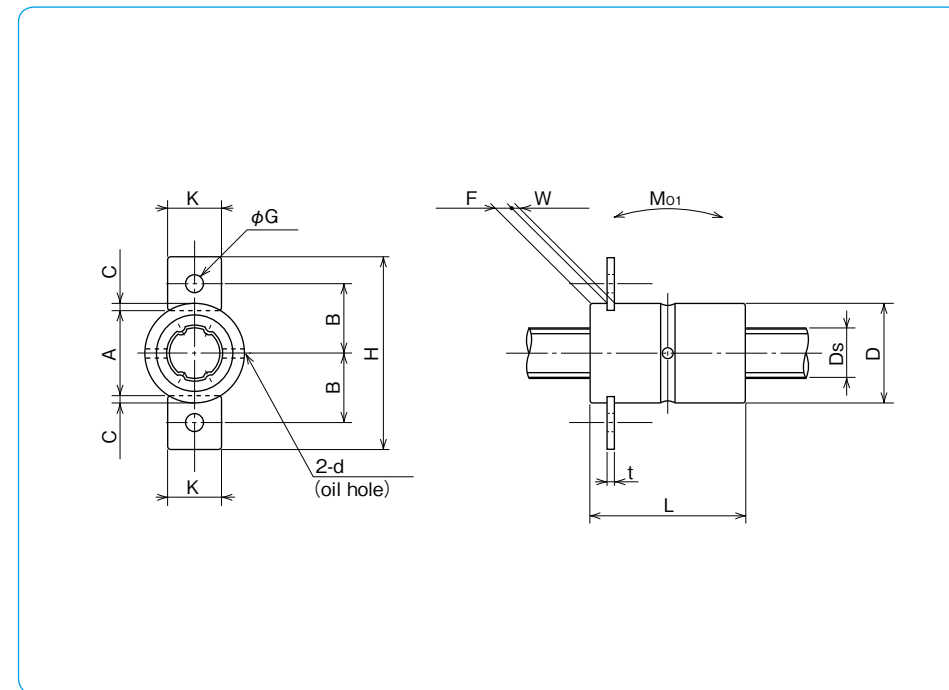

| G mm | t mm | Ds mm | Ds tolerance μm | basic torque rating | | basic load rating | | allowable static moment | | mass | | size |
|---------|---------|----------|-----------------------|----------------------------------|----------------------------------|--------------------|--------------------|-------------------------|------------------------|-----------|---------------|-----------|
| | | | | dynamic C _T N·m | static Co _T N·m | dynamic C kN | static Co kN | Mo ₁ N·m | Mo ₂ N·m | nut kg | shaft kg/m | |
| 2.9 | 1.0 | 6 | 0/-12 | 1.5 | 2.4 | 1.22 | 2.28 | 5.1 | 40 | 0.019 | 0.21 | 6 |
| 3.5 | 1.2 | 8 | 0 | 2.1 | 3.7 | 1.45 | 2.87 | 7.4 | 50 | 0.023 | 0.38 | 8 |
| 3.5 | 1.2 | 10 | -15 | 4.4 | 8.2 | 2.73 | 5.07 | 18.0 | 116 | 0.054 | 0.60 | 10 |

1kN≒102kgf 1N·m≒0.102kgf·m

SSPF TYPE

— Flange Type Nut —



part number structure

example **SSPF 25 - 2 - T1 - 436 - P / CU**

specification
SSPF: standard
SSPFS: anti-corrosion

nominal diameter

number of nuts attached to one shaft


Note: retainer material is resin.

with special specification


accuracy grade
blank: high
P: precision

spline shaft total length

preload symbol
blank: standard
T1: light
T2: medium



When two spline nuts are used in close contact.

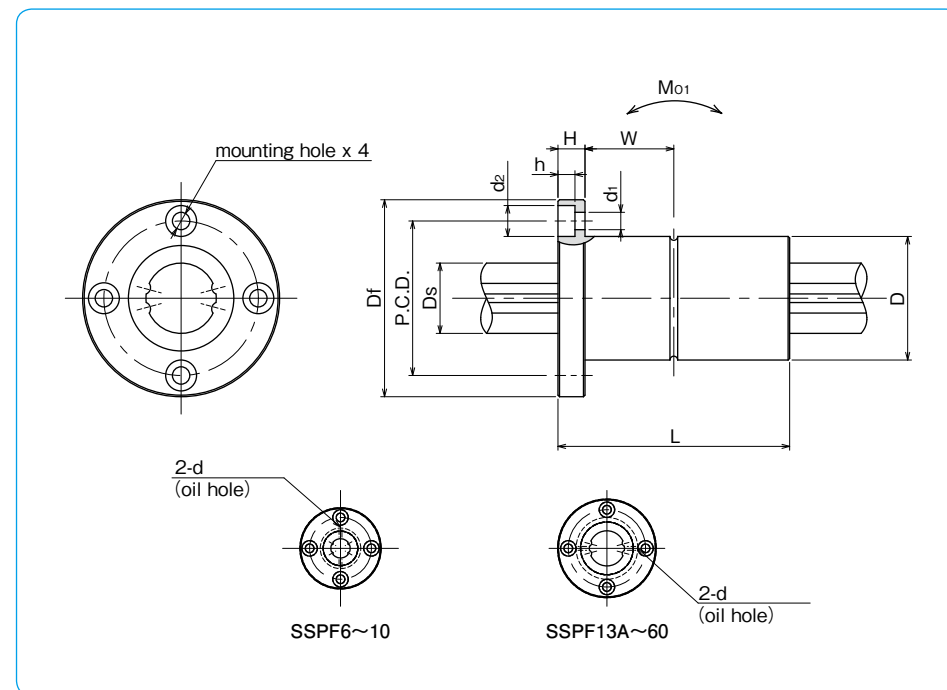


| part number | | D | | L | | major dimensions | | | | |
|-------------|----------------|----|-------------------------|-----|--------------|------------------|------|-----------|------------------------------|------------|
| standard | anti-corrosion | mm | tolerance μm | mm | tolerance mm | Df mm | H mm | P.C.D. mm | $d_1 \times d_2 \times h$ mm | W mm |
| SSPF 6 | SSPFS 6 | 14 | 0 | 25 | 0 | 30 | 5 | 22 | 3.4×6.5×3.3 | 7.5 |
| SSPF 8 | SSPFS 8 | 16 | -11 | 25 | | 32 | 5 | 24 | 3.4×6.5×3.3 | 7.5 |
| SSPF10 | SSPFS10 | 21 | 0 | 33 | | 42 | 6 | 32 | 4.5×8×4.4 | 10.5 |
| SSPF13A | SSPFS13A | 24 | -13 | 36 | -0.2 | 43 | 7 | 33 | 4.5×8×4.4 | 11 |
| SSPF16A | SSPFS16A | 31 | | 50 | 0 | 50 | 7 | 40 | 4.5×8×4.4 | 18 |
| SSPF20A | SSPFS20A | 35 | 0 | 63 | | 58 | 9 | 45 | 5.5×9.5×5.4 | 22.5 |
| SSPF25A | SSPFS25A | 42 | -16 | 71 | | 65 | 9 | 52 | 5.5×9.5×5.4 | 26.5 |
| SSPF30A | — | 47 | | 80 | 0 | 75 | 10 | 60 | 6.6×11×6.5 | 30 |
| SSPF40A | — | 64 | 0 | 100 | | 100 | 14 | 82 | 9×14×8.6 | 36 |
| SSPF50A | — | 80 | -19 | 125 | | -0.3 | 124 | 16 | 102 | 11×17.5×11 |
| SSPF60A | — | 90 | 0/-22 | 140 | | 129 | 18 | 107 | 11×17.5×11 | 52 |
| SSPF20 | SSPFS20 | 32 | | 60 | 0/-0.2 | 51 | 7 | 40 | 4.5×8×4.4 | 23 |
| SSPF25 | SSPFS25 | 37 | 0 | 70 | 0 | 60 | 9 | 47 | 5.5×9.5×5.4 | 26 |
| SSPF30 | — | 45 | -16 | 80 | | 70 | 10 | 54 | 6.6×11×6.5 | 30 |
| SSPF40 | — | 60 | 0 | 100 | | 90 | 14 | 72 | 9×14×8.6 | 36 |
| SSPF50 | — | 75 | -19 | 112 | -0.3 | 113 | 16 | 91 | 11×17.5×11 | 40 |
| SSPF60 | — | 90 | 0/-22 | 127 | | 129 | 18 | 107 | 11×17.5×11 | 45.5 |

| d | Ds | tolerance μm | basic torque rating | | basic load rating | | allowable static moment | | mass | | size |
|-----|------|-------------------------|---------------------|---------------------|-------------------|-----------------|-------------------------|--------------|--------|------------|------|
| | | | dynamic C_T N·m | static C_{0T} N·m | dynamic C kN | static C_0 kN | M_{O1} N·m | M_{O2} N·m | nut kg | shaft kg/m | |
| 1 | 6 | 0/-12 | 1.5 | 2.4 | 1.22 | 2.28 | 5.1 | 40 | 0.037 | 0.21 | 6 |
| 1.5 | 8 | 0 | 2.1 | 3.7 | 1.45 | 2.87 | 7.4 | 50 | 0.042 | 0.38 | 8 |
| 1.5 | 10 | -15 | 4.4 | 8.2 | 2.73 | 5.07 | 18.0 | 116 | 0.094 | 0.6 | 10 |
| 1.5 | 13 | 0 | 21 | 39.2 | 2.67 | 4.89 | 13.7 | 109 | 0.1 | 1 | 13A |
| 2 | 16 | -18 | 60 | 110 | 6.12 | 11.2 | 46 | 299 | 0.2 | 1.5 | 16A |
| 2 | 20 | | 105 | 194 | 8.9 | 16.3 | 110 | 560 | 0.33 | 2.4 | 20A |
| 3 | 25 | 0 | 189 | 346 | 12.8 | 23.4 | 171 | 1,020 | 0.45 | 3.7 | 25A |
| 3 | 30 | -21 | 307 | 439 | 18.6 | 23.2 | 181 | 1,470 | 0.55 | 5.38 | 30A |
| 4 | 40 | 0 | 674 | 934 | 30.8 | 37.5 | 358 | 2,940 | 1.41 | 9.55 | 40A |
| 4 | 50 | -25 | 1,290 | 2,950 | 40.3 | 64.9 | 690 | 4,080 | 2.73 | 15.0 | 50A |
| 4 | 60 | 0/-30 | 1,570 | 2,620 | 47.7 | 79.5 | 881 | 5,470 | 3.2 | 21.6 | 60A |
| 2 | 18.2 | | 83 | 133 | 7.84 | 11.3 | 63 | 500 | 0.22 | 2 | 20 |
| 3 | 23 | 0 | 162 | 239 | 12.3 | 16.1 | 104 | 830 | 0.32 | 3.1 | 25 |
| 3 | 28 | -21 | 289 | 412 | 18.6 | 23.2 | 181 | 1,470 | 0.51 | 4.8 | 30 |
| 4 | 37.4 | 0 | 637 | 882 | 30.8 | 37.5 | 358 | 2,940 | 1.15 | 8.6 | 40 |
| 4 | 47 | -25 | 1,390 | 3,180 | 46.1 | 74.2 | 696 | 4,400 | 2.1 | 13.1 | 50 |
| 4 | 56.5 | 0/-30 | 2,100 | 4,800 | 58.0 | 127 | 1,300 | 8,800 | 3.3 | 19 | 60 |

1kN=102kgf 1N·m=0.102kgf·m




SSPT TYPE

– Two Side Cut Flange Type –

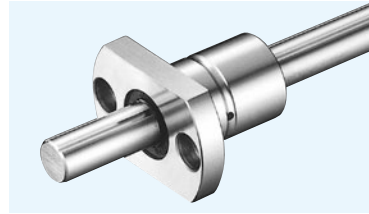

part number structure

example **SSPT 10-2-T1-436-P/CU**

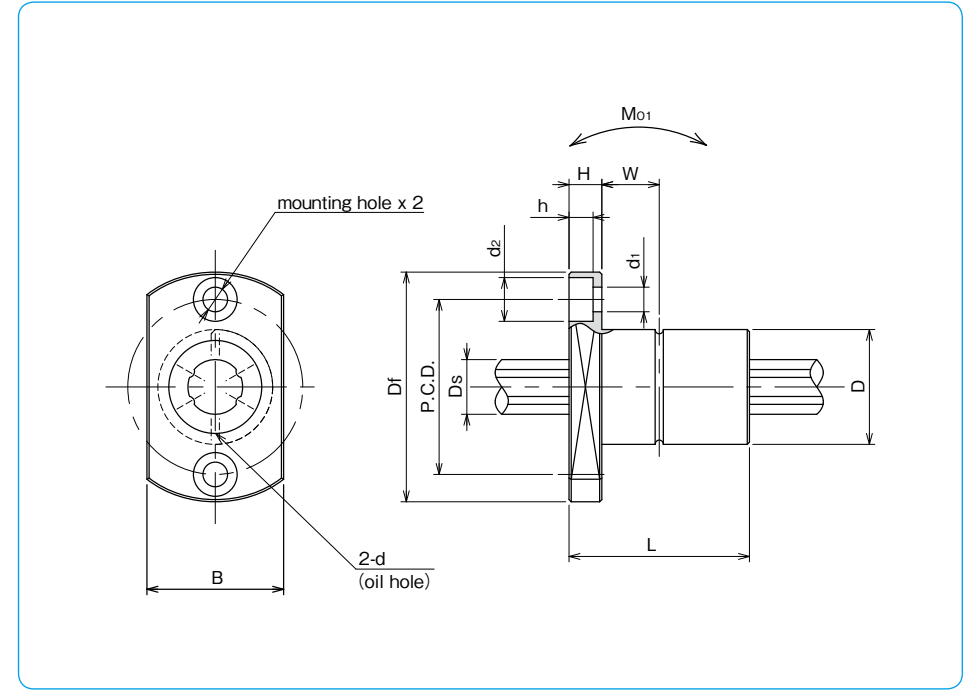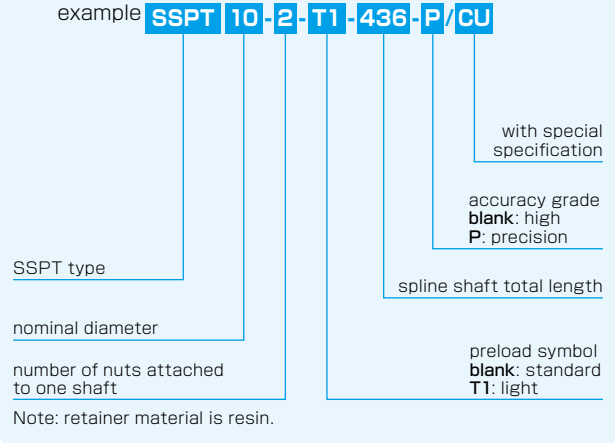


| part number | D | | L | | major dimensions | | | | | W |
|----------------|----|-----------------|----|-----------------|------------------|---------|---------|--------------|---|------|
| | mm | tolerance μm | mm | tolerance mm | Df mm | B mm | H mm | P.C.D. mm | d ₁ × d ₂ × h mm | |
| SSPT 6 | 14 | 0 | 25 | 0 | 30 | 18 | 5 | 22 | 3.4 × 6.5 × 3.3 | 7.5 |
| SSPT 8 | 16 | -11 | 25 | -0.2 | 32 | 21 | 5 | 24 | 3.4 × 6.5 × 3.3 | 7.5 |
| SSPT 10 | 21 | 0/-13 | 33 | -0.2 | 42 | 25 | 6 | 32 | 4.5 × 8 × 4.4 | 10.5 |

| d | D _s | tolerance μm | basic torque rating | | basic load rating | | allowable static moment | | mass | | size |
|-----|----------------|-----------------|---------------------------|---------------------------|-------------------|--------------|-------------------------|-----------------|-------|-------|-----------|
| | | | dynamic C _T | static Co _T | dynamic C | static Co | Mo ₁ | Mo ₂ | nut | shaft | |
| mm | mm | μm | N · m | N · m | kN | kN | N · m | N · m | kg | kg/m | |
| 1 | 6 | 0/-12 | 1.5 | 2.4 | 1.22 | 2.28 | 5.1 | 40 | 0.029 | 0.21 | 6 |
| 1.5 | 8 | 0 | 2.1 | 3.7 | 1.45 | 2.87 | 7.4 | 50 | 0.035 | 0.38 | 8 |
| 1.5 | 10 | -15 | 4.4 | 8.2 | 2.73 | 5.07 | 18.0 | 116 | 0.075 | 0.6 | 10 |

1kN ≒ 102kgf 1N · m ≒ 0.102kgf · m


SSPT-AM TYPE SSPK-AM TYPE

— Light and Compact Flange Type —

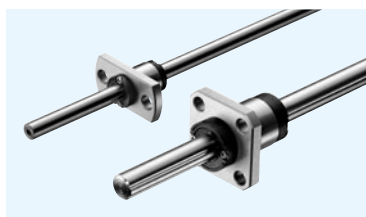


part number structure


example **SSPK 10 AM-2 T1 400 P/CU**

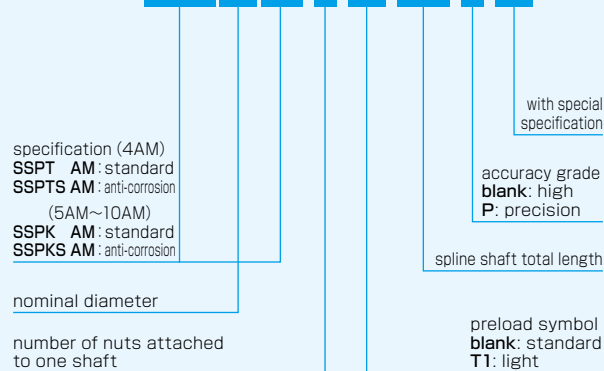


Note: Nut material of SSPT-AM and SSPK-AM is stainless steel.

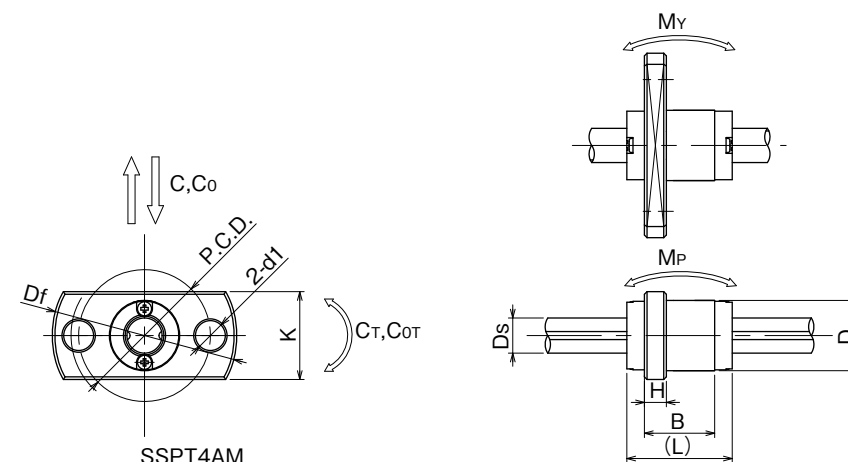

SSPT4AM
*SSPT4AM spline nut does not come with seal ring.



SSPK5AM~10AM
*SSPK5AM spline nut does not come with oil groove.

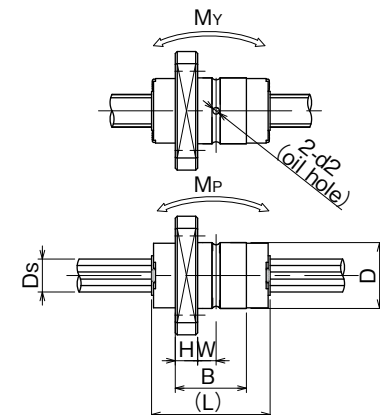


| part number | | major dimensions | | | | | | | | | |
|-------------|----------------|------------------|----|------|----|----|------|--------|-----|-----|----|
| standard | anti-corrosion | D h6 tolerance | L | B | Df | K | H | P.C.D. | d1 | W | |
| | | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| SSPT 4AM | SSPTS 4AM | 8 | 12 | 8 | 21 | 10 | 2.5 | 15 | 3.4 | — | |
| SSPK 5AM | SSPKS 5AM | 10 | 18 | 10.8 | 23 | 18 | 3.4 | 17 | 3.4 | 2.8 | |
| SSPK 6AM | SSPKS 6AM | 12 | 21 | 13 | 25 | 20 | 3 | 19 | 3.4 | 3.5 | |
| SSPK 8AM | SSPKS 8AM | 15 | 25 | 14.9 | 28 | 22 | 3.95 | 22 | 3.4 | 3.5 | |
| SSPK10AM | SSPKS10AM | 19 | 30 | 18 | 36 | 28 | 4 | 28 | 4.5 | 5 | |

| d2 | Ds h7 tolerance | basic torque rating | | basic load rating | | allowable static moment | | mass | | size | |
|-----|-----------------|---------------------------|---------------------------|-------------------|--------------|---------------------------------|----------------------------------|------|-------|---------|------|
| | | dynamic C _T | static Co _T | dynamic C | static Co | static moment M _P | static moment M _{V2} | nut | shaft | | |
| mm | mm | μm | N·m | N·m | N | N | N·m | N·m | g | g/100mm | |
| — | 4 | 0 | 0.72 | 1.00 | 314 | 438 | 0.59 | 1.03 | 5.0 | 9.7 | 4AM |
| 1 | 5 | -12 | 2.33 | 4.05 | 825 | 1,160 | 2.10 | 2.56 | 10.7 | 14.9 | 5AM |
| 1 | 6 | -12 | 2.95 | 5.27 | 890 | 1,290 | 2.55 | 3.11 | 14.7 | 21.6 | 6AM |
| 1.2 | 8 | 0 | 5.85 | 9.83 | 1,330 | 1,810 | 4.11 | 5.00 | 23.9 | 38.4 | 8AM |
| 1.5 | 10 | -15 | 12.4 | 19.4 | 2,270 | 2,870 | 7.84 | 9.53 | 44.0 | 59.8 | 10AM |

Allowable static moment M_{P2} and M_{V2} are the values when two spline nuts are used in close contact. 1N≒102gf 1N·m≒102gf·m

COMMERCIAL BALL SPLINE

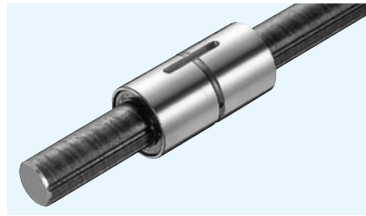

part number structure

example **SSPF 25 C - 2 - 436 / CU**

nut shape
SSP: cylindrical type
SSPF: flange type


nominal diameter

commercial spline shaft

spline shaft total length

number of nuts attached to one shaft

with special specification

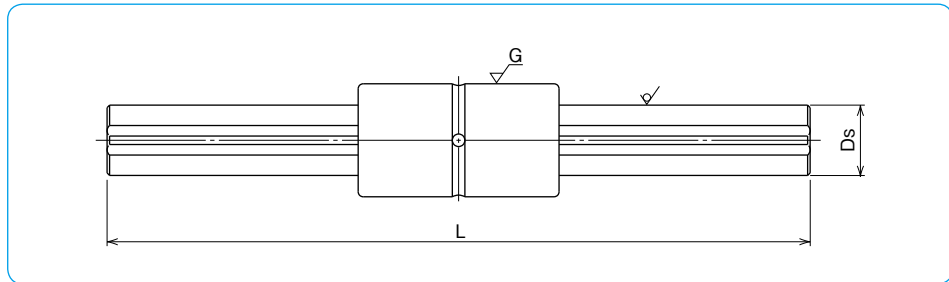

| nominal diameter | Ds mm | major dimensions | | | | | | applicable nut | |
|------------------|----------|------------------|-------|-------|-------|-------|-------|-----------------------|-----------------------|
| | | standard length | | | | | | SSP | SSPF |
| | | L mm | | | | | | | |
| 20A | 20 | 500 | 1,000 | 2,000 | 3,000 | 4,000 | 5,000 | <input type="radio"/> | <input type="radio"/> |
| 25A | 25 | 500 | 1,000 | 2,000 | 3,000 | 4,000 | 5,000 | <input type="radio"/> | <input type="radio"/> |
| 30A | 30 | 500 | 1,000 | 2,000 | 3,000 | 4,000 | 5,000 | <input type="radio"/> | <input type="radio"/> |
| 40A | 40 | 500 | 1,000 | 2,000 | 3,000 | 4,000 | 5,000 | <input type="radio"/> | <input type="radio"/> |
| 50A | 50 | 500 | 1,000 | 2,000 | 3,000 | 4,000 | 5,000 | <input type="radio"/> | <input type="radio"/> |
| 20 | 18.2 | 500 | 1,000 | 2,000 | 3,000 | 4,000 | 5,000 | <input type="radio"/> | <input type="radio"/> |
| 25 | 23 | 500 | 1,000 | 2,000 | 3,000 | 4,000 | 5,000 | <input type="radio"/> | <input type="radio"/> |
| 30 | 28 | 500 | 1,000 | 2,000 | 3,000 | 4,000 | 5,000 | <input type="radio"/> | <input type="radio"/> |
| 40 | 37.4 | 500 | 1,000 | 2,000 | 3,000 | 4,000 | 5,000 | <input type="radio"/> | <input type="radio"/> |
| 50 | 47 | 500 | 1,000 | 2,000 | 3,000 | 4,000 | 5,000 | <input type="radio"/> | <input type="radio"/> |

- Tolerance of total length
total length up to 4,000: JIS B0405 coarse grade
total length greater than 4,000: ±5.0mm
Please specify tolerances when required.
 - Please refer to dimension tables for nut shape and dimensions.
 - When a commercial shaft is used, the load rating of the nut is approximately 70% of indicated rating in the dimension tables.
- yes — none

ROTARY BALL SPLINE

The NB rotary ball spline can be used for both rotational motion and linear motion. The applications include SCARA robots, vertical shaft of assembly equipment, tool changers, and loaders, etc.

STRUCTURE AND ADVANTAGES

The NB Rotary Ball Spline nut consists of a spline nut and a rotating portion using either cross rollers for SPR or balls for SPB.

High Accuracy

Ball Splines transfer torque and achieve accurate positioning in the linear direction. By adding the rotating portion, Rotary Ball Splines can achieve accurate positioning in the linear and rotational directions.

Half the Parts, Reduction in Installation Cost

The Spline nut and rotary bearing are combined in order to significantly reduce the number of parts, compared to conventional system. The combination also reduces the housing thickness to a minimum, resulting in light weight and easy installation.

Figure B-26 Structure of SPR type


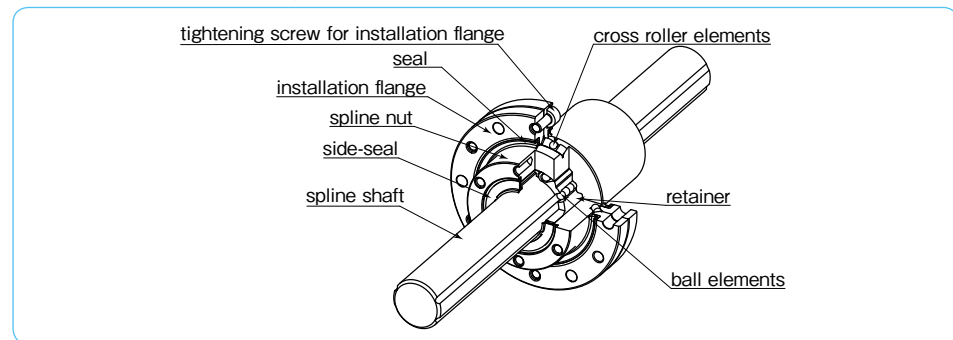



Figure B-27 Structure of SPB-KP type and SPB type

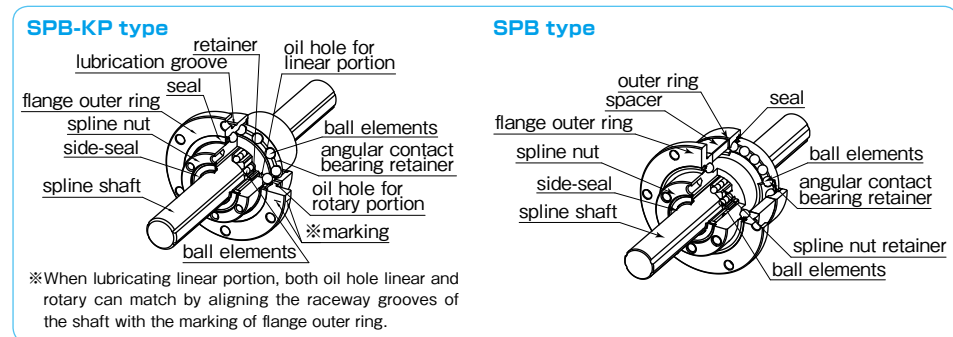

ACCURACY OF SPR TYPE

The accuracy of SPR type is measured at the points shown in Figure B-28.

Figure B-28 Accuracy Measurement Points

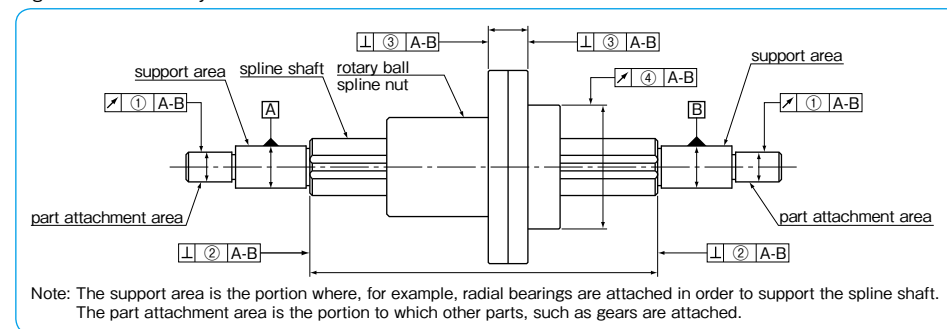

Tolerance of Spline Shaft Groove Torsion (Max.)

The groove torsion is indicated per 100mm, arbitrarily set as the effective length of the spline shaft section.

Table B-18 Tolerance of Spline Shaft Groove Torsion (Max.)

| tolerance |
|-------------|
| 13 μm/100mm |

Table B-19 Tolerance Relative to Spline Support Area (Max.)

unit : μm

| part number | ①radial runout of part attachment area | ②perpendicularity of the end of the spline shaft section (when grinding is requested on the drawing) | ③perpendicularity of the flange |
|-------------|--|--|---------------------------------|
| SPR 6 | 14 | 9 | 14 |
| SPR 8 | | | |
| SPR10 | | | |
| SPR13 | | | |
| SPR16 | 19 | 11 | 18 |
| SPR20A | | | |
| SPR25A | | | |
| SPR30A | | | |
| SPR40A | 25 | 16 | 25 |
| SPR50A | | | |
| SPR60A | | | |
| SPR60A | | | |
| SPR20 | 19 | 11 | 18 |
| SPR25 | | | |
| SPR30 | | | |
| SPR40 | | | |
| SPR50 | 25 | 16 | 25 |
| SPR60 | | | |
| SPR60 | 29 | 19 | 29 |
| SPR60 | | | |

Table B-20 ④Radial Runout of Outer Surface of Rotary Spline Nut Relative to Spline Support Area (Max.)

unit : μm


| spline shaft total length (mm) greater than or less | part number | | | | | | | |
|---|-------------|--------|------------|-------------------------------|----------------------|-------------|-------------|-------------|
| | SPR 6, 8 | SPR 10 | SPR 13, 16 | SPR 20A, 20, 25A, 25, 30A, 30 | SPR 40A, 40, 50A, 50 | SPR 60A, 60 | SPR 60A, 60 | SPR 60A, 60 |
| 200 | 46 | 36 | 34 | 32 | 32 | 30 | 30 | 30 |
| 200 315 | 89 | 54 | 45 | 39 | 36 | 34 | 34 | 34 |
| 315 400 | 126 | 68 | 53 | 44 | 39 | 36 | 36 | 36 |
| 400 500 | 163* | 82 | 62 | 50 | 43 | 38 | 38 | 38 |
| 500 630 | — | 102 | 75 | 57 | 47 | 41 | 41 | 41 |
| 630 800 | — | — | 92 | 68 | 54 | 45 | 45 | 45 |
| 800 1,000 | — | — | 115 | 83 | 63 | 51 | 51 | 51 |
| 1,000 1,250 | — | — | 153 | 102 | 76 | 59 | 59 | 59 |
| 1,250 1,600 | — | — | 195* | 130 | 93 | 70 | 70 | 70 |
| 1,600 2,000 | — | — | — | 171 | 118 | 86 | 86 | 86 |

※Please contact NB for spline shafts exceeding 2000mm. * SPR6 shaft Max. length: 400mm SPR13, SPR16 Max.length: 1500mm

ACCURACY OF SPB TYPE

The accuracy of SPB type is measured at the points shown in Figure B-29.

Figure B-29 Accuracy Measurement Points

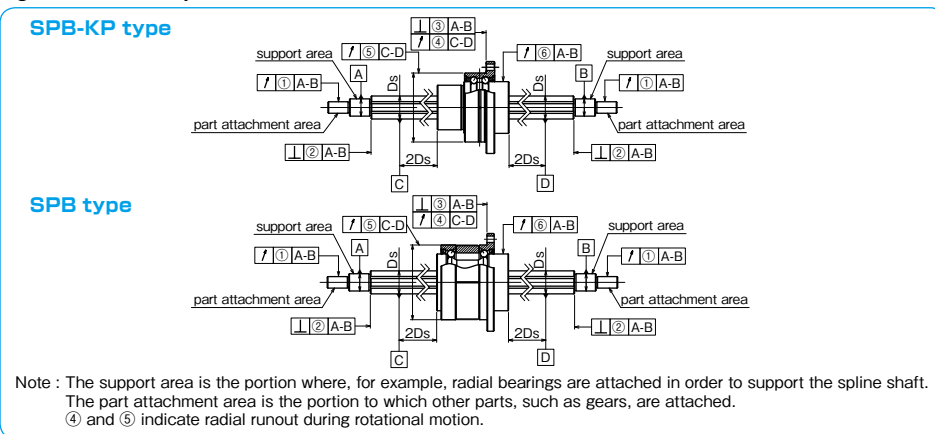

Tolerance of Spline Shaft Groove Torsion (Max.)

The groove torsion is indicated per 100mm, arbitrarily set as the effective length of the spline shaft section.

Table B-21 Tolerance of Spline Shaft Groove Torsion (Max.)

| accuracy grade | high | precision (P) |
|----------------|-------------|---------------|
| tolerance | 13 μm/100mm | 6 μm/100mm |

Table B-22 Tolerance Relative to Spline Support Area (Max.)

unit : μ m

| part number | ①radial runout of part attachment area | | ②perpendicularity of the end of the spline shaft section (when grinding is requested on the drawing) | | ③perpendicularity of the flange | |
|-------------|--|---------------------|--|---------------------|---------------------------------|---------------------|
| | high-grade | precision-grade (P) | high-grade | precision-grade (P) | high-grade | precision-grade (P) |
| SPB 6KP | 14 | 8 | 9 | 6 | 14 | 10 |
| SPB 8KP | | | | | | |
| SPB10KP | 17 | 10 | 11 | 8 | 18 | 13 |
| SPB13KP | 19 | 12 | | | | |
| SPB16KP,16 | | | | | | |
| SPB20KP,20 | | | | | | |
| SPB25KP,25 | 22 | 13 | 13 | 9 | 21 | 16 |

Table B-23 Tolerance of Angular Contact Bearing Rotation (Max.) unit : μ m

| part number | ④lateral runout of flange mounting side | | ⑤radial runout of outer ring | |
|-------------|---|---------------------|------------------------------|---------------------|
| | high-grade | precision-grade (P) | high-grade | precision-grade (P) |
| SPB 6KP | 6 | 6 | 8 | 8 |
| SPB 8KP | | | | |
| SPB10KP | | | | |
| SPB13KP | 8 | 8 | 9 | 9 |
| SPB16KP,16 | | | | |
| SPB20KP,20 | | | 10 | 10 |
| SPB25KP,25 | | | | |

Table B-24 ⑥Radial Runout of Spline Nut Relative to Spline Support Area (Max.) unit : μ m

| spline shaft total length (mm) | size | size | | | | | | | | | |
|--------------------------------|---------|------------|---------------------|------------|---------------------|------------|---------------------|------------|---------------------|------------|---------------------|
| | | 6 | | 8 | | 10 | | 13,16 | | 20,25 | |
| greater than | or less | high-grade | precision-grade (P) | high-grade | precision-grade (P) | high-grade | precision-grade (P) | high-grade | precision-grade (P) | high-grade | precision-grade (P) |
| - | 200 | 46 | 26 | 46 | 26 | 36 | 20 | 34 | 18 | 32 | 18 |
| 200 | 315 | 89 | 57 | 89 | 57 | 54 | 32 | 45 | 25 | 39 | 21 |
| 315 | 400 | 126 | - | 126 | 82 | 68 | 41 | 53 | 31 | 44 | 25 |
| 400 | 500 | - | - | 163 | - | 82 | 51 | 62 | 38 | 50 | 29 |
| 500 | 630 | - | - | - | - | 102 | 65 | 75 | 46 | 57 | 34 |
| 630 | 800 | - | - | - | - | - | 92 | 58 | 68 | 42 | |
| 800 | 1,000 | - | - | - | - | - | 115 | 75 | 83 | 52 | |
| 1,000 | 1,250 | - | - | - | - | - | 153 | 97 | 102 | 65 | |
| 1,250 | 1,600 | - | - | - | - | - | 195 | 127 | 130 | 85 | |
| 1,600 | 2,000 | - | - | - | - | - | - | - | 171 | 116 | |

*SPB16, 13KP, and 16KP shaft maximum length : 1,500mm
 **Please contact NB for spline shafts exceeding 2,000mm.

PRELOAD AND CLEARANCE

The amount of clearance and preload for the spline portion and the cross roller portion are expressed in terms of the clearance in the rotational direction and the clearance in the radial direction, respectively. Three levels of preload are available: standard, light (T1), and medium (T2).

Table B-25 Preload and Clearance in Rotational and Radial Direction unit : μ m

| | part number | standard | light (T1) | medium (T2) |
|-------------------|-------------|---------------|------------|-------------|
| | | linear motion | SPR 6 | -2~+1 |
| | SPR 8 | | | |
| | SPR10 | | | |
| | SPR13 | -3~+1 | - 8~-3 | -13~- 8 |
| | SPR16 | | | |
| | SPR20A | | | |
| | SPR25A | -4~+2 | -12~-4 | -20~-12 |
| | SPR30A | | | |
| | SPR40A | | | |
| | SPR50A | -6~+3 | -18~-6 | -30~-18 |
| | SPR60A | | | |
| | SPR20 | | | |
| | SPR25 | -4~+2 | -12~-4 | -20~-12 |
| | SPR30 | | | |
| | SPR40 | | | |
| | SPR50 | -6~+3 | -18~-6 | -30~-18 |
| | SPR60 | | | |
| rotational motion | SPR 6 | -1~+3 | | |
| | SPR60 | | | |

Table B-26 Preload and Clearance in Rotational Direction (Linear Motion) unit : μ m

| part number | standard | light (T1) | medium (T2) |
|-------------|----------|------------|-------------|
| SPB 6KP | 0 ~ +3 | - 3 ~ 0 | - |
| SPB 8KP | | | |
| SPB10KP | | | |
| SPB13KP | -3 ~ +1 | - 8 ~ -3 | -13 ~ - 8 |
| SPB16KP,16 | | | |
| SPB20KP,20 | -4 ~ +2 | -12 ~ -4 | -20 ~ -12 |
| SPB25KP,25 | | | |

Please contact NB for other than preload standards above.

Table B-27 Preload and Operating Conditions

| preload | symbol | operating conditions |
|----------|--------|--|
| standard | blank | minute vibration is applied. a precise motion is required. moment is applied in a given direction. |
| light | T1 | light vibration is applied. light torsional load is applied. cyclic torque is applied. |
| medium | T2 | shock/vibration is applied. over-hang load is applied. torsional load is applied. |


**Frictional resistance may be affected by preload.

HOLLOW SPLINE SHAFT

NB provides hollow shafts. It can be used for running cable, air piping, and weight reduction. Table B-28 shows a list of recommended inner diameter for hollow spline shaft (SUJ2).

Table B-28 Recommended Inner Diameter for Hollow Spline Shaft


| part number | outer diameter Ds mm | inner diameter d mm | second moment of inertia I mm ⁴ | cross-sectional coefficient Z mm ³ |
|-------------|----------------------|---------------------|--|---|
| SPR 6 | 6 | 2 | 58.3 | 18.9 |
| SPR 8 | 8 | 3 | 186 | 44.9 |
| SPR10 | 10 | 4 | 448 | 85.9 |
| SPR13 | 13 | 6 | 1,260 | 182 |
| SPR16 | 16 | 8 | 2,780 | 323 |
| SPR20A | 20 | 10 | 6,860 | 637 |
| SPR25A | 25 | 15 | 15,400 | 1,100 |

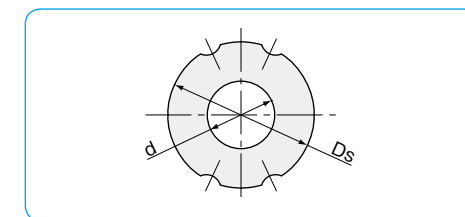

SPECIAL REQUIREMENTS

NB provides customization such as shaft-end machining, spline nut machining, and surface treatment per customer requests. Please contact NB for the inner diameter of SPR20~SPR60.

Figure B-30 Examples of Shaft-end Machining

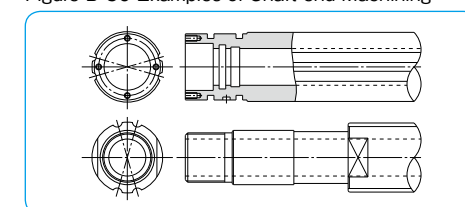

MOUNTING

The flange attachment screws of SPR type have been pre-adjusted for smooth rotary movement and should never be loosened. Shock loading to the flange assembly should be avoided as this can degrade the accuracy of movement and deteriorate the overall performance.

The spacer of SPB type is properly adjusted to produce the best preload condition. Shock loading to the spacer should be avoided as this can change the preload condition and deteriorate the accuracy.

Please fix the mounting screws diagonally. The recommended torque values for medium-hardness steel screws are listed in Table B-29.

Table B-29 Recommended Torque unit : N·m

| mounting screw | M2 | M2.5 | M3 | M4 | M5 | M6 | M8 |
|--------------------|-----|------|-----|-----|-----|------|------|
| recommended torque | 0.4 | 0.9 | 1.4 | 3.2 | 6.6 | 11.2 | 27.6 |

(for alloy steel screw)

SPR Type

When the flange of SPR type is to be used with a faucet joint (as shown in Figure B-31) the housing bore should be machined to a tolerance of H7 and to a minimum depth of 60% of the flange thickness. If only a light load is applied to the SPR in operation, the flange can be used without a pilot end.

Figure B-31 SPR type Mounting Method

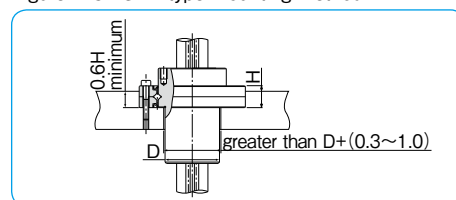


Figure B-32 SPB-KP type Mounting Method


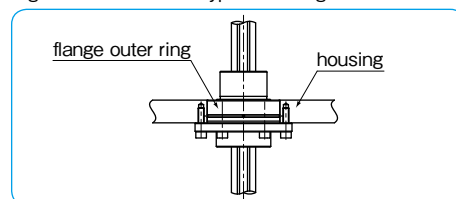


Figure B-33 SPB type Mounting Method

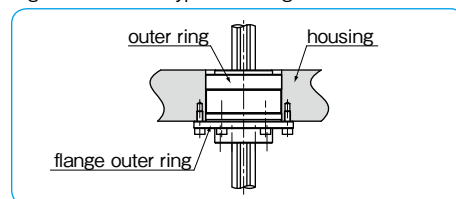

SPB-KP Type

The housing bore for the SPB-KP type should be matched to a tolerance of H7 and keep enough depth (as shown in Figure B-32) so that the outer ring is inside the housing.

SPB Type

The housing bore for the SPB type should be machined to a tolerance of H7 and contain enough depth so that the outer ring is inside the housing. If not, the outer ring may fall off.

Insertion of Spline Shaft

When inserting the spline shaft into the rotary ball spline nut, ensure that the ball elements do not drop out. This is done by aligning the raceway grooves of the shaft with the rows of ball elements and seal-lip of the nut. Then, carefully insert the spline shaft through the spline nut.

LUBRICATION

Since NB rotary ball spline nuts are equipped with seals at both the spline portion and the rotational portion, the lubricant is retained for an extended period of time. The spline nut is prelubricated with lithium soap based grease prior to shipment for immediate use. Please relubricate with a similar type of grease periodically depending on the operating conditions.

Low dust generation grease is available from NB standard grease. (refer to page Eng-40)

However, an oil lubricant is recommended for high-speed applications. A grease fitting or machining oil holes is optional (Figure B-34-37), please contact NB for details.

SPR Type

A grease fitting for rotational portion and machining oil hole for spline portion are optional.

Figure B-34 Example of Installed Grease Fitting


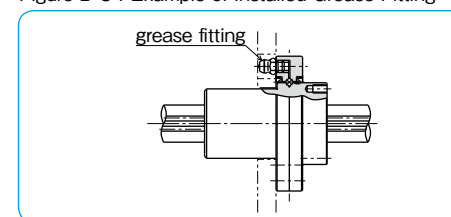



Figure B-35 SPR type Oil Hole

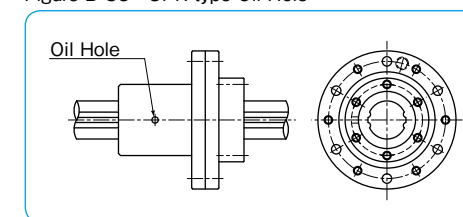

SPB-KP Type

Lubrication is done through oil hole on the outer ring. It is applied the spline portion and the cross roller portion simultaneously.


Figure B-36 SPB-KP type Oil Hole

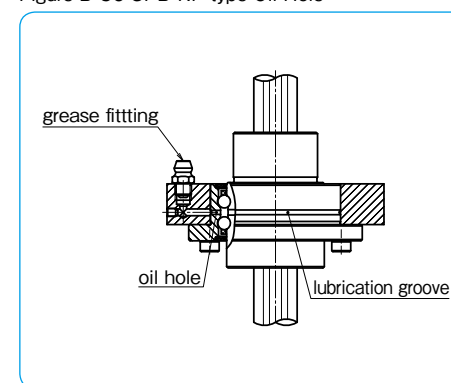

SPB Type

Rotational portion has an oil hole as a standard. For lubrication, it is recommended to mount a grease fitting or oil hole to housing. Machining oil hole for spline portion is available. Please contact NB.

Figure B-37 SPB type Oil Hole

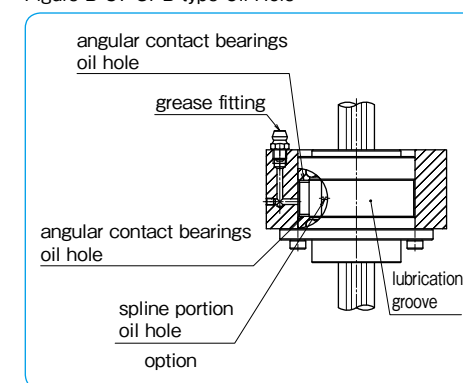

OPERATING CONDITIONS

The performance of the rotary ball spline is affected by the operating conditions of the application. The operating conditions should therefore be carefully taken into consideration.


Operating Temperature

Resin retainers are used in the rotary ball spline, since the operating temperature should never exceed 80°C.


Dust Prevention

Foreign particles or dust in the rotary ball spline nut affect the motion accuracy and shorten the lifetime. Standard seals will perform well for dust prevention under normal operating conditions; however, in a harsh environment, it is necessary to attach bellows or protective covers.

Figure B-38 NB mark Alignment

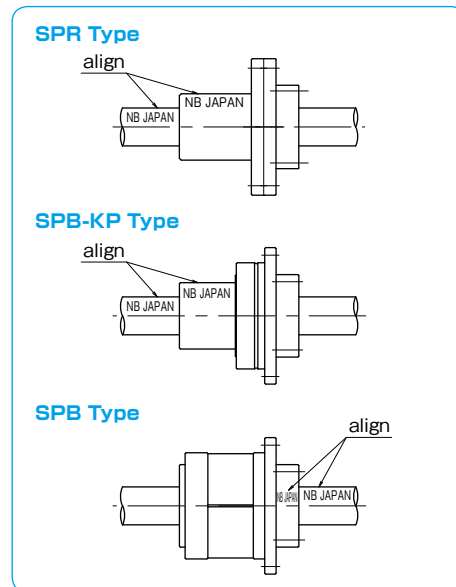


APPLICATION EXAMPLES

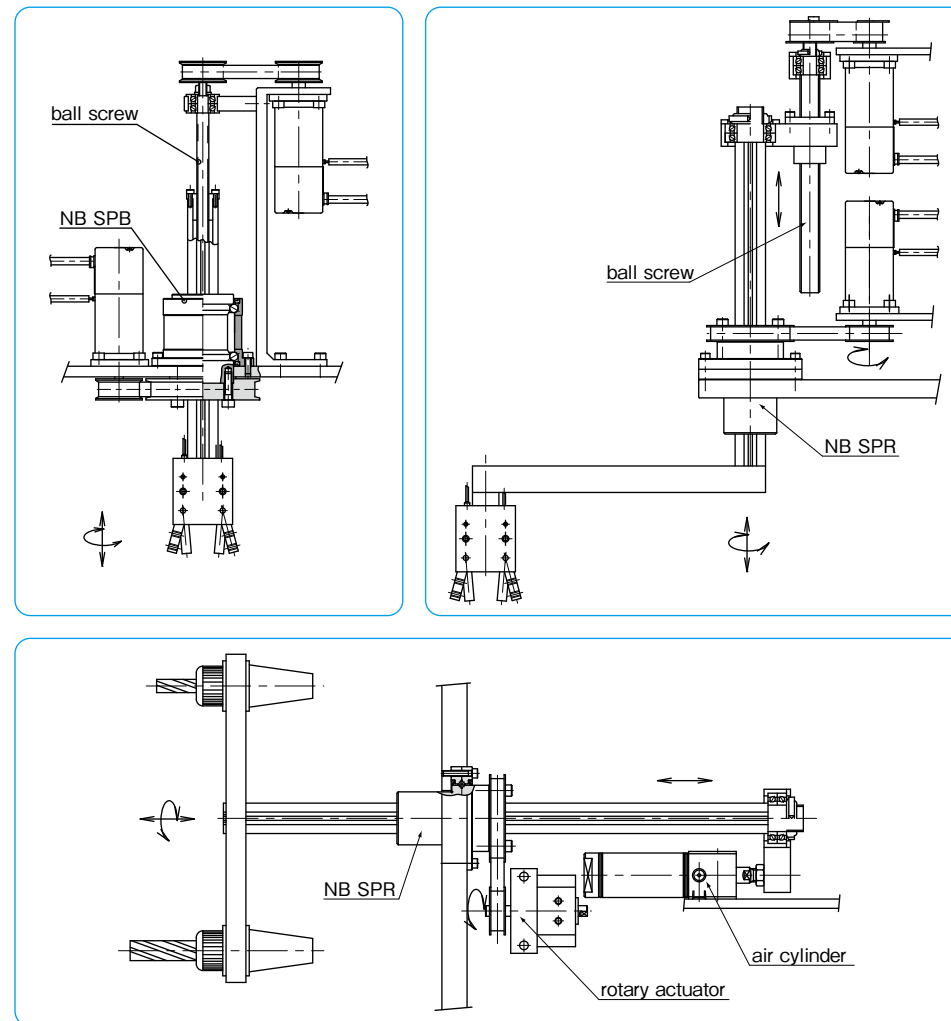



ROTARY BALL SPLINE

SPR TYPE

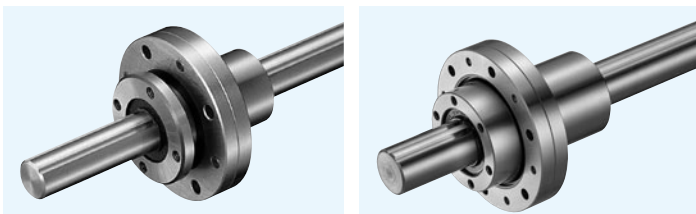

part number structure

example **SPR 25 - 2 - T1 - 436 / CU**

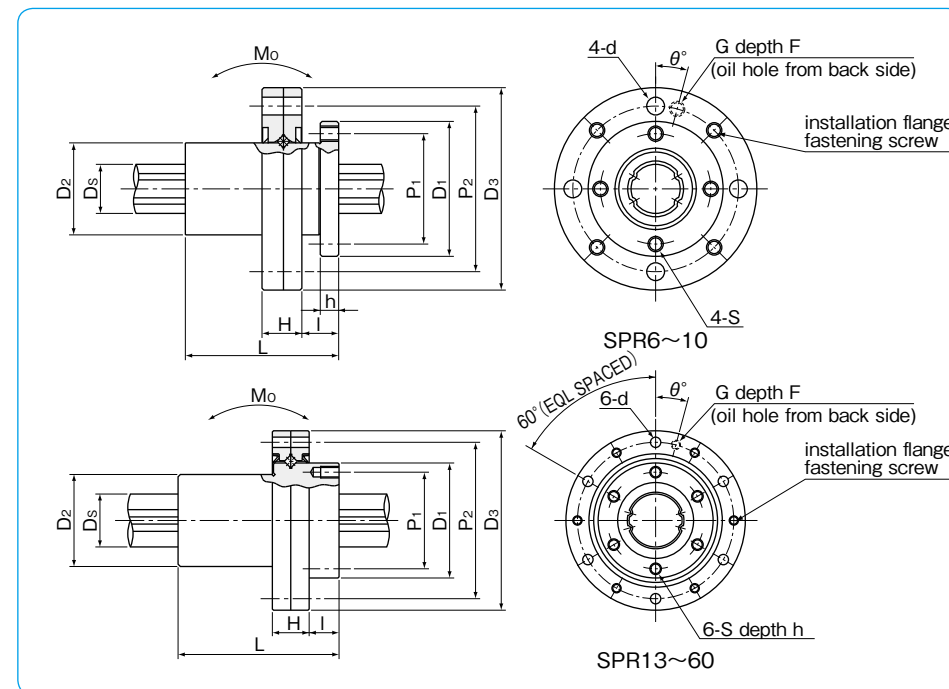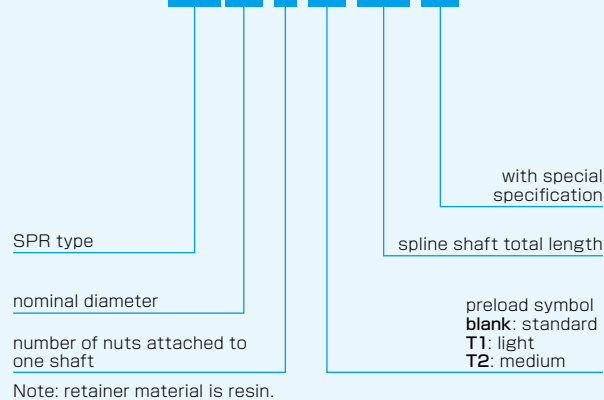

| part number | major dimensions | | | | | major dimensions of cross roller bearing | | | | | | | | | |
|-------------|------------------|----------------|-----|----------------|------|--|----|-----|----------------|----------------|-----|---------|-----|-----|---|
| | D ₁ | D ₂ | L | P ₁ | S | h | I | H | D ₃ | P ₂ | d | G | F | θ | |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | ° |
| SPR 6 | 20 | 13 | 25 | 16 | M2 | 2.5 | 5 | 6.5 | 30 | 24 | 2.4 | M3 | 2.6 | 20° | |
| SPR 8 | 22 | 15 | 25 | 18 | M2.5 | 3 | 6 | 6.5 | 33 | 27 | 2.9 | M3 | 2.6 | 20° | |
| SPR10 | 27 | 19 | 33 | 22 | M3 | 4 | 8 | 7 | 40 | 33 | 3.4 | M3 | 2.8 | 20° | |
| SPR13 | 29 | 24 | 36 | 24 | M3 | 5 | 8 | 9 | 50 | 42 | 3.4 | M3 | 3.6 | 15° | |
| SPR16 | 36 | 31 | 50 | 30 | M4 | 6 | 10 | 11 | 60 | 50 | 4.5 | M3 | 4.4 | 15° | |
| SPR20A | 44 | 35 | 63 | 38 | M4 | 7 | 12 | 13 | 72 | 62 | 4.5 | M6×0.75 | 5.2 | 15° | |
| SPR25A | 55 | 42 | 71 | 47 | M5 | 8 | 13 | 16 | 82 | 72 | 4.5 | M6×0.75 | 6.4 | 15° | |
| SPR30A | 61 | 47 | 80 | 52 | M6 | 10 | 17 | 17 | 100 | 86 | 6.6 | M6×0.75 | 6.8 | 15° | |
| SPR40A | 76 | 64 | 100 | 66 | M6 | 10 | 23 | 20 | 120 | 104 | 9 | M6×0.75 | 8 | 15° | |
| SPR50A | 92 | 80 | 125 | 80 | M8 | 13 | 24 | 22 | 134 | 118 | 9 | M6×0.75 | 8.8 | 15° | |
| SPR60A | 107 | 90 | 140 | 95 | M8 | 13 | 25 | 25 | 155 | 137 | 9 | M6×0.75 | 10 | 15° | |
| SPR20 | 40 | 34 | 60 | 34 | M4 | 7 | 12 | 13 | 66 | 56 | 4.5 | M6×0.75 | 5.2 | 15° | |
| SPR25 | 50 | 40 | 70 | 42 | M5 | 8 | 13 | 16 | 78 | 68 | 4.5 | M6×0.75 | 6.4 | 15° | |
| SPR30 | 61 | 47 | 80 | 52 | M6 | 10 | 17 | 17 | 100 | 86 | 6.6 | M6×0.75 | 6.8 | 15° | |
| SPR40 | 76 | 64 | 100 | 64 | M6 | 10 | 23 | 20 | 120 | 104 | 9 | M6×0.75 | 8 | 15° | |
| SPR50 | 88 | 75 | 112 | 77 | M8 | 13 | 24 | 22 | 130 | 114 | 9 | M6×0.75 | 8.8 | 15° | |
| SPR60 | 102 | 90 | 127 | 90 | M8 | 13 | 25 | 25 | 150 | 132 | 9 | M6×0.75 | 10 | 15° | |

Please contact NB for the grease fitting and relubrication method.


| spline shaft | ball spline | | | | cross roller bearing | | | allowable static moment Mo | mass | | size | |
|--------------|----------------|------------------------|------------------------|-------------------|-----------------------|------------------------|------------------------|----------------------------|-------|-------|------|-----|
| | D _s | basic torque rating | | basic load rating | | basic load rating | | | nut | shaft | | |
| | tolerance | dynamic C _T | static C _{0T} | dynamic C | static C ₀ | dynamic C _R | static C _{0R} | | | | | kg |
| 6 | 0/-12 | 1.5 | 2.4 | 1.22 | 2.28 | 0.6 | 0.5 | 2,940 | 5.1 | 0.04 | 0.21 | 6 |
| 8 | 0 | 2.1 | 3.7 | 1.45 | 2.87 | 1.2 | 1.10 | 2,580 | 7.4 | 0.05 | 0.38 | 8 |
| 10 | -15 | 4.4 | 8.2 | 2.73 | 5.07 | 2.4 | 2.45 | 2,060 | 18.0 | 0.09 | 0.60 | 10 |
| 13 | 0 | 21 | 39.2 | 2.67 | 4.89 | 2.9 | 3.70 | 1,350 | 13.7 | 0.17 | 1.0 | 13 |
| 16 | -18 | 60 | 110 | 6.12 | 11.2 | 5.6 | 6.70 | 1,080 | 46 | 0.33 | 1.5 | 16 |
| 20 | 0 | 105 | 194 | 8.9 | 16.3 | 6.55 | 8.79 | 890 | 110 | 0.57 | 2.4 | 20A |
| 25 | -21 | 189 | 346 | 12.8 | 23.4 | 9.63 | 12.7 | 700 | 171 | 0.81 | 3.7 | 25A |
| 30 | 0 | 307 | 439 | 18.6 | 23.2 | 11.8 | 17.1 | 640 | 181 | 1.19 | 5.38 | 30A |
| 40 | 0 | 674 | 934 | 30.8 | 37.5 | 23.0 | 32.3 | 510 | 358 | 2.25 | 9.55 | 40A |
| 50 | -25 | 1,290 | 2,950 | 40.3 | 64.9 | 27.8 | 44.0 | 430 | 690 | 3.57 | 15.0 | 50A |
| 60 | 0/-30 | 1,570 | 2,620 | 47.7 | 79.5 | 29.0 | 48.8 | 370 | 881 | 5.03 | 21.6 | 60A |
| 18.2 | 0 | 83 | 133 | 7.84 | 11.3 | 5.90 | 7.35 | 980 | 63 | 0.45 | 2.0 | 20 |
| 23 | -21 | 162 | 239 | 12.3 | 16.1 | 9.11 | 11.5 | 770 | 104 | 0.75 | 3.1 | 25 |
| 28 | 0 | 289 | 412 | 18.6 | 23.2 | 11.8 | 17.1 | 640 | 181 | 1.25 | 4.8 | 30 |
| 37.4 | 0 | 637 | 882 | 30.8 | 37.5 | 23.0 | 32.3 | 510 | 358 | 2.30 | 8.6 | 40 |
| 47 | -25 | 1,390 | 3,180 | 46.1 | 74.2 | 27.2 | 42.1 | 450 | 696 | 3.10 | 13.1 | 50 |
| 56.5 | 0/-30 | 2,100 | 4,800 | 58.0 | 127 | 26.5 | 42.6 | 400 | 1,300 | 4.70 | 19 | 60 |

※ Maximum revolutions for grease lubrication.

Contact NB for further information in case oil lubrication is required.

1kN≒102kgf 1N·m≒0.102kgf·m


SPB-KP TYPE



part number structure

example **SPB 16 KP-2-T1-600-P/CU**

- SPB KP type**
- nominal diameter**
- number of nuts attached to one shaft**
- with special specification**
- accuracy grade blank: high P: precision**
- spline shaft total length**
- preload symbol for linear portion blank: standard T1: light T2: medium**

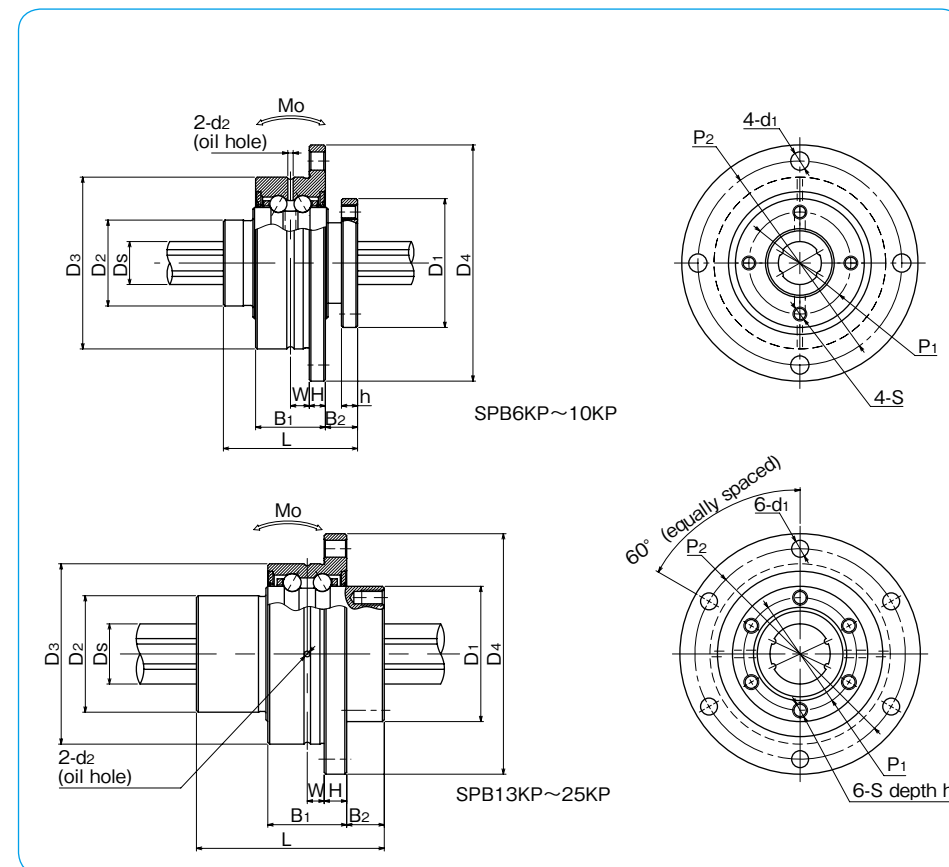


| part number | major dimensions | | | | | | | major dimensions of angular contact bearing | | | | | |
|----------------|-------------------|----------------|----|----------------|------|----|-------------------|---|----|----------------|----------------|----------------|--|
| | D ₁ h7 | D ₂ | L | P ₁ | S | h | D ₃ g6 | D ₄ | H | B ₁ | B ₂ | P ₂ | |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | |
| SPB 6KP | 20 | 14 | 25 | 16 | M2 | 3 | 28 | 38 | 3 | 13 | 6 | 33 | |
| SPB 8KP | 24 | 16 | 25 | 19 | M2.6 | 3 | 32 | 44 | 3 | 13 | 6 | 38 | |
| SPB10KP | 28 | 21 | 33 | 23 | M3 | 4 | 36 | 48 | 3 | 15 | 9 | 42 | |
| SPB13KP | 30 | 24 | 36 | 25 | M3 | 5 | 44 | 56 | 4 | 18 | 9 | 50 | |
| SPB16KP | 36 | 31 | 50 | 30 | M4 | 6 | 48 | 64 | 6 | 21 | 10 | 56 | |
| SPB20KP | 43.5 | 35 | 63 | 36 | M5 | 8 | 56 | 72 | 6 | 21 | 12 | 64 | |
| SPB25KP | 52 | 42 | 71 | 44 | M5 | 8 | 66 | 86 | 7 | 25 | 13 | 75 | |


| d ₁ | W | d ₂ | D _s | rotary ball spline | | | | angular contact bearings | | allowable static moment Mo | mass | | | |
|----------------|-----|----------------|----------------|--|--|-----------------------------|-----------------------------|--|--|----------------------------|---------------------|------|-------|------|
| | | | | basic torque rating dynamic C _T | basic torque rating static Co _T | basic load rating dynamic C | basic load rating static Co | basic load rating dynamic C _R | basic load rating static Co _R | | maximum revolutions | nut | shaft | size |
| mm | mm | mm | mm | N·m | N·m | kN | kN | kN | kN | rpm | N·m | kg | kg/m | |
| 2.4 | 3.5 | 1 | 6 | 1.5 | 2.4 | 1.22 | 2.28 | 4.35 | 2.74 | 8,100 | 5.1 | 0.07 | 0.21 | 6 |
| 3.4 | 3.5 | 1 | 8 | 2.1 | 3.7 | 1.45 | 2.87 | 4.54 | 3.13 | 7,000 | 7.4 | 0.10 | 0.38 | 8 |
| 3.4 | 4.5 | 1 | 10 | 4.4 | 8.2 | 2.73 | 5.07 | 6.86 | 4.82 | 6,200 | 18.0 | 0.14 | 0.60 | 10 |
| 3.4 | 5 | 1 | 13 | 21 | 39.2 | 2.67 | 4.89 | 9.45 | 7.01 | 5,000 | 13.7 | 0.23 | 1.0 | 13 |
| 4.5 | 4.5 | 1.5 | 16 | 60 | 110 | 6.12 | 11.2 | 10.2 | 8.56 | 4,200 | 46 | 0.37 | 1.5 | 16 |
| 4.5 | 4.5 | 1.5 | 20 | 105 | 194 | 8.9 | 16.3 | 10.9 | 10.1 | 3,600 | 110 | 0.55 | 2.4 | 20 |
| 5.5 | 5.5 | 1.5 | 25 | 189 | 346 | 12.8 | 23.4 | 13.7 | 12.9 | 3,100 | 171 | 0.84 | 3.7 | 25 |

※Maximum revolutions for grease lubrication.


SPB TYPE



part number structure

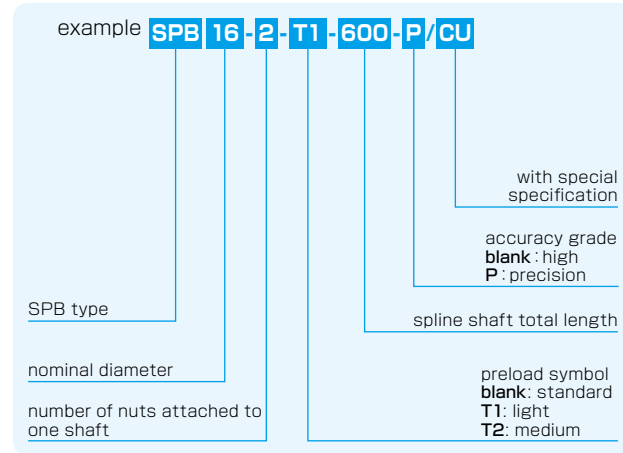

| part number | major dimensions | | | | | | major dimensions of angular contact bearing | | | | | | | |
|--------------|-------------------------------|----|--------------------------|----|----|-----------------------------|---|----|----------------|----------------|--------------------------|-----|--|--|
| | D _{1h7} tolerance | L | P ₁ P.C.D. | S | h | D ₂ tolerance | D ₃ | H | B ₁ | B ₂ | P ₂ P.C.D. | d | | |
| | mm μm | mm | mm | mm | mm | mm μm | mm | mm | mm | mm | mm | mm | | |
| SPB16 | 39.5 0 | 50 | 32 | M5 | 8 | 52 0 | 68 | 5 | 37 | 10 | 60 | 4.5 | | |
| SPB20 | 43.5 -25 | 63 | 36 | M5 | 8 | 56 -7 | 72 | 6 | 48 | 12 | 64 | 4.5 | | |
| SPB25 | 53 0/-30 | 71 | 45 | M6 | 8 | 62 | 78 | 6 | 55 | 13 | 70 | 4.5 | | |

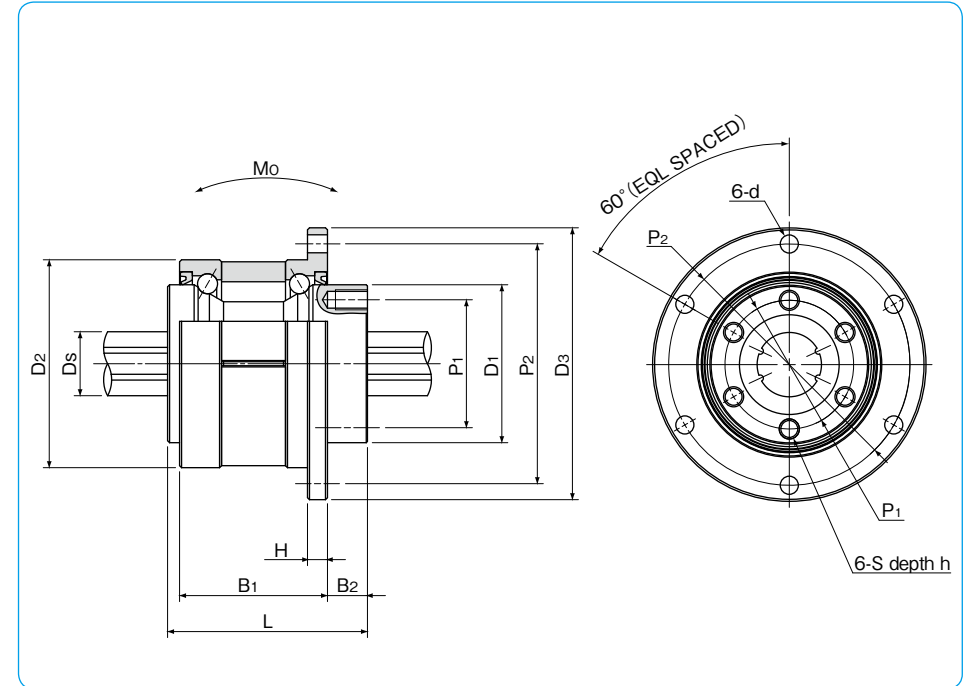

| spline shaft D _s tolerance | rotary ball spline | | | | angular contact bearings | | allowable static moment M _o N·m | mass | | size | |
|---|--|----------------------------------|--------------------|--------------------------------|--|---------------------------------|--|-----------|---------------|------|-----------|
| | basic torque rating C _T N·m | static C _{0T} N·m | dynamic C kN | static C _o kN | basic load rating dynamic C _R kN | static C _{oR} kN | | nut kg | shaft kg/m | | |
| 16 0/-18 | 60 | 110 | 6.12 | 11.2 | 13.0 | 12.8 | 4,000 | 46 | 0.54 | 1.5 | 16 |
| 20 0 | 105 | 194 | 8.9 | 16.3 | 17.4 | 17.2 | 3,600 | 110 | 0.70 | 2.4 | 20 |
| 25 -21 | 189 | 346 | 12.8 | 23.4 | 22.1 | 22.5 | 3,200 | 171 | 0.91 | 3.7 | 25 |

*Maximum revolutions for grease lubrication. (please contact NB in case of oil lubrication.) 1kN≒102kgf 1N·m≒0.102kgf·m

STROKE BALL SPLINE

The NB stroke ball spine SPLFS type is a highly accurate linear motion bearing with a limited stroke, to which both radial load and torque can be applied at the same time. It operates with extremely low dynamic friction.

STRUCTURE AND ADVANTAGES

The NB stroke ball spline consists of a nut and a shaft both with raceway grooves. The flanged spline nut consists of an outer cylinder, a retainer, side-rings, and ball elements. Since the retainer in the nut is equipped with ball pockets, the ball elements do not contact each other, which allows for a smooth linear motion. The stroke is limited since the retainer is a non-circulating type. For normal operation, it is recommended to consider 80% of the maximum stroke shown in the dimension table as an actual stroke length.

Extremely low Dynamic Friction and Low Noise

The rolling elements are separated by the ball pockets so that they do not contact each other. The stroke length is limited, but extremely low dynamic friction and low noise are realized because the rolling elements do not circulate.

Compact-Size

With the nut about 20% smaller than those of conventional ball splines, it contributes to space saving.


All Stainless Steel Type

Since all the components are made of stainless steel, this stroke ball spline has an excellent corrosion resistance and heat resistance (operating temperature: -20 to 140°C). It is ideal for clean room or vacuum applications.

Lubrication

A lubricant groove and two lubrication holes are provided on the outer surface of the nut, which allows for an easy designing of lubricant replenishment.

Figure B-38 Structure of SPLFS type

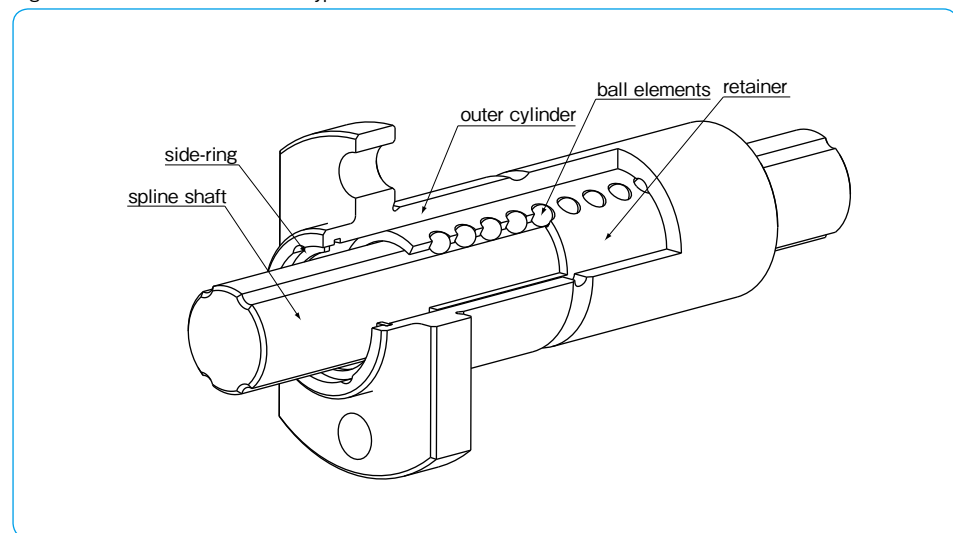

ACCURACY

The accuracy of the NB stroke ball spline is measured at the points shown in Figure B-39.

Figure B-39 Accuracy Measurement Points

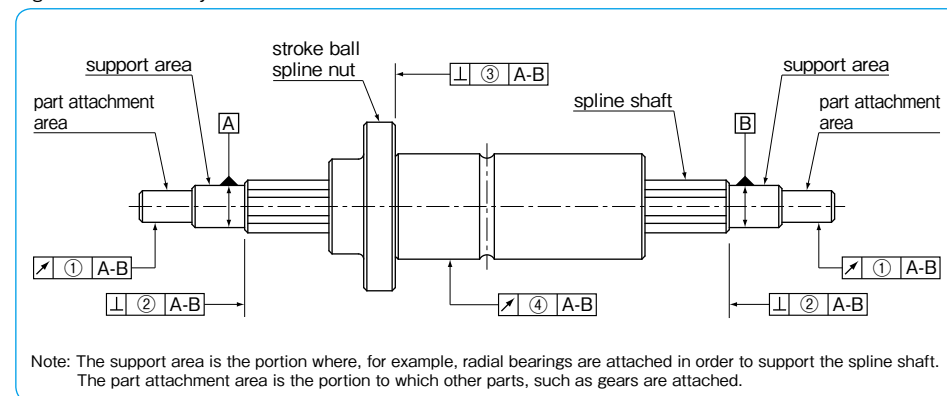


Table B-30 Tolerance of Spline Shaft Groove Torsion (Max.)

The groove torsion is indicated per 100mm, arbitrarily set as the effective length of the spline shaft section.

| tolerance |
|-------------|
| 13 μm/100mm |

Table B-31 Tolerance Relative to Spline Support Area (Max.) unit: μm

| part number | ① radial runout of part attachment area | ② perpendicularity of the end of the spline shaft section | ③ perpendicularity of the flange |
|-------------|---|---|----------------------------------|
| SPLFS 6 | 14 | 9 | 11 |
| SPLFS 8 | 14 | 9 | 11 |
| SPLFS10 | 17 | 9 | 13 |
| SPLFS13 | 19 | 11 | 13 |
| SPLFS16 | 19 | 11 | 13 |

Table B-32 ④ Radial Runout of Outer Surface of Spline Nut Relative to Spline Support Area (Max.) unit: μm

| spline shaft total length (mm) | | part number | | |
|--------------------------------|---------|-------------|---------|-------------|
| greater than | or less | SPLFS6, 8 | SPLFS10 | SPLFS13, 16 |
| — | 200 | 46 | 36 | 34 |
| 200 | 315 | 89 | 54 | 45 |
| 315 | 400 | 126* | 68 | 53 |
| 400 | 500 | 163* | 82 | 62 |
| 500 | 630 | — | 102 | 75 |
| 630 | 800 | — | — | 92 |
| 800 | 1,000 | — | — | 115 |
| 1,000 | 1,250 | — | — | 153 |
| 1,250 | 1,500 | — | — | 195 |

* SPLFS6 maximum shaft length: 400 mm

PRELOAD AND CLEARANCE


Preload and clearance are expressed in terms of clearance in the rotational direction. For the SPLFS type, only the standard preload is available as shown in Table B-33. Please contact NB if a special preload is required.

Table B-33 Preload and Clearance in Rotational Direction unit: μm

| part number | standard |
|-------------|----------|
| SPLFS 6 | -4~0 |
| SPLFS 8 | -4~0 |
| SPLFS10 | -4~0 |
| SPLFS13 | -4~0 |
| SPLFS16 | -4~0 |

COMPARISON OF DYNAMIC FRICTIONAL RESISTANCE

Figure B-40 Comparison of Dynamic Friction

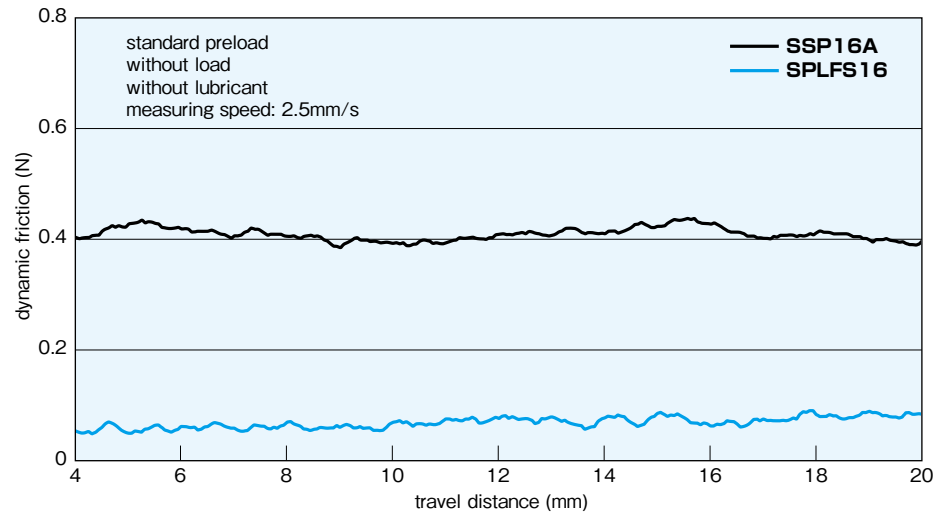

USE AND HANDLING PRECAUTIONS

Dust Prevention

Since the stroke ball spline is designed and manufactured for operation with an extremely low dynamic frictional resistance, seals that increase frictional resistance are not equipped as a standard feature. Please contact NB for a special requirement of seals. For use under harsh conditions, the stroke ball spline should be protected using bellows and protective covers.

Maximum Stroke

The maximum stroke in the dimension table is the stroke limit.


Retainer Slippage

If the stroke ball spline is used at a high speed or with a vertical shaft, or under an asymmetric load or oscillation, a retainer slippage may occur. For general operation, it is recommended to consider 80% of the maximum stroke length shown in the dimension table as the stroke length.

To prevent the retainer slippage, it is recommended to conduct a full-stroke movement of the nut whenever necessary in order for the retainer to be relocated to the center.

SPLFS TYPE

— Two Side Cut Flange Type —

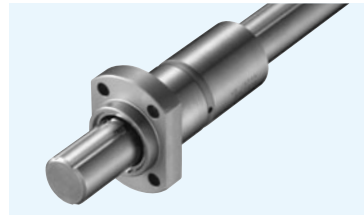

part number structure

example **SPLFS 16-2-200/CU**


SPLFS type

nominal diameter


number of nuts attached to one shaft

spline shaft total length

with special specification



When two spline nuts are used in close contact.

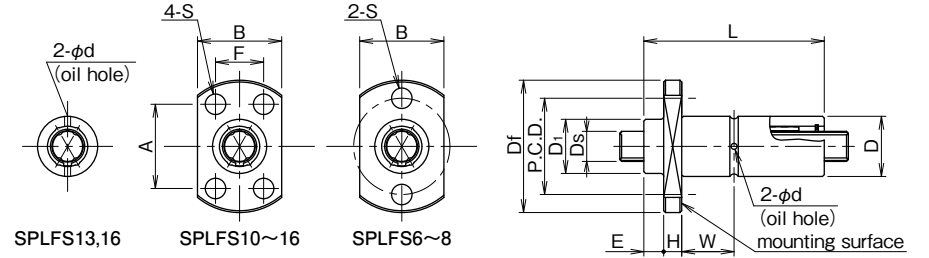

| part number | maximum stroke | | D tolerance μm | D ₁ | | L tolerance mm | major dimensions | | | | | | |
|-----------------|----------------|----|----------------------|----------------|----|----------------------|------------------|----------------|---|----|--------|----|----|
| | mm | mm | | mm | mm | | E | D _f | H | B | P.C.D. | A | F |
| SPLFS 6 | 22 | 11 | 0 | 10 | 40 | 0 | 3.3 | 23 | 4 | 14 | 17 | — | — |
| SPLFS 8 | 20 | 13 | | 12.5 | 40 | | 3.3 | 25.5 | 4 | 16 | 19.5 | — | — |
| SPLFS 10 | 28 | 16 | -8 | 15.5 | 50 | -0.2 | 3.3 | 28.5 | 5 | 20 | — | 18 | 13 |
| SPLFS 13 | 24 | 20 | | 19.5 | 50 | | 4.8 | 36 | 5 | 25 | — | 22 | 17 |
| SPLFS 16 | 26 | 24 | -9 | 23.5 | 60 | — | 4.8 | 40 | 7 | 29 | — | 25 | 19 |

| S | W | d | D _s | tolerance μm | basic torque rating | | basic load rating | | allowable static moment | | mass | | size |
|-----|------|-----|----------------|-----------------|---------------------------|---------------------------|-------------------|--------------|-------------------------|-----------------|----------|---------------|-----------|
| | | | | | dynamic C _T | static Co _T | dynamic C | static Co | M _{O1} | M _{O2} | nut g | shaft kg/m | |
| 3.4 | 12.7 | 1.2 | 6 | 0/-12 | 2.3 | 3.8 | 1.8 | 3.0 | 11.2 | 45 | 21.5 | 0.21 | 6 |
| 3.4 | 12.7 | 1.2 | 8 | 0 | 3.3 | 5.5 | 2.02 | 3.37 | 13.1 | 52 | 27.0 | 0.38 | 8 |
| 3.4 | 16.7 | 1.5 | 10 | -15 | 6.5 | 10.9 | 3.21 | 5.35 | 25.6 | 102 | 47.7 | 0.6 | 10 |
| 3.4 | 15.2 | 1.5 | 13 | 0 | 27.6 | 50.7 | 4.15 | 7.6 | 38.8 | 155 | 75.3 | 1.0 | 13 |
| 4.5 | 18.2 | 2.0 | 16 | -18 | 62.8 | 115 | 7.66 | 14 | 88.3 | 353 | 123.5 | 1.5 | 16 |

1kN≐102kgf 1N·m≐0.102kgf·m

BALL SCREW SPLINE

STRUCTURE AND ADVANTAGES

The NB Ball Screw Spline consists of a highly accurate and highly rigid Ball Screw nut and Ball Spline nut attached to the ball screw spline shaft which has a screw groove and spline grooves.

SPBR type has a Rotary Ball Screw nut and Rotary Ball Spline nut.

Rotary Ball Screw nut is an integration of ball screw nut and angular contact bearings.


Rotary Ball Spline nut is an integration of ball spline nut and angular contact bearings.

SPBF type has a Rotary Ball Screw nut and a Ball Spline nut.

A single axis of the NB Ball Screw Spline can provide positioning, linear and rotary motion as well as combined spiral motion.

The typical applications are SCARA robot, assembly machine, loader, etc.

Figure B-41 Structure of SPBR type, SPBF type

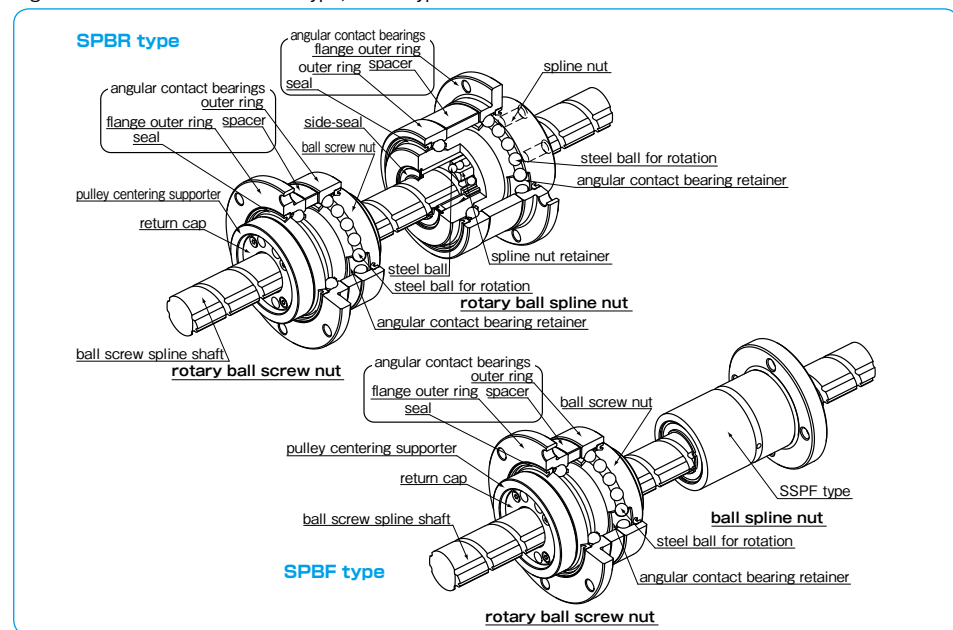

PRELOAD

The preload is properly adjusted for the ball screw nut, spline nut, and angular contact bearings. Please contact NB for preload specification.

USE AND HANDLING PRECAUTIONS

- Please do not adjust the spacer. The spacer is adjusted to provide a proper spacing for the best preload condition.
- Please do not remove the Rotary Ball Screw nut from the shaft. There is no ball-retainer in the Rotary Ball Screw nut.
- Please use the pulley centering supporter when attaching the pulley to the return-cap.

ACCURACY

The NB Ball Screw Spline is measured for accuracy at the points shown in Figure B-42.

Figure B-42 Accuracy Measurement Points

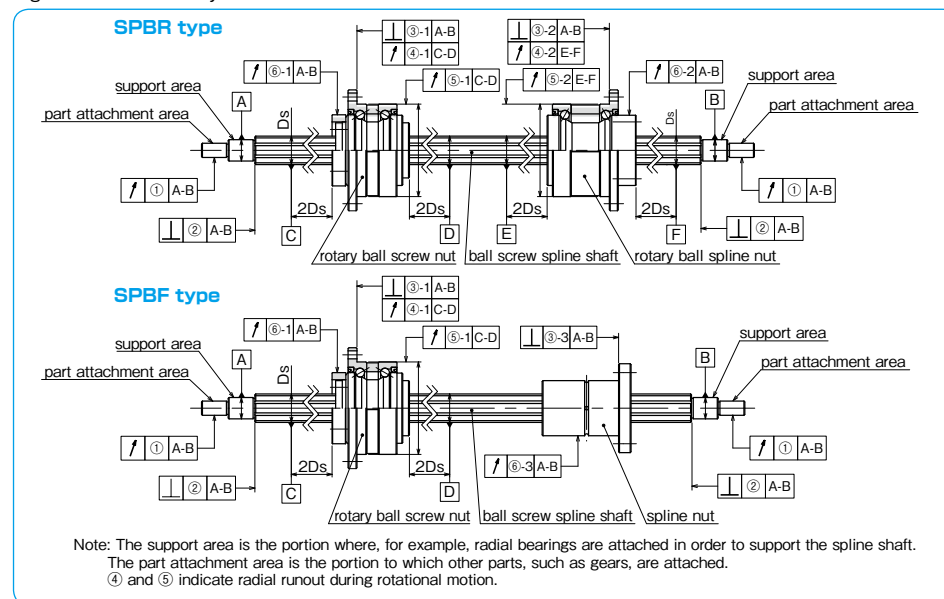


Table B-34 Tolerance of Spline Shaft Groove Torsion (Max.)

| tolerance |
|------------|
| 13μm/100mm |

The groove torsion is indicated per 100mm, arbitrarily set within the effective length of the spline shaft section.

Table B-35 Grade of Ball Screw Groove

| tolerance |
|-----------|
| C5 |

Applied to lead angle accuracy only

Table B-36 Tolerance Relative to Spline Support Area (Max.)

unit: μm

| part number | ① radial runout of part attachment area | ② perpendicularity of the end of the spline shaft section (when grinding is requested on the drawing) | ③ perpendicularity of the flange | | |
|---------------|---|---|----------------------------------|-----|-----|
| | | | ③-1 | ③-2 | ③-3 |
| SPBR16,SPBF16 | 19 | 11 | 16 | 18 | 13 |
| SPBR20,SPBF20 | | | | | |
| SPBR25,SPBF25 | | | | | |

Table B-37 Radial Runout of Outer Surface of Rotary Spline Nut Relative to Spline Shaft Area (Max.) unit: μm

| part number | ④ lateral runout of flange mounting side | | ⑤ radial runout of outer ring | |
|-------------|--|-----|-------------------------------|-----|
| | ④-1 | ④-2 | ⑤-1 | ⑤-2 |
| SPBR16 | 8 | 8 | 9 | 9 |
| SPBR20 | | | 10 | 10 |
| SPBR25 | | | | |


Table B-38 Radial Runout of Spline Nut Relative to Spline Support Area (Max.) unit: μm

| ball screw spline shaft total length (mm) | part number: SPBR, SPBF | | | | |
|---|-------------------------|-----|--------|----|-------|
| | ⑥-1 | | ⑥-2,-3 | | |
| greater than | or less | 16 | 20,25 | 16 | 20,25 |
| — | 200 | 40 | 35 | 18 | 18 |
| 200 | 315 | 45 | 40 | 25 | 21 |
| 315 | 400 | 55 | 45 | 31 | 25 |
| 400 | 500 | 60 | 50 | 38 | 29 |
| 500 | 630 | 75 | 60 | 46 | 34 |
| 630 | 800 | 90 | 70 | 58 | 42 |
| 800 | 1,000 | 120 | 85 | 75 | 52 |

SPBR TYPE MOTION PATTERN

One set of SPBR type can handle linear, rotational, and spiral motion.

SPBR type Motion Pattern

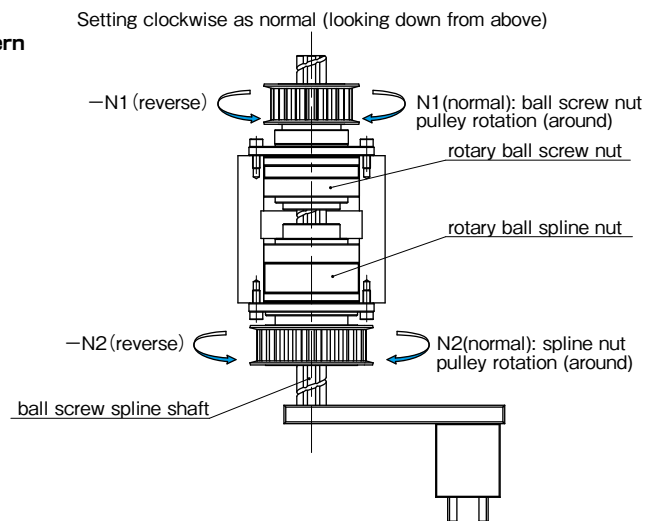


| motion | input | | motion direction | output | | |
|------------------------------|---|------------------------------|--|---|--|----------------------------|
| | ball screw nut | spline nut | | travel distance (linear direction) | revolution (rotational direction) | |
| | N ₁ (normal) | 0 | ① | L=N ₁ ·R (up) | 0 | |
| | -N ₁ (reverse) | 0 | ② | L=-N ₁ ·R (down) | 0 | |
| | N ₁ =N ₂ (normal) (normal) | | ① | 0 | N ₂ (normal) | |
| | -N ₁ =-N ₂ (reverse) (reverse) | | ② | 0 | -N ₂ (reverse) | |
| | 0 | N ₂ (normal) | ① | L=N ₂ ·R (down) | N ₂ (normal) | |
| | 0 | -N ₂ (reverse) | ② | L=-N ₂ ·R (up) | -N ₂ (reverse) | |
| | N ₁ (normal) | N ₂ (normal) | ① | L=(N ₂ - (±N ₁))·R | in case of N ₂ - (±N ₁)>0 (down) | N ₂ (normal) |
| | | | ④ | | in case of N ₂ - (±N ₁)<0 (up) | |
| -N ₁ (reverse) | -N ₂ (reverse) | ③ | L=(-N ₂ - (±N ₁))·R | in case of -N ₂ - (±N ₁)>0 (down) | -N ₂ (reverse) | |
| | | ② | | in case of -N ₂ - (±N ₁)<0 (up) | | |

L : travel distance [mm] R : ball screw lead [mm] N₁ : ball screw nut pulley rotation (around) N₂ : ball spline nut pulley rotation (around)

SPBF TYPE MOTION PATTERN

SPBF type can handle linear motion.


SPBF type Motion Pattern

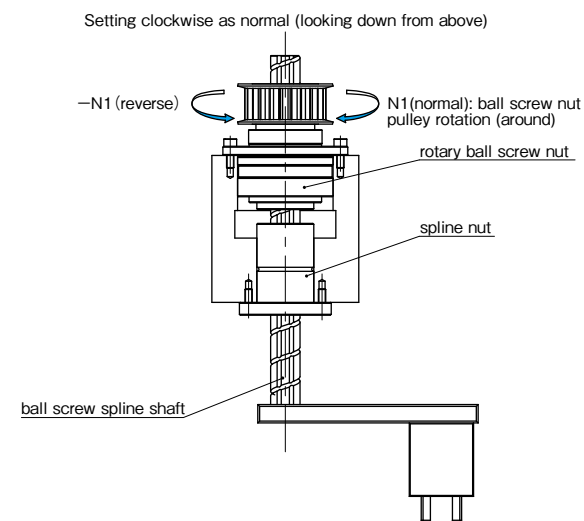

| motion | input | | motion direction | output | |
|--------|------------------------------|------------|------------------|------------------------------------|-----------------------------------|
| | ball screw nut | spline nut | | travel distance (linear direction) | revolution (rotational direction) |
| | N ₁ (normal) | 0 | ① | L=N ₁ ·R (up) | 0 |
| | -N ₁ (reverse) | 0 | ② | L=-N ₁ ·R (down) | 0 |

L : travel distance [mm] R : ball screw lead [mm] N₁ : ball screw nut pulley rotation (around)

SPBR TYPE

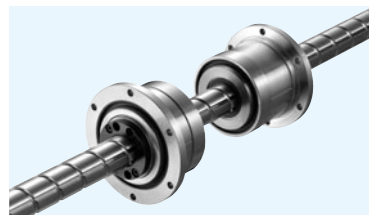

part number structure

example **SPBR 16 - 300 / CU**

SPBR type

with special specification

nominal diameter

ball screw spline shaft total length

Note: retainer material is resin.

ROTARY BALL SCREW NUT

| part number | major dimensions | | | | | | | | | | major dimensions of angular contact bearings | | | | | | |
|---------------|------------------|-------|----------------|--------------|----------------|----------------|-----|----------------|----------------|----------------|--|----------------|----------------|----------------|----------------|----------------|----------------|
| | D ₁ | h7 | D ₂ | H7 | L ₁ | P ₁ | θ | S ₁ | f ₁ | T _e | D ₃ | D ₄ | H ₁ | B ₁ | B ₂ | P ₂ | d ₁ |
| | mm | μm | mm | tolerance μm | mm | P.C.D. mm | ° | mm | mm | mm | mm | mm | mm | mm | mm | P.C.D. mm | mm |
| SPBR16 | 40 | 0 | 32 | | 43.5 | 25 | 40° | M4 | 12 | 2 | 52 | 68 | 5 | 27.5 | 9 | 60 | 4.5 |
| SPBR20 | 50 | -25 | 39 | +25 0 | 54 | 31 | 40° | M5 | 16 | 2 | 62 | 78 | 6 | 34 | 11 | 70 | 4.5 |
| SPBR25 | 58 | 0/-30 | 47 | | 65 | 38 | 40° | M6 | 19 | 3 | 72 | 92 | 8 | 43 | 12.5 | 81 | 5.5 |


ROTARY BALL SPLINE NUT

| part number | major dimensions | | | | | | major dimensions of angular contact bearings | | | | | | |
|---------------|------------------|--------------|----------------|----------------|----------------|----------------|--|----------------|----------------|----------------|----------------|----------------|----------------|
| | D ₅ | h7 | L ₂ | P ₃ | S ₂ | f ₂ | D ₆ | D ₇ | H ₂ | B ₃ | B ₄ | P ₄ | d ₂ |
| | mm | tolerance μm | mm | P.C.D. mm | mm | mm | mm | mm | mm | mm | mm | P.C.D. mm | mm |
| SPBR16 | 39.5 | 0 | 50 | 32 | M5 | 8 | 52 | 68 | 5 | 37 | 10 | 60 | 4.5 |
| SPBR20 | 43.5 | -25 | 63 | 36 | M5 | 8 | 56 | 72 | 6 | 48 | 12 | 64 | 4.5 |
| SPBR25 | 53 | 0/-30 | 71 | 45 | M6 | 8 | 62 | 78 | 6 | 55 | 13 | 70 | 4.5 |

*Please select the smallest maximum revolutions (rpm) in case that more than one portion rotate at the same time.

※Maximum revolutions for grease lubrication.

*Moment of inertia is calculated excluding the angular contact bearings.

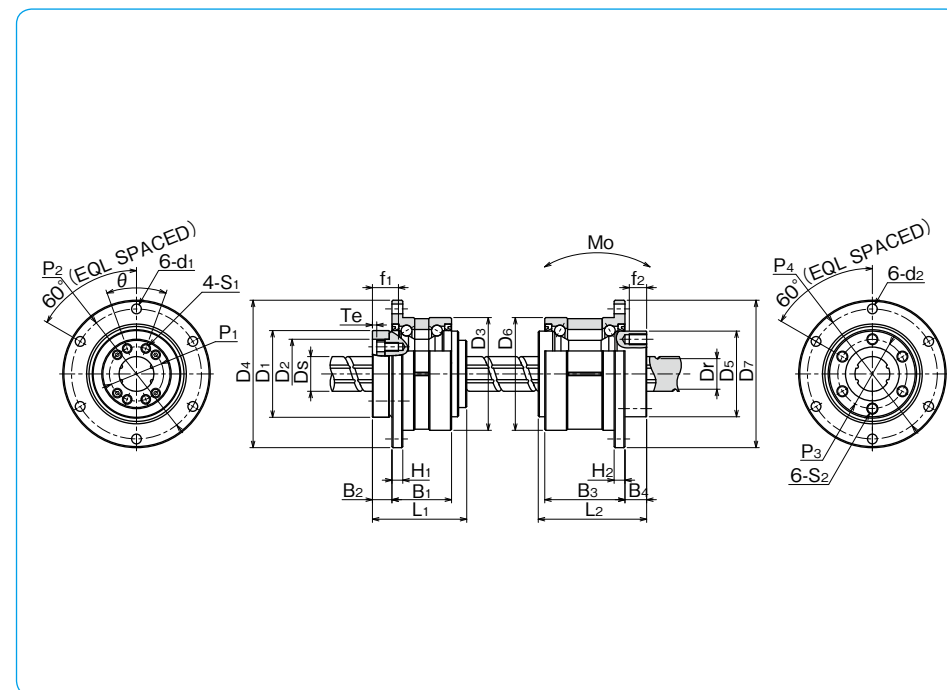


BALL SPLINE


| ball screw spline shaft D _s | lead | root diameter D _r | ball screw basic load rating | | angular contact bearings basic load rating | | moment of inertia for the nut | moment of inertia for the ball screw shaft | mass | | ball screw nut maximum revolutions based on D _m -N rpm | size | |
|--|------|------------------------------|------------------------------|---------------|--|----------------------------|-------------------------------|--|-------------------------|--------|---|-------|------------|
| | | | dynamic Ca kN | static Coa kN | dynamic Ca _R kN | static Coa _R kN | | | maximum revolutions rpm | nut kg | | | shaft kg/m |
| 16 | 16 | 13.4 | 4.62 | 8.59 | 11.1 | 22.2 | 4,000 | 0.60 | 4.43×10 ⁻⁴ | 0.45 | 1.47 | 4,179 | 16 |
| 20 | 20 | 17.2 | 5.77 | 12.2 | 14.4 | 30.5 | 3,200 | 1.75 | 1.12×10 ⁻³ | 0.76 | 2.33 | 3,414 | 20 |
| 25 | 25 | 21.9 | 8.62 | 19.2 | 18.2 | 39.8 | 2,800 | 3.86 | 2.74×10 ⁻³ | 1.26 | 3.65 | 2,692 | 25 |

| ball spline | | | | angular contact bearings | | | allowable static moment Mo | moment of inertia | mass nut |
|--|----------------------------|--------------------------------|--------------|----------------------------|---------------------------|-------------------------|----------------------------|-------------------|----------|
| basic torque rating dynamic C _T N·m | static Co _T N·m | basic load rating dynamic C kN | static Co kN | dynamic Ca _R kN | static Co _R kN | maximum revolutions rpm | | | |
| 60 | 110 | 6.12 | 11.2 | 13.0 | 12.8 | 4,000 | 46 | 0.63 | 0.54 |
| 105 | 194 | 8.9 | 16.3 | 17.4 | 17.2 | 3,600 | 110 | 1.10 | 0.70 |
| 189 | 346 | 12.8 | 23.4 | 22.1 | 22.5 | 3,200 | 171 | 2.14 | 0.92 |

SPBF TYPE

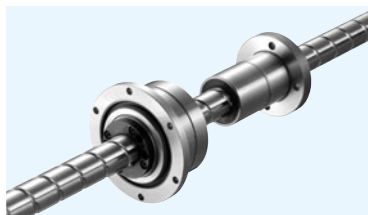

part number structure

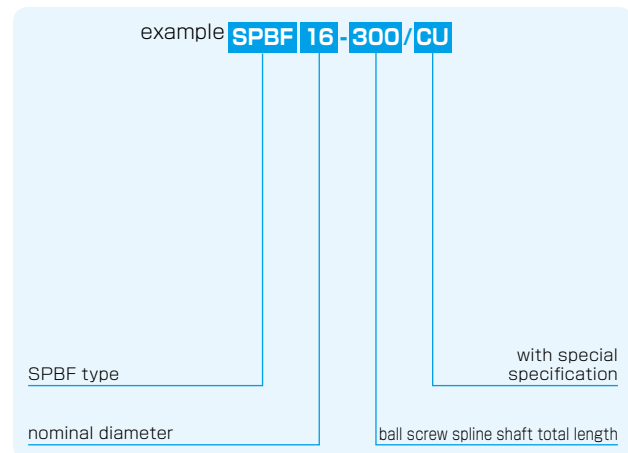

ROTARY BALL SCREW NUT

| part number | major dimensions | | | | | | | | | | major dimensions of angular contact bearings | | | | | | |
|---------------|----------------------|----------|----------------------|-----------------------|----------------------|--------------------------------|-----|----------------|----------------------|----------------------|--|----------------------|----------------------|----------------------|----------------------|--------------------------------|----------------------|
| | D ₁ mm | h7 μm | D ₂ mm | H7 tolerance μm | L ₁ mm | P ₁ P.C.D. mm | θ | S ₁ | f ₁ mm | T _e mm | D ₃ mm | D ₄ mm | H ₁ mm | B ₁ mm | B ₂ mm | P ₂ P.C.D. mm | d ₁ mm |
| SPBF16 | 40 | 0 | 32 | +25 0 | 43.5 | 25 | 40° | M4 | 12 | 2 | 52 | 68 | 5 | 27.5 | 9 | 60 | 4.5 |
| SPBF20 | 50 | -25 | 39 | 0 | 54 | 31 | 40° | M5 | 16 | 2 | 62 | 78 | 6 | 34 | 11 | 70 | 4.5 |
| SPBF25 | 58 | 0/-30 | 47 | 0 | 65 | 38 | 40° | M6 | 19 | 3 | 72 | 92 | 8 | 43 | 12.5 | 81 | 5.5 |


BALL SPLINE NUT

| part number | major dimensions | | | | | | | |
|---------------|----------------------|-----------------------|----------------------|-----------------|-----------------------|----------------|--------------------------------|---|
| | D ₉ mm | h6 tolerance μm | L ₃ mm | tolerance mm | D ₁₀ mm | H ₃ | P ₅ P.C.D. mm | d ₃ ×d ₄ ×h mm |
| SPBF16 | 31 | 0 | 50 | 0 | 50 | 7 | 40 | 4.5×8×4.4 |
| SPBF20 | 35 | -16 | 63 | -0.2 | 58 | 9 | 45 | 5.5×9.5×5.4 |
| SPBF25 | 42 | -16 | 71 | 0/-0.3 | 65 | 9 | 52 | 5.5×9.5×5.4 |

•Please select the smallest maximum revolutions (rpm) in case that more than one portion rotate at the same time.

※Maximum revolutions for grease lubrication.

•Moment of inertia is calculated excluding the angular contact bearings.

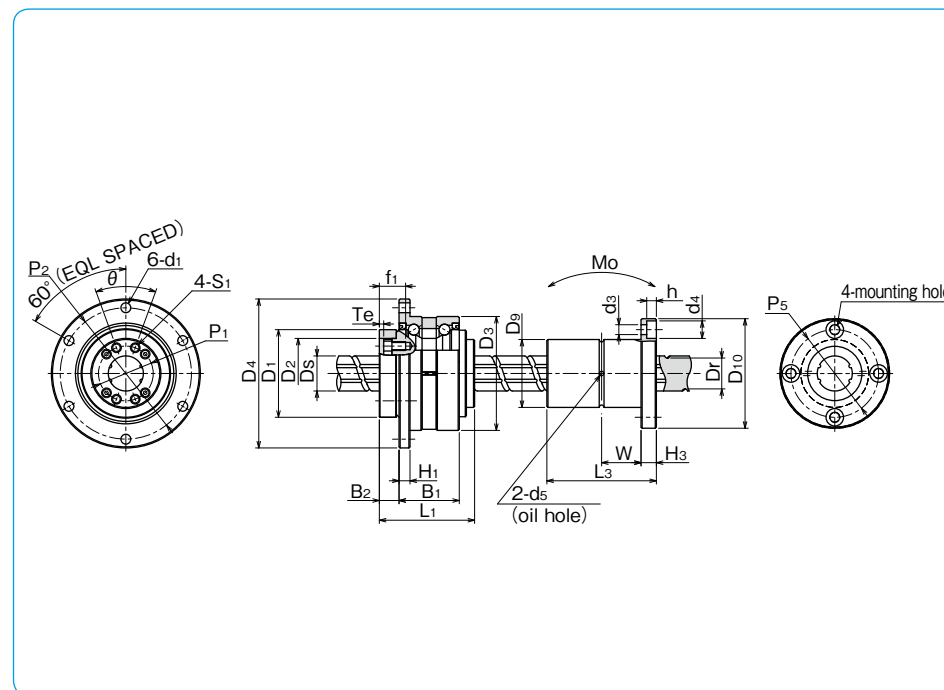

| ball screw spline shaft D _s mm | lead mm | root diameter D _r mm | ball screw basic load rating | | angular contact bearings basic load rating | | bearings * maximum revolutions rpm | moment of inertia for the nut kg·cm ² | moment of inertia for the ball screw shaft kg·cm ² /mm | mass | | ball screw nut maximum revolutions based on D _m ·N rpm | size |
|---|------------|---------------------------------------|---------------------------------|---------------------------------|---|----------------------------------|--|---|---|-----------|---------------|---|------|
| | | | dynamic C _a kN | static C _{oa} kN | dynamic C _{aR} kN | static C _{oaR} kN | | | | nut kg | shaft kg/m | | |
| 16 | 16 | 13.4 | 4.62 | 8.59 | 11.1 | 22.2 | 4,000 | 0.60 | 4.43×10 ⁻⁴ | 0.45 | 1.47 | 4,179 | 16 |
| 20 | 20 | 17.2 | 5.77 | 12.2 | 14.4 | 30.5 | 3,200 | 1.75 | 1.12×10 ⁻³ | 0.76 | 2.33 | 3,414 | 20 |
| 25 | 25 | 21.9 | 8.62 | 19.2 | 18.2 | 39.8 | 2,800 | 3.86 | 2.74×10 ⁻³ | 1.26 | 3.65 | 2,692 | 25 |

| W mm | d ₅ mm | basic torque rating | | basic load rating | | allowable static moment M _o N·m | moment of inertia kg·cm ² | mass nut kg |
|---------|----------------------|----------------------------------|----------------------------------|--------------------|--------------------------------|---|--|-------------------|
| | | dynamic C _T N·m | static C _{oT} N·m | dynamic C kN | static C _o kN | | | |
| 18 | 2 | 60 | 110 | 6.12 | 11.2 | 46 | 0.52 | 0.2 |
| 22.5 | 2 | 105 | 194 | 8.9 | 16.3 | 110 | 1.11 | 0.33 |
| 26.5 | 3 | 189 | 346 | 12.8 | 23.4 | 171 | 2.01 | 0.45 |

SLIDE BUSH

SLIDE BUSH

| | |
|--------------------------------------|-------|
| STRUCTURE AND ADVANTAGES | C-2 |
| TYPES | C-3 |
| BLOCK SERIES | C-6 |
| SPECIFICATIONS | C-7 |
| LIFE CALCULATION | C-7 |
| LOAD RATING FOR OPEN TYPE SLIDE BUSH | C-8 |
| MOUNTING | C-8 |
| LUBRICATION | C-10 |
| DUST PREVENTION | C-10 |
| COUNTERMEASURE FOR DUST PREVENTION | C-11 |
| FIT SERIES | C-11 |
| SURFACE TREATMENT ANTIRUST EFFECT | C-12 |
| SPECIAL SPECIFICATIONS | C-12 |
| ACCURACY OF CE·CD TYPE | C-12 |
| USE AND HANDLING PRECAUTIONS | C-13 |
| NOTES ON USAGE OF BLOCK SERIES | C-13 |
| DIMENSION TABLE | C-14~ |

SLIDE BUSH

The NB slide bush is a linear motion mechanism utilizing the rotational motion of ball elements. Since linear motion is obtained using a simple mechanism, the slide bush can be used in a wide variety of applications, including transportation equipment, food processing equipment, and semiconductor manufacturing equipment.

STRUCTURE AND ADVANTAGES

The outer cylinder of slide bush contains a ball retainer that is perfectly designed to control the circulation of ball elements, resulting in smooth linear motion.

Compact Mechanism

The NB slide bush uses a round shaft for the guiding axis, resulting in space-saving, which allows for compact designs.

A Wide Variety of Shapes and Installation Methods

The NB slide bush is available in various types, standard, clearance-adjustable, open, flange, etc., for a various applications.

Selection According to Environment

NB slide bushes are available in standard and anti-corrosion types. Available options include steel-retainer suitable for use in harsh environments and resin retainer for low acoustic, low-cost requirement. Other options can be specified according to the application requirements.

Compatibility

The NB slide bush is fully compatible with a variety of shaft types.

Doublelip-Seal

Doublelip-seals reduce the grease leakage, keeping the same function as UU seals which prevent the foreign particles from entering the bush. (see page C-10)

Low Friction

The raceway surface is precision ground. Since the contact surface between the ball elements and the raceway surface is minimized, the NB slide bush provides low friction compared to other linear motion mechanisms.

GM Series

The GM slide bush makes efficient use of resin sub-parts making it possible to achieve an overall weight reduction of 30~50% compared with the SM slide bush. The ball return section is made of resin material, which serves for low noise operation. Also, cost-effectiveness expands the use of slide bush in many applications.


Block Type Series

Block type series is a unit of NB slide bush and a block type housing. A variety of block types are available such as precision-machined blocks, resin-made blocks, and cost-effective units, each contributes to higher accuracy, light-weight, and low-cost and design-time saving, respectively.

FIT Series

FIT series is a combination of NB slide bush and precision-machined shaft. The best-fit between slide bush and shaft achieves a smooth, high-accuracy performance meeting the customer requirements. (see page F-33)

Figure C-2 Basic Structure of NB Slide Bush (GM)

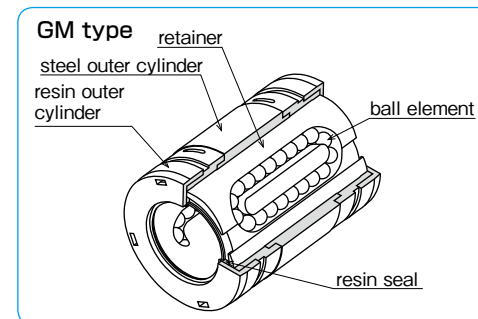

TYPES

Table C-1 Type (1)

| type | | standard | anti-corrosion | page |
|--------------------------------|--|---------------|----------------|-------|
| standard type | | SM | SMS | C- 14 |
| | | KB | KBS | C- 78 |
| | | SW | SWS | C- 98 |
| clearance-adjustable (AJ) type | | SM-AJ | SMS-AJ | C- 16 |
| | | KB-AJ | KBS-AJ | C- 80 |
| | | SW-AJ | SWS-AJ | C-100 |
| open (OP) type | | SM-OP | SMS-OP | C- 18 |
| | | KB-OP | KBS-OP | C- 82 |
| | | SW-OP | SWS-OP | C-102 |
| long type | | SM-G-L | — | C- 20 |
| double-wide type | | SM-W | SMS-W | C- 22 |
| | | KB-W | KBS-W | C- 84 |
| | | SW-W | SWS-W | C-104 |

Figure C-1 Basic Structure of NB Slide Bush (SM, KB, SW)

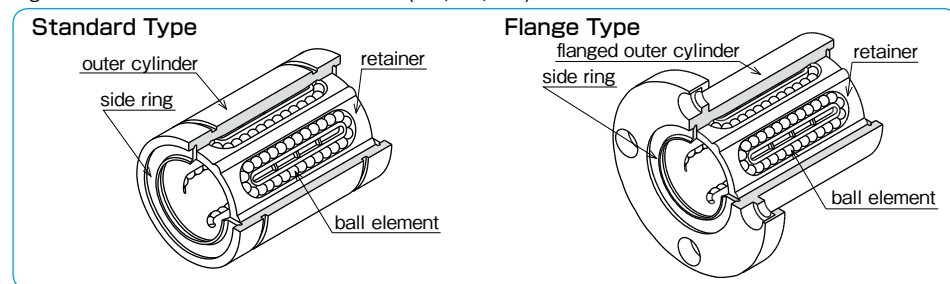


Table C-2 Type (2)








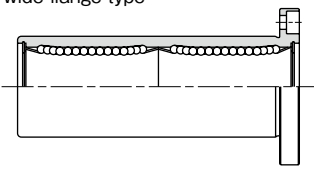


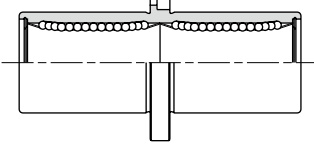

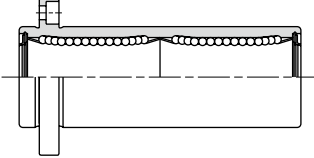

| type | | standard | anti-corrosion | page |
|--|---|----------------|-----------------|-------|
| flange type  |  | SMF | SMSF | C- 24 |
| | | KBF | KBSF | C- 86 |
| | | SWF | SWSF | C-106 |
| | | SMK | SMSK | C- 26 |
| | | KBK | KBSK | C- 88 |
| | | SWK | SWSK | C-108 |
| |  | SMT | SMST | C- 28 |
| flange type with pilot end  |  | SMF-E | SMSF-E | C- 30 |
| | | SMK-E | SMSK-E | C- 32 |
| | | SMT-E | SMST-E | C- 34 |
| long flange type  |  | SMK-G-L | — | C- 36 |
| double wide flange type  |  | SMF-W | SMSF-W | C- 38 |
| | | KBF-W | KBSF-W | C- 90 |
| | | SWF-W | SWSF-W | C-110 |
| | | SMK-W | SMSK-W | C- 40 |
| | | KBK-W | KBSK-W | C- 92 |
| | | SWK-W | SWSK-W | C-112 |
| |  | SMT-W | SMST-W | C- 42 |
| center mount flange type  |  | SMFC | SMSFC | C- 44 |
| | | KBFC | KBSFC | C- 94 |
| | | SMKC | SMSKC | C- 46 |
| | | KBKC | KBSKC | C- 96 |
| | | SMTC | SMSTC | C- 48 |
| double-wide pilot end flange type  |  | SMF-W-E | SMSF-W-E | C- 50 |
| | | SMK-W-E | SMSK-W-E | C- 52 |
| | | SMT-W-E | SMST-W-E | C- 54 |

Table C-3 Type (3)

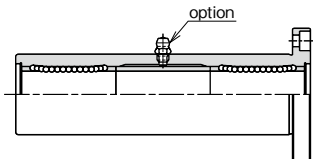

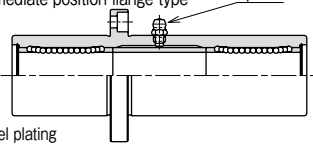

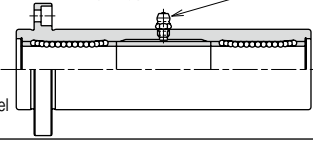









| type | | standard | page |
|--|---|----------------|-------|
| triple wide flange type  |  | TRF | C- 56 |
| | | TRK | C- 58 |
| | | TRT | C- 60 |
| ※ Outer cylinder is treated with electroless nickel plating | | | |
| triple-wide intermediate position flange type  |  | TRFC | C- 62 |
| | | TRKC | C- 64 |
| ※ Outer cylinder is treated with electroless nickel plating | | | |
| triple-wide pilot end flange type  |  | TRF-E | C- 66 |
| | | TRK-E | C- 68 |
| ※ Outer cylinder is treated with electroless nickel plating | | | |
| flange type with pilot end  |  | TQF-E | C- 70 |
| | | TQK-E | C- 72 |
| Grease fitting is standard | | | |
| double flange type with pilot end  |  | TQF-W-E | C- 74 |
| | | TQK-W-E | C- 76 |
| Grease fitting is standard | | | |

Table C-4 Type (4) GM Series

| type | | standard | page |
|--|---|-------------|-------|
| GM single type  |  | GM | C-114 |
| GM double-wide type  |  | GM-W | C-115 |

BLOCK SERIES

SMA·AK·SWA Type

This type is the most commonly used standard type. The housing is made of aluminum alloy. The wide (W) type is also available for SMA and AK types.

SMJ · SWJ Type

Clearance-adjustment is achieved by creating a slit on the SMA/SWA type housing. Less clearance between block and shaft results in higher positioning accuracy by tightening the adjustment screw.

SMP Type

The housing has a self-aligning feature. This feature will absorb inaccuracy of the installation base so that a smooth movement is expected.


SME·SMD·SWD Type

Open type housing allows a support from below so that a deflection of the shaft is minimized for high loading or long-stroke applications. The wide(W) type is also available for SME type.


CE·CD Type

This type is a unit of block(s), shaft, and support rail that contributes to a total cost reduction. The maximum length is 2,000mm for the support rail and for the shaft the maximum length is 4,500mm.

Metric Series

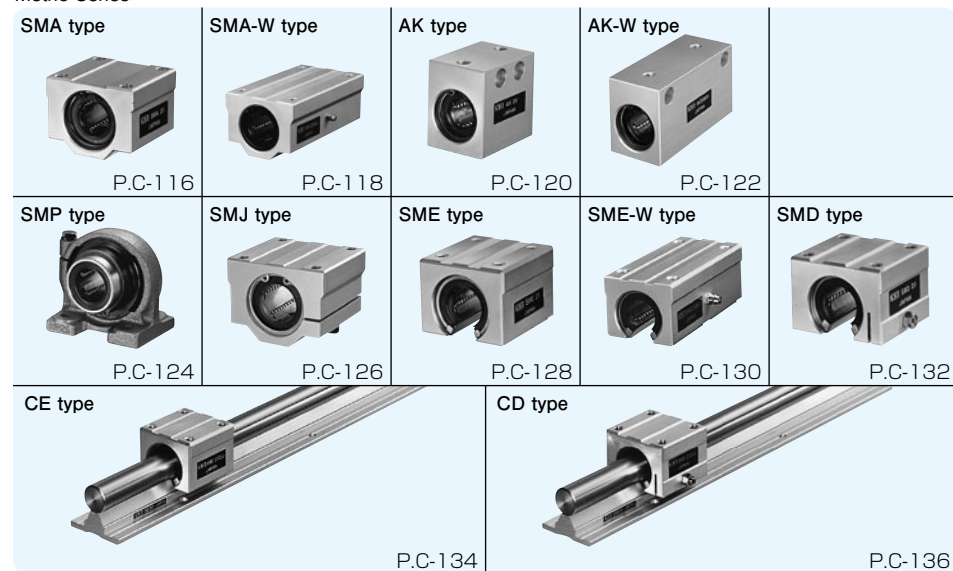

Inch Series

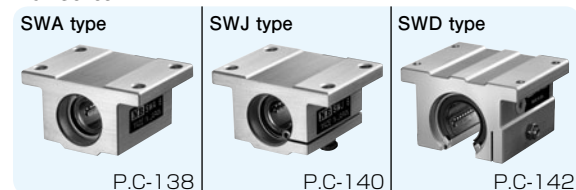

SPECIFICATIONS

Series

The NB slide bush is available in three primary dimensional series, each with different dimensions and tolerances depending on the location of use. Please select the series that is most appropriate for your location.

Allowable Load

NB slide bushes are categorized into three functional types depending on the number and location of retainers: single, double, and triple. Table C-6 shows load ratings and static moment in comparison. The single type uses only one retainer, so when a moment load is to be applied, the double or triple type is recommended.

Material

The outer cylinder of standard type is made of bearing steel and the outer cylinder of anti-corrosion type is made of Martensitic stainless steel. The retainer is available in steel (stainless steel for anti-corrosion), and resin for low acoustic operation. The steel retainer is made of one plate (seamless type).

Table C-5 Series and Use Location

| series | location | | | |
|--------|----------|------|--------|---------------|
| | Japan | Asia | Europe | North America |
| metric | SM | ◎ | ◎ | ○ |
| | GM | | | |
| | KB | ○ | ○ | ◎ |
| inch | SW | ○ | ○ | ◎ |

◎ generally used ○ rarely used

Table C-6 Load Comparison

| type | basic dynamic load rating | basic static load rating | allowable static moment |
|-----------|---------------------------|--------------------------|-------------------------|
| single | 1 | 1 | 1 |
| long | 1.3 | 1.8 | approx. 4 |
| GM-W | 1.6 | 2 | approx. 4 |
| SM double | 1.6 | 2 | approx. 6 |
| triple | 1.6 | 2 | approx.21 |

※ The single type is designated as "1" for comparison purposes.

Table C-7 Operating Environment Temperature

| material | | temperature range |
|----------------|----------|-------------------|
| outer cylinder | retainer | |
| steel | steel | -20°C~110°C |
| | resin | -20°C~ 80°C |
| stainless | steel | -20°C~140°C* |
| | resin | -20°C~ 80°C |

* If a seal is used in the stainless steel slide bush, the temperature is up to 120°C. Please contact NB if a temperature range exceeds 140°C.

LIFE CALCULATION

Since ball elements are used as the rolling element in the NB slide bush, the following equation is used to calculate the travel life.

$$L = \left(\frac{f_H \cdot f_T \cdot f_C \cdot C}{f_W \cdot P} \right)^3 \cdot 50$$

L: rated life (km) f_H: hardness coefficient
 f_T: temperature coefficient f_C: contact coefficient
 f_W: applied load coefficient C: basic dynamic load rating (N)
 P: applied load (N)
 *Refer to page Eng-5 for the coefficients.

If the stroke distance and number of strokes per unit time are constant, the life time is calculated using the following equation.

$$L_h = \frac{L \cdot 10^3}{2 \cdot \ell_s \cdot n_1 \cdot 60}$$

L_h: life time (hr) ℓ_s: stroke length (m)
 L: rated life (km) n₁: number of cycles per minute (cpm)

LOAD RATING FOR OPEN TYPE SLIDE BUSH

For the open type slide bush an opening is provided to allow the shaft to be supported from underneath. In case a load is constantly applied in the direction of the opening (for example, being used with a vertical shaft or an overhang loading is applied), the load rating decreases due to less number of loaded rows of ball elements (Table C-8). Therefore, the load rating must be calibrated at the time of design based on the direction of the loading.

Table C-8 Direction of Load and Basic Static Load Rating

| part number | SM10G~16G-OP KB10G~16G-OP SW 8G~10G-OP SME (D) 10G~16G CE (D) 16 | SM20 (G) -OP KB20 (G) -OP SW12 (G) -OP SME (D) 20 CE (D) 20 | SM25 (G) ~100-OP KB25 (G) ~80-OP SW16 (G) ~64-OP SME (D) 20 SME25~50 SMD25~30 CE (D) 25~30 | SM120,150-OP |
|--------------------|--|---|--|--------------|
| loading from above | | | | |
| | C | C | C | C |
| loading from below | | | | |
| | 0.64C | 0.54C | 0.57C | 0.35C |

※ Excludes all 3-row steel retainer types. Please contact NB for 3-row steel retainer.

MOUNTING

Examples of Mounting methods are shown in Figures C-3~6.

Figure C-3 Standard Type

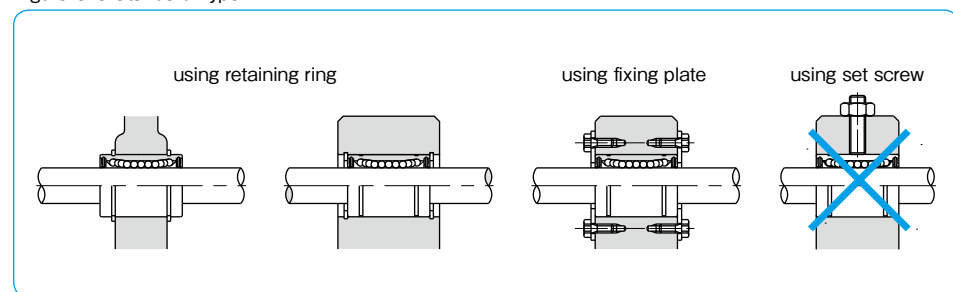


Figure C-4 Clearance Adjustable Type

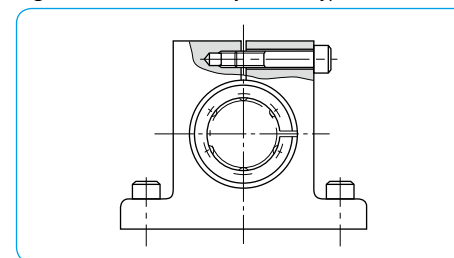


Figure C-5 Open Type


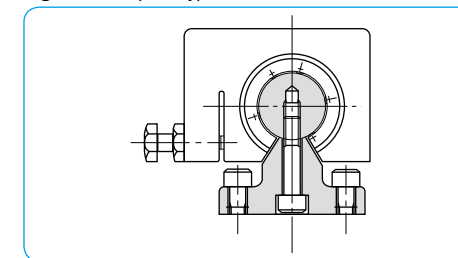


Figure C-6 Flange Type

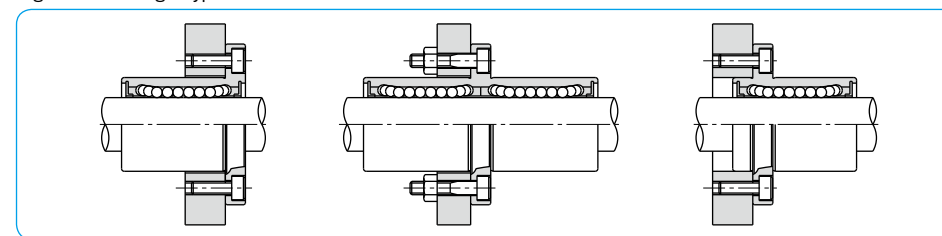

Fit

The normal clearance fit listed in Table C-9 is generally selected as a shaft outer diameter tolerance for the NB slide bush. The transition fit is selected for a higher accuracy by reducing clearance between slide bush and shaft. Matching bush and shaft (FIT series) is also available for customer's specified clearance. Please be cautious not to apply excess preloading with clearance adjustable and open types. Please keep preloading within the maximum radial clearance listed in the dimension table. The flange-type bush is generally inserted into an installation bore, which is slightly larger than the outer cylinder. However, if the outer cylinder is used as the pilot, H7 tolerance is recommended for housing.

The recommended clearances for the flange type are listed in Table C-10.

Table C-9 Recommended Fit

| series | accuracy grade | shaft diameter | | housing inner diameter | |
|--------|----------------|----------------|----------------|------------------------|----------------|
| | | clearance fit | transition fit | clearance fit | transition fit |
| SM | high | g6 | h6 | H7 | J7 |
| | precision(P) | g5 | h5 | H6 | J6 |
| SM-G-L | high | g6 | — | H7 | — |
| SM-W | high | g6 | — | H7 | — |
| KB | high | h6 | j6 | H7 | J7 |
| KB-W | high | h6 | — | H7 | — |
| SW | high | g6 | h6 | H7 | J7 |
| | precision(P) | g5 | h5 | H6 | J6 |
| SW-W | high | g6 | — | H7 | — |
| GM | high | g6 | h6 | H7 | — |
| GM-W | high | g6 | — | H7 | — |

Table C-10 Recommended Fit (Flange Type)

| series | shaft diameter | |
|---------|----------------|----------------|
| | clearance fit | transition fit |
| SMF | g6 | h6 |
| SMK-G-L | g6 | — |
| SMF-W | g6 | — |
| TRF | g6 | — |
| KBF | h6 | j6 |
| KBF-W | h6 | — |
| SWF | g6 | h6 |
| SWF-W | g6 | — |

Notes on Shaft Selection:

In order to ensure a high accuracy motion of the bush, it is essential to select a high quality shaft.

In selecting a shaft, please take note of:

Hardness: 58HRC or more (refer to hardness coefficient on page Eng-5) recommended

Surface Roughness: less than Ra0.4 recommended

LUBRICATION

It is important to lubricate the slide bush for an accurate operation and for a long life. Anti-rust oil is applied to NB slide bush prior to shipment. The NB selected anti-rust oil has a little effect on the lubricant, however, please apply lubricant after cleaning the slide bush by, for example, kerosene, etc.

Grease Lubricant

Prior to usage, please apply grease, then re-lubricate periodically according to the operating conditions. (Lithium soap-based grease is recommended.) Re-lubrication can be done by directly applying grease inside the ball bush or by using a grease fitting as Figure C-7 shows.

A special low dust generating grease is optional for clean room application, please refer to page Eng-40.

Oil Lubricant

Prior to usage, please apply oil directly to the shaft surface or by using an oil hole as Figure C-8 shows. Turbine oil (ISO standard VG32-68) is recommended.

Oil holes can be machined (see Figure C-8) in the center portion of the outer cylinder. Please contact NB for oil hole specification.

Figure C-7 Grease Fitting


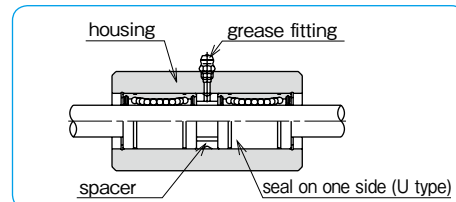


Figure C-8 Oil Hole -Specification-

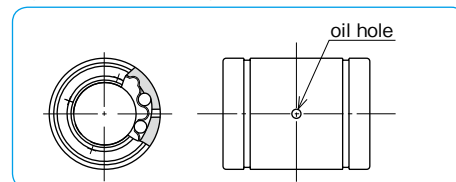

DUST PREVENTION

Seal

The seals prevent dust from entering the slide bush in order to retain the motion accuracy, resulting in a long life time. The UU type is a standard option that has seals on both sides. The U type has a seal on one side only and is available for the standard, clearance adjustable, and open types. Nitril rubber, which has low wear and good sealing characteristics, is used as the seal material.

* Resin seals are used for GM and GW series.

Doublelip-Seal

A doublelip-seal is a combination of outside lip-seal and inside lip-seal. Outside lip-seal prevents foreign particles from entering the bush and inside lip-seal prevents grease from leaking out of the bush.

By the doublelip-seal, the seal resistance shall be increased by some margin. Applicable Part Number: SM(S) 6 to 30, TRF 6 to 30.

Please refer to the dimension table for seal option.

Fluororubber Seal

For a high temperature application, fluororubber seals are available on the SM series size 3 to 30. Please contact NB for details.

Figure C-9 Seal Profile


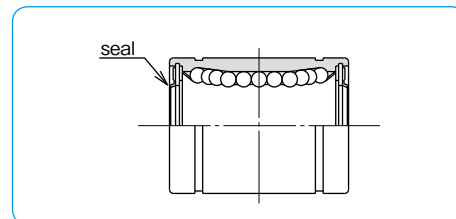



Figure C-10 Doublelip-Seal

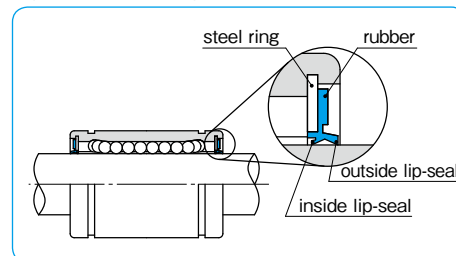

COUNTERMEASURE FOR DUST PREVENTION

A smooth ball circulation is hindered by dust or foreign particles inside the slide bush. Seals on both sides is a standard option for the NB slide bush, however, in a harsh environment it is necessary to attach bellows or protective covers.

Figure C-11 Example of Dust Prevention

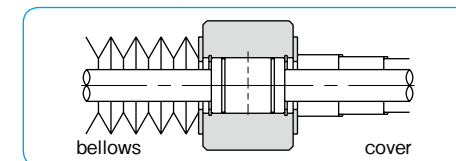

Felt Seal (Except Flange Type)

A felt seal FLM strengthens lubrication characteristics and extends re-lubrication period of the NB slide bush. The felt seal does not work as a retaining ring. Figure C-13 shows how to install the felt seal.

Figure C-12 Felt Seal

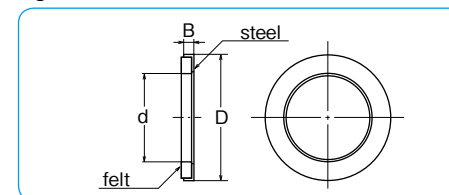


Figure C-13 Example of Felt Seal Installation

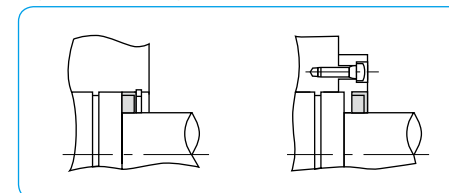


Table C-11


| part number | major dimensions(mm) | | | applicable slide bush |
|-------------|----------------------|-----|----|-----------------------|
| | d | D | B | |
| FLM 6 | 6 | 12 | 2 | SM 6 / GM 6 |
| FLM 8 | 8 | 15 | 2 | SM 8 / GM 8 |
| FLM 10 | 10 | 19 | 3 | SM 10 / GM10 |
| FLM 12 | 12 | 21 | 3 | SM 12 / GM12 |
| FLM 13 | 13 | 23 | 3 | SM 13 / GM13 |
| FLM 16 | 16 | 28 | 4 | SM 16 / GM16 |
| FLM 20 | 20 | 32 | 4 | SM 20 / GM20 |
| FLM 25 | 25 | 40 | 5 | SM 25 / GM25 |
| FLM 30 | 30 | 45 | 5 | SM 30 / GM30 |
| FLM 35 | 35 | 52 | 5 | SM 35 |
| FLM 40 | 40 | 60 | 5 | SM 40 |
| FLM 50 | 50 | 80 | 10 | SM 50 |
| FLM 60 | 60 | 90 | 10 | SM 60 |
| FLM 80 | 80 | 120 | 10 | SM 80 |
| FLM100 | 100 | 150 | 10 | SM100 |

FIT SERIES

Due to the combined tolerances of the bush's bore and the shaft's diameter, accuracy can be affected by clearance or increased dynamic friction caused by preloading.

NB's FIT Series takes advantages of the lower cost slide bush and the precision ground shaft to achieve a target clearance in order for the linear system to produce a smooth, high-accuracy performance.

part number structure



- Please refer to corresponding catalog pages for details.
- Please specify on the drawing about the shaft machining, radial clearance, match-marking, etc.

SURFACE TREATMENT AND ANTIRUST EFFECT

In order to adapt various kinds of environment, NB provides flange bushes with surface treatment as a standard.

Table C-12 Surface Treatment

| part number | surface treatment | anti-rust effect | color |
|----------------|---|------------------|--------|
| SK | electroless nickel plating | ◎ | silver |
| LF | low temperature black chrome treatment with fluoride coating | ⊙ | black |
| SB | black oxide (excluding anti-corrosion type) | △ | black |
| SC | industrial chrome plating | ○ | silver |
| standard | High-carbon chromium bearing steel (without surface treatment) | —*2 | silver |
| anti-corrosion | Martensite stainless steel (without surface treatment) | ○ | silver |

◎:excellent ⊙:highly effective ○:effective △:mildly effective

*1 : Please note that tolerance of bushes with surface treatment may be different from the tolerance in dimension table. Please contact NB for details of thickness of plating.


*2 : In order to prevent corrosion, please do not leave de-greased standard bush without surface treatment.

SPECIAL SPECIFICATIONS

●Special Specifications

Please contact NB for more information on surface treatment, oil hole (Figure C-8), flange mounting hole (Figure C-14), etc.

Figure C-14 Examples of Special Installation Hole

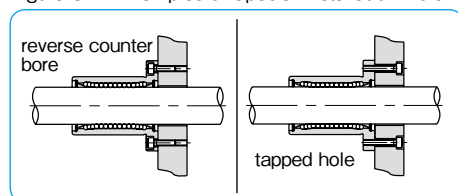

ACCURACY OF CE · CD TYPE

The accuracy of CE · CD-type support rails are measured as shown in Figure C-15.

Figure C-15 Accuracy Measurement


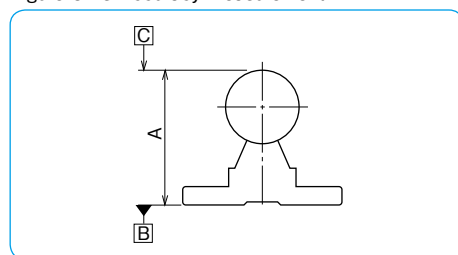


Figure C-16 Accuracy of CE · CD-type Support Rails

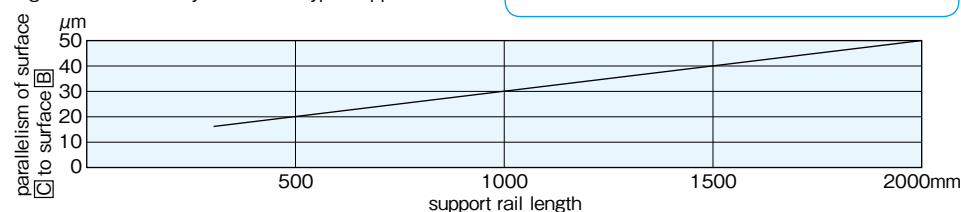

USE AND HANDLING PRECAUTIONS

The NB slide bush is a precision component, please handle with care to maintain its high motion accuracy.

The slide bush is designed for linear motion, so that for applications in which a combination of linear and rotational motion is a requirement, let us recommend Stroke Bush, Slide Rotary Bush, or Rotary Ball Spline.

Notes on Installation

When inserting a slide bush into a housing, carefully insert it by using a jig to apply a uniform pushing force at the end of the outer cylinder, as illustrated in Figure C-18. Motion performance may be diminished if an excessive force is applied to the resin portion of the outer cylinder, the side-ring, or the seal.

Ensure that all burrs are removed from the shaft and carefully install the bush by aligning it with the center of the bore. Excessive force may drop out the ball elements during insertion.

When two or more shafts are used, the parallelism of the shafts will greatly affect the motion characteristics and life of the slide bush. Please check the parallelism by moving the slide bush back and forth the length of stroke to check for freedom of movement before final fixing of the shaft.

Please refer to page F-3 for shaft specifications.

GM Standard Type

Please avoid a tension load when retaining rings are used for installation.

NOTES ON USAGE OF BLOCK SERIES

Reference Surface

The NB slide units have a reference surface as shown in Figure C-20. Accuracy is achieved by simply pushing the reference surface against the shoulder of the installation surface. (Excluding RBW and SMP types)

Clearance Adjustment

On the clearance adjustment type please avoid excessive preloading. In the same manner please do not apply excessive torque when tightening the screws.

Mounting of RBW Type

RBW type has a resin housing. Table C-13 shows proper torque values.

Recommended Fit

For clearance fit please use a shaft with g6 tolerance and for transition fit a shaft with h6 tolerance. (Excluding adjustable-clearance and open types)

Special Installation Case of SMJ Type

Special mounting holes will be required for installations such as Figure C-21 shows. Please contact NB for special requirements.

Figure C-17 Direction of Motion

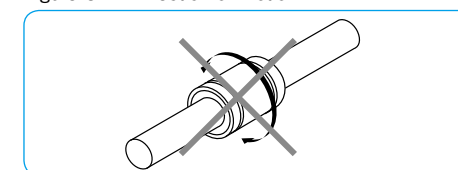


Figure C-18 Insertion of Slide Bush

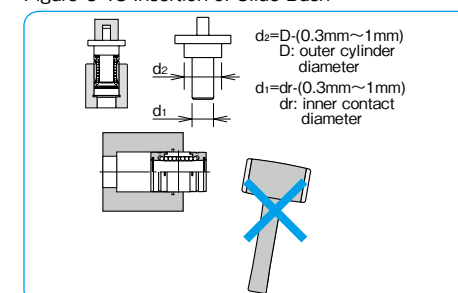


Figure C-19 Installation of GM Standard Type

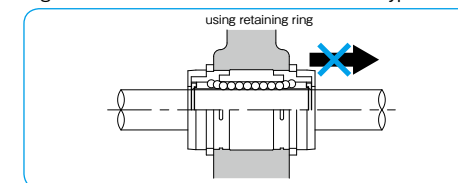


Figure C-20 Reference Surface


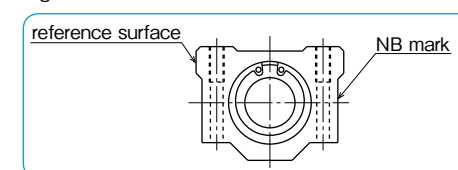


Table C-13 Recommended Torque for RBW Type

| part number | mounting screw | torque N · m |
|-------------|----------------|--------------|
| RBW8 | #6 | 1.3 |
| RBW10,12 | #8 | 1.9 |
| RBW16 | #10 | 5.2 |

Figure C-21 Special Installation of SMJ Type

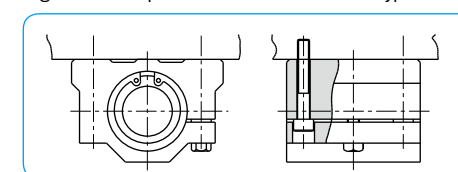

SM TYPE

– Standard Type –



part number structure

example **SMS 25 G UU -P**

specification
SM: standard
SMS: anti-corrosion


inner contact diameter (dr)

retainer material
blank: standard/steel
G: anti-corrosion/stainless steel
resin

accuracy grade
blank: high
P: precision

seal
blank: without seal
U: seal on one side
UU: seals on both sides
Z: doublelip-seal on one side
ZZ: doublelip-seals on both sides

Doublelip-seal is available for size 6 to 30.

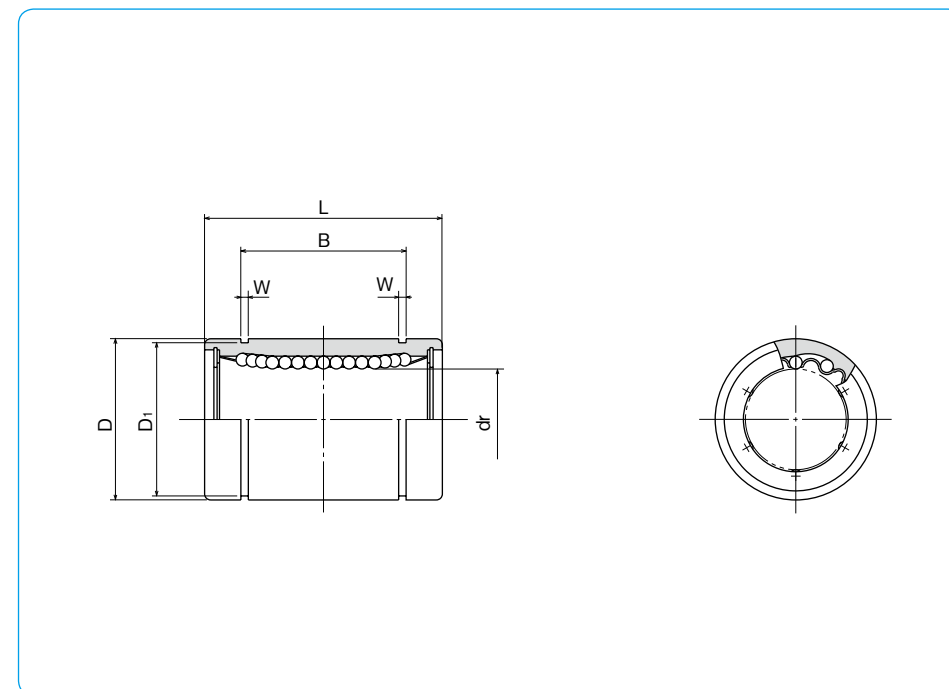

| part number | | | | number of ball circuits | major dimensions | | | | |
|----------------|----------------|--------------------|----------------|-------------------------|----------------------------|-----------|---------------------------|-----|-------|
| standard | | anti-corrosion | | | dr tolerance μm | | D tolerance μm | | |
| steel retainer | resin retainer | stainless retainer | resin retainer | | mm | precision | high | mm | mm |
| SM 3 | SM 3G | SMS 3 | SMS 3G | 4 | 3 | | | 7 | 0 |
| SM 4 | SM 4G | SMS 4 | SMS 4G | 4 | 4 | 0 | 0 | 8 | 0 |
| SM 5 | SM 5G | SMS 5 | SMS 5G | 4 | 5 | -5 | -8 | 10 | -9 |
| SM 6 | SM 6G | SMS 6 | SMS 6G | 4 | 6 | | | 12 | 0 |
| SM 8s | SM 8sG | SMS 8s | SMS 8sG | 4 | 8 | | | 15 | -11 |
| SM 8 | SM 8G | SMS 8 | SMS 8G | 4 | 8 | | | 15 | |
| SM 10 | SM10G | SMS10 | SMS10G | 4 | 10 | 0 | 0 | 19 | 0 |
| SM 12 | SM12G | SMS12 | SMS12G | 4 | 12 | -6 | -9 | 21 | 0 |
| SM 13 | SM13G | SMS13 | SMS13G | 4 | 13 | | | 23 | -13 |
| SM 16 | SM16G | SMS16 | SMS16G | 4 | 16 | | | 28 | |
| SM 20 | SM20G | SMS20 | SMS20G | 5 | 20 | | | 32 | 0 |
| SM 25 | SM25G | SMS25 | SMS25G | 6 | 25 | -7 | -10 | 40 | -16 |
| SM 30 | SM30G | SMS30 | SMS30G | 6 | 30 | | | 45 | |
| SM 35 | SM35G | SMS35 | SMS35G | 6 | 35 | | | 52 | 0 |
| SM 40 | SM40G | SMS40 | SMS40G | 6 | 40 | 0 | 0 | 60 | 0 |
| SM 50 | SM50G | SMS50 | SMS50G | 6 | 50 | -8 | -12 | 80 | -19 |
| SM 60 | SM60G | SMS60 | SMS60G | 6 | 60 | 0 | 0 | 90 | 0 |
| SM 80 | SM80G | SMS80 | SMS80G | 6 | 80 | -9 | -15 | 120 | -22 |
| SM100 | - | - | - | 6 | 100 | 0 | 0 | 150 | 0 |
| SM120 | - | - | - | 8 | 120 | -10 | -20 | 180 | -25 |
| SM150 | - | - | - | 8 | 150 | 0/-13 | 0/-25 | 210 | 0/-29 |

| mm | L tolerance mm | B tolerance mm | | W mm | D1 mm | eccentricity | | radial clearance (maximum) μm | basic load rating | | mass g | shaft diameter mm |
|-----|----------------|----------------|------|------|-------|-------------------------|--------------------|--|-------------------|--------|--------|-------------------|
| | | mm | mm | | | precision μm | high μm | | C N | Co N | | |
| 10 | | - | - | - | - | | | | 69 | 105 | 1.4 | 3 |
| 12 | 0 | - | - | - | - | 4 | 8 | | 88 | 127 | 2.0 | 4 |
| 15 | -0.12 | 10.2 | | 1.1 | 9.6 | | | -3 | 167 | 206 | 4.0 | 5 |
| 19 | | 13.5 | | 1.1 | 11.5 | | | | 206 | 265 | 8.5 | 6 |
| 17 | | 11.5 | | 1.1 | 14.3 | | | | 176 | 216 | 11 | 8 |
| 24 | | 17.5 | | 1.1 | 14.3 | | | | 274 | 392 | 17 | 8 |
| 29 | 0 | 22 | 0 | 1.3 | 18 | 8 | 12 | | 372 | 549 | 36 | 10 |
| 30 | -0.2 | 23 | -0.2 | 1.3 | 20 | | | -4 | 510 | 784 | 42 | 12 |
| 32 | | 23 | | 1.3 | 22 | | | | 510 | 784 | 49 | 13 |
| 37 | | 26.5 | | 1.6 | 27 | | | | 774 | 1,180 | 76 | 16 |
| 42 | | 30.5 | | 1.6 | 30.5 | | | -6 | 882 | 1,370 | 100 | 20 |
| 59 | | 41 | | 1.85 | 38 | 10 | 15 | | 980 | 1,570 | 240 | 25 |
| 64 | | 44.5 | | 1.85 | 43 | | | -8 | 1,570 | 2,740 | 270 | 30 |
| 70 | 0 | 49.5 | 0 | 2.1 | 49 | | | | 1,670 | 3,140 | 425 | 35 |
| 80 | -0.3 | 60.5 | -0.3 | 2.1 | 57 | 12 | 20 | -10 | 2,160 | 4,020 | 654 | 40 |
| 100 | | 74 | | 2.6 | 76.5 | | | -13 | 3,820 | 7,940 | 1,700 | 50 |
| 110 | | 85 | | 3.15 | 86.5 | | | | 4,700 | 10,000 | 2,000 | 60 |
| 140 | | 105.5 | | 4.15 | 116 | 17 | 25 | | 7,350 | 16,000 | 4,520 | 80 |
| 175 | 0 | 125.5 | 0 | 4.15 | 145 | | | -20 | 14,100 | 34,800 | 8,600 | 100 |
| 200 | -0.4 | 158.6 | -0.4 | 4.15 | 175 | 20 | 30 | | 16,400 | 40,000 | 15,000 | 120 |
| 240 | | 170.6 | | 5.15 | 204 | 25 | 40 | -25 | 21,100 | 54,300 | 20,250 | 150 |

1N=0.102kgf

SM-AJ TYPE

– Clearance Adjustable Type –



part number structure

example **SMS 25 G UU -AJ**


specification
SM: standard
SMS: anti-corrosion

inner contact diameter (dr)

retainer material
blank: standard/steel
U: anti-corrosion/stainless steel
G: resin

clearance-adjustable

seal
blank: without seal
U: seal on one side
UU: seals on both sides

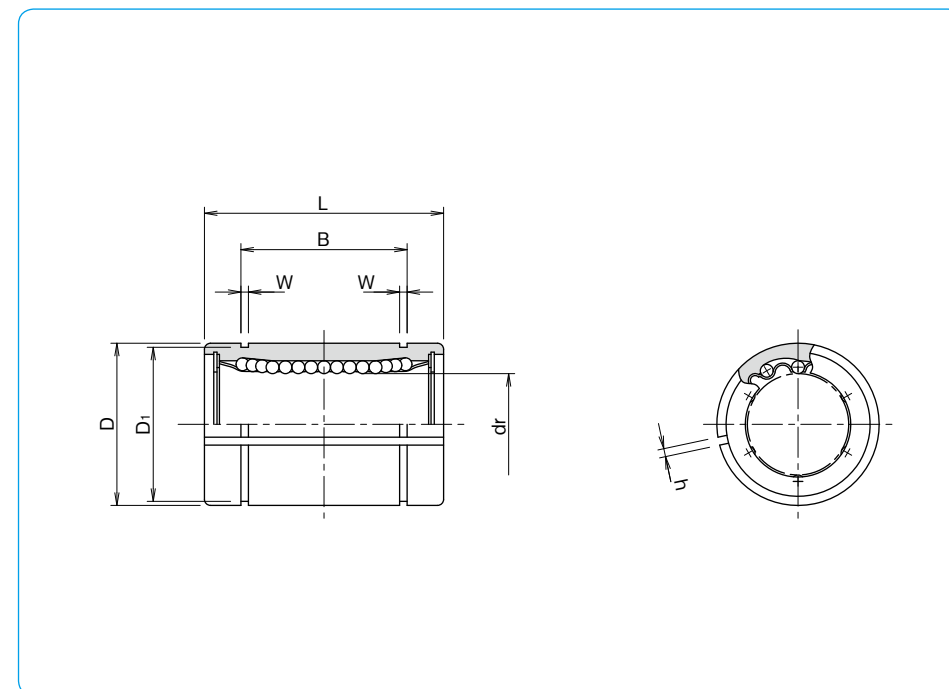

| part number | | number of ball circuits | dr | major dimensions | | | |
|----------------|----------------|-------------------------|----------------|------------------|------------------|-----|------------------|
| standard | anti-corrosion | | | D | D | | |
| steel retainer | resin retainer | stainless retainer | resin retainer | mm | tolerance* μm | mm | tolerance* μm |
| — | SM 6G-AJ | — | SMS 6G-AJ | 4 | 6 | 12 | 0 |
| — | SM 8sG-AJ | — | SMS 8sG-AJ | 4 | 8 | 15 | -11 |
| — | SM 8G-AJ | — | SMS 8G-AJ | 4 | 8 | 15 | 0 |
| — | SM10G-AJ | — | SMS10G-AJ | 4 | 10 | 19 | -9 |
| SM 12-AJ | SM12G-AJ | SMS 12-AJ | SMS12G-AJ | 4 | 12 | 21 | 0 |
| SM 13-AJ | SM13G-AJ | SMS 13-AJ | SMS13G-AJ | 4 | 13 | 23 | -13 |
| SM 16-AJ | SM16G-AJ | SMS 16-AJ | SMS16G-AJ | 4 | 16 | 28 | 0 |
| SM 20-AJ | SM20G-AJ | SMS20-AJ | SMS20G-AJ | 5 | 20 | 32 | 0 |
| SM 25-AJ | SM25G-AJ | SMS25-AJ | SMS25G-AJ | 6 | 25 | 40 | -16 |
| SM 30-AJ | SM30G-AJ | SMS30-AJ | SMS30G-AJ | 6 | 30 | 45 | 0 |
| SM 35-AJ | SM35G-AJ | SMS35-AJ | SMS35G-AJ | 6 | 35 | 52 | 0 |
| SM 40-AJ | SM40G-AJ | SMS40-AJ | SMS40G-AJ | 6 | 40 | 60 | -19 |
| SM 50-AJ | SM50G-AJ | SMS50-AJ | SMS50G-AJ | 6 | 50 | 80 | 0 |
| SM 60-AJ | SM60G-AJ | SMS60-AJ | SMS60G-AJ | 6 | 60 | 90 | 0 |
| SM 80-AJ | SM80G-AJ | — | — | 6 | 80 | 120 | -22 |
| SM100-AJ | — | — | — | 6 | 100 | 150 | 0 |
| SM120-AJ | — | — | — | 8 | 120 | 180 | -25 |
| SM150-AJ | — | — | — | 8 | 150 | 210 | 0/-29 |


* Accuracy is measured prior to machining clearance slit.

| mm | L tolerance mm | B | | W mm | D ₁ mm | h mm | eccentricity* μm | basic load rating | | mass g | shaft diameter mm |
|-----|----------------------|-------|-----------------|---------|----------------------|---------|---------------------|-------------------|-------------------|-----------|----------------------|
| | | mm | tolerance mm | | | | | dynamic C N | static Co N | | |
| 19 | 0 -0.2 | 13.5 | 0 -0.2 | 1.1 | 11.5 | 1 | 12 | 206 | 265 | 7.5 | 6 |
| 17 | | 11.5 | | 1.1 | 14.3 | 1 | | 176 | 216 | 10 | 8 |
| 24 | | 17.5 | | 1.1 | 14.3 | 1 | | 274 | 392 | 14.7 | 8 |
| 29 | | 22 | | 1.3 | 18 | 1 | | 372 | 549 | 29 | 10 |
| 30 | | 23 | | 1.3 | 20 | 1.5 | | 510 | 784 | 41 | 12 |
| 32 | 0 -0.3 | 23 | 0 -0.3 | 1.3 | 22 | 1.5 | 15 | 510 | 784 | 48 | 13 |
| 37 | | 26.5 | | 1.6 | 27 | 1.5 | | 774 | 1,180 | 75 | 16 |
| 42 | | 30.5 | | 1.6 | 30.5 | 1.5 | | 882 | 1,370 | 98 | 20 |
| 59 | | 41 | | 1.85 | 38 | 2 | | 980 | 1,570 | 237 | 25 |
| 64 | | 44.5 | | 1.85 | 43 | 2.5 | | 1,570 | 2,740 | 262 | 30 |
| 70 | 0 -0.4 | 49.5 | 0 -0.4 | 2.1 | 49 | 2.5 | 20 | 1,670 | 3,140 | 420 | 35 |
| 80 | | 60.5 | | 2.1 | 57 | 3 | | 2,160 | 4,020 | 640 | 40 |
| 100 | | 74 | | 2.6 | 76.5 | 3 | | 3,820 | 7,940 | 1,680 | 50 |
| 110 | | 85 | | 3.15 | 86.5 | 3 | | 4,700 | 10,000 | 1,980 | 60 |
| 140 | | 105.5 | | 4.15 | 116 | 3 | | 7,350 | 16,000 | 4,400 | 80 |
| 175 | 0 -0.4 | 125.5 | 0 -0.4 | 4.15 | 145 | 3 | 30 | 14,100 | 34,800 | 8,540 | 100 |
| 200 | | 158.6 | | 4.15 | 175 | 3 | | 16,400 | 40,000 | 14,900 | 120 |
| 240 | | 170.6 | | 5.15 | 204 | 3 | | 21,100 | 54,300 | 20,150 | 150 |

1N≒0.102kgf

SM-OP TYPE

– Open Type –

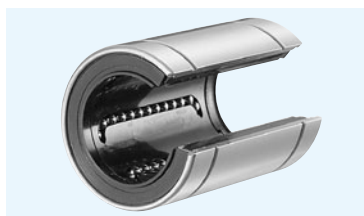

part number structure

example **SMS 25 G UU -OP**


specification
SM: standard
SMS: anti-corrosion

inner contact diameter (dr)

retainer material
blank: standard/steel
 anti-corrosion/stainless steel
G: resin

open type

seal
blank: without seal
U: seal on one side
UU: seals on both sides

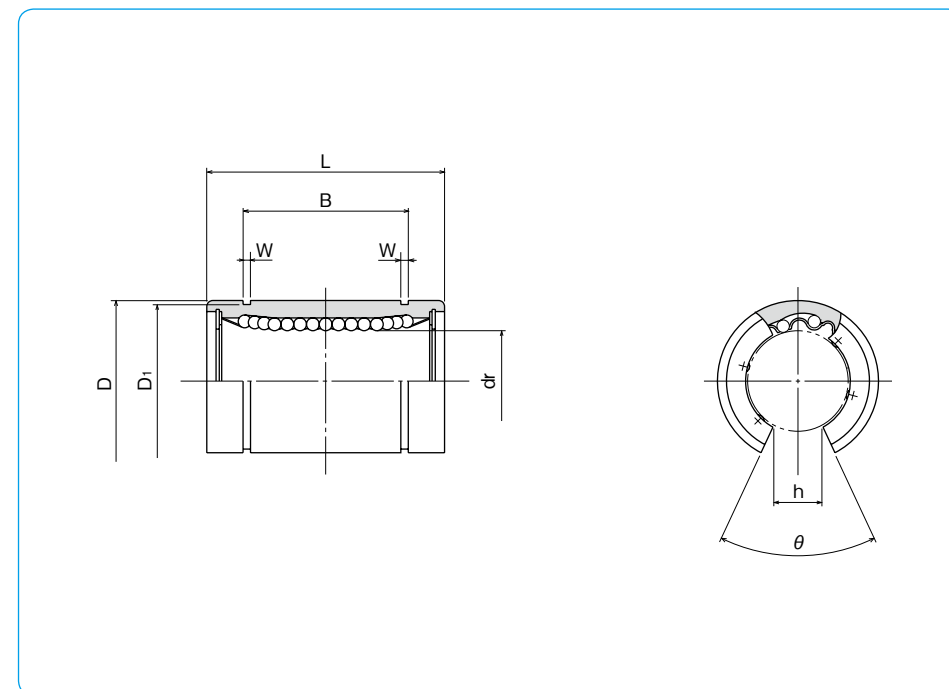

| part number | | | | number of ball circuits | mm | dr tolerance* μm | major dimensions | |
|-------------------------|-----------------|-----------------------------------|------------------|-------------------------|-----|---------------------|------------------|--------------------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | resin retainer | | | | mm | D tolerance* μm |
| – | SM10G-OP | – | SMS10G-OP | 3 | 10 | | 19 | |
| SM 12-OP | SM12G-OP | SMS12-OP | SMS12G-OP | 3 | 12 | 0 | 21 | 0 |
| SM 13-OP | SM13G-OP | SMS13-OP | SMS13G-OP | 3 | 13 | – 9 | 23 | –13 |
| SM 16-OP | SM16G-OP | SMS16-OP | SMS16G-OP | 3 | 16 | | 28 | |
| SM 20-OP | SM20G-OP | SMS20-OP | SMS20G-OP | 4 | 20 | 0 | 32 | 0 |
| SM 25-OP | SM25G-OP | SMS25-OP | SMS25G-OP | 5 | 25 | –10 | 40 | –16 |
| SM 30-OP | SM30G-OP | SMS30-OP | SMS30G-OP | 5 | 30 | | 45 | |
| SM 35-OP | SM35G-OP | SMS35-OP | SMS35G-OP | 5 | 35 | 0 | 52 | 0 |
| SM 40-OP | SM40G-OP | SMS40-OP | SMS40G-OP | 5 | 40 | –12 | 60 | –19 |
| SM 50-OP | SM50G-OP | SMS50-OP | SMS50G-OP | 5 | 50 | 0 | 80 | 0 |
| SM 60-OP | SM60G-OP | SMS60-OP | SMS60G-OP | 5 | 60 | –15 | 90 | –22 |
| SM 80-OP | SM80G-OP | – | – | 5 | 80 | 0 | 120 | 0 |
| SM100-OP | – | – | – | 5 | 100 | –20 | 150 | –25 |
| SM120-OP | – | – | – | 6 | 120 | | 180 | |
| SM150-OP | – | – | – | 6 | 150 | 0/–25 | 210 | 0/–29 |

* Accuracy is measured prior to machining open slit.

| mm | L tolerance mm | B tolerance mm | | W mm | D1 mm | h mm | θ | eccentricity* μm | basic load rating | | mass g | shaft diameter mm |
|-----|----------------|----------------|-----------|------|-------|------|-----|------------------|-------------------|-------------|--------|-------------------|
| | | mm | mm | | | | | | dynamic C N | static Co N | | |
| 29 | 0 –0.2 | 22 | 0 –0.2 | 1.3 | 18 | 6.8 | 80° | 12 | 372 | 549 | 23 | 10 |
| 30 | | 23 | | 1.3 | 20 | 8 | 80° | | 510 | 784 | 32 | 12 |
| 32 | | 23 | | 1.3 | 22 | 9 | 80° | | 510 | 784 | 37 | 13 |
| 37 | | 26.5 | | 1.6 | 27 | 11 | 80° | | 774 | 1,180 | 58 | 16 |
| 42 | | 30.5 | | 1.6 | 30.5 | 11 | 60° | | 882 | 1,370 | 79 | 20 |
| 59 | 0 –0.3 | 41 | 0 –0.3 | 1.85 | 38 | 12 | 50° | 15 | 980 | 1,570 | 203 | 25 |
| 64 | | 44.5 | | 1.85 | 43 | 15 | 50° | | 1,570 | 2,740 | 228 | 30 |
| 70 | | 49.5 | | 2.1 | 49 | 17 | 50° | | 1,670 | 3,140 | 355 | 35 |
| 80 | | 60.5 | | 2.1 | 57 | 20 | 50° | | 2,160 | 4,020 | 546 | 40 |
| 100 | | 74 | | 2.6 | 76.5 | 25 | 50° | | 3,820 | 7,940 | 1,420 | 50 |
| 110 | 0 –0.4 | 85 | 0 –0.4 | 3.15 | 86.5 | 30 | 50° | 25 | 4,700 | 10,000 | 1,650 | 60 |
| 140 | | 105.5 | | 4.15 | 116 | 40 | 50° | | 7,350 | 16,000 | 3,750 | 80 |
| 175 | | 125.5 | | 4.15 | 145 | 50 | 50° | | 14,100 | 34,800 | 7,200 | 100 |
| 200 | | 158.6 | | 4.15 | 175 | 85 | 80° | | 16,400 | 40,000 | 11,600 | 120 |
| 240 | | 170.6 | | 5.15 | 204 | 105 | 80° | | 21,100 | 54,300 | 15,700 | 150 |



1N≐0.102kgf

SM-G-L TYPE

– Long Type –



part number structure

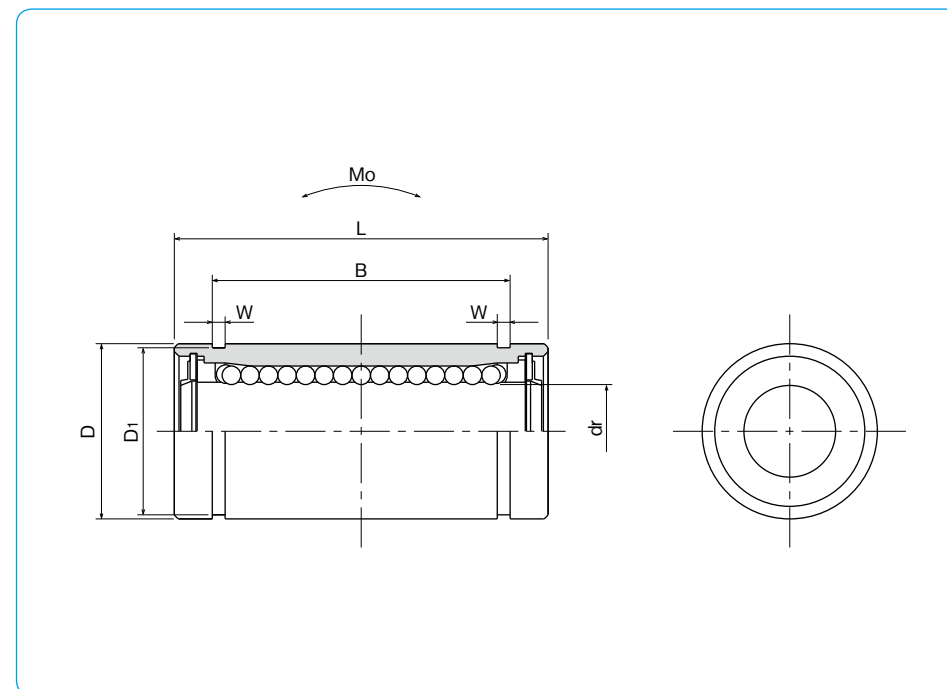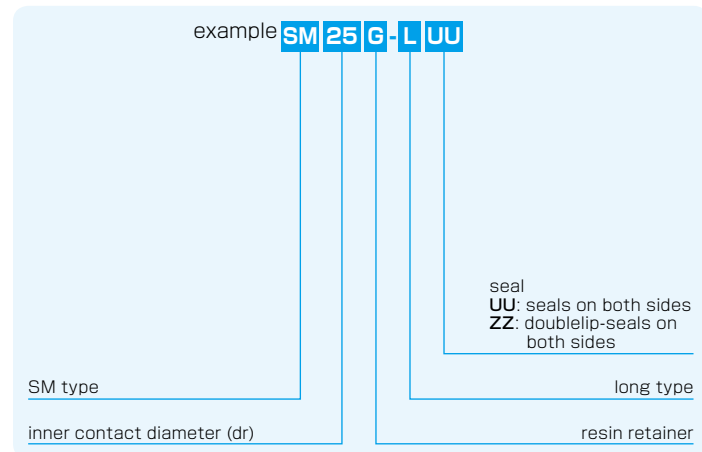

| part number* | number of ball circuits | dr | | D | | major dimensions | | | |
|------------------|-------------------------|----|-------------------------|-----|-------------------------|------------------|--------------|------|--------------|
| | | mm | tolerance μm | mm | tolerance μm | mm | tolerance mm | mm | tolerance mm |
| SM 6G-LUU | 4 | 6 | 0 | 12 | 0 | 26 | 0 | 20.5 | -0.2 |
| SM 8G-LUU | 4 | 8 | | 15 | -13 | 32 | | 25.5 | |
| SM10G-LUU | 4 | 10 | | 19 | 39 | 32 | | | |
| SM12G-LUU | 4 | 12 | | 21 | 0 | 41 | | 34 | |
| SM13G-LUU | 4 | 13 | | 23 | -16 | 45 | | 36 | |
| SM16G-LUU | 4 | 16 | | 28 | 53 | 42 | | | |
| SM20G-LUU | 5 | 20 | 32 | 0 | 59 | 47.5 | 0 | | |
| SM25G-LUU | 6 | 25 | 40 | 0 | 83 | 69 | | | |
| SM30G-LUU | 6 | 30 | 45 | -19 | 90 | 75 | | -0.3 | |

* Seals-on-both-sides is standard.

| W | D ₁ | eccentricity | basic load rating | | allowable static moment M ₀ N · m | mass g | shaft diameter mm |
|------|----------------|--------------|-------------------|-------------------------------|--|-----------|----------------------|
| | | | dynamic C N | static C ₀ N | | | |
| 1.1 | 11.5 | 15 | 262 | 476 | 1.15 | 10 | 6 |
| 1.1 | 14.3 | | 352 | 615 | 1.94 | 19 | 8 |
| 1.3 | 18 | | 493 | 1,000 | 3.98 | 38 | 10 |
| 1.3 | 20 | | 637 | 1,430 | 6.26 | 43 | 12 |
| 1.3 | 22 | | 682 | 1,560 | 7.68 | 62 | 13 |
| 1.6 | 27 | | 1,039 | 2,350 | 13.2 | 99 | 16 |
| 1.6 | 30.5 | 20 | 1,160 | 2,740 | 17.9 | 125 | 20 |
| 1.85 | 38 | | 1,300 | 2,960 | 27.2 | 315 | 25 |
| 1.85 | 43 | | 2,160 | 5,880 | 61.3 | 347 | 30 |


1N \div 0.102kgf 1N · m \div 0.102kgf · m

SM-W TYPE

– Double-Wide Type –




part number structure

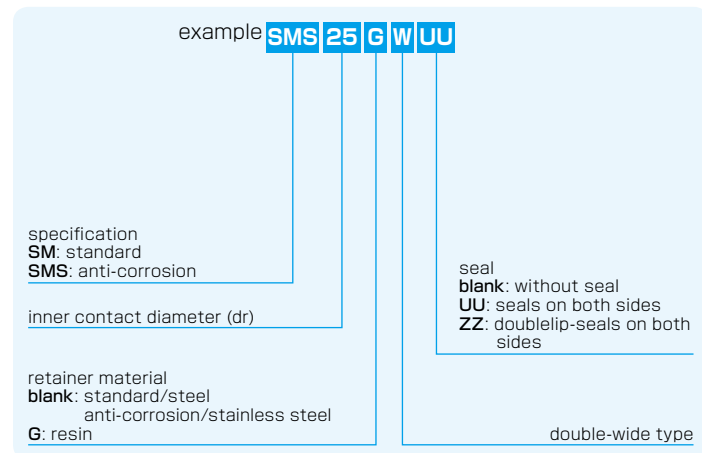

Doublelip-seal is available for size 6 to 30.

| part number | | | | number of ball circuits | dr | | major dimensions | |
|-------------------------|----------------|-----------------------------------|----------------|-------------------------|----|-------------------------|------------------|-------------------------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | resin retainer | | mm | tolerance μm | mm | tolerance μm |
| SM 3W | SM 3GW | SMS 3W | SMS 3GW | 4 | 3 | 0 -10 | 7 | 0 |
| SM 4W | SM 4GW | SMS 4W | SMS 4GW | 4 | 4 | | 8 | -11 |
| SM 5W | SM 5GW | SMS 5W | SMS 5GW | 4 | 5 | | 10 | 0 |
| SM 6W | SM 6GW | SMS 6W | SMS 6GW | 4 | 6 | | 12 | -13 |
| SM 8W | SM 8GW | SMS 8W | SMS 8GW | 4 | 8 | | 15 | 0 |
| SM10W | SM10GW | SMS10W | SMS10GW | 4 | 10 | | 19 | -16 |
| SM12W | SM12GW | SMS12W | SMS12GW | 4 | 12 | | 21 | 0 |
| SM13W | SM13GW | SMS13W | SMS13GW | 4 | 13 | | 23 | -19 |
| SM16W | SM16GW | SMS16W | SMS16GW | 4 | 16 | | 28 | 0 |
| SM20W | SM20GW | SMS20W | SMS20GW | 5 | 20 | | 32 | -22 |
| SM25W | SM25GW | SMS25W | SMS25GW | 6 | 25 | 0 -12 | 40 | 0 |
| SM30W | SM30GW | SMS30W | SMS30GW | 6 | 30 | | 45 | -19 |
| SM35W | SM35GW | SMS35W | SMS35GW | 6 | 35 | 0 -15 | 52 | 0 |
| SM40W | SM40GW | SMS40W | SMS40GW | 6 | 40 | | 60 | -22 |
| SM50W | SM50GW | SMS50W | SMS50GW | 6 | 50 | 80 | | |
| SM60W | SM60GW | SMS60W | SMS60GW | 6 | 60 | 0/-20 | 90 | 0/-25 |

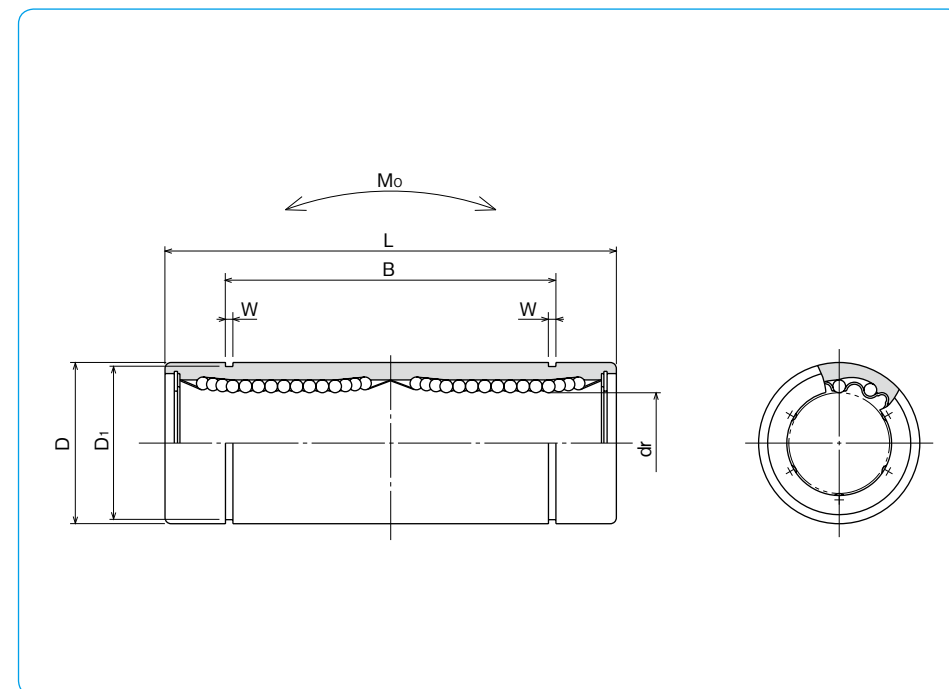

| mm | L tolerance mm | B | | W mm | D1 mm | eccentricity μm | basic load rating | | allowable static moment Mo N·m | mass g | shaft diameter mm |
|-----|----------------|------|--------------|------|-------|----------------------------|-------------------|-------------|--------------------------------|--------|-------------------|
| | | mm | tolerance mm | | | | dynamic C N | static Co N | | | |
| 19 | 0 -0.3 | — | — | — | — | 10 | 138 | 210 | 0.51 | 3.2 | 3 |
| 23 | | — | — | — | — | | 176 | 254 | 0.63 | 4.8 | 4 |
| 28 | | 20.4 | 0 -0.3 | 1.1 | 9.6 | | 265 | 412 | 1.38 | 11 | 5 |
| 35 | | 27 | | 1.1 | 11.5 | 323 | 530 | 2.18 | 16 | 6 | |
| 45 | | 35 | | 1.1 | 14.3 | 431 | 784 | 4.31 | 31 | 8 | |
| 55 | | 44 | | 1.3 | 18 | 588 | 1,100 | 7.24 | 62 | 10 | |
| 57 | | 46 | | 1.3 | 20 | 813 | 1,570 | 10.9 | 80 | 12 | |
| 61 | | 46 | | 1.3 | 22 | 813 | 1,570 | 11.6 | 90 | 13 | |
| 70 | | 53 | | 1.6 | 27 | 1,230 | 2,350 | 19.7 | 145 | 16 | |
| 80 | | 61 | | 1.6 | 30.5 | 1,400 | 2,740 | 26.8 | 180 | 20 | |
| 112 | 82 | 1.85 | | 38 | 1,560 | 3,140 | 43.4 | 440 | 25 | | |
| 123 | 89 | 1.85 | | 43 | 2,490 | 5,490 | 82.8 | 480 | 30 | | |
| 135 | 0 -0.4 | 99 | 0 -0.4 | 2.1 | 49 | 25 | 2,650 | 6,270 | 110 | 795 | 35 |
| 151 | | 121 | | 2.1 | 57 | | 3,430 | 8,040 | 147 | 1,170 | 40 |
| 192 | | 148 | | 2.6 | 76.5 | | 6,080 | 15,900 | 397 | 3,100 | 50 |
| 209 | | 170 | | 3.15 | 86.5 | | 7,550 | 20,000 | 530 | 3,500 | 60 |

1N \approx 0.102kgf 1N · m \approx 0.102kgf · m

SMF TYPE

– Round Flange Type –




part number structure

example **SMSF 25 G UU-SK**

| | |
|--|--|
| specification SMF : standard SMSF : anti-corrosion | outer cylinder surface treatment blank : no surface treatment SK : electroless nickel plating LF : low temperature black chrome treatment with fluoride coating SB : black oxide (not available on anti-corrosion type) SC : industrial chrome plating |
| inner contact diameter (dr) | seal blank : without seal UU : seals on both sides ZZ : doublelip-seals on both sides |
| retainer material blank : standard/steel anti-corrosion/stainless steel G : resin | |

Doublelip-seal is available for size 6 to 30.

| part number | | | | number of ball circuits | dr mm | dr tolerance μm | major dimensions | | |
|-------------------------|-------------------------------|--------------------------|----------------|-------------------------|----------|--------------------|------------------|-------------------|--------------|
| standard steel retainer | anti-corrosion resin retainer | stainless steel retainer | resin retainer | | | | D mm | D tolerance μm | L ±0.3 mm |
| SMF 6 | SMF 6G | SMSF 6 | SMSF 6G | 4 | 6 | 0 | 12 | 19 | |
| SMF 8s | SMF 8sG | SMSF 8s | SMSF 8sG | 4 | 8 | -9 | 15 | 17 | |
| SMF 8 | SMF 8G | SMSF 8 | SMSF 8G | 4 | 8 | -13 | 15 | 24 | |
| SMF 10 | SMF10G | SMSF10 | SMSF10G | 4 | 10 | -9 | 19 | 29 | |
| SMF 12 | SMF12G | SMSF12 | SMSF12G | 4 | 12 | -16 | 21 | 30 | |
| SMF 13 | SMF13G | SMSF13 | SMSF13G | 4 | 13 | -16 | 23 | 32 | |
| SMF 16 | SMF16G | SMSF16 | SMSF16G | 4 | 16 | -16 | 28 | 37 | |
| SMF 20 | SMF20G | SMSF20 | SMSF20G | 5 | 20 | -10 | 32 | 42 | |
| SMF 25 | SMF25G | SMSF25 | SMSF25G | 6 | 25 | -10 | 40 | 59 | |
| SMF 30 | SMF30G | SMSF30 | SMSF30G | 6 | 30 | -12 | 45 | 64 | |
| SMF 35 | SMF35G | SMSF35 | SMSF35G | 6 | 35 | -12 | 52 | 70 | |
| SMF 40 | SMF40G | SMSF40 | SMSF40G | 6 | 40 | -12 | 60 | 80 | |
| SMF 50 | SMF50G | SMSF50 | SMSF50G | 6 | 50 | -12 | 80 | 100 | |
| SMF 60 | SMF60G | SMSF60 | SMSF60G | 6 | 60 | 0 | 90 | 110 | |
| SMF 80 | - | - | - | 6 | 80 | -15 | 120 | 140 | |
| SMF100 | - | - | - | 6 | 100 | 0/-20 | 150 | 175 | |

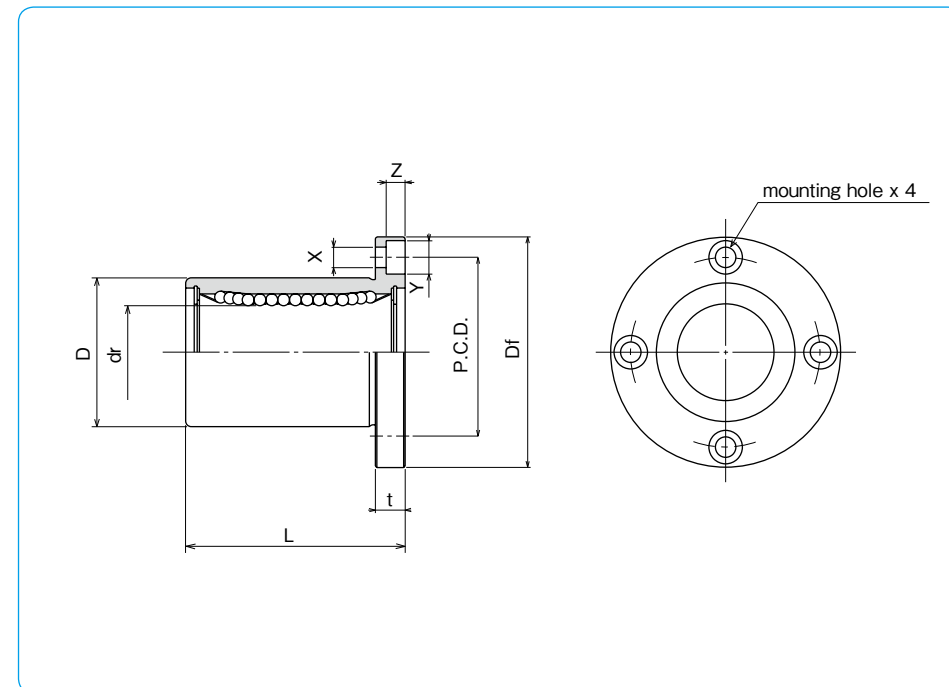

| Df mm | t mm | flange P.C.D. mm | X×Y×Z mm | eccentricity μm | perpendicularity μm | basic load rating | | mass g | shaft diameter mm |
|----------|---------|------------------------|-------------|--------------------|------------------------|-------------------|-------------------|-----------|----------------------|
| | | | | | | dynamic C N | static Co N | | |
| 28 | 5 | 20 | 3.5×6×3.1 | 12 | 12 | 206 | 265 | 24 | 6 |
| 32 | 5 | 24 | 3.5×6×3.1 | | | 176 | 216 | 32 | 8 |
| 32 | 5 | 24 | 3.5×6×3.1 | | | 274 | 392 | 37 | 8 |
| 40 | 6 | 29 | 4.5×7.5×4.1 | | | 372 | 549 | 72 | 10 |
| 42 | 6 | 32 | 4.5×7.5×4.1 | | | 510 | 784 | 76 | 12 |
| 43 | 6 | 33 | 4.5×7.5×4.1 | | | 510 | 784 | 88 | 13 |
| 48 | 6 | 38 | 4.5×7.5×4.1 | 15 | 15 | 774 | 1,180 | 120 | 16 |
| 54 | 8 | 43 | 5.5×9×5.1 | | | 882 | 1,370 | 180 | 20 |
| 62 | 8 | 51 | 5.5×9×5.1 | | | 980 | 1,570 | 340 | 25 |
| 74 | 10 | 60 | 6.6×11×6.1 | | | 1,570 | 2,740 | 470 | 30 |
| 82 | 10 | 67 | 6.6×11×6.1 | | | 1,670 | 3,140 | 650 | 35 |
| 96 | 13 | 78 | 9×14×8.1 | | | 2,160 | 4,020 | 1,060 | 40 |
| 116 | 13 | 98 | 9×14×8.1 | 20 | 20 | 3,820 | 7,940 | 2,200 | 50 |
| 134 | 18 | 112 | 11×17×11.1 | | | 4,700 | 10,000 | 3,000 | 60 |
| 164 | 18 | 142 | 11×17×11.1 | | | 7,350 | 16,000 | 5,800 | 80 |
| 200 | 20 | 175 | 14×20×13.1 | | | 14,100 | 34,800 | 10,600 | 100 |

1N≒0.102kgf

SMK TYPE

– Square Flange Type –




part number structure

example **SMSK 25 G UU -SK**

| | | | | |
|--|-----------------------------|--|--|---|
| specification SMK : standard SMSK : anti-corrosion | inner contact diameter (dr) | retainer material blank : standard/steel anti-corrosion/stainless steel G : resin | outer cylinder surface treatment blank : no surface treatment SK : electroless nickel plating LF : low temperature black chrome treatment with fluoride coating SB : black oxide (not available on anti-corrosion type) SC : industrial chrome plating | seal blank : without seal UU : seals on both sides ZZ : doublelip-seals on both sides |
|--|-----------------------------|--|--|---|

Doublelip-seal is available for size 6 to 30.

| part number | | | | number of ball circuits | dr | | major dimensions | | |
|-------------------------|----------------|-----------------------------------|-------------------------------|-------------------------|-----|-------------------------|------------------|-------------------------|----------------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | anti-corrosion resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| SMK 6 | SMK 6G | SMSK 6 | SMSK 6G | 4 | 6 | 0 | 12 | 0 | 19 |
| SMK 8s | SMK 8sG | SMSK 8s | SMSK 8sG | 4 | 8 | -9 | 15 | -13 | 17 |
| SMK 8 | SMK 8G | SMSK 8 | SMSK 8G | 4 | 8 | 0 | 15 | 0 | 24 |
| SMK 10 | SMK10G | SMSK10 | SMSK10G | 4 | 10 | -9 | 19 | -16 | 29 |
| SMK 12 | SMK12G | SMSK12 | SMSK12G | 4 | 12 | 0 | 21 | 0 | 30 |
| SMK 13 | SMK13G | SMSK13 | SMSK13G | 4 | 13 | -10 | 23 | -19 | 32 |
| SMK 16 | SMK16G | SMSK16 | SMSK16G | 4 | 16 | 0 | 28 | 0 | 37 |
| SMK 20 | SMK20G | SMSK20 | SMSK20G | 5 | 20 | -12 | 32 | -22 | 42 |
| SMK 25 | SMK25G | SMSK25 | SMSK25G | 6 | 25 | 0 | 40 | 0 | 59 |
| SMK 30 | SMK30G | SMSK30 | SMSK30G | 6 | 30 | -10 | 45 | -19 | 64 |
| SMK 35 | SMK35G | SMSK35 | SMSK35G | 6 | 35 | 0 | 52 | 0 | 70 |
| SMK 40 | SMK40G | SMSK40 | SMSK40G | 6 | 40 | -12 | 60 | -22 | 80 |
| SMK 50 | SMK50G | SMSK50 | SMSK50G | 6 | 50 | 0 | 80 | 0 | 100 |
| SMK 60 | SMK60G | SMSK60 | SMSK60G | 6 | 60 | 0 | 90 | 0 | 110 |
| SMK 80 | - | - | - | 6 | 80 | -15 | 120 | -25 | 140 |
| SMK100 | - | - | - | 6 | 100 | 0/-20 | 150 | 0/-29 | 175 |

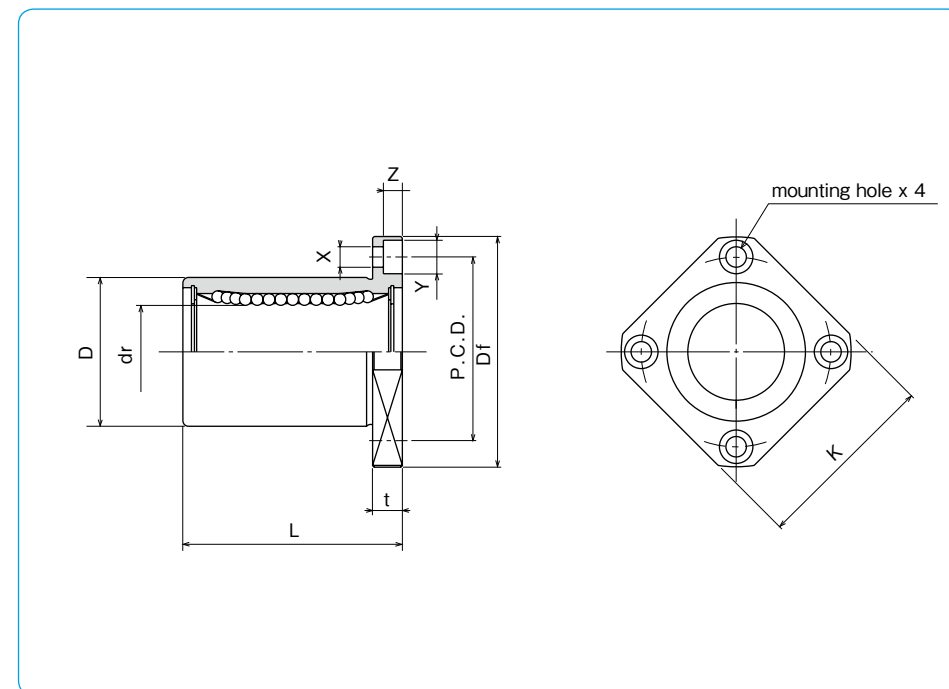

| Df mm | flange | | | | eccentricity μm | perpendicularity μm | basic load rating | | mass g | shaft diameter mm |
|-------|--------|------|-----------|-------------|----------------------------|--------------------------------|-------------------|-------------|--------|-------------------|
| | K mm | t mm | P.C.D. mm | X×Y×Z mm | | | dynamic C N | static Co N | | |
| 28 | 22 | 5 | 20 | 3.5×6×3.1 | 12 | 12 | 206 | 265 | 18 | 6 |
| 32 | 25 | 5 | 24 | 3.5×6×3.1 | | | 176 | 216 | 24 | 8 |
| 32 | 25 | 5 | 24 | 3.5×6×3.1 | | | 274 | 392 | 29 | 8 |
| 40 | 30 | 6 | 29 | 4.5×7.5×4.1 | | | 372 | 549 | 52 | 10 |
| 42 | 32 | 6 | 32 | 4.5×7.5×4.1 | | | 510 | 784 | 57 | 12 |
| 43 | 34 | 6 | 33 | 4.5×7.5×4.1 | | | 510 | 784 | 72 | 13 |
| 48 | 37 | 6 | 38 | 4.5×7.5×4.1 | 15 | 15 | 774 | 1,180 | 104 | 16 |
| 54 | 42 | 8 | 43 | 5.5×9×5.1 | | | 882 | 1,370 | 145 | 20 |
| 62 | 50 | 8 | 51 | 5.5×9×5.1 | | | 980 | 1,570 | 300 | 25 |
| 74 | 58 | 10 | 60 | 6.6×11×6.1 | | | 1,570 | 2,740 | 375 | 30 |
| 82 | 64 | 10 | 67 | 6.6×11×6.1 | | | 1,670 | 3,140 | 560 | 35 |
| 96 | 75 | 13 | 78 | 9×14×8.1 | | | 2,160 | 4,020 | 880 | 40 |
| 116 | 92 | 13 | 98 | 9×14×8.1 | 20 | 20 | 3,820 | 7,940 | 2,000 | 50 |
| 134 | 106 | 18 | 112 | 11×17×11.1 | | | 4,700 | 10,000 | 2,560 | 60 |
| 164 | 136 | 18 | 142 | 11×17×11.1 | | | 7,350 | 16,000 | 5,300 | 80 |
| 200 | 170 | 20 | 175 | 14×20×13.1 | | | 14,100 | 34,800 | 9,900 | 100 |

1N=0.102kgf

SMT TYPE

– Two Side Cut Flange Type –



part number structure

example **SMST 25 G UU -SK**


specification
SMT: standard
SMST: anti-corrosion

inner contact diameter (dr)

retainer material
blank: standard/steel
 anti-corrosion/stainless steel
G: resin

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome plating

seal
UU: seals on both sides
ZZ: doublelip-seals on both sides

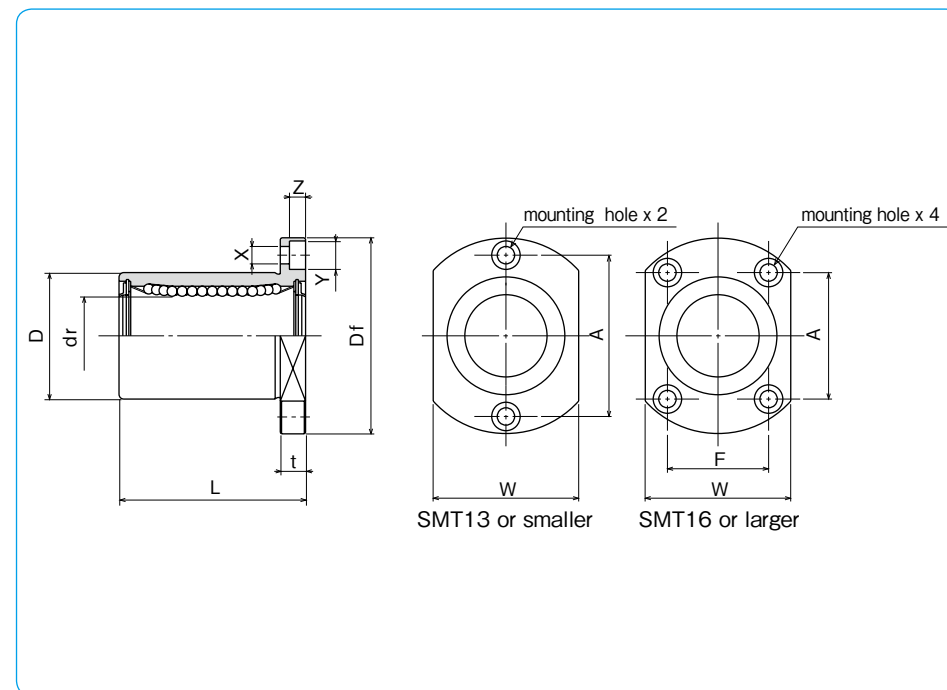

| part number* | | | | number of ball circuits | major dimensions | | | |
|-----------------|------------------|--------------------|-------------------|-------------------------|-------------------------|----|-------------------------|--------------|
| standard | | anti-corrosion | | | dr | D | L | |
| steel retainer | resin retainer | stainless retainer | resin retainer | mm | tolerance μm | mm | tolerance μm | ± 0.3 mm |
| SMT 6UU | SMT 6GUU | SMST 6UU | SMST 6GUU | 4 | 6 | 12 | 0 | 19 |
| SMT 8UU | SMT 8GUU | SMST 8UU | SMST 8GUU | 4 | 8 | 15 | -13 | 24 |
| SMT 10UU | SMT 10GUU | SMST 10UU | SMST 10GUU | 4 | 10 | 19 | 0 | 29 |
| SMT 12UU | SMT 12GUU | SMST 12UU | SMST 12GUU | 4 | 12 | 21 | 0 | 30 |
| SMT 13UU | SMT 13GUU | SMST 13UU | SMST 13GUU | 4 | 13 | 23 | -16 | 32 |
| SMT 16UU | SMT 16GUU | SMST 16UU | SMST 16GUU | 4 | 16 | 28 | 0 | 37 |
| SMT 20UU | SMT 20GUU | SMST 20UU | SMST 20GUU | 5 | 20 | 32 | 0 | 42 |
| SMT 25UU | SMT 25GUU | SMST 25UU | SMST 25GUU | 6 | 25 | 40 | -19 | 59 |
| SMT 30UU | SMT 30GUU | SMST 30UU | SMST 30GUU | 6 | 30 | 45 | 0 | 64 |

* Seals-on-both-sides is standard.

| Df mm | W mm | t mm | flange | | | eccentricity μm | perpendicularity μm | basic load rating | | mass g | shaft diameter mm |
|-------|------|------|--------|------|-------------|----------------------------|--------------------------------|-------------------|-------------|--------|-------------------|
| | | | A mm | F mm | X×Y×Z mm | | | dynamic C N | static Co N | | |
| 28 | 18 | 5 | 20 | — | 3.5×6×3.1 | 12 | 12 | 206 | 265 | 21 | 6 |
| 32 | 21 | 5 | 24 | — | 3.5×6×3.1 | | | 274 | 392 | 33 | 8 |
| 40 | 25 | 6 | 29 | — | 4.5×7.5×4.1 | | | 372 | 549 | 64 | 10 |
| 42 | 27 | 6 | 32 | — | 4.5×7.5×4.1 | | | 510 | 784 | 68 | 12 |
| 43 | 29 | 6 | 33 | — | 4.5×7.5×4.1 | | | 510 | 784 | 81 | 13 |
| 48 | 34 | 6 | 31 | 22 | 4.5×7.5×4.1 | 774 | 1,180 | 112 | 16 | | |
| 54 | 38 | 8 | 36 | 24 | 5.5×9×5.1 | 882 | 1,370 | 167 | 20 | | |
| 62 | 46 | 8 | 40 | 32 | 5.5×9×5.1 | 980 | 1,570 | 325 | 25 | | |
| 74 | 51 | 10 | 49 | 35 | 6.6×11×6.1 | 1,570 | 2,740 | 388 | 30 | | |

1N≒0.102kgf

SMF-E TYPE

– Round Flange Type with Pilot End –



part number structure

example **SMSF 25 G UU -E -SK**

specification
SMF: standard
SMSF: anti-corrosion

inner contact diameter (dr)

retainer material
blank: standard/steel
G: resin

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome plating


with pilot end

seal
UU: seals on both sides
ZZ: doublelip-seals on both sides

Doublelip-seal is available for size 6 to 30.

| part number* | | | | number of ball circuits | dr | | major dimensions | | |
|-------------------------|----------------|-----------------------------------|-------------------------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | anti-corrosion resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| SMF 6UU-E | SMF 6GUU-E | SMSF 6UU-E | SMSF 6GUU-E | 4 | 6 | 12 | 0 | 19 | |
| SMF 8UU-E | SMF 8GUU-E | SMSF 8UU-E | SMSF 8GUU-E | 4 | 8 | 15 | -13 | 24 | |
| SMF 10UU-E | SMF 10GUU-E | SMSF 10UU-E | SMSF 10GUU-E | 4 | 10 | 19 | 0 | 29 | |
| SMF 12UU-E | SMF 12GUU-E | SMSF 12UU-E | SMSF 12GUU-E | 4 | 12 | 21 | 0 | 30 | |
| SMF 13UU-E | SMF 13GUU-E | SMSF 13UU-E | SMSF 13GUU-E | 4 | 13 | 23 | -16 | 32 | |
| SMF 16UU-E | SMF 16GUU-E | SMSF 16UU-E | SMSF 16GUU-E | 4 | 16 | 28 | | 37 | |
| SMF 20UU-E | SMF 20GUU-E | SMSF 20UU-E | SMSF 20GUU-E | 5 | 20 | 32 | 0 | 42 | |
| SMF 25UU-E | SMF 25GUU-E | SMSF 25UU-E | SMSF 25GUU-E | 6 | 25 | 40 | -19 | 59 | |
| SMF 30UU-E | SMF 30GUU-E | SMSF 30UU-E | SMSF 30GUU-E | 6 | 30 | 45 | | 64 | |
| SMF 35UU-E | SMF 35GUU-E | — | — | 6 | 35 | 52 | 0 | 70 | |
| SMF 40UU-E | SMF 40GUU-E | — | — | 6 | 40 | 60 | 0 | 80 | |
| SMF 50UU-E | SMF 50GUU-E | — | — | 6 | 50 | 80 | -22 | 100 | |
| SMF 60UU-E | SMF 60GUU-E | — | — | 6 | 60 | 90 | 0/-25 | 110 | |

* Seals-on-both-sides is standard.

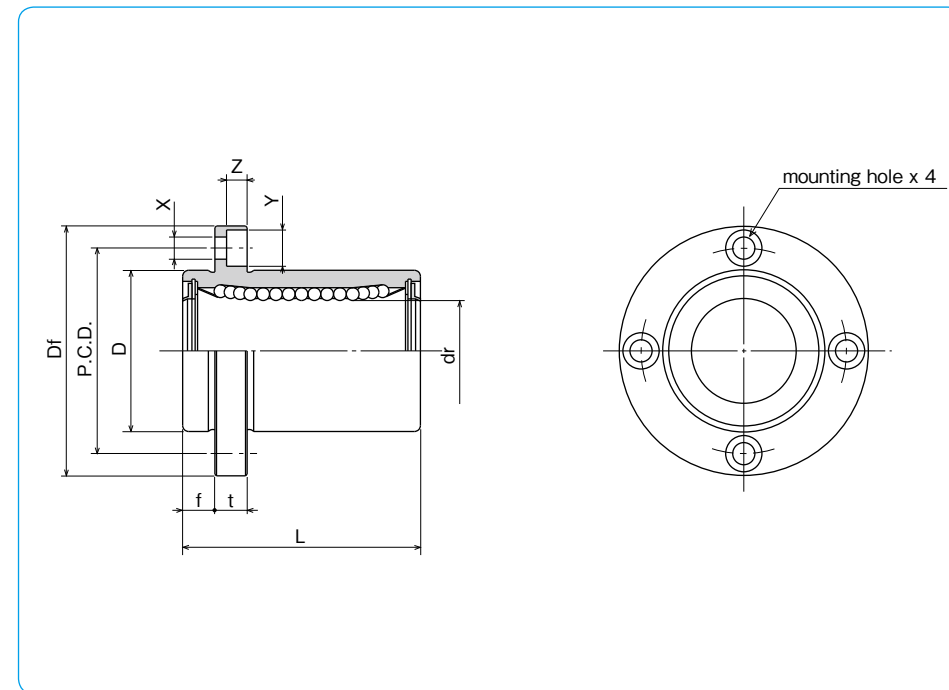

| flange | | | | | eccentricity μm | perpendicularity μm | basic load rating | | mass g | shaft diameter mm | | |
|--------|-------|------|-----------|-------------|----------------------------|--------------------------------|-------------------|-------------|--------|-------------------|-------|----|
| f mm | Df mm | t mm | P.C.D. mm | X×Y×Z mm | | | dynamic C N | static Co N | | | | |
| 5 | 28 | 5 | 20 | 3.5×6×3.1 | 12 | 12 | 206 | 265 | 24 | 6 | | |
| 5 | 32 | 5 | 24 | 3.5×6×3.1 | | | 274 | 392 | 37 | 8 | | |
| 6 | 40 | 6 | 29 | 4.5×7.5×4.1 | | | 372 | 549 | 72 | 10 | | |
| 6 | 42 | 6 | 32 | 4.5×7.5×4.1 | | | 510 | 784 | 76 | 12 | | |
| 6 | 43 | 6 | 33 | 4.5×7.5×4.1 | | | 510 | 784 | 88 | 13 | | |
| 6 | 48 | 6 | 38 | 4.5×7.5×4.1 | | | 774 | 1,180 | 120 | 16 | | |
| 8 | 54 | 8 | 43 | 5.5×9×5.1 | 15 | 15 | 882 | 1,370 | 180 | 20 | | |
| 8 | 62 | 8 | 51 | 5.5×9×5.1 | | | 980 | 1,570 | 340 | 25 | | |
| 10 | 74 | 10 | 60 | 6.6×11×6.1 | | | 1,570 | 2,740 | 470 | 30 | | |
| 10 | 82 | 10 | 67 | 6.6×11×6.1 | 20 | 20 | 1,670 | 3,140 | 650 | 35 | | |
| 13 | 96 | 13 | 78 | 9×14×8.1 | | | 2,160 | 4,020 | 1,060 | 40 | | |
| 13 | 116 | 13 | 98 | 9×14×8.1 | | | 3,820 | 7,940 | 2,200 | 50 | | |
| 18 | 134 | 18 | 112 | 11×17×11.1 | | | 25 | 25 | 4,700 | 10,000 | 3,000 | 60 |
| | | | | | | | | | | | | |


1N=0.102kgf

SMK-E TYPE


– Square Flange Type with Pilot End –



part number structure

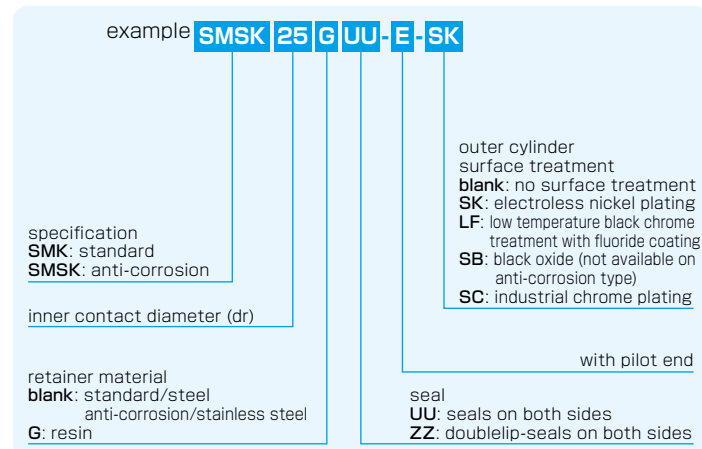

Doublelip-seal is available for size 6 to 30.

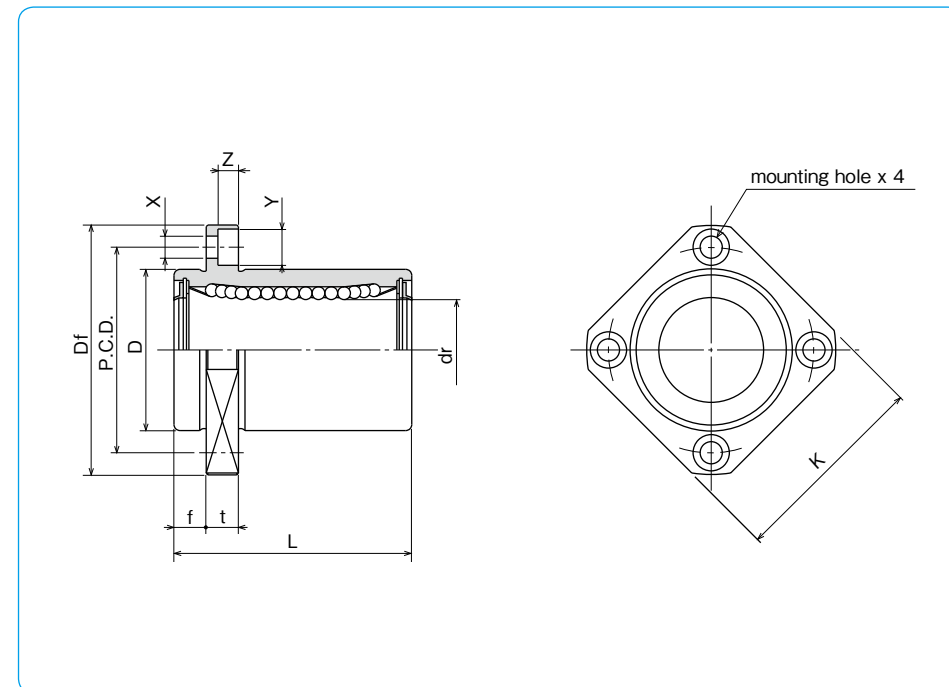

| part number* | | | | number of ball circuits | dr | | major dimensions | | |
|-------------------------|-------------------------------|--------------------------|----------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| standard steel retainer | anti-corrosion resin retainer | stainless steel retainer | resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| SMK 6UU-E | SMK 6GUU-E | SMSK 6UU-E | SMSK 6GUU-E | 4 | 6 | 0 | 12 | 0 | 19 |
| SMK 8UU-E | SMK 8GUU-E | SMSK 8UU-E | SMSK 8GUU-E | 4 | 8 | 0 | 15 | -13 | 24 |
| SMK 10UU-E | SMK 10GUU-E | SMSK 10UU-E | SMSK 10GUU-E | 4 | 10 | 0 | 19 | 0 | 29 |
| SMK 12UU-E | SMK 12GUU-E | SMSK 12UU-E | SMSK 12GUU-E | 4 | 12 | -9 | 21 | 0 | 30 |
| SMK 13UU-E | SMK 13GUU-E | SMSK 13UU-E | SMSK 13GUU-E | 4 | 13 | 0 | 23 | -16 | 32 |
| SMK 16UU-E | SMK 16GUU-E | SMSK 16UU-E | SMSK 16GUU-E | 4 | 16 | 0 | 28 | 0 | 37 |
| SMK 20UU-E | SMK 20GUU-E | SMSK 20UU-E | SMSK 20GUU-E | 5 | 20 | 0 | 32 | 0 | 42 |
| SMK 25UU-E | SMK 25GUU-E | SMSK 25UU-E | SMSK 25GUU-E | 6 | 25 | -10 | 40 | -19 | 59 |
| SMK 30UU-E | SMK 30GUU-E | SMSK 30UU-E | SMSK 30GUU-E | 6 | 30 | 0 | 45 | 0 | 64 |
| SMK 35UU-E | SMK 35GUU-E | — | — | 6 | 35 | 0 | 52 | 0 | 70 |
| SMK 40UU-E | SMK 40GUU-E | — | — | 6 | 40 | -12 | 60 | -22 | 80 |
| SMK 50UU-E | SMK 50GUU-E | — | — | 6 | 50 | 0 | 80 | 0 | 100 |
| SMK 60UU-E | SMK 60GUU-E | — | — | 6 | 60 | 0/-15 | 90 | 0/-25 | 110 |

* Seals-on-both-sides is standard.

| f mm | Df mm | flange | | | P.C.D. mm | X×Y×Z mm | eccentricity μm | perpendicularity μm | basic load rating | | mass g | shaft diameter mm |
|------|-------|--------|------|-------------|-------------|----------|----------------------------|--------------------------------|-------------------|-------|--------|-------------------|
| | | K mm | t mm | dynamic C N | | | | | static Co N | | | |
| 5 | 28 | 22 | 5 | 20 | 3.5×6×3.1 | 12 | 12 | 206 | 265 | 18 | 6 | |
| 5 | 32 | 25 | 5 | 24 | 3.5×6×3.1 | | | 274 | 392 | 29 | 8 | |
| 6 | 40 | 30 | 6 | 29 | 4.5×7.5×4.1 | | | 372 | 549 | 52 | 10 | |
| 6 | 42 | 32 | 6 | 32 | 4.5×7.5×4.1 | | | 510 | 784 | 57 | 12 | |
| 6 | 43 | 34 | 6 | 33 | 4.5×7.5×4.1 | | | 510 | 784 | 72 | 13 | |
| 6 | 48 | 37 | 6 | 38 | 4.5×7.5×4.1 | | | 774 | 1,180 | 104 | 16 | |
| 8 | 54 | 42 | 8 | 43 | 5.5×9×5.1 | 15 | 15 | 882 | 1,370 | 145 | 20 | |
| 8 | 62 | 50 | 8 | 51 | 5.5×9×5.1 | | | 980 | 1,570 | 300 | 25 | |
| 10 | 74 | 58 | 10 | 60 | 6.6×11×6.1 | | | 1,570 | 2,740 | 375 | 30 | |
| 10 | 82 | 64 | 10 | 67 | 6.6×11×6.1 | 20 | 20 | 1,670 | 3,140 | 560 | 35 | |
| 13 | 96 | 75 | 13 | 78 | 9×14×8.1 | | | 2,160 | 4,020 | 880 | 40 | |
| 13 | 116 | 92 | 13 | 98 | 9×14×8.1 | | | 3,820 | 7,940 | 2,000 | 50 | |
| 18 | 134 | 106 | 18 | 112 | 11×17×11.1 | | | 4,700 | 10,000 | 2,560 | 60 | |

1N=0.102kgf

SMT-E TYPE

– Two Side Cut Pilot End Flange Type –



part number structure

example **SMST 25 G UU -E -SK**

specification
SMT: standard
SMST: anti-corrosion


inner contact diameter (dr)

retainer material
blank: standard/steel
 anti-corrosion/stainless steel
G: resin

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome plating

with pilot end

seal
UU: seals on both sides
ZZ: doublelip-seals on both sides

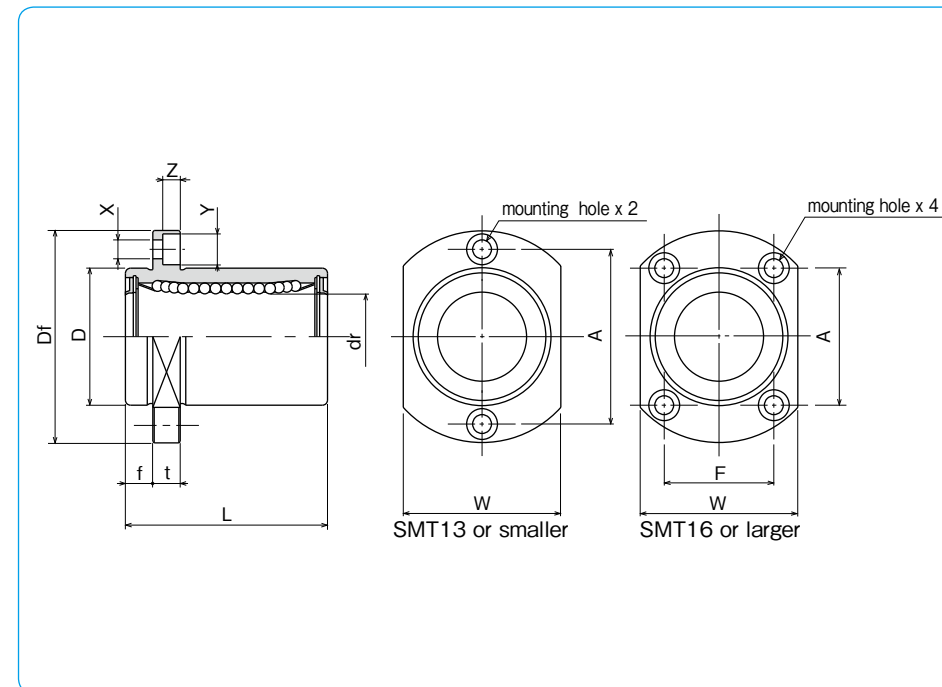

| part number* | | | | number of ball circuits | dr mm | dr tolerance μm | major dimensions | | |
|-------------------------|-------------------------|-----------------------------------|-------------------------------|-------------------------|----------|-----------------------|------------------|----------------------|-----------------|
| standard steel retainer | standard resin retainer | anti-corrosion stainless retainer | anti-corrosion resin retainer | | | | D mm | D tolerance μm | L ±0.3 mm |
| SMT 6UU-E | SMT 6GUU-E | SMST 6UU-E | SMST 6GUU-E | 4 | 6 | 0 | 12 | 19 | |
| SMT 8UU-E | SMT 8GUU-E | SMST 8UU-E | SMST 8GUU-E | 4 | 8 | -9 | 15 | 24 | |
| SMT10UU-E | SMT10GUU-E | SMST10UU-E | SMST10GUU-E | 4 | 10 | 0 | 19 | 29 | |
| SMT12UU-E | SMT12GUU-E | SMST12UU-E | SMST12GUU-E | 4 | 12 | -9 | 21 | 30 | |
| SMT13UU-E | SMT13GUU-E | SMST13UU-E | SMST13GUU-E | 4 | 13 | 0 | 23 | 32 | |
| SMT16UU-E | SMT16GUU-E | SMST16UU-E | SMST16GUU-E | 4 | 16 | -16 | 28 | 37 | |
| SMT20UU-E | SMT20GUU-E | SMST20UU-E | SMST20GUU-E | 5 | 20 | 0 | 32 | 42 | |
| SMT25UU-E | SMT25GUU-E | SMST25UU-E | SMST25GUU-E | 6 | 25 | -10 | 40 | 59 | |
| SMT30UU-E | SMT30GUU-E | SMST30UU-E | SMST30GUU-E | 6 | 30 | 0 | 45 | 64 | |

* Seals-on-both-sides is standard.

| f mm | Df mm | flange | | | | eccentricity μm | perpendicularity μm | basic load rating | | mass g | shaft diameter mm |
|---------|----------|---------|---------|---------|---------|--------------------|------------------------|-------------------|-------------------|-----------|----------------------|
| | | W mm | t mm | A mm | F mm | | | dynamic C N | static Co N | | |
| 5 | 28 | 18 | 5 | 20 | — | 12 | 12 | 206 | 265 | 21 | 6 |
| 5 | 32 | 21 | 5 | 24 | — | | | 274 | 392 | 33 | 8 |
| 6 | 40 | 25 | 6 | 29 | — | | | 372 | 549 | 64 | 10 |
| 6 | 42 | 27 | 6 | 32 | — | | | 510 | 784 | 68 | 12 |
| 6 | 43 | 29 | 6 | 33 | — | 15 | 15 | 510 | 784 | 81 | 13 |
| 6 | 48 | 34 | 6 | 31 | 22 | | | 774 | 1,180 | 112 | 16 |
| 8 | 54 | 38 | 8 | 36 | 24 | 15 | 15 | 882 | 1,370 | 167 | 20 |
| 8 | 62 | 46 | 8 | 40 | 32 | | | 980 | 1,570 | 325 | 25 |
| 10 | 74 | 51 | 10 | 49 | 35 | | | 1,570 | 2,740 | 388 | 30 |

1N≒0.102kgf

SMK-G-L TYPE

– Square Flange Long type –




part number structure

example **SMK25G-LUU-SK**

| | | | | | |
|-----------------------------|----|---|---|-----------|----|
| SMK type | 25 | G | L | UU | SK |
| inner contact diameter (dr) | | | | | |
| resin retainer | | | | | |
| | | | | long type | |

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome plating

seal
UU: seals on both sides
ZZ: doublelip-seals on both sides

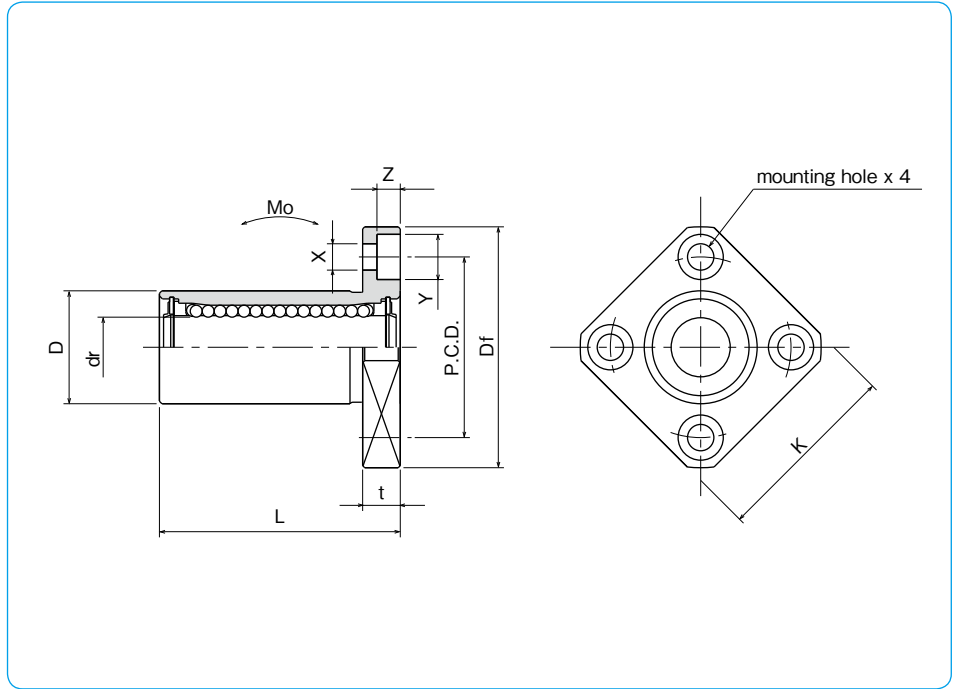

| part number* | number of ball circuits | dr | | D | | major dimensions | | | | |
|--------------|-------------------------|----|-------------------------|----|-------------------------|------------------|-------|------|------|------------------|
| | | mm | tolerance μm | mm | tolerance μm | L ± 0.3 mm | Df mm | K mm | t mm | flange P.C.D. mm |
| SMK 6G-LUU | 4 | 6 | 0 | 12 | 0 | 26 | 28 | 22 | 5 | 20 |
| SMK 8G-LUU | 4 | 8 | | 15 | -13 | 32 | 32 | 25 | 5 | 24 |
| SMK 10G-LUU | 4 | 10 | | 19 | -16 | 39 | 40 | 30 | 6 | 29 |
| SMK 12G-LUU | 4 | 12 | | 21 | | 0 | 41 | 42 | 32 | 6 |
| SMK 13G-LUU | 4 | 13 | 23 | 0 | | 45 | 43 | 34 | 6 | 33 |
| SMK 16G-LUU | 4 | 16 | 28 | 0 | | 53 | 48 | 37 | 6 | 38 |
| SMK 20G-LUU | 5 | 20 | -12 | 32 | 0 | 59 | 54 | 42 | 8 | 43 |
| SMK 25G-LUU | 6 | 25 | | 40 | -19 | 83 | 62 | 50 | 8 | 51 |
| SMK 30G-LUU | 6 | 30 | | 45 | 0 | 90 | 74 | 58 | 10 | 60 |

* Seals-on-both-sides is standard.

| X×Y×Z mm | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment Mo N·m | mass g | shaft diameter mm |
|-------------|----------------------------|--------------------------------|-------------------|-------------|--------------------------------|--------|-------------------|
| | | | dynamic C N | static Co N | | | |
| 3.5×6×3.1 | 15 | 15 | 262 | 476 | 1.15 | 20 | 6 |
| 3.5×6×3.1 | | | 352 | 615 | 1.94 | 32 | 8 |
| 4.5×7.5×4.1 | | | 493 | 1,000 | 3.98 | 59 | 10 |
| 4.5×7.5×4.1 | | | 637 | 1,430 | 6.26 | 67 | 12 |
| 4.5×7.5×4.1 | | | 682 | 1,560 | 7.68 | 88 | 13 |
| 4.5×7.5×4.1 | 20 | 20 | 1,039 | 2,350 | 13.2 | 125 | 16 |
| 5.5×9×5.1 | | | 1,160 | 2,740 | 17.9 | 170 | 20 |
| 5.5×9×5.1 | | | 1,300 | 2,960 | 27.2 | 380 | 25 |
| 5.5×9×5.1 | | | 1,300 | 2,960 | 27.2 | 380 | 25 |
| 6.6×11×6.1 | | | 2,160 | 5,880 | 61.3 | 460 | 30 |

1N \approx 0.102kgf 1N·m \approx 0.102kgf·m

SMF-W TYPE

– Round Flange Double-Wide Type –




part number structure

example **SMSF 25 G W UU -SK**

| | |
|--|--|
| specification SMF: standard SMSF: anti-corrosion | outer cylinder surface treatment blank: no surface treatment SK: electroless nickel plating LF: low temperature black chrome treatment with fluoride coating SB: black oxide (not available on anti-corrosion type) SC: industrial chrome plating |
| inner contact diameter (dr) | seal blank: without seal UU: seals on both sides ZZ: doublelip-seals on both sides |
| retainer material blank: standard/steel anti-corrosion/stainless steel G: resin | double-wide type |

Doublelip-seal is available for size 6 to 30.

| part number | | | | number of ball circuits | dr | | major dimensions | | |
|-------------------------|----------------|-----------------------------------|----------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| SMF 6W | SMF 6GW | SMSF 6W | SMSF 6GW | 4 | 6 | 0 | 12 | 0 | 35 |
| SMF 8W | SMF 8GW | SMSF 8W | SMSF 8GW | 4 | 8 | 0 | 15 | -13 | 45 |
| SMF10W | SMF10GW | SMSF10W | SMSF10GW | 4 | 10 | 0 | 19 | 0 | 55 |
| SMF12W | SMF12GW | SMSF12W | SMSF12GW | 4 | 12 | -10 | 21 | 0 | 57 |
| SMF13W | SMF13GW | SMSF13W | SMSF13GW | 4 | 13 | 0 | 23 | -16 | 61 |
| SMF16W | SMF16GW | SMSF16W | SMSF16GW | 4 | 16 | 0 | 28 | 0 | 70 |
| SMF20W | SMF20GW | SMSF20W | SMSF20GW | 5 | 20 | 0 | 32 | 0 | 80 |
| SMF25W | SMF25GW | SMSF25W | SMSF25GW | 6 | 25 | -12 | 40 | -19 | 112 |
| SMF30W | SMF30GW | SMSF30W | SMSF30GW | 6 | 30 | 0 | 45 | 0 | 123 |
| SMF35W | SMF35GW | SMSF35W | SMSF35GW | 6 | 35 | 0 | 52 | 0 | 135 |
| SMF40W | SMF40GW | SMSF40W | SMSF40GW | 6 | 40 | -15 | 60 | -22 | 151 |
| SMF50W | SMF50GW | SMSF50W | SMSF50GW | 6 | 50 | 0 | 80 | 0 | 192 |
| SMF60W | SMF60GW | SMSF60W | SMSF60GW | 6 | 60 | 0/-20 | 90 | 0/-25 | 209 |

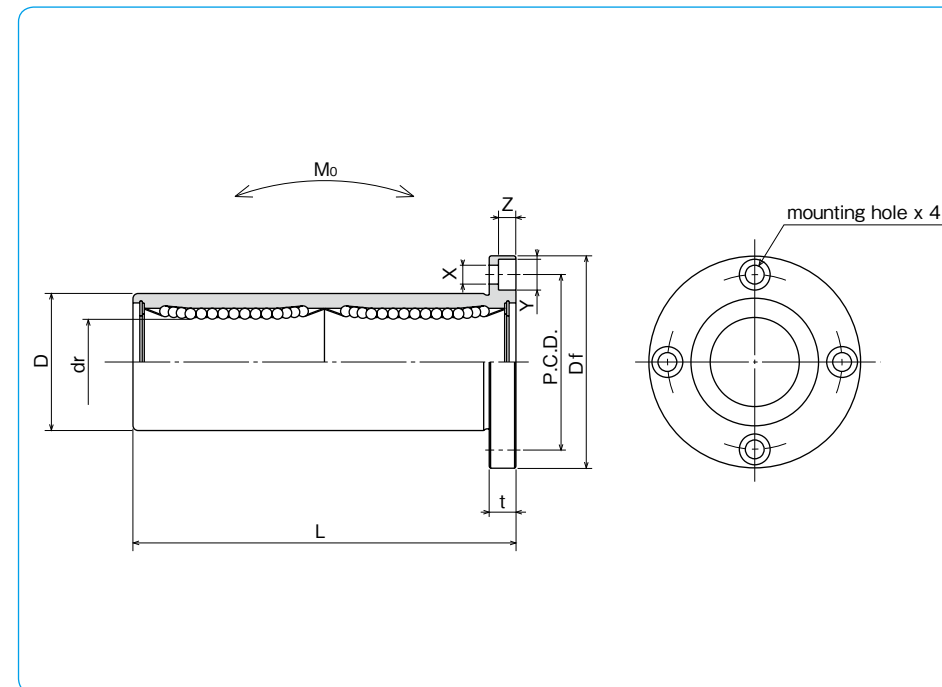


| Df mm | t mm | flange P.C.D. mm | X × Y × Z mm | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment M_o N · m | mass g | shaft diameter mm |
|-------|------|------------------|-----------------|----------------------------|--------------------------------|-------------------|----------------|-------------------------------------|--------|-------------------|
| | | | | | | dynamic C N | static C_o N | | | |
| 28 | 5 | 20 | 3.5 × 6 × 3.1 | 15 | 15 | 323 | 530 | 2.18 | 31 | 6 |
| 32 | 5 | 24 | 3.5 × 6 × 3.1 | | | 431 | 784 | 4.31 | 51 | 8 |
| 40 | 6 | 29 | 4.5 × 7.5 × 4.1 | | | 588 | 1,100 | 7.24 | 98 | 10 |
| 42 | 6 | 32 | 4.5 × 7.5 × 4.1 | | | 813 | 1,570 | 10.9 | 110 | 12 |
| 43 | 6 | 33 | 4.5 × 7.5 × 4.1 | | | 813 | 1,570 | 11.6 | 130 | 13 |
| 48 | 6 | 38 | 4.5 × 7.5 × 4.1 | | | 1,230 | 2,350 | 19.7 | 190 | 16 |
| 54 | 8 | 43 | 5.5 × 9 × 5.1 | 20 | 20 | 1,400 | 2,740 | 26.8 | 260 | 20 |
| 62 | 8 | 51 | 5.5 × 9 × 5.1 | | | 1,560 | 3,140 | 43.4 | 540 | 25 |
| 74 | 10 | 60 | 6.6 × 11 × 6.1 | | | 2,490 | 5,490 | 82.8 | 680 | 30 |
| 82 | 10 | 67 | 6.6 × 11 × 6.1 | | | 2,650 | 6,270 | 110 | 1,020 | 35 |
| 96 | 13 | 78 | 9 × 14 × 8.1 | 25 | 25 | 3,430 | 8,040 | 147 | 1,570 | 40 |
| 116 | 13 | 98 | 9 × 14 × 8.1 | | | 6,080 | 15,900 | 397 | 3,600 | 50 |
| 134 | 18 | 112 | 11 × 17 × 11.1 | | | 7,550 | 20,000 | 530 | 4,500 | 60 |

1N \approx 0.102kgf 1N · m \approx 0.102kgf · m

SMK-W TYPE

– Square Flange Double-Wide Type –

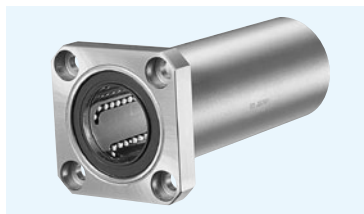


part number structure

example **SMSK 25 G W UU -SK**

| | |
|--|--|
| specification SMK : standard SMSK : anti-corrosion | outer cylinder surface treatment blank : no surface treatment SK : electroless nickel plating LF : low temperature black chrome treatment with fluoride coating SB : black oxide (not available on anti-corrosion type) SC : industrial chrome plating |
| inner contact diameter (dr) | seal blank : without seal UU : seals on both sides ZZ : doublelip-seals on both sides |
| retainer material blank : standard/steel anti-corrosion/stainless steel G : resin | double-wide type |

Doublelip-seal is available for size 6 to 30.

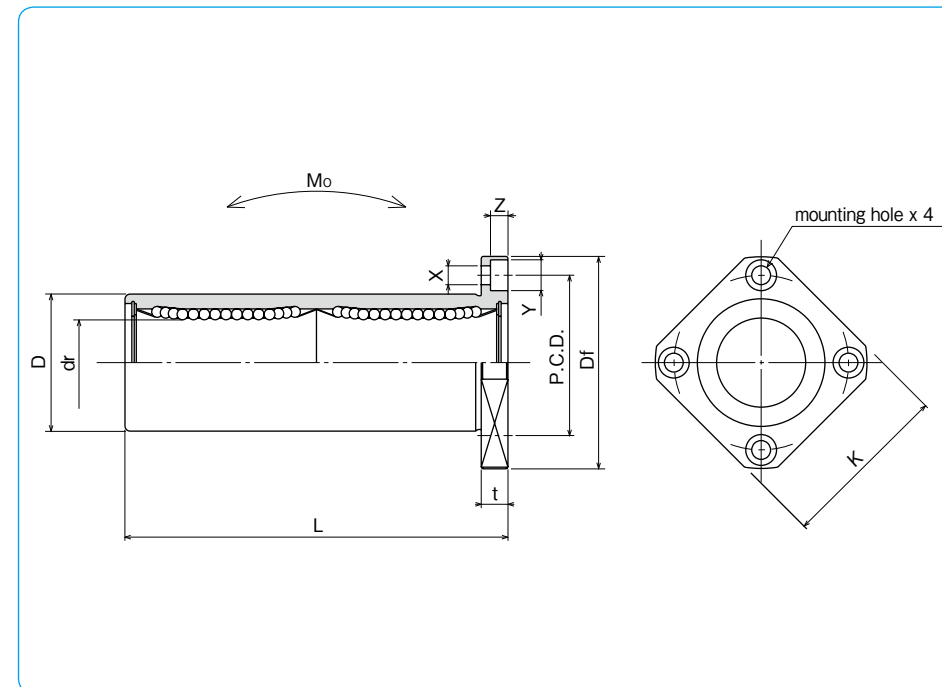

| part number | | | | number of ball circuits | major dimensions | | |
|-------------------------|-------------------------------|--------------------------|----------------|-------------------------|------------------|--------|--------|
| standard steel retainer | anti-corrosion resin retainer | stainless steel retainer | resin retainer | | dr (mm) | D (mm) | L (mm) |
| SMK 6W | SMK 6GW | SMSK 6W | SMSK 6GW | 4 | 6 | 12 | 35 |
| SMK 8W | SMK 8GW | SMSK 8W | SMSK 8GW | 4 | 8 | 15 | 45 |
| SMK 10W | SMK 10GW | SMSK 10W | SMSK 10GW | 4 | 10 | 19 | 55 |
| SMK 12W | SMK 12GW | SMSK 12W | SMSK 12GW | 4 | 12 | 21 | 57 |
| SMK 13W | SMK 13GW | SMSK 13W | SMSK 13GW | 4 | 13 | 23 | 61 |
| SMK 16W | SMK 16GW | SMSK 16W | SMSK 16GW | 4 | 16 | 28 | 70 |
| SMK 20W | SMK 20GW | SMSK 20W | SMSK 20GW | 5 | 20 | 32 | 80 |
| SMK 25W | SMK 25GW | SMSK 25W | SMSK 25GW | 6 | 25 | 40 | 112 |
| SMK 30W | SMK 30GW | SMSK 30W | SMSK 30GW | 6 | 30 | 45 | 123 |
| SMK 35W | SMK 35GW | SMSK 35W | SMSK 35GW | 6 | 35 | 52 | 135 |
| SMK 40W | SMK 40GW | SMSK 40W | SMSK 40GW | 6 | 40 | 60 | 151 |
| SMK 50W | SMK 50GW | SMSK 50W | SMSK 50GW | 6 | 50 | 80 | 192 |
| SMK 60W | SMK 60GW | SMSK 60W | SMSK 60GW | 6 | 60 | 90 | 209 |

| Df (mm) | flange | | | | eccentricity (μm) | perpendicularity (μm) | basic load rating | | allowable static moment Mo (N·m) | mass (g) | shaft diameter (mm) |
|---------|--------|--------|-------------|-------------|-------------------|-----------------------|-------------------|---------------|----------------------------------|----------|---------------------|
| | K (mm) | t (mm) | P.C.D. (mm) | X×Y×Z (mm) | | | dynamic C (N) | static Co (N) | | | |
| 28 | 22 | 5 | 20 | 3.5×6×3.1 | 15 | 15 | 323 | 530 | 2.18 | 25 | 6 |
| 32 | 25 | 5 | 24 | 3.5×6×3.1 | | | 431 | 784 | 4.31 | 43 | 8 |
| 40 | 30 | 6 | 29 | 4.5×7.5×4.1 | | | 588 | 1,100 | 7.24 | 78 | 10 |
| 42 | 32 | 6 | 32 | 4.5×7.5×4.1 | | | 813 | 1,570 | 10.9 | 90 | 12 |
| 43 | 34 | 6 | 33 | 4.5×7.5×4.1 | | | 813 | 1,570 | 11.6 | 108 | 13 |
| 48 | 37 | 6 | 38 | 4.5×7.5×4.1 | | | 1,230 | 2,350 | 19.7 | 165 | 16 |
| 54 | 42 | 8 | 43 | 5.5×9×5.1 | 20 | 20 | 1,400 | 2,740 | 26.8 | 225 | 20 |
| 62 | 50 | 8 | 51 | 5.5×9×5.1 | | | 1,560 | 3,140 | 43.4 | 500 | 25 |
| 74 | 58 | 10 | 60 | 6.6×11×6.1 | | | 2,490 | 5,490 | 82.8 | 590 | 30 |
| 82 | 64 | 10 | 67 | 6.6×11×6.1 | | | 2,650 | 6,270 | 110 | 930 | 35 |
| 96 | 75 | 13 | 78 | 9×14×8.1 | 25 | 25 | 3,430 | 8,040 | 147 | 1,380 | 40 |
| 116 | 92 | 13 | 98 | 9×14×8.1 | | | 6,080 | 15,900 | 397 | 3,400 | 50 |
| 134 | 106 | 18 | 112 | 11×17×11.1 | | | 7,550 | 20,000 | 530 | 4,060 | 60 |

1N≒0.102kgf 1N·m≒0.102kgf·m

SMT-W TYPE


– Two Side Cut Double-Wide Flange Type –



part number structure

example **SMST 25 G W UU -SK**

| | |
|--|--|
| specification SMT: standard SMST: anti-corrosion | outer cylinder surface treatment blank: no surface treatment SK: electroless nickel plating LF: low temperature black chrome treatment with fluoride coating SB: black oxide (not available on anti-corrosion type) SC: industrial chrome plating |
| inner contact diameter (dr) | seal UU: seals on both sides ZZ: doublelip-seals on both sides |
| retainer material blank: standard/steel anti-corrosion/stainless steel G: resin | double-wide type |

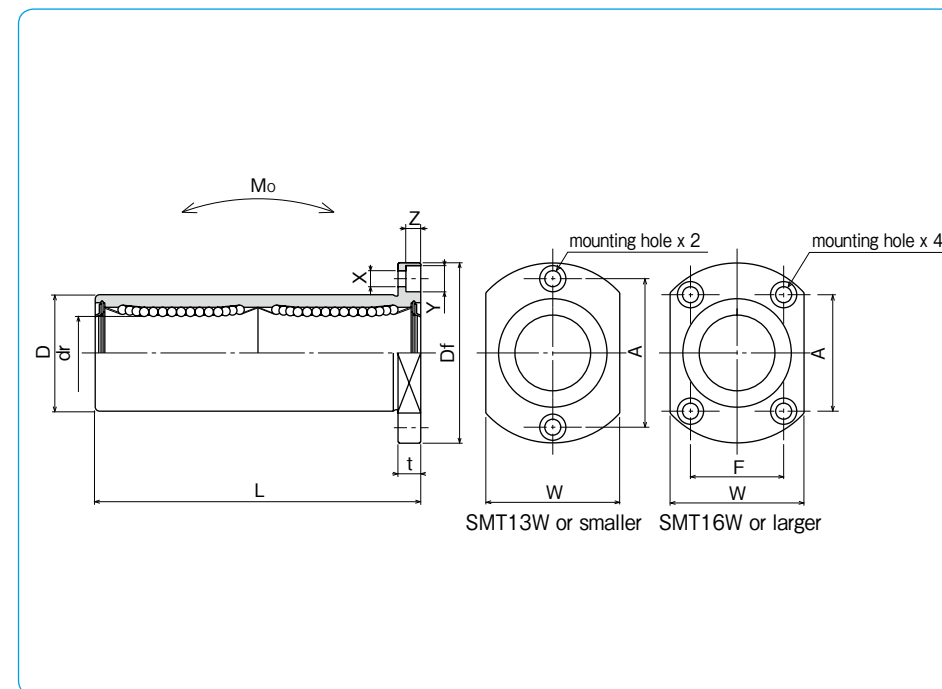

| part number* | | | | number of ball circuits | dr | | major dimensions | | |
|-------------------------|----------------|-----------------------------------|-------------------------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | anti-corrosion resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| SMT 6WUU | SMT 6GWUU | SMST 6WUU | SMST 6GWUU | 4 | 6 | 12 | 0 | 35 | |
| SMT 8WUU | SMT 8GWUU | SMST 8WUU | SMST 8GWUU | 4 | 8 | 15 | -13 | 45 | |
| SMT10WUU | SMT10GWUU | SMST10WUU | SMST10GWUU | 4 | 10 | 19 | 0 | 55 | |
| SMT12WUU | SMT12GWUU | SMST12WUU | SMST12GWUU | 4 | 12 | 21 | 0 | 57 | |
| SMT13WUU | SMT13GWUU | SMST13WUU | SMST13GWUU | 4 | 13 | 23 | -16 | 61 | |
| SMT16WUU | SMT16GWUU | SMST16WUU | SMST16GWUU | 4 | 16 | 28 | 0 | 70 | |
| SMT20WUU | SMT20GWUU | SMST20WUU | SMST20GWUU | 5 | 20 | 32 | 0 | 80 | |
| SMT25WUU | SMT25GWUU | SMST25WUU | SMST25GWUU | 6 | 25 | 40 | -19 | 112 | |
| SMT30WUU | SMT30GWUU | SMST30WUU | SMST30GWUU | 6 | 30 | 45 | 0 | 123 | |

* Seals-on-both-sides is standard.

| Df mm | W mm | t mm | flange | | | X×Y×Z mm | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment $\text{N} \cdot \text{m}$ | mass g | shaft diameter mm |
|-------|------|------|--------|------|-------------|----------|----------------------------|--------------------------------|-------------------|------|---|--------|-------------------|
| | | | F mm | A mm | C | | | | Co | | | | |
| 28 | 18 | 5 | 20 | — | 3.5×6×3.1 | 15 | 15 | 323 | 530 | 2.18 | 28 | 6 | |
| 32 | 21 | 5 | 24 | — | 3.5×6×3.1 | | | 431 | 784 | 4.31 | 47 | 8 | |
| 40 | 25 | 6 | 29 | — | 4.5×7.5×4.1 | | | 588 | 1,100 | 7.24 | 90 | 10 | |
| 42 | 27 | 6 | 32 | — | 4.5×7.5×4.1 | | | 813 | 1,570 | 10.9 | 102 | 12 | |
| 43 | 29 | 6 | 33 | — | 4.5×7.5×4.1 | | | 813 | 1,570 | 11.6 | 123 | 13 | |
| 48 | 34 | 6 | 31 | 22 | 4.5×7.5×4.1 | | | 1,230 | 2,350 | 19.7 | 182 | 16 | |
| 54 | 38 | 8 | 36 | 24 | 5.5×9×5.1 | 20 | 20 | 1,400 | 2,740 | 26.8 | 247 | 20 | |
| 62 | 46 | 8 | 40 | 32 | 5.5×9×5.1 | | | 1,560 | 3,140 | 43.4 | 525 | 25 | |
| 74 | 51 | 10 | 49 | 35 | 6.6×11×6.1 | | | 2,490 | 5,490 | 82.8 | 645 | 30 | |

1N \div 0.102kgf 1N \cdot m \div 0.102kgf \cdot m

SMFC TYPE

– Center Mount Round Flange Type –




part number structure

example **SMSFC 25 G UU -SK**

| | |
|--|--|
| specification SMFC : standard SMSFC : anti-corrosion | outer cylinder surface treatment blank : no surface treatment SK : electroless nickel plating LF : low temperature black chrome treatment with fluoride coating SB : black oxide (not available on anti-corrosion type) SC : industrial chrome plating |
| inner contact diameter (dr) | seal blank : without seal UU : seals on both sides ZZ : doublelip-seals on both sides |
| retainer material blank : standard/steel anti-corrosion/stainless steel G : resin | |

Doublelip-seal is available for size 6 to 30.

| part number | | | | number of ball circuits | dr | | major dimensions | | |
|-------------------------|-------------------------------|--------------------------|----------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| standard steel retainer | anti-corrosion resin retainer | stainless steel retainer | resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| SMFC 6 | SMFC 6G | SMSFC 6 | SMSFC 6G | 4 | 6 | 0 | 12 | 0 | 35 |
| SMFC 8 | SMFC 8G | SMSFC 8 | SMSFC 8G | 4 | 8 | 0 | 15 | -13 | 45 |
| SMFC10 | SMFC10G | SMSFC10 | SMSFC10G | 4 | 10 | 0 | 19 | 0 | 55 |
| SMFC12 | SMFC12G | SMSFC12 | SMSFC12G | 4 | 12 | -10 | 21 | 0 | 57 |
| SMFC13 | SMFC13G | SMSFC13 | SMSFC13G | 4 | 13 | 0 | 23 | -16 | 61 |
| SMFC16 | SMFC16G | SMSFC16 | SMSFC16G | 4 | 16 | 0 | 28 | 0 | 70 |
| SMFC20 | SMFC20G | SMSFC20 | SMSFC20G | 5 | 20 | 0 | 32 | 0 | 80 |
| SMFC25 | SMFC25G | SMSFC25 | SMSFC25G | 6 | 25 | -12 | 40 | -19 | 112 |
| SMFC30 | SMFC30G | SMSFC30 | SMSFC30G | 6 | 30 | 0 | 45 | 0 | 123 |
| SMFC35 | SMFC35G | SMSFC35 | SMSFC35G | 6 | 35 | 0 | 52 | 0 | 135 |
| SMFC40 | SMFC40G | SMSFC40 | SMSFC40G | 6 | 40 | -15 | 60 | -22 | 151 |
| SMFC50 | SMFC50G | SMSFC50 | SMSFC50G | 6 | 50 | 0 | 80 | 0 | 192 |
| SMFC60 | SMFC60G | SMSFC60 | SMSFC60G | 6 | 60 | 0/-20 | 90 | 0/-25 | 209 |

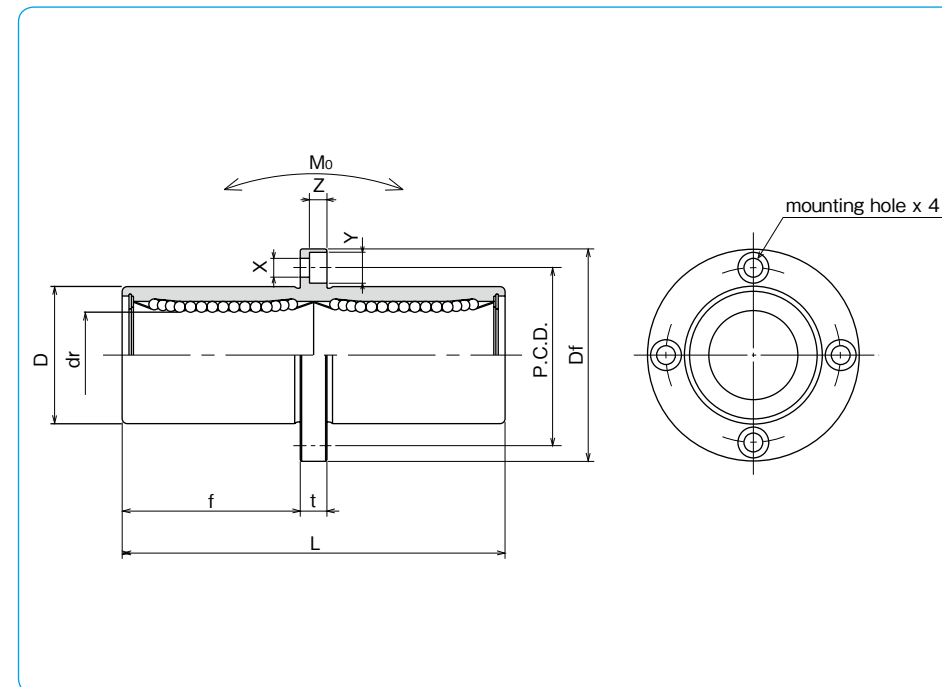

| flange | | | | | eccentricity μm | perpendicularity μm | basic load rating | | | allowable static moment $\text{N} \cdot \text{m}$ | mass g | shaft diameter mm |
|--------|----------|------|-----------|--------------------------|----------------------------|--------------------------------|-------------------|----------------|------|---|--------|-------------------|
| f mm | D_f mm | t mm | P.C.D. mm | $X \times Y \times Z$ mm | | | dynamic C N | static C_o N | | | | |
| 15 | 28 | 5 | 20 | 3.5×6×3.1 | 15 | 15 | 323 | 530 | 2.18 | 31 | 6 | |
| 20 | 32 | 5 | 24 | 3.5×6×3.1 | | | 431 | 784 | 4.31 | 51 | 8 | |
| 24.5 | 40 | 6 | 29 | 4.5×7.5×4.1 | | | 588 | 1,100 | 7.24 | 98 | 10 | |
| 25.5 | 42 | 6 | 32 | 4.5×7.5×4.1 | | | 813 | 1,570 | 10.9 | 110 | 12 | |
| 27.5 | 43 | 6 | 33 | 4.5×7.5×4.1 | | | 813 | 1,570 | 11.6 | 130 | 13 | |
| 32 | 48 | 6 | 38 | 4.5×7.5×4.1 | | | 1,230 | 2,350 | 19.7 | 190 | 16 | |
| 36 | 54 | 8 | 43 | 5.5×9×5.1 | 20 | 20 | 1,400 | 2,740 | 26.8 | 260 | 20 | |
| 52 | 62 | 8 | 51 | 5.5×9×5.1 | | | 1,560 | 3,140 | 43.4 | 540 | 25 | |
| 56.5 | 74 | 10 | 60 | 6.6×11×6.1 | | | 2,490 | 5,490 | 82.8 | 680 | 30 | |
| 62.5 | 82 | 10 | 67 | 6.6×11×6.1 | 25 | 25 | 2,650 | 6,270 | 110 | 1,020 | 35 | |
| 69 | 96 | 13 | 78 | 9×14×8.1 | | | 3,430 | 8,040 | 147 | 1,570 | 40 | |
| 89.5 | 116 | 13 | 98 | 9×14×8.1 | | | 6,080 | 15,900 | 397 | 3,600 | 50 | |
| 95.5 | 134 | 18 | 112 | 11×17×11.1 | 30 | 30 | 7,550 | 20,000 | 530 | 4,500 | 60 | |

1N \approx 0.102kgf 1N \cdot m \approx 0.102kgf \cdot m

SMKC TYPE

– Center Mount Square Flange Type –




part number structure

example **SMSKC 25 G UU -SK**

| | |
|--|--|
| specification SMKC : standard SMSKC : anti-corrosion | outer cylinder surface treatment blank : no surface treatment SK : electroless nickel plating LF : low temperature black chrome treatment with fluoride coating SB : black oxide (not available on anti-corrosion type) SC : industrial chrome plating |
| inner contact diameter (dr) | seal blank : without seal UU : seals on both sides ZZ : doublelip-seals on both sides |
| retainer material blank : standard/steel anti-corrosion/stainless steel G : resin | |

Doublelip-seal is available for size 6 to 30.

| part number | | | | number of ball circuits | dr | | major dimensions | | |
|-------------------------|----------------|-----------------------------------|-------------------------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | anti-corrosion resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| SMKC 6 | SMKC 6G | SMSKC 6 | SMSKC 6G | 4 | 6 | 0 | 12 | 0 | 35 |
| SMKC 8 | SMKC 8G | SMSKC 8 | SMSKC 8G | 4 | 8 | 0 | 15 | -13 | 45 |
| SMKC10 | SMKC10G | SMSKC10 | SMSKC10G | 4 | 10 | 0 | 19 | 0 | 55 |
| SMKC12 | SMKC12G | SMSKC12 | SMSKC12G | 4 | 12 | -10 | 21 | 0 | 57 |
| SMKC13 | SMKC13G | SMSKC13 | SMSKC13G | 4 | 13 | -10 | 23 | -16 | 61 |
| SMKC16 | SMKC16G | SMSKC16 | SMSKC16G | 4 | 16 | -10 | 28 | -16 | 70 |
| SMKC20 | SMKC20G | SMSKC20 | SMSKC20G | 5 | 20 | 0 | 32 | 0 | 80 |
| SMKC25 | SMKC25G | SMSKC25 | SMSKC25G | 6 | 25 | -12 | 40 | -19 | 112 |
| SMKC30 | SMKC30G | SMSKC30 | SMSKC30G | 6 | 30 | -12 | 45 | -19 | 123 |
| SMKC35 | SMKC35G | SMSKC35 | SMSKC35G | 6 | 35 | 0 | 52 | 0 | 135 |
| SMKC40 | SMKC40G | SMSKC40 | SMSKC40G | 6 | 40 | -15 | 60 | -22 | 151 |
| SMKC50 | SMKC50G | SMSKC50 | SMSKC50G | 6 | 50 | -15 | 80 | -22 | 192 |
| SMKC60 | SMKC60G | SMSKC60 | SMSKC60G | 6 | 60 | 0/-20 | 90 | 0/-25 | 209 |

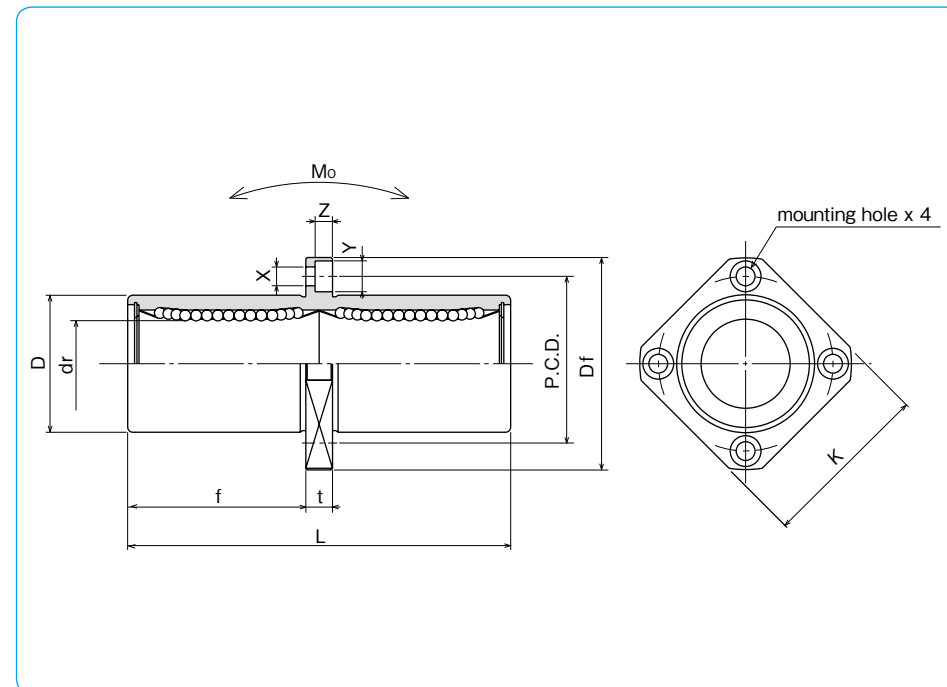

| f mm | Df mm | flange | | | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment $\text{N}\cdot\text{m}$ | mass g | shaft diameter mm | |
|------|-------|--------|------|-----------|----------------------------|--------------------------------|-------------------|-------------|---|--------|-------------------|-------------|
| | | K mm | t mm | P.C.D. mm | | | X×Y×Z mm | dynamic C N | | | | static Co N |
| 15 | 28 | 22 | 5 | 20 | 3.5×6×3.1 | 15 | 15 | 323 | 530 | 2.18 | 25 | 6 |
| 20 | 32 | 25 | 5 | 24 | 3.5×6×3.1 | | | 431 | 784 | 4.31 | 43 | 8 |
| 24.5 | 40 | 30 | 6 | 29 | 4.5×7.5×4.1 | | | 588 | 1,100 | 7.24 | 78 | 10 |
| 25.5 | 42 | 32 | 6 | 32 | 4.5×7.5×4.1 | | | 813 | 1,570 | 10.9 | 90 | 12 |
| 27.5 | 43 | 34 | 6 | 33 | 4.5×7.5×4.1 | | | 813 | 1,570 | 11.6 | 108 | 13 |
| 32 | 48 | 37 | 6 | 38 | 4.5×7.5×4.1 | 1,230 | 2,350 | 19.7 | 165 | 16 | | |
| 36 | 54 | 42 | 8 | 43 | 5.5×9×5.1 | 20 | 20 | 1,400 | 2,740 | 26.8 | 225 | 20 |
| 52 | 62 | 50 | 8 | 51 | 5.5×9×5.1 | | | 1,560 | 3,140 | 43.4 | 500 | 25 |
| 56.5 | 74 | 58 | 10 | 60 | 6.6×11×6.1 | | | 2,490 | 5,490 | 82.8 | 590 | 30 |
| 62.5 | 82 | 64 | 10 | 67 | 6.6×11×6.1 | | | 2,650 | 6,270 | 110 | 930 | 35 |
| 69 | 96 | 75 | 13 | 78 | 9×14×8.1 | | | 3,430 | 8,040 | 147 | 1,380 | 40 |
| 89.5 | 116 | 92 | 13 | 98 | 9×14×8.1 | 25 | 25 | 6,080 | 15,900 | 397 | 3,400 | 50 |
| 95.5 | 134 | 106 | 18 | 112 | 11×17×11.1 | | | 7,550 | 20,000 | 530 | 4,060 | 60 |

1N \approx 0.102kgf 1N \cdot m \approx 0.102kgf \cdot m

SMTC TYPE

- Two Side Cut Center Flange Type -



part number structure

example **SMSTC 25 G UU -SK**


specification
SMTC: standard
SMSTC: anti-corrosion

inner contact diameter (dr)

retainer material
blank: standard/steel
 anti-corrosion/stainless steel
G: resin

outer cylinder
 surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome
 treatment with fluoride coating
SB: black oxide (not available on
 anti-corrosion type)
SC: industrial chrome plating

seal
UU: seals on both sides
ZZ: doublelip-seals on both sides

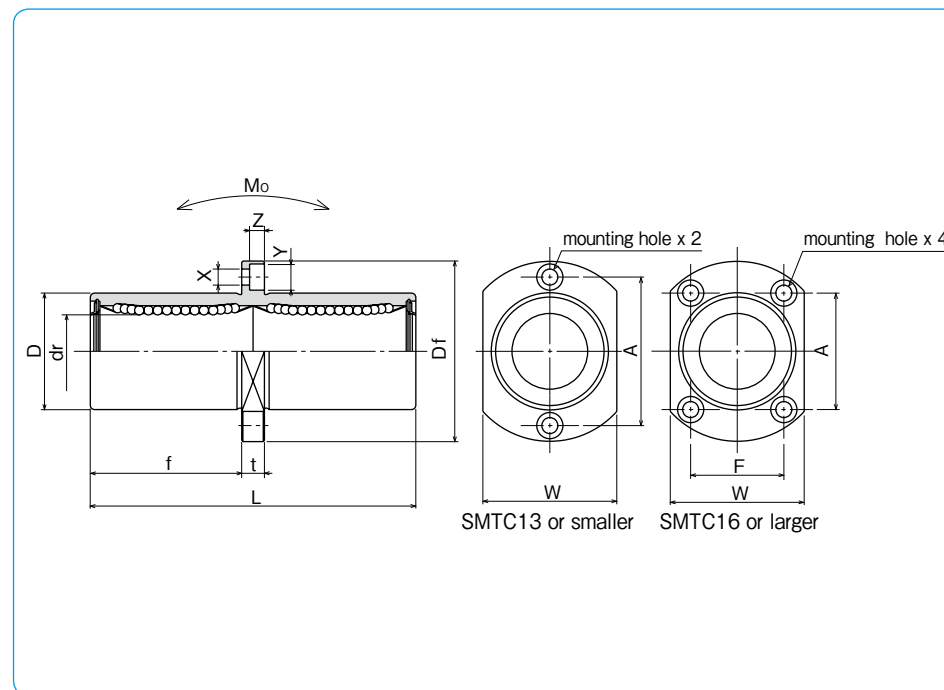

| part number* | | | | number of ball circuits | major dimensions | | |
|-------------------------|----------------|-----------------------------------|----------------|-------------------------|------------------|------|-----------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | resin retainer | | dr mm | D mm | L ±0.3 mm |
| SMTC 6UU | SMTC 6GUU | SMSTC 6UU | SMSTC 6GUU | 4 | 6 | 12 | 35 |
| SMTC 8UU | SMTC 8GUU | SMSTC 8UU | SMSTC 8GUU | 4 | 8 | 15 | 45 |
| SMTC10UU | SMTC10GUU | SMSTC10UU | SMSTC10GUU | 4 | 10 | 19 | 55 |
| SMTC12UU | SMTC12GUU | SMSTC12UU | SMSTC12GUU | 4 | 12 | 21 | 57 |
| SMTC13UU | SMTC13GUU | SMSTC13UU | SMSTC13GUU | 4 | 13 | 23 | 61 |
| SMTC16UU | SMTC16GUU | SMSTC16UU | SMSTC16GUU | 4 | 16 | 28 | 70 |
| SMTC20UU | SMTC20GUU | SMSTC20UU | SMSTC20GUU | 5 | 20 | 32 | 80 |
| SMTC25UU | SMTC25GUU | SMSTC25UU | SMSTC25GUU | 6 | 25 | 40 | 112 |
| SMTC30UU | SMTC30GUU | SMSTC30UU | SMSTC30GUU | 6 | 30 | 45 | 123 |

* Seals-on-both-sides is standard.

| flange | | | | | | | eccentricity μm | perpendicularity μm | basic load rating | | | mass g | shaft diameter mm |
|--------|-------|------|------|------|------|-------------|--------------------|------------------------|-------------------|----------------|-------------------------|-----------|----------------------|
| f mm | Df mm | W mm | t mm | A mm | F mm | X×Y×Z mm | | | dynamic C N | static Co N | static moment Mo N·m | | |
| 15 | 28 | 18 | 5 | 20 | — | 3.5×6×3.1 | 15 | 15 | 323 | 530 | 2.18 | 28 | 6 |
| 20 | 32 | 21 | 5 | 24 | — | 3.5×6×3.1 | | | 431 | 784 | 4.31 | 47 | 8 |
| 24.5 | 40 | 25 | 6 | 29 | — | 4.5×7.5×4.1 | | | 588 | 1,100 | 7.24 | 90 | 10 |
| 25.5 | 42 | 27 | 6 | 32 | — | 4.5×7.5×4.1 | | | 813 | 1,570 | 10.9 | 102 | 12 |
| 27.5 | 43 | 29 | 6 | 33 | — | 4.5×7.5×4.1 | | | 813 | 1,570 | 11.6 | 123 | 13 |
| 32 | 48 | 34 | 6 | 31 | 22 | 4.5×7.5×4.1 | | | 1,230 | 2,350 | 19.7 | 182 | 16 |
| 36 | 54 | 38 | 8 | 36 | 24 | 5.5×9×5.1 | 20 | 20 | 1,400 | 2,740 | 26.8 | 247 | 20 |
| 52 | 62 | 46 | 8 | 40 | 32 | 5.5×9×5.1 | | | 1,560 | 3,140 | 43.4 | 525 | 25 |
| 56.5 | 74 | 51 | 10 | 49 | 35 | 6.6×11×6.1 | | | 2,490 | 5,490 | 82.8 | 645 | 30 |

1N ÷ 0.102kgf 1N · m ÷ 0.102kgf · m

SMF-W-E TYPE

— Round Flange Double-Wide Pilot End Type —



part number structure


example **SMSF 25 G W UU - E - SK**

| | |
|--|--|
| specification SMF : standard SMSF : anti-corrosion | outer cylinder surface treatment blank : no surface treatment SK : electroless nickel plating LF : low temperature black chrome treatment with fluoride coating SB : black oxide (not available on anti-corrosion type) SC : industrial chrome plating |
| inner contact diameter (dr) | with pilot end |
| retainer material blank : standard/steel anti-corrosion/stainless steel G : resin | seal UU : seals on both sides ZZ : doublelip-seals on both sides |
| double-wide type | |

Doublelip-seal is available for size 6 to 30.

| part number* | | | | number of ball circuits | dr | | major dimensions | | |
|-------------------------|----------------|-----------------------------------|-------------------------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | anti-corrosion resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| SMF 6WUU-E | SMF 6GWUU-E | SMSF 6WUU-E | SMSF 6GWUU-E | 4 | 6 | 12 | 0 | 35 | |
| SMF 8WUU-E | SMF 8GWUU-E | SMSF 8WUU-E | SMSF 8GWUU-E | 4 | 8 | 15 | -13 | 45 | |
| SMF 10WUU-E | SMF 10GWUU-E | SMSF 10WUU-E | SMSF 10GWUU-E | 4 | 10 | 19 | 0 | 55 | |
| SMF 12WUU-E | SMF 12GWUU-E | SMSF 12WUU-E | SMSF 12GWUU-E | 4 | 12 | 21 | 0 | 57 | |
| SMF 13WUU-E | SMF 13GWUU-E | SMSF 13WUU-E | SMSF 13GWUU-E | 4 | 13 | 23 | -16 | 61 | |
| SMF 16WUU-E | SMF 16GWUU-E | SMSF 16WUU-E | SMSF 16GWUU-E | 4 | 16 | 28 | 0 | 70 | |
| SMF 20WUU-E | SMF 20GWUU-E | SMSF 20WUU-E | SMSF 20GWUU-E | 5 | 20 | 32 | 0 | 80 | |
| SMF 25WUU-E | SMF 25GWUU-E | SMSF 25WUU-E | SMSF 25GWUU-E | 6 | 25 | 40 | -19 | 112 | |
| SMF 30WUU-E | SMF 30GWUU-E | SMSF 30WUU-E | SMSF 30GWUU-E | 6 | 30 | 45 | 0 | 123 | |
| SMF 35WUU-E | SMF 35GWUU-E | — | — | 6 | 35 | 52 | 0 | 135 | |
| SMF 40WUU-E | SMF 40GWUU-E | — | — | 6 | 40 | 60 | -22 | 151 | |
| SMF 50WUU-E | SMF 50GWUU-E | — | — | 6 | 50 | 80 | 0 | 192 | |
| SMF 60WUU-E | SMF 60GWUU-E | — | — | 6 | 60 | 90 | 0/-25 | 209 | |

* Seals-on-both-sides is standard.

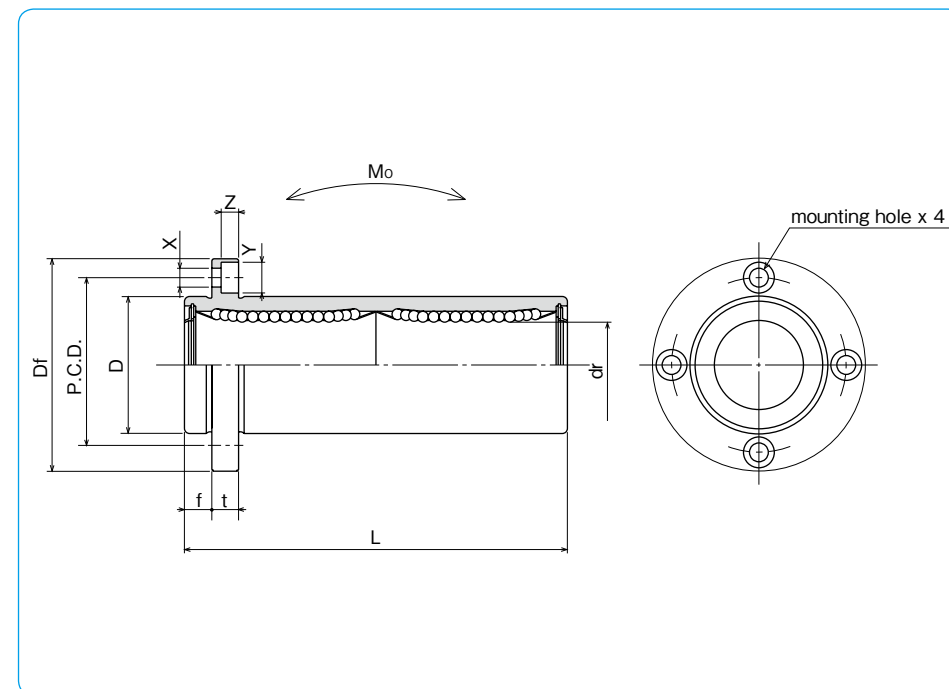

| f mm | Df mm | flange | | | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment $\text{N}\cdot\text{m}$ | mass g | shaft diameter mm |
|------|-------|--------|-----------|-------------|----------------------------|--------------------------------|-------------------|-------------|---|--------|-------------------|
| | | t mm | P.C.D. mm | X×Y×Z mm | | | dynamic C N | static Co N | | | |
| 5 | 28 | 5 | 20 | 3.5×6×3.1 | 15 | 15 | 323 | 530 | 2.18 | 31 | 6 |
| 5 | 32 | 5 | 24 | 3.5×6×3.1 | | | 431 | 784 | 4.31 | 51 | 8 |
| 6 | 40 | 6 | 29 | 4.5×7.5×4.1 | | | 588 | 1,100 | 7.24 | 98 | 10 |
| 6 | 42 | 6 | 32 | 4.5×7.5×4.1 | | | 813 | 1,570 | 10.9 | 110 | 12 |
| 6 | 43 | 6 | 33 | 4.5×7.5×4.1 | | | 813 | 1,570 | 11.6 | 130 | 13 |
| 6 | 48 | 6 | 38 | 4.5×7.5×4.1 | | | 1,230 | 2,350 | 19.7 | 190 | 16 |
| 8 | 54 | 8 | 43 | 5.5×9×5.1 | 20 | 20 | 1,400 | 2,740 | 26.8 | 260 | 20 |
| 8 | 62 | 8 | 51 | 5.5×9×5.1 | | | 1,560 | 3,140 | 43.4 | 540 | 25 |
| 10 | 74 | 10 | 60 | 6.6×11×6.1 | | | 2,490 | 5,490 | 82.8 | 680 | 30 |
| 10 | 82 | 10 | 67 | 6.6×11×6.1 | | | 2,650 | 6,270 | 110 | 1,020 | 35 |
| 13 | 96 | 13 | 78 | 9×14×8.1 | 25 | 25 | 3,430 | 8,040 | 147 | 1,570 | 40 |
| 13 | 116 | 13 | 98 | 9×14×8.1 | | | 6,080 | 15,900 | 397 | 3,600 | 50 |
| 18 | 134 | 18 | 112 | 11×17×11.1 | | | 7,550 | 20,000 | 530 | 4,500 | 60 |

1N \approx 0.102kgf 1N \cdot m \approx 0.102kgf \cdot m

SMK-W-E TYPE

— Square Flange Double-Wide Pilot End Type —



part number structure


example **SMSK 25 G W UU - E - SK**

| | |
|--|--|
| specification SMK : standard SMSK : anti-corrosion | outer cylinder surface treatment blank : no surface treatment SK : electroless nickel plating LF : low temperature black chrome treatment with fluoride coating SB : black oxide (not available on anti-corrosion type) SC : industrial chrome plating |
| inner contact diameter (dr) | with pilot end |
| retainer material blank : standard/steel anti-corrosion/stainless steel G : resin | seal UU : seals on both sides ZZ : doublelip-seals on both sides |
| double-wide type | |

Doublelip-seal is available for size 6 to 30.

| part number* | | | | number of ball circuits | major dimensions | | |
|-------------------------|-------------------------|-----------------------------------|-------------------------------|-------------------------|------------------|---------|---------|
| standard steel retainer | standard resin retainer | anti-corrosion stainless retainer | anti-corrosion resin retainer | | dr mm | D mm | L mm |
| SMK 6WUU-E | SMK 6GWUU-E | SMSK 6WUU-E | SMSK 6GWUU-E | 4 | 6 | 12 | 35 |
| SMK 8WUU-E | SMK 8GWUU-E | SMSK 8WUU-E | SMSK 8GWUU-E | 4 | 8 | 15 | 45 |
| SMK 10WUU-E | SMK 10GWUU-E | SMSK 10WUU-E | SMSK 10GWUU-E | 4 | 10 | 19 | 55 |
| SMK 12WUU-E | SMK 12GWUU-E | SMSK 12WUU-E | SMSK 12GWUU-E | 4 | 12 | 21 | 57 |
| SMK 13WUU-E | SMK 13GWUU-E | SMSK 13WUU-E | SMSK 13GWUU-E | 4 | 13 | 23 | 61 |
| SMK 16WUU-E | SMK 16GWUU-E | SMSK 16WUU-E | SMSK 16GWUU-E | 4 | 16 | 28 | 70 |
| SMK 20WUU-E | SMK 20GWUU-E | SMSK 20WUU-E | SMSK 20GWUU-E | 5 | 20 | 32 | 80 |
| SMK 25WUU-E | SMK 25GWUU-E | SMSK 25WUU-E | SMSK 25GWUU-E | 6 | 25 | 40 | 112 |
| SMK 30WUU-E | SMK 30GWUU-E | SMSK 30WUU-E | SMSK 30GWUU-E | 6 | 30 | 45 | 123 |
| SMK 35WUU-E | SMK 35GWUU-E | — | — | 6 | 35 | 52 | 135 |
| SMK 40WUU-E | SMK 40GWUU-E | — | — | 6 | 40 | 60 | 151 |
| SMK 50WUU-E | SMK 50GWUU-E | — | — | 6 | 50 | 80 | 192 |
| SMK 60WUU-E | SMK 60GWUU-E | — | — | 6 | 60 | 90 | 209 |

* Seals-on-both-sides is standard.

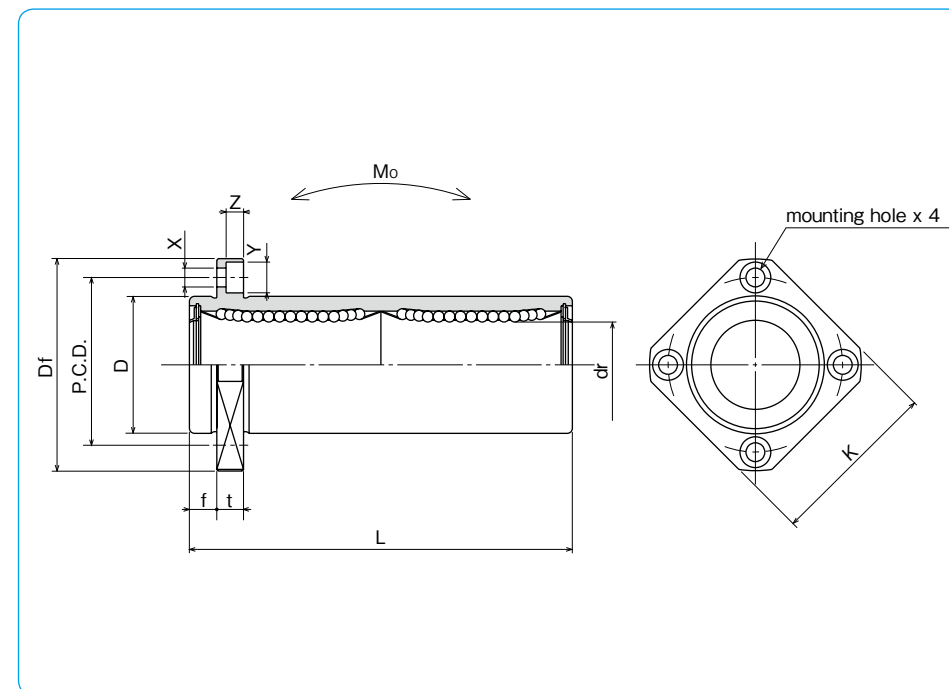

| f mm | Df mm | flange | | | P.C.D. mm | X×Y×Z mm | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment Mo N·m | mass g | shaft diameter mm |
|---------|----------|---------|---------|-------------------|--------------|-------------|--------------------|------------------------|-------------------|------|--------------------------------------|-----------|----------------------|
| | | K mm | t mm | dynamic C N | | | | | static Co N | | | | |
| 5 | 28 | 22 | 5 | 20 | 3.5×6×3.1 | 15 | 15 | 323 | 530 | 2.18 | 25 | 6 | |
| 5 | 32 | 25 | 5 | 24 | 3.5×6×3.1 | | | 431 | 784 | 4.31 | 43 | 8 | |
| 6 | 40 | 30 | 6 | 29 | 4.5×7.5×4.1 | | | 588 | 1,100 | 7.24 | 78 | 10 | |
| 6 | 42 | 32 | 6 | 32 | 4.5×7.5×4.1 | | | 813 | 1,570 | 10.9 | 90 | 12 | |
| 6 | 43 | 34 | 6 | 33 | 4.5×7.5×4.1 | | | 813 | 1,570 | 11.6 | 108 | 13 | |
| 6 | 48 | 37 | 6 | 38 | 4.5×7.5×4.1 | | | 1,230 | 2,350 | 19.7 | 165 | 16 | |
| 8 | 54 | 42 | 8 | 43 | 5.5×9×5.1 | 20 | 20 | 1,400 | 2,740 | 26.8 | 225 | 20 | |
| 8 | 62 | 50 | 8 | 51 | 5.5×9×5.1 | | | 1,560 | 3,140 | 43.4 | 500 | 25 | |
| 10 | 74 | 58 | 10 | 60 | 6.6×11×6.1 | | | 2,490 | 5,490 | 82.8 | 590 | 30 | |
| 10 | 82 | 64 | 10 | 67 | 6.6×11×6.1 | | | 2,650 | 6,270 | 110 | 930 | 35 | |
| 13 | 96 | 75 | 13 | 78 | 9×14×8.1 | 25 | 25 | 3,430 | 8,040 | 147 | 1,380 | 40 | |
| 13 | 116 | 92 | 13 | 98 | 9×14×8.1 | | | 6,080 | 15,900 | 397 | 3,400 | 50 | |
| 18 | 134 | 106 | 18 | 112 | 11×17×11.1 | | | 7,550 | 20,000 | 530 | 4,060 | 60 | |

1N ≅ 0.102kgf 1N · m ≅ 0.102kgf · m

SMT-W-E TYPE


— Two Side Cut Double-Wide Flange Pilot End Type —



part number structure

example **SMST 25 G W UU - E - SK**

| | |
|--|--|
| specification SMT : standard SMST : anti-corrosion | outer cylinder surface treatment blank : no surface treatment SK : electroless nickel plating LF : low temperature black chrome treatment with fluoride coating SB : black oxide (not available on anti-corrosion type) SC : industrial chrome plating |
| inner contact diameter (dr) | with pilot end |
| retainer material blank : standard/steel anti-corrosion/stainless steel G : resin | seal UU : seals on both sides ZZ : doublelip-seals on both sides |
| double-wide type | |

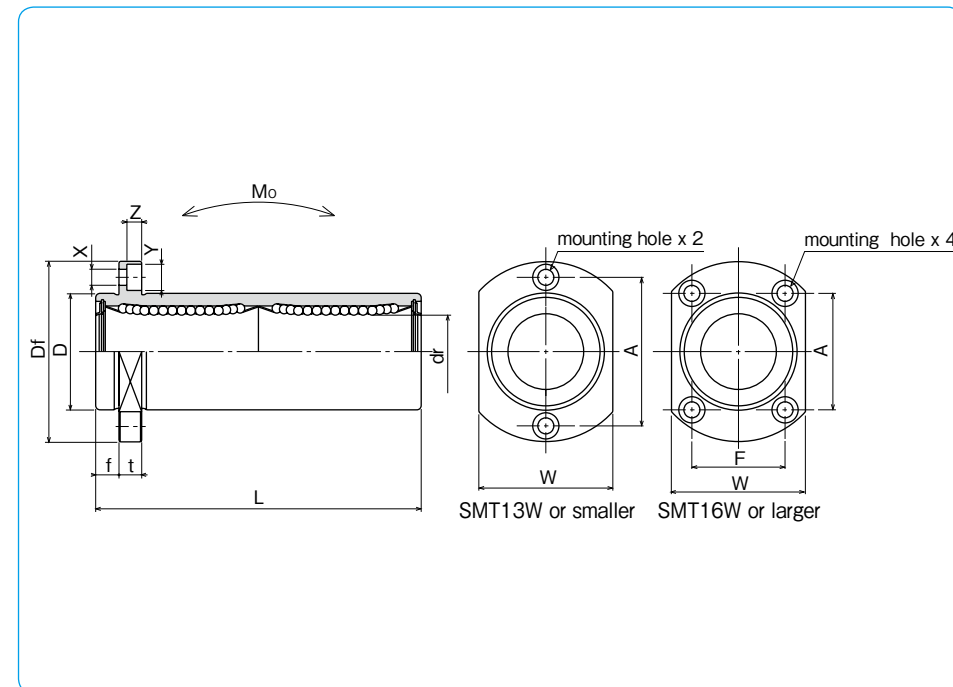

| part number* | | | | number of ball circuits | dr | | major dimensions | | |
|-------------------------|-------------------------|-----------------------------------|-------------------------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| standard steel retainer | standard resin retainer | anti-corrosion stainless retainer | anti-corrosion resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| SMT 6WUU-E | SMT 6GWUU-E | SMST 6WUU-E | SMST 6GWUU-E | 4 | 6 | 12 | 0 | 35 | |
| SMT 8WUU-E | SMT 8GWUU-E | SMST 8WUU-E | SMST 8GWUU-E | 4 | 8 | 15 | -13 | 45 | |
| SMT10WUU-E | SMT10GWUU-E | SMST10WUU-E | SMST10GWUU-E | 4 | 10 | 19 | 0 | 55 | |
| SMT12WUU-E | SMT12GWUU-E | SMST12WUU-E | SMST12GWUU-E | 4 | 12 | 21 | 0 | 57 | |
| SMT13WUU-E | SMT13GWUU-E | SMST13WUU-E | SMST13GWUU-E | 4 | 13 | 23 | -16 | 61 | |
| SMT16WUU-E | SMT16GWUU-E | SMST16WUU-E | SMST16GWUU-E | 4 | 16 | 28 | 0 | 70 | |
| SMT20WUU-E | SMT20GWUU-E | SMST20WUU-E | SMST20GWUU-E | 5 | 20 | 32 | 0 | 80 | |
| SMT25WUU-E | SMT25GWUU-E | SMST25WUU-E | SMST25GWUU-E | 6 | 25 | 40 | -19 | 112 | |
| SMT30WUU-E | SMT30GWUU-E | SMST30WUU-E | SMST30GWUU-E | 6 | 30 | 45 | 0 | 123 | |


* Seals-on-both-sides is standard.

| f mm | Df mm | flange | | | | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment $\text{N} \cdot \text{m}$ | mass g | shaft diameter mm | |
|------|-------|--------|------|------|------|----------------------------|--------------------------------|-------------------|-------------|---|--------|-------------------|----|
| | | W mm | t mm | A mm | F mm | | | dynamic C N | static Co N | | | | |
| 5 | 28 | 18 | 5 | 20 | — | 3.5×6×3.1 | 15 | 15 | 323 | 530 | 2.18 | 28 | 6 |
| 5 | 32 | 21 | 5 | 24 | — | 3.5×6×3.1 | | | 431 | 784 | 4.31 | 47 | 8 |
| 6 | 40 | 25 | 6 | 29 | — | 4.5×7.5×4.1 | | | 588 | 1,100 | 7.24 | 90 | 10 |
| 6 | 42 | 27 | 6 | 32 | — | 4.5×7.5×4.1 | | | 813 | 1,570 | 10.9 | 102 | 12 |
| 6 | 43 | 29 | 6 | 33 | — | 4.5×7.5×4.1 | 813 | 1,570 | 11.6 | 123 | 13 | | |
| 6 | 48 | 34 | 6 | 31 | 22 | 4.5×7.5×4.1 | 1,230 | 2,350 | 19.7 | 182 | 16 | | |
| 8 | 54 | 38 | 8 | 36 | 24 | 5.5×9×5.1 | 1,400 | 2,740 | 26.8 | 247 | 20 | | |
| 8 | 62 | 46 | 8 | 40 | 32 | 5.5×9×5.1 | 1,560 | 3,140 | 43.4 | 525 | 25 | | |
| 10 | 74 | 51 | 10 | 49 | 35 | 6.6×11×6.1 | 2,490 | 5,490 | 82.8 | 645 | 30 | | |


1N \approx 0.102kgf 1N \cdot m \approx 0.102kgf \cdot m

TRF TYPE

– Triple-Wide Round Flange Type –

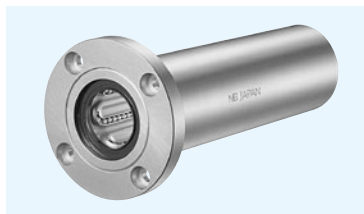

part number structure

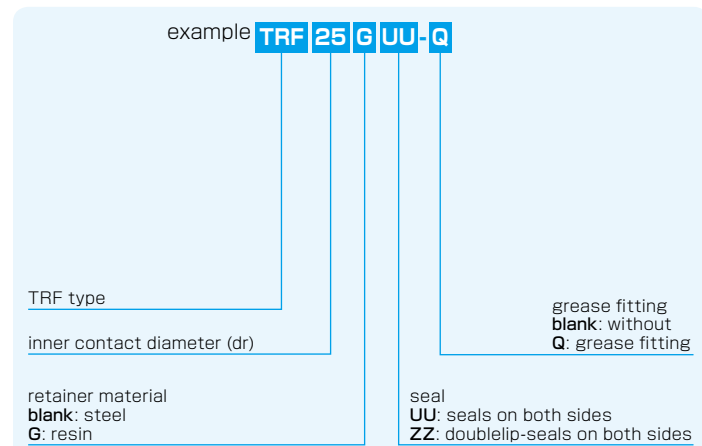


Doublelip-seal is available for size 6 to 30.

| part number* | | number of ball circuits | dr | | major dimensions | | |
|----------------|----------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| steel retainer | resin retainer | | mm | tolerance μm | D | tolerance μm | L ± 0.3 mm |
| TRF 6UU | TRF 6GUU | 4 | 6 | | 15 | 0/-18 | 51 |
| TRF 8UU | TRF 8GUU | 4 | 8 | 0 | 19 | | 66 |
| TRF10UU | TRF10GUU | 4 | 10 | -12 | 23 | 0 | 80 |
| TRF12UU | TRF12GUU | 4 | 12 | | 26 | -21 | 84 |
| TRF13UU | TRF13GUU | 4 | 13 | 0 | 28 | | 90 |
| TRF16UU | TRF16GUU | 4 | 16 | -15 | 32 | 0 | 103 |
| TRF20UU | TRF20GUU | 5 | 20 | | 40 | -25 | 118 |
| TRF25UU | TRF25GUU | 6 | 25 | 0 | 45 | | 165 |
| TRF30UU | TRF30GUU | 6 | 30 | -18 | 52 | 0 | 182 |
| TRF35UU | TRF35GUU | 6 | 35 | | 60 | -30 | 200 |
| TRF40UU | TRF40GUU | 6 | 40 | 0 | 65 | | 230 |
| TRF50UU | TRF50GUU | 6 | 50 | -21 | 85 | 0 | 290 |
| TRF60UU | TRF60GUU | 6 | 60 | 0/-25 | 100 | -35 | 310 |

Outer cylinder is treated with electroless nickel plating.

* Seals-on-both-sides is standard.

** TRF6: A-MT6x1 TRF8: A-M6x1 TRF10~30: A-M6F TRF35~60: A-R1/8

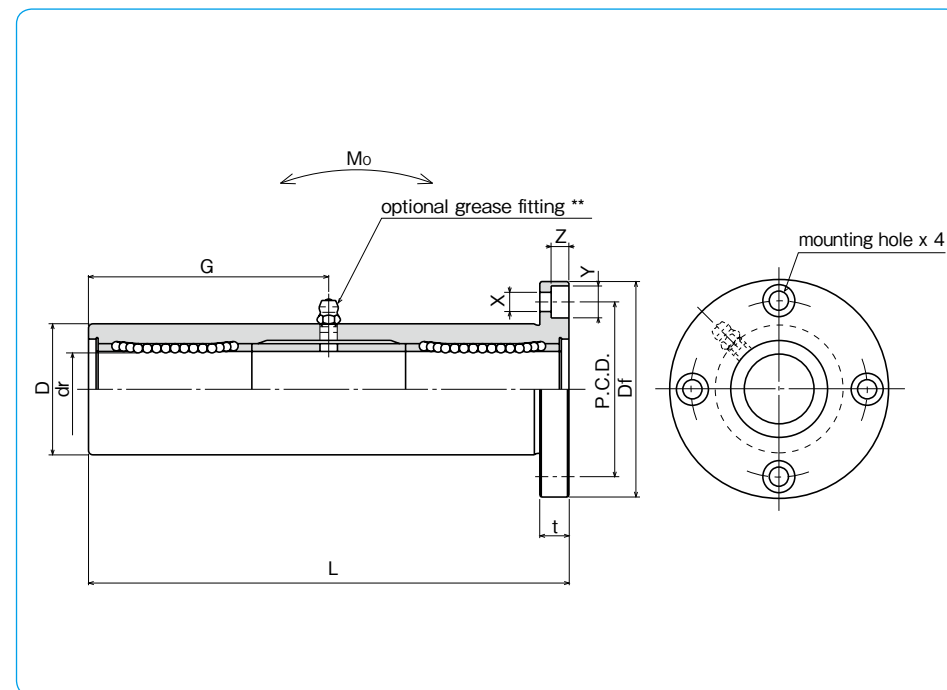


| Df mm | t mm | flange P.C.D. mm | X × Y × Z mm | grease fitting G mm | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment $\text{N} \cdot \text{m}$ | mass g | shaft diameter mm |
|-------|------|------------------|-----------------|---------------------|----------------------------|--------------------------------|-------------------|-------------|---|--------|-------------------|
| | | | | | | | dynamic C N | static Co N | | | |
| 32 | 5 | 24 | 3.5 × 6 × 3.1 | 20.5 | 20 | 20 | 323 | 530 | 8.2 | 66 | 6 |
| 40 | 6 | 29 | 4.5 × 7.5 × 4.1 | 29 | | | 431 | 784 | 16.0 | 135 | 8 |
| 43 | 6 | 33 | 4.5 × 7.5 × 4.1 | 38 | | | 588 | 1,100 | 27.0 | 205 | 10 |
| 46 | 6 | 36 | 4.5 × 7.5 × 4.1 | 41 | | | 813 | 1,570 | 40.1 | 248 | 12 |
| 48 | 6 | 38 | 4.5 × 7.5 × 4.1 | 45 | | | 813 | 1,570 | 42.9 | 308 | 13 |
| 54 | 8 | 43 | 5.5 × 9 × 5.1 | 51 | 25 | 25 | 1,230 | 2,350 | 73.5 | 412 | 16 |
| 62 | 8 | 51 | 5.5 × 9 × 5.1 | 59 | | | 1,400 | 2,740 | 98.0 | 752 | 20 |
| 74 | 10 | 60 | 6.6 × 11 × 6.1 | 82.5 | | | 1,560 | 3,140 | 157 | 1,244 | 25 |
| 82 | 10 | 67 | 6.6 × 11 × 6.1 | 91 | | | 2,490 | 5,490 | 297 | 1,636 | 30 |
| 96 | 13 | 78 | 9 × 14 × 8.1 | 100 | | | 2,650 | 6,270 | 373 | 2,580 | 35 |
| 101 | 13 | 83 | 9 × 14 × 8.1 | 115 | 30 | 30 | 3,430 | 8,040 | 553 | 2,950 | 40 |
| 129 | 18 | 107 | 11 × 17 × 11.1 | 145 | | | 6,080 | 15,900 | 1,370 | 6,860 | 50 |
| 144 | 18 | 122 | 11 × 17 × 11.1 | 155 | | | 7,550 | 20,000 | 1,800 | 9,660 | 60 |


1N ≐ 0.102kgf 1N · m ≐ 0.102kgf · m

TRK TYPE

– Triple-Wide Square Flange Type –

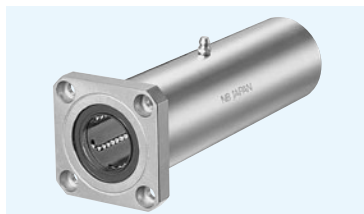

part number structure

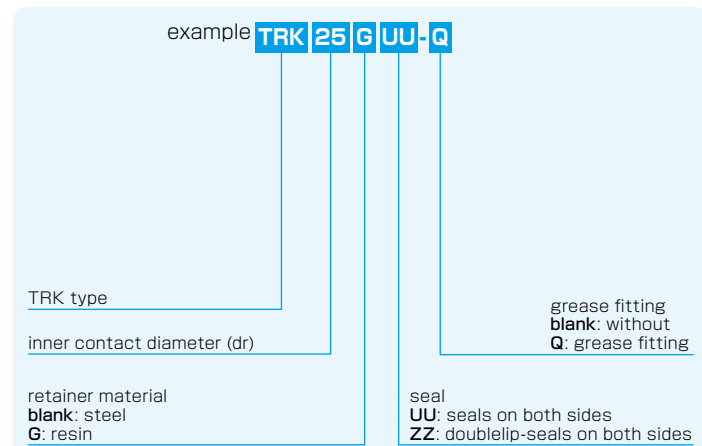


Doublelip-seal is available for size 6 to 30.

| part number* | | number of ball circuits | dr | | major dimensions | | |
|----------------|----------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| steel retainer | resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| TRK 6UU | TRK 6GUU | 4 | 6 | 0 | 15 | 0/-18 | 51 |
| TRK 8UU | TRK 8GUU | 4 | 8 | -12 | 19 | | 66 |
| TRK 10UU | TRK 10GUU | 4 | 10 | | 23 | 0 | 80 |
| TRK 12UU | TRK 12GUU | 4 | 12 | | 26 | -21 | 84 |
| TRK 13UU | TRK 13GUU | 4 | 13 | 0 | 28 | | 90 |
| TRK 16UU | TRK 16GUU | 4 | 16 | -15 | 32 | | 103 |
| TRK 20UU | TRK 20GUU | 5 | 20 | | 40 | 0 | 118 |
| TRK 25UU | TRK 25GUU | 6 | 25 | 0 | 45 | -25 | 165 |
| TRK 30UU | TRK 30GUU | 6 | 30 | -18 | 52 | | 182 |
| TRK 35UU | TRK 35GUU | 6 | 35 | | 60 | 0 | 200 |
| TRK 40UU | TRK 40GUU | 6 | 40 | 0 | 65 | -30 | 230 |
| TRK 50UU | TRK 50GUU | 6 | 50 | -21 | 85 | 0 | 290 |
| TRK 60UU | TRK 60GUU | 6 | 60 | 0/-25 | 100 | -35 | 310 |

Outer cylinder is treated with electroless nickel plating.

* Seals-on-both-sides is standard.

** TRK6: A-MT6x1 TRK8: A-M6x1 TRK10~30: A-M6F TRK35~60: A-R1/8

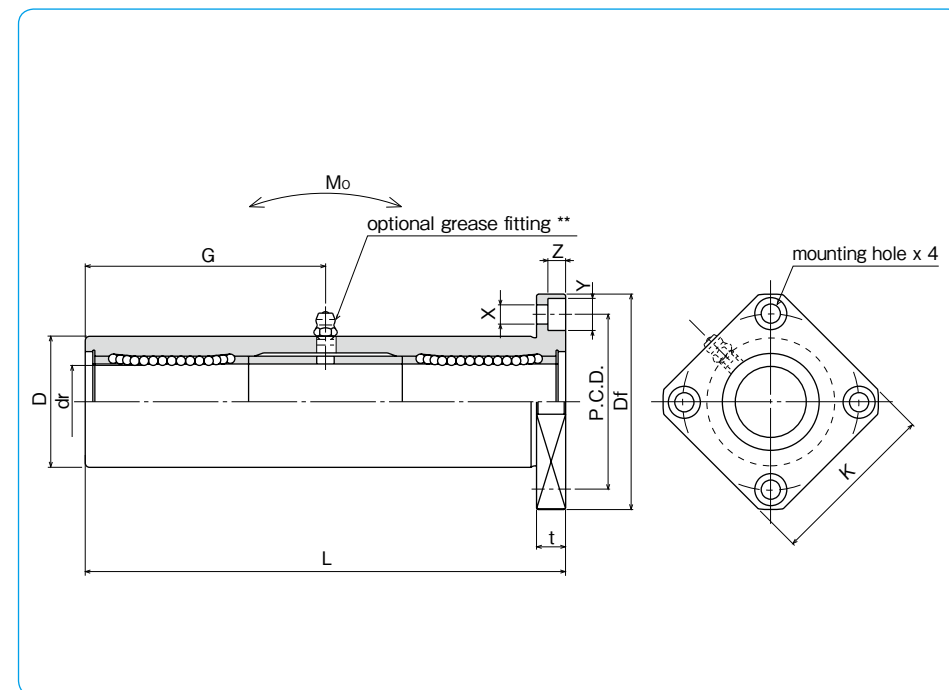


| Df mm | K mm | flange | | | grease fitting G mm | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment $\text{N} \cdot \text{m}$ | mass g | shaft diameter mm |
|-------|------|--------|-----------|-------------|---------------------|----------------------------|--------------------------------|-------------------|-------------|---|--------|-------------------|
| | | t mm | P.C.D. mm | X×Y×Z mm | | | | dynamic C N | static Co N | | | |
| 32 | 25 | 5 | 24 | 3.5×6×3.1 | 20.5 | 20 | 20 | 323 | 530 | 8.2 | 58 | 6 |
| 40 | 30 | 6 | 29 | 4.5×7.5×4.1 | 29 | | | 431 | 784 | 16.0 | 117 | 8 |
| 43 | 34 | 6 | 33 | 4.5×7.5×4.1 | 38 | | | 588 | 1,100 | 27.0 | 189 | 10 |
| 46 | 35 | 6 | 36 | 4.5×7.5×4.1 | 41 | | | 813 | 1,570 | 40.1 | 228 | 12 |
| 48 | 37 | 6 | 38 | 4.5×7.5×4.1 | 45 | | | 813 | 1,570 | 42.9 | 286 | 13 |
| 54 | 42 | 8 | 43 | 5.5×9×5.1 | 51 | 25 | 25 | 1,230 | 2,350 | 73.5 | 376 | 16 |
| 62 | 50 | 8 | 51 | 5.5×9×5.1 | 59 | | | 1,400 | 2,740 | 98.0 | 714 | 20 |
| 74 | 58 | 10 | 60 | 6.6×11×6.1 | 82.5 | | | 1,560 | 3,140 | 157 | 1,163 | 25 |
| 82 | 64 | 10 | 67 | 6.6×11×6.1 | 91 | | | 2,490 | 5,490 | 297 | 1,543 | 30 |
| 96 | 75 | 13 | 78 | 9×14×8.1 | 100 | | | 2,650 | 6,270 | 373 | 2,400 | 35 |
| 101 | 80 | 13 | 83 | 9×14×8.1 | 115 | 30 | 30 | 3,430 | 8,040 | 553 | 2,510 | 40 |
| 129 | 100 | 18 | 107 | 11×17×11.1 | 145 | | | 6,080 | 15,900 | 1,370 | 6,400 | 50 |
| 144 | 116 | 18 | 122 | 11×17×11.1 | 155 | | | 7,550 | 20,000 | 1,800 | 9,200 | 60 |



1N \approx 0.102kgf 1N \cdot m \approx 0.102kgf \cdot m

TRT TYPE

– Triple-Wide Two Side Cut Flange Type –

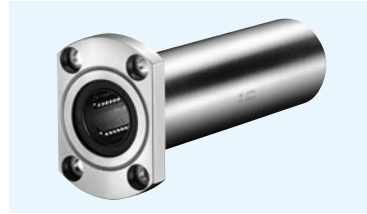

part number structure

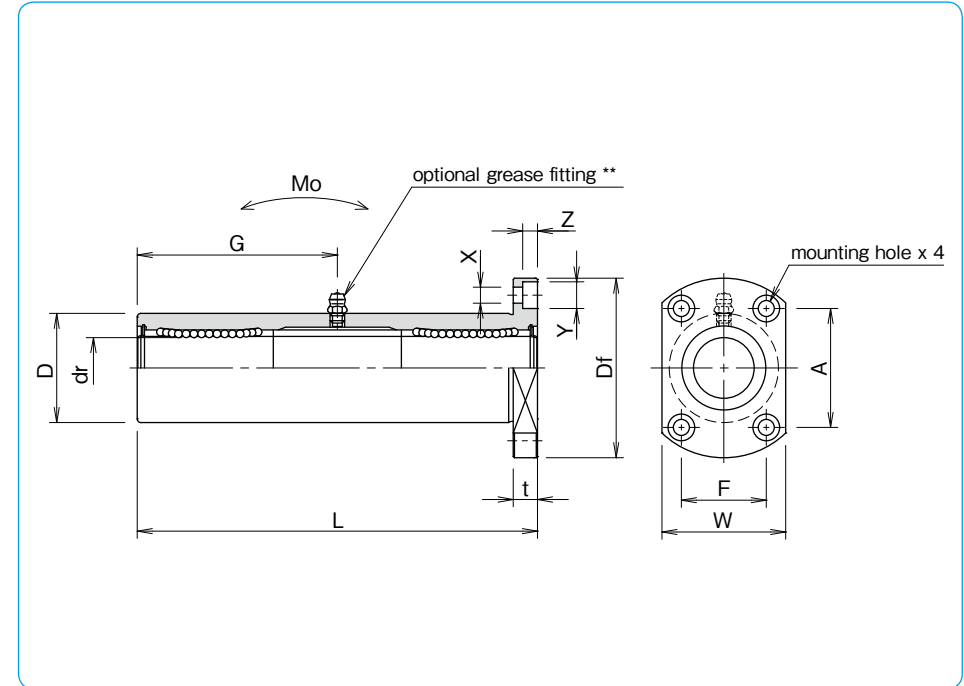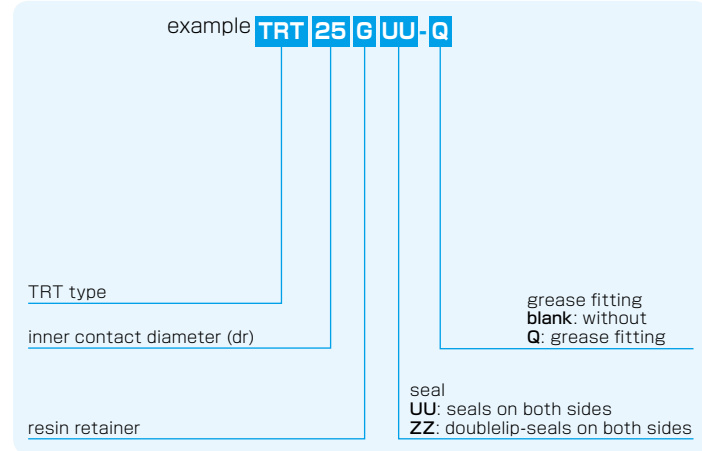

| part number* | number of ball circuits | dr | | D | | major dimensions | | | | | flange | |
|--------------|-------------------------|----|-------------------------|----|-------------------------|------------------|-------|------|------|------|--------|--|
| | | mm | tolerance μm | mm | tolerance μm | L ± 0.3 mm | Df mm | W mm | t mm | A mm | F mm | |
| TRT12GUU | 4 | 12 | 0 | 26 | 0 | 84 | 46 | 32 | 6 | 28 | 22 | |
| TRT13GUU | 4 | 13 | 0 | 28 | -21 | 90 | 48 | 34 | 6 | 31 | 22 | |
| TRT16GUU | 4 | 16 | -15 | 32 | 0 | 103 | 54 | 38 | 8 | 36 | 24 | |
| TRT20GUU | 5 | 20 | 0 | 40 | -25 | 118 | 62 | 46 | 8 | 40 | 32 | |
| TRT25GUU | 6 | 25 | -18 | 45 | 0 | 165 | 74 | 51 | 10 | 49 | 35 | |
| TRT30GUU | 6 | 30 | -18 | 52 | 0/-30 | 182 | 82 | 58 | 10 | 55 | 38 | |

Outer cylinder is treated with electroless nickel plating.

* Seals-on-both-sides is standard.

**TRT12G~30G: A-M6F

| X × Y × Z mm | grease fitting G mm | eccentricity μm | perpendicularity μm | basic load rating dynamic C N | static Co N | allowable static moment Mo N · m | mass g | shaft diameter mm |
|-----------------|---------------------|----------------------------|--------------------------------|-------------------------------|-------------|----------------------------------|--------|-------------------|
| 4.5 × 7.5 × 4.1 | 41 | 20 | 20 | 813 | 1,570 | 40.1 | 236 | 12 |
| 4.5 × 7.5 × 4.1 | 45 | | | 813 | 1,570 | 42.9 | 291 | 13 |
| 5.5 × 9 × 5.1 | 51 | 25 | 25 | 1,230 | 2,350 | 73.5 | 388 | 16 |
| 5.5 × 9 × 5.1 | 59 | | | 1,400 | 2,740 | 98.0 | 720 | 20 |
| 6.6 × 11 × 6.1 | 82.5 | | | 1,560 | 3,140 | 157 | 1,160 | 25 |
| 6.6 × 11 × 6.1 | 91 | | | 2,490 | 5,490 | 297 | 1,555 | 30 |


1N \approx 0.102kgf 1N · m \approx 0.102kgf · m

TRFC TYPE

— Triple-Wide Intermediate Position Round Flange Type —



part number structure

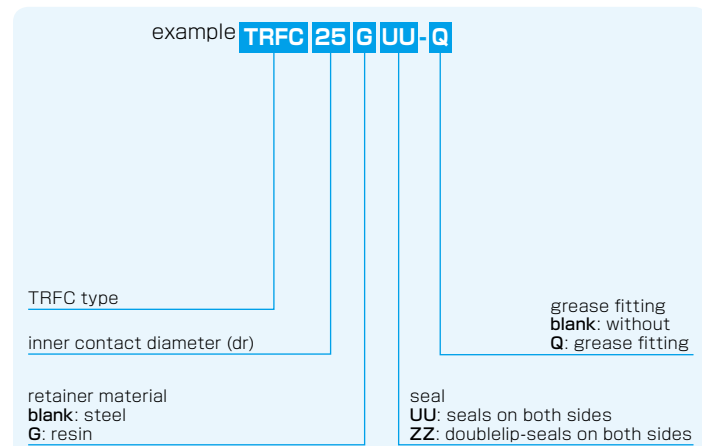


Doublelip-seal is available for size 6 to 30.

| part number* | | number of ball circuits | dr | | major dimensions | | |
|----------------|----------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| steel retainer | resin retainer | | mm | tolerance μm | D | tolerance μm | L ± 0.3 mm |
| TRFC 6UU | TRFC 6GUU | 4 | 6 | 0 | 15 | 0/-18 | 51 |
| TRFC 8UU | TRFC 8GUU | 4 | 8 | -12 | 19 | | 66 |
| TRFC 10UU | TRFC 10GUU | 4 | 10 | | 23 | 0 | 80 |
| TRFC 12UU | TRFC 12GUU | 4 | 12 | | 26 | -21 | 84 |
| TRFC 13UU | TRFC 13GUU | 4 | 13 | 0 | 28 | | 90 |
| TRFC 16UU | TRFC 16GUU | 4 | 16 | -15 | 32 | | 103 |
| TRFC 20UU | TRFC 20GUU | 5 | 20 | | 40 | 0 | 118 |
| TRFC 25UU | TRFC 25GUU | 6 | 25 | 0 | 45 | -25 | 165 |
| TRFC 30UU | TRFC 30GUU | 6 | 30 | -18 | 52 | | 182 |
| TRFC 35UU | TRFC 35GUU | 6 | 35 | | 60 | 0 | 200 |
| TRFC 40UU | TRFC 40GUU | 6 | 40 | 0 | 65 | -30 | 230 |
| TRFC 50UU | TRFC 50GUU | 6 | 50 | -21 | 85 | 0 | 290 |
| TRFC 60UU | TRFC 60GUU | 6 | 60 | 0/-25 | 100 | -35 | 310 |

Outer cylinder is treated with electroless nickel plating.

* Seals-on-both-sides is standard.

** TRFC6: A-MT6x1 TRFC8: A-M6x1 TRFC10~30: A-M6F TRFC35~60: A-R1/8

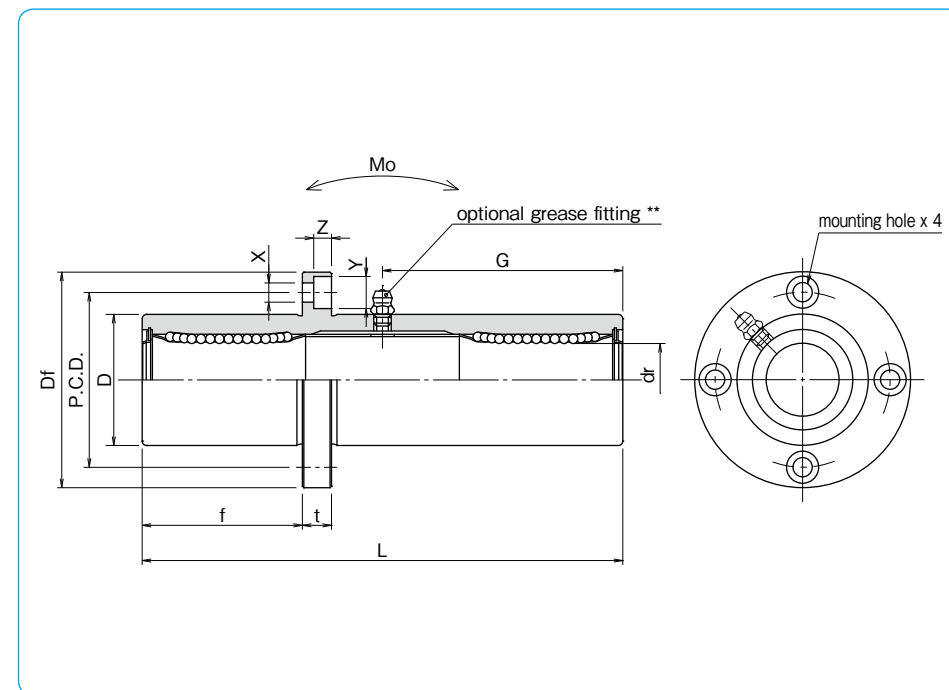

| f mm | Df mm | flange | | | grease fitting G mm | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment Mo N·m | mass g | shaft diameter mm |
|------|-------|--------|-----------|-------------|---------------------|----------------------------|--------------------------------|-------------------|-------------|--------------------------------|--------|-------------------|
| | | t mm | P.C.D. mm | X×Y×Z mm | | | | dynamic C N | static Co N | | | |
| 17 | 32 | 5 | 24 | 3.5×6×3.1 | 20.5 | 20 | 20 | 323 | 530 | 8.2 | 66 | 6 |
| 22 | 40 | 6 | 29 | 4.5×7.5×4.1 | 29 | | | 431 | 784 | 16.0 | 135 | 8 |
| 27 | 43 | 6 | 33 | 4.5×7.5×4.1 | 38 | | | 588 | 1,100 | 27.0 | 205 | 10 |
| 28 | 46 | 6 | 36 | 4.5×7.5×4.1 | 41 | | | 813 | 1,570 | 40.1 | 248 | 12 |
| 30 | 48 | 6 | 38 | 4.5×7.5×4.1 | 45 | | | 813 | 1,570 | 42.9 | 308 | 13 |
| 35 | 54 | 8 | 43 | 5.5×9×5.1 | 51 | 25 | 25 | 1,230 | 2,350 | 73.5 | 412 | 16 |
| 40 | 62 | 8 | 51 | 5.5×9×5.1 | 59 | | | 1,400 | 2,740 | 98.0 | 752 | 20 |
| 55 | 74 | 10 | 60 | 6.6×11×6.1 | 82.5 | | | 1,560 | 3,140 | 157 | 1,244 | 25 |
| 61 | 82 | 10 | 67 | 6.6×11×6.1 | 91 | | | 2,490 | 5,490 | 297 | 1,636 | 30 |
| 67 | 96 | 13 | 78 | 9×14×8.1 | 100 | | | 2,650 | 6,270 | 373 | 2,580 | 35 |
| 77 | 101 | 13 | 83 | 9×14×8.1 | 115 | 30 | 30 | 3,430 | 8,040 | 553 | 2,950 | 40 |
| 97 | 129 | 18 | 107 | 11×17×11.1 | 145 | | | 6,080 | 15,900 | 1,370 | 6,860 | 50 |
| 104 | 144 | 18 | 122 | 11×17×11.1 | 155 | | | 7,550 | 20,000 | 1,800 | 9,660 | 60 |


1N \approx 0.102kgf 1N·m \approx 0.102kgf·m

TRKC TYPE

— Triple-Wide Intermediate Position Square Flange Type —



part number structure

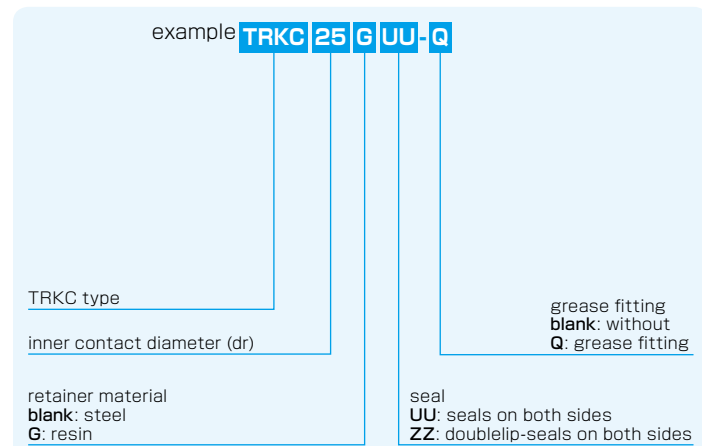


Doublelip-seal is available for size 6 to 30.

| part number* | | number of ball circuits | dr | | major dimensions | | |
|----------------|----------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| steel retainer | resin retainer | | mm | tolerance μm | D | tolerance μm | L ± 0.3 mm |
| TRKC 6UU | TRKC 6GUU | 4 | 6 | | 15 | 0/-18 | 51 |
| TRKC 8UU | TRKC 8GUU | 4 | 8 | 0 | 19 | | 66 |
| TRKC 10UU | TRKC 10GUU | 4 | 10 | -12 | 23 | 0 | 80 |
| TRKC 12UU | TRKC 12GUU | 4 | 12 | | 26 | -21 | 84 |
| TRKC 13UU | TRKC 13GUU | 4 | 13 | 0 | 28 | | 90 |
| TRKC 16UU | TRKC 16GUU | 4 | 16 | -15 | 32 | | 103 |
| TRKC 20UU | TRKC 20GUU | 5 | 20 | | 40 | 0 | 118 |
| TRKC 25UU | TRKC 25GUU | 6 | 25 | 0 | 45 | -25 | 165 |
| TRKC 30UU | TRKC 30GUU | 6 | 30 | -18 | 52 | | 182 |
| TRKC 35UU | TRKC 35GUU | 6 | 35 | | 60 | 0 | 200 |
| TRKC 40UU | TRKC 40GUU | 6 | 40 | 0 | 65 | -30 | 230 |
| TRKC 50UU | TRKC 50GUU | 6 | 50 | -21 | 85 | 0 | 290 |
| TRKC 60UU | TRKC 60GUU | 6 | 60 | 0/-25 | 100 | -35 | 310 |

Outer cylinder is treated with electroless nickel plating.

* Seals-on-both-sides is standard.

** TRKC6: A-MT6x1 TRKC8: A-M6x1 TRKC10~30: A-M6F TRKC35~60: A-R1/8

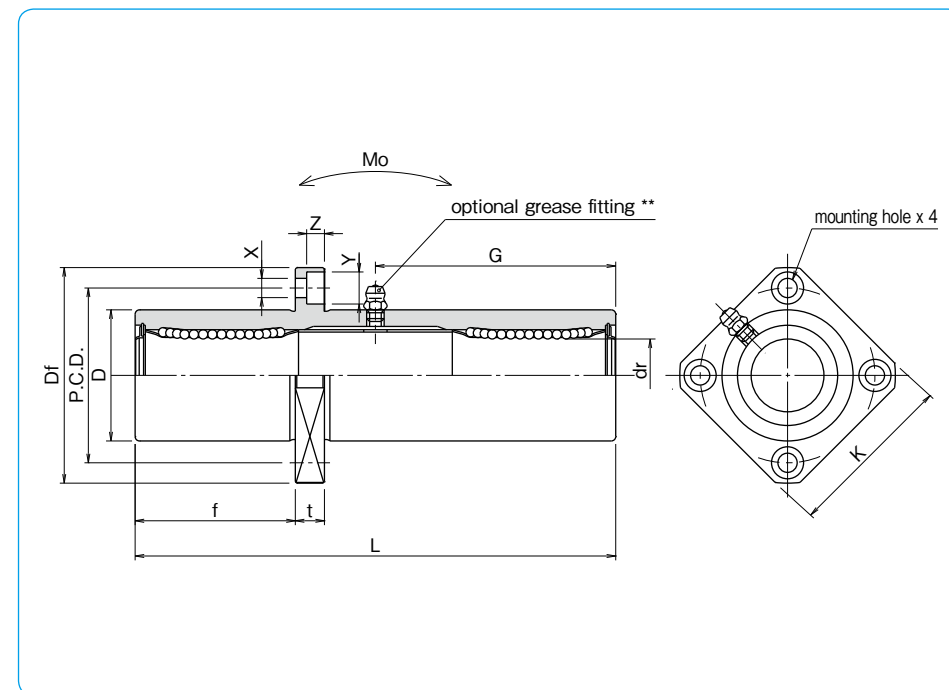


| f mm | Df mm | flange | | | P.C.D. mm | X×Y×Z mm | grease fitting G mm | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment Mo N·m | mass g | shaft diameter mm |
|------|-------|--------|------|-----|-------------|----------|---------------------|----------------------------|--------------------------------|-------------------|-------|--------------------------------|--------|-------------------|
| | | K mm | t mm | C N | | | | | | Co N | | | | |
| 17 | 32 | 25 | 5 | 24 | 3.5×6×3.1 | 20.5 | 20 | 20 | 323 | 530 | 8.2 | 58 | 6 | |
| 22 | 40 | 30 | 6 | 29 | 4.5×7.5×4.1 | 29 | | | 431 | 784 | 16.0 | 117 | 8 | |
| 27 | 43 | 34 | 6 | 33 | 4.5×7.5×4.1 | 38 | | | 588 | 1,100 | 27.0 | 189 | 10 | |
| 28 | 46 | 35 | 6 | 36 | 4.5×7.5×4.1 | 41 | | | 813 | 1,570 | 40.1 | 228 | 12 | |
| 30 | 48 | 37 | 6 | 38 | 4.5×7.5×4.1 | 45 | | | 813 | 1,570 | 42.9 | 286 | 13 | |
| 35 | 54 | 42 | 8 | 43 | 5.5×9×5.1 | 51 | 25 | 25 | 1,230 | 2,350 | 73.5 | 376 | 16 | |
| 40 | 62 | 50 | 8 | 51 | 5.5×9×5.1 | 59 | | | 1,400 | 2,740 | 98.0 | 714 | 20 | |
| 55 | 74 | 58 | 10 | 60 | 6.6×11×6.1 | 82.5 | | | 1,560 | 3,140 | 157 | 1,163 | 25 | |
| 61 | 82 | 64 | 10 | 67 | 6.6×11×6.1 | 91 | | | 2,490 | 5,490 | 297 | 1,543 | 30 | |
| 67 | 96 | 75 | 13 | 78 | 9×14×8.1 | 100 | | | 2,650 | 6,270 | 373 | 2,400 | 35 | |
| 77 | 101 | 80 | 13 | 83 | 9×14×8.1 | 115 | 30 | 30 | 3,430 | 8,040 | 553 | 2,510 | 40 | |
| 97 | 129 | 100 | 18 | 107 | 11×17×11.1 | 145 | | | 6,080 | 15,900 | 1,370 | 6,400 | 50 | |
| 104 | 144 | 116 | 18 | 122 | 11×17×11.1 | 155 | | | 7,550 | 20,000 | 1,800 | 9,200 | 60 | |


1N \approx 0.102kgf 1N · m \approx 0.102kgf · m

TRF-E TYPE

– Triple-Wide Round Flange Pilot End Type –

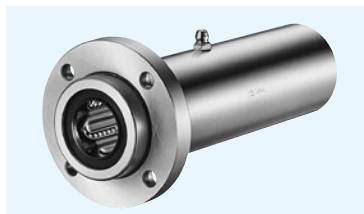

part number structure

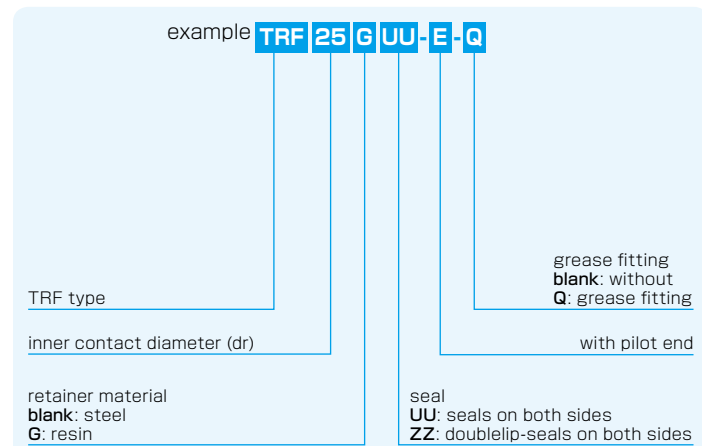


Doublelip-seal is available for size 6 to 30.

| part number* | | number of ball circuits | dr | | major dimensions | | |
|----------------|----------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| steel retainer | resin retainer | | mm | tolerance μm | D | tolerance μm | L ± 0.3 mm |
| TRF 6UU-E | TRF 6GUU-E | 4 | 6 | 0 | 15 | 0/-18 | 51 |
| TRF 8UU-E | TRF 8GUU-E | 4 | 8 | -12 | 19 | | 66 |
| TRF 10UU-E | TRF 10GUU-E | 4 | 10 | | 23 | 0 | 80 |
| TRF 12UU-E | TRF 12GUU-E | 4 | 12 | | 26 | -21 | 84 |
| TRF 13UU-E | TRF 13GUU-E | 4 | 13 | 0 | 28 | | 90 |
| TRF 16UU-E | TRF 16GUU-E | 4 | 16 | -15 | 32 | | 103 |
| TRF 20UU-E | TRF 20GUU-E | 5 | 20 | | 40 | 0 | 118 |
| TRF 25UU-E | TRF 25GUU-E | 6 | 25 | 0 | 45 | -25 | 165 |
| TRF 30UU-E | TRF 30GUU-E | 6 | 30 | -18 | 52 | | 182 |
| TRF 35UU-E | TRF 35GUU-E | 6 | 35 | | 60 | 0 | 200 |
| TRF 40UU-E | TRF 40GUU-E | 6 | 40 | 0 | 65 | -30 | 230 |
| TRF 50UU-E | TRF 50GUU-E | 6 | 50 | -21 | 85 | 0 | 290 |
| TRF 60UU-E | TRF 60GUU-E | 6 | 60 | 0/-25 | 100 | -35 | 310 |

Outer cylinder is treated with electroless nickel plating.

* Seals-on-both-sides is standard.

** TRF6: A-MT6x1 TRF8: A-M6x1 TRF10~30: A-M6F TRF35~60: A-R1/8

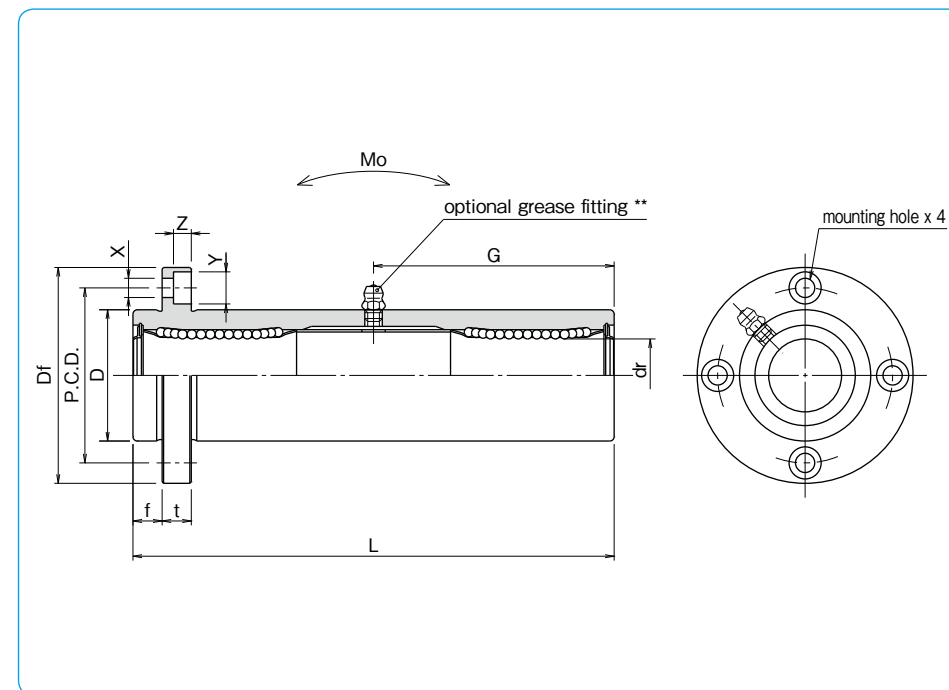

| f mm | Df mm | flange | | | grease fitting G mm | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment $\text{N} \cdot \text{m}$ | mass g | shaft diameter mm |
|------|-------|--------|-----------|-------------|---------------------|----------------------------|--------------------------------|-------------------|-------------|---|--------|-------------------|
| | | t mm | P.C.D. mm | X×Y×Z mm | | | | dynamic C N | static Co N | | | |
| 5 | 32 | 5 | 24 | 3.5×6×3.1 | 20.5 | 20 | 20 | 323 | 530 | 8.2 | 66 | 6 |
| 6 | 40 | 6 | 29 | 4.5×7.5×4.1 | 29 | | | 431 | 784 | 16.0 | 135 | 8 |
| 6 | 43 | 6 | 33 | 4.5×7.5×4.1 | 38 | | | 588 | 1,100 | 27.0 | 205 | 10 |
| 6 | 46 | 6 | 36 | 4.5×7.5×4.1 | 41 | | | 813 | 1,570 | 40.1 | 248 | 12 |
| 6 | 48 | 6 | 38 | 4.5×7.5×4.1 | 45 | 25 | 25 | 813 | 1,570 | 42.9 | 308 | 13 |
| 8 | 54 | 8 | 43 | 5.5×9×5.1 | 51 | | | 1,230 | 2,350 | 73.5 | 412 | 16 |
| 8 | 62 | 8 | 51 | 5.5×9×5.1 | 59 | | | 1,400 | 2,740 | 98.0 | 752 | 20 |
| 10 | 74 | 10 | 60 | 6.6×11×6.1 | 82.5 | | | 1,560 | 3,140 | 157 | 1,244 | 25 |
| 10 | 82 | 10 | 67 | 6.6×11×6.1 | 91 | 30 | 30 | 2,490 | 5,490 | 297 | 1,636 | 30 |
| 13 | 96 | 13 | 78 | 9×14×8.1 | 100 | | | 2,650 | 6,270 | 373 | 2,580 | 35 |
| 13 | 101 | 13 | 83 | 9×14×8.1 | 115 | | | 3,430 | 8,040 | 553 | 2,950 | 40 |
| 18 | 129 | 18 | 107 | 11×17×11.1 | 145 | | | 6,080 | 15,900 | 1,370 | 6,860 | 50 |
| 18 | 144 | 18 | 122 | 11×17×11.1 | 155 | | | 7,550 | 20,000 | 1,800 | 9,660 | 60 |


1N \approx 0.102kgf 1N \cdot m \approx 0.102kgf \cdot m

TRK-E TYPE

– Triple-Wide Square Flange Pilot End Type –



part number structure

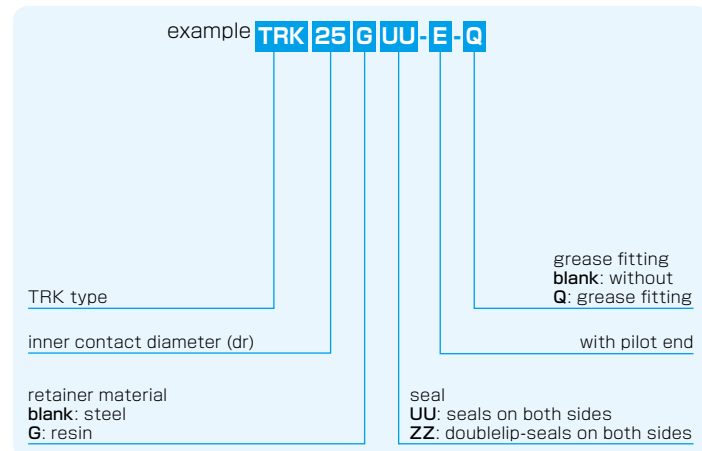


Doublelip-seal is available for size 6 to 30.

| part number* | | number of ball circuits | major dimensions | | |
|----------------|----------------|-------------------------|------------------|---------|--------------|
| steel retainer | resin retainer | | dr mm | D mm | L ±0.3 mm |
| TRK 6UU-E | TRK 6GUU-E | 4 | 6 | 15 | 51 |
| TRK 8UU-E | TRK 8GUU-E | 4 | 8 | 19 | 66 |
| TRK 10UU-E | TRK 10GUU-E | 4 | 10 | 23 | 80 |
| TRK 12UU-E | TRK 12GUU-E | 4 | 12 | 26 | 84 |
| TRK 13UU-E | TRK 13GUU-E | 4 | 13 | 28 | 90 |
| TRK 16UU-E | TRK 16GUU-E | 4 | 16 | 32 | 103 |
| TRK 20UU-E | TRK 20GUU-E | 5 | 20 | 40 | 118 |
| TRK 25UU-E | TRK 25GUU-E | 6 | 25 | 45 | 165 |
| TRK 30UU-E | TRK 30GUU-E | 6 | 30 | 52 | 182 |
| TRK 35UU-E | TRK 35GUU-E | 6 | 35 | 60 | 200 |
| TRK 40UU-E | TRK 40GUU-E | 6 | 40 | 65 | 230 |
| TRK 50UU-E | TRK 50GUU-E | 6 | 50 | 85 | 290 |
| TRK 60UU-E | TRK 60GUU-E | 6 | 60 | 100 | 310 |

Outer cylinder is treated with electroless nickel plating.

* Seals-on-both-sides is standard.

** TRK6: A-MT6x1 TRK8: A-M6x1 TRK10~30: A-M6F TRK35~60: A-R1/8

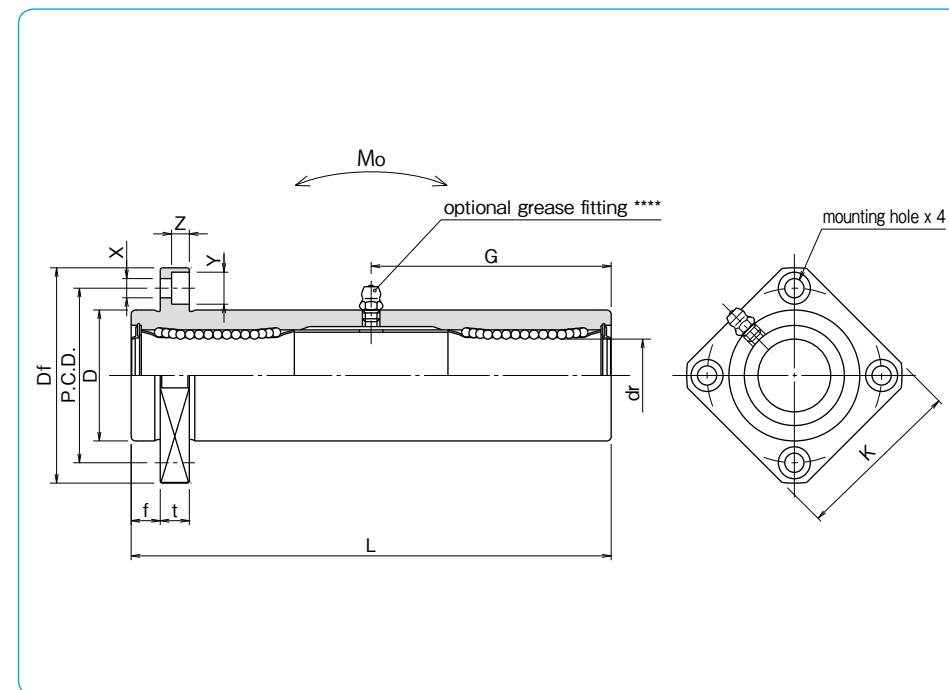


| f mm | Df mm | flange | | | P.C.D. mm | X×Y×Z mm | grease fitting G mm | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment Mo N·m | mass g | shaft diameter mm |
|---------|----------|---------|---------|-------------------|--------------|-------------|---------------------------|--------------------|------------------------|-------------------|-------|--------------------------------------|-----------|----------------------|
| | | K mm | t mm | dynamic C N | | | | | | static Co N | | | | |
| 5 | 32 | 25 | 5 | 24 | 3.5×6×3.1 | 20.5 | 20 | 20 | 323 | 530 | 8.2 | 58 | 6 | |
| 6 | 40 | 30 | 6 | 29 | 4.5×7.5×4.1 | 29 | | | 431 | 784 | 16.0 | 117 | 8 | |
| 6 | 43 | 34 | 6 | 33 | 4.5×7.5×4.1 | 38 | | | 588 | 1,100 | 27.0 | 189 | 10 | |
| 6 | 46 | 35 | 6 | 36 | 4.5×7.5×4.1 | 41 | | | 813 | 1,570 | 40.1 | 228 | 12 | |
| 6 | 48 | 37 | 6 | 38 | 4.5×7.5×4.1 | 45 | 25 | 25 | 813 | 1,570 | 42.9 | 286 | 13 | |
| 8 | 54 | 42 | 8 | 43 | 5.5×9×5.1 | 51 | | | 1,230 | 2,350 | 73.5 | 376 | 16 | |
| 8 | 62 | 50 | 8 | 51 | 5.5×9×5.1 | 59 | | | 1,400 | 2,740 | 98.0 | 714 | 20 | |
| 10 | 74 | 58 | 10 | 60 | 6.6×11×6.1 | 82.5 | | | 1,560 | 3,140 | 157 | 1,163 | 25 | |
| 10 | 82 | 64 | 10 | 67 | 6.6×11×6.1 | 91 | 30 | 30 | 2,490 | 5,490 | 297 | 1,543 | 30 | |
| 13 | 96 | 75 | 13 | 78 | 9×14×8.1 | 100 | | | 2,650 | 6,270 | 373 | 2,400 | 35 | |
| 13 | 101 | 80 | 13 | 83 | 9×14×8.1 | 115 | | | 3,430 | 8,040 | 553 | 2,510 | 40 | |
| 18 | 129 | 100 | 18 | 107 | 11×17×11.1 | 145 | | | 6,080 | 15,900 | 1,370 | 6,400 | 50 | |
| 18 | 144 | 116 | 18 | 122 | 11×17×11.1 | 155 | 7,550 | 20,000 | 1,800 | 9,200 | 60 | | | |


1N≐0.102kgf 1N·m≐0.102kgf·m

TQF-E TYPE

– Round Flange Type with Pilot End –

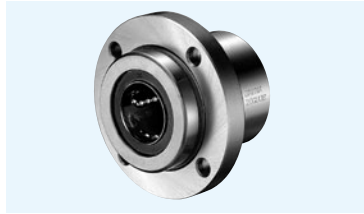

part number structure

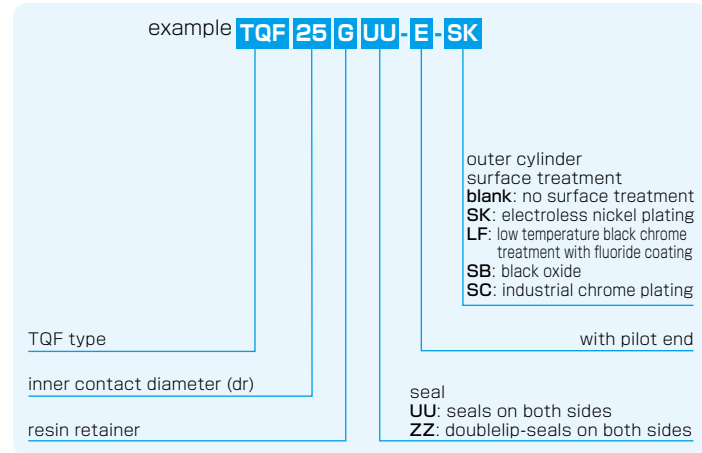


Doublelip-seal is available for size 6 to 30.

| part number* | number of ball circuits | dr | | D | | major dimensions | | | | |
|-------------------|-------------------------|----|-------------------------|----|-------------------------|------------------|------|-------|------|------------------|
| | | mm | tolerance μm | mm | tolerance μm | L ± 0.3 mm | f mm | Df mm | t mm | flange P.C.D. mm |
| TQF16GUU-E | 4 | 16 | 0/-9 | 32 | 0 | 37 | 8 | 54 | 8 | 43 |
| TQF20GUU-E | 5 | 20 | 0 | 40 | -19 | 42 | 8 | 62 | 8 | 51 |
| TQF25GUU-E | 6 | 25 | -10 | 45 | 0 | 59 | 10 | 74 | 10 | 60 |
| TQF30GUU-E | 6 | 30 | 0 | 52 | -22 | 64 | 10 | 82 | 10 | 67 |
| TQF35GUU-E | 6 | 35 | 0 | 60 | 0 | 70 | 13 | 96 | 13 | 78 |
| TQF40GUU-E | 6 | 40 | -12 | 65 | 0 | 80 | 13 | 101 | 13 | 83 |

* Seals-on-both-sides is standard.

**TQF16G~25G : M3-1 grease fitting TQF30G~40G : A-M6x1
 Surface treatment is optional.

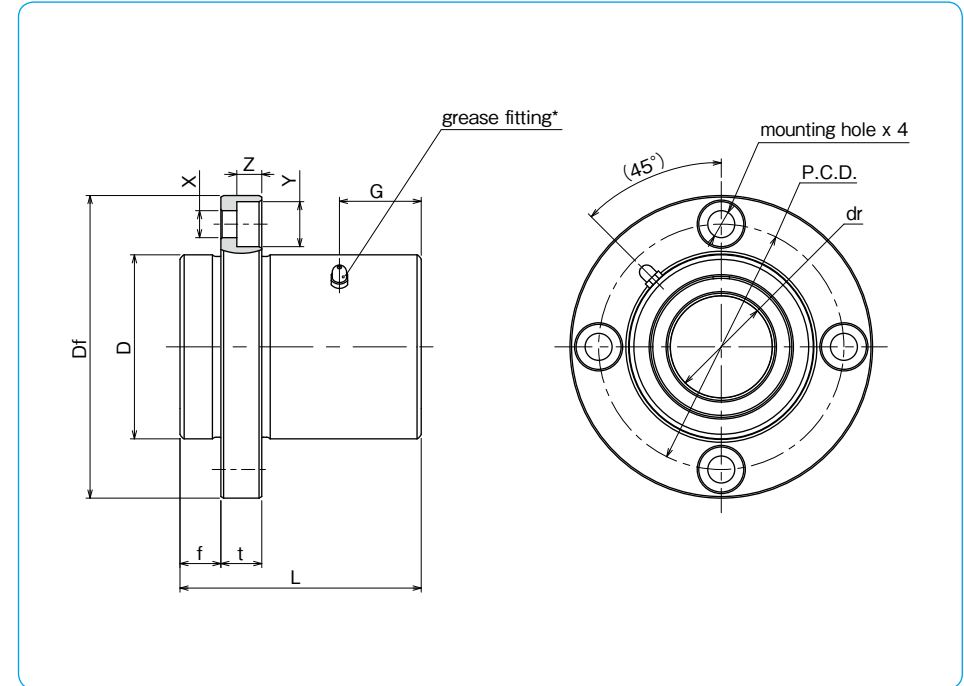


| X×Y×Z mm | grease fitting | eccentricity μm | perpendicularity μm | basic load rating | | mass g | shaft diameter mm |
|------------|----------------|----------------------------|--------------------------------|-------------------|-------------|--------|-------------------|
| | G mm | | | dynamic C N | static Co N | | |
| 5.5×9×5.1 | 12 | 12 | 12 | 774 | 1,180 | 205 | 16 |
| 5.5×9×5.1 | 14 | 15 | 15 | 882 | 1,370 | 334 | 20 |
| 6.6×11×6.1 | 20 | | | 980 | 1,570 | 568 | 25 |
| 6.6×11×6.1 | 21 | 20 | 20 | 1,570 | 2,740 | 737 | 30 |
| 9×14×8.1 | 23 | | | 1,670 | 3,140 | 1,170 | 35 |
| 9×14×8.1 | 27 | | | 2,160 | 4,020 | 1,330 | 40 |

1N≒0.102kgf

TQK-E TYPE

– Square Flange Type with Pilot End –

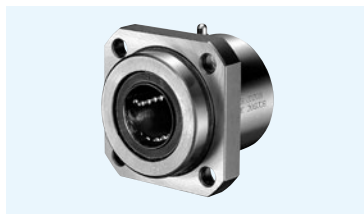

part number structure

example) **TQK 25 G UU-E-SK**


| | | | | | |
|-----------------------------|----|---|----|---|--|
| TQK type | 25 | G | UU | E | SK |
| inner contact diameter (dr) | | | | | |
| resin retainer | | | | | |
| | | | | | with pilot end |
| | | | | | outer cylinder surface treatment |
| | | | | | blank: no surface treatment |
| | | | | | SK: electroless nickel plating |
| | | | | | LF: low temperature black chrome treatment with fluoride coating |
| | | | | | SB: black oxide |
| | | | | | SC: industrial chrome plating |
| | | | | | seal |
| | | | | | UU: seals on both sides |
| | | | | | ZZ: doublelip-seals on both sides |

Doublelip-seal is available for size 6 to 30.

| part number* | number of ball circuits | dr | | D | | major dimensions | | | | | |
|--------------|-------------------------|----|-------------------------|----|-------------------------|------------------|------|-------|------|------|------------------|
| | | mm | tolerance μm | mm | tolerance μm | L ± 0.3 mm | f mm | Df mm | K mm | t mm | flange P.C.D. mm |
| TQK16GUU-E | 4 | 16 | 0/-9 | 32 | 0 | 37 | 8 | 54 | 42 | 8 | 43 |
| TQK20GUU-E | 5 | 20 | 0 | 40 | -19 | 42 | 8 | 62 | 50 | 8 | 51 |
| TQK25GUU-E | 6 | 25 | -10 | 45 | 0 | 59 | 10 | 74 | 58 | 10 | 60 |
| TQK30GUU-E | 6 | 30 | 0 | 52 | -22 | 64 | 10 | 82 | 64 | 10 | 67 |
| TQK35GUU-E | 6 | 35 | 0 | 60 | 0 | 70 | 13 | 96 | 75 | 13 | 78 |
| TQK40GUU-E | 6 | 40 | -12 | 65 | 0 | 80 | 13 | 101 | 80 | 13 | 83 |

* Seals-on-both-sides is standard.

**TQK16G~25G : M3-1 grease fitting TQK30G~40G : A-M6x1
Surface treatment is optional.

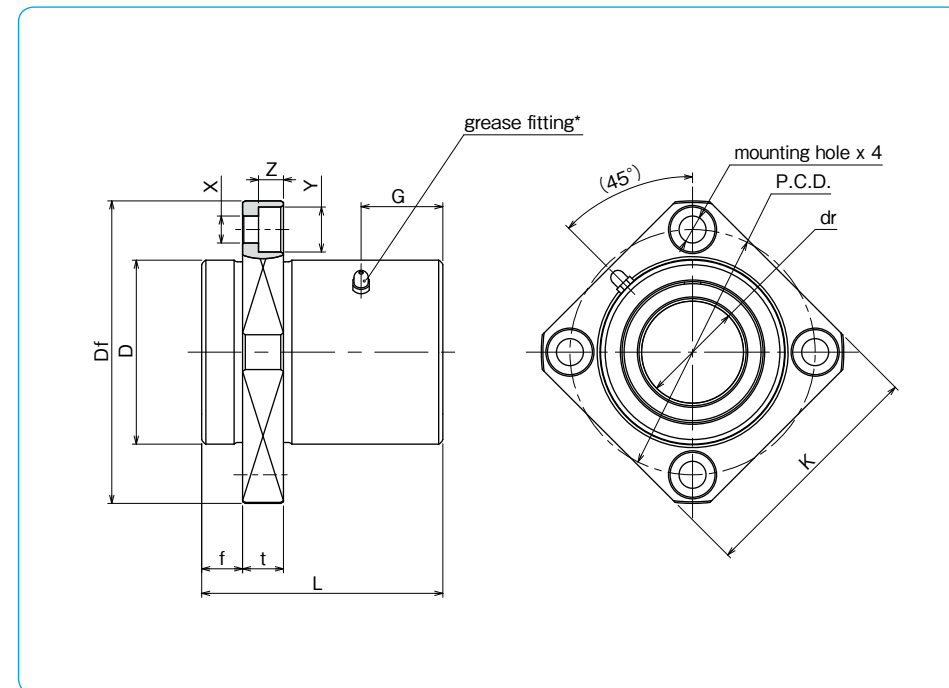

| X×Y×Z mm | grease fitting | eccentricity μm | perpendicularity μm | basic load rating | | mass g | shaft diameter mm |
|------------|----------------|----------------------------|--------------------------------|-------------------|-------------|--------|-------------------|
| | G mm | | | dynamic C N | static Co N | | |
| 5.5×9×5.1 | 12 | 12 | 12 | 774 | 1,180 | 170 | 16 |
| 5.5×9×5.1 | 14 | 15 | 15 | 882 | 1,370 | 297 | 20 |
| 6.6×11×6.1 | 20 | | | 980 | 1,570 | 490 | 25 |
| 6.6×11×6.1 | 21 | 20 | 20 | 1,570 | 2,740 | 639 | 30 |
| 9×14×8.1 | 23 | | | 1,670 | 3,140 | 989 | 35 |
| 9×14×8.1 | 27 | | | 2,160 | 4,020 | 1,040 | 40 |

1N≐0.102kgf

TQF-W-E TYPE

— Round Flange Double-Wide Pilot End Type —



part number structure

example **TQF 25 G W UU - E - SK**

TQF type

inner contact diameter (dr)

resin retainer

double-wide type

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide
SC: industrial chrome plating

with pilot end

seal
UU: seals on both sides
ZZ: doublelip-seals on both sides


Doublelip-seal is available for size 6 to 30.

| part number* | number of ball circuits | dr | | D | | major dimensions | | | | |
|--------------|-------------------------|----|-------------------------|----|-------------------------|------------------|------|-------|------|------------------|
| | | mm | tolerance μm | mm | tolerance μm | L ± 0.3 mm | f mm | Df mm | t mm | flange P.C.D. mm |
| TQF16GWUU-E | 4 | 16 | 0/-9 | 32 | 0 | 70 | 8 | 54 | 8 | 43 |
| TQF20GWUU-E | 5 | 20 | 0 | 40 | -19 | 80 | 8 | 62 | 8 | 51 |
| TQF25GWUU-E | 6 | 25 | -12 | 45 | 0 | 112 | 10 | 74 | 10 | 60 |
| TQF30GWUU-E | 6 | 30 | 0 | 52 | -22 | 123 | 10 | 82 | 10 | 67 |
| TQF35GWUU-E | 6 | 35 | 0 | 60 | 0 | 135 | 13 | 96 | 13 | 78 |
| TQF40GWUU-E | 6 | 40 | -15 | 65 | -22 | 151 | 13 | 101 | 13 | 83 |

* Seals-on-both-sides is standard.

**TQF16G~25G : M3-1 grease fitting TQF30G~40G : A-M6x1

Surface treatment is optional.

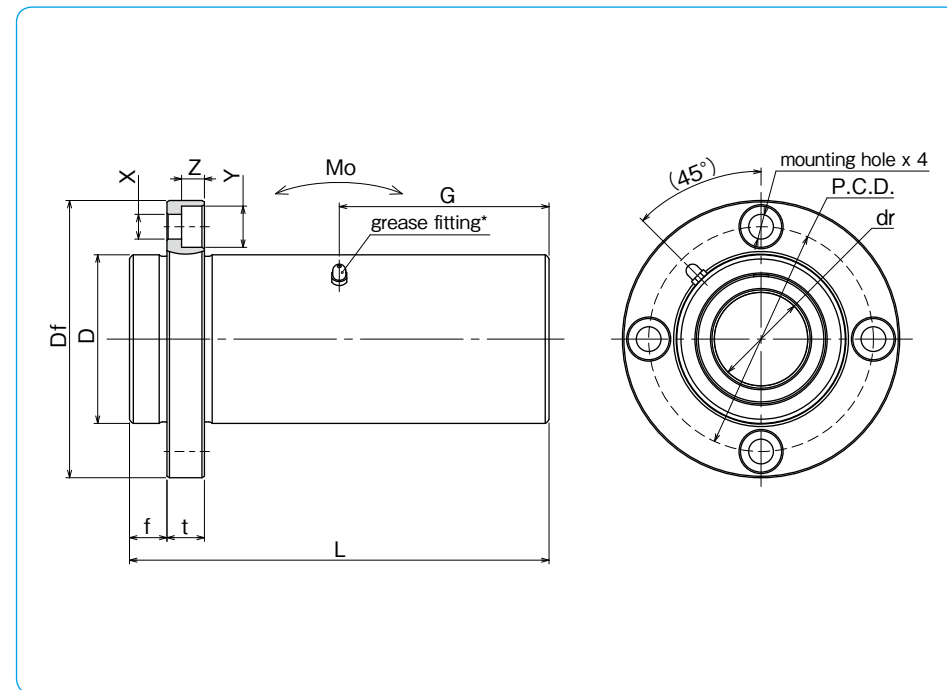

| X × Y × Z mm | grease fitting G mm | eccentricity μm | perpendicularity μm | basic load rating dynamic C N | static Co N | allowable static moment Mo N · m | mass g | shaft diameter mm |
|----------------|---------------------|----------------------------|--------------------------------|-------------------------------|-------------|----------------------------------|--------|-------------------|
| 5.5 × 9 × 5.1 | 35 | 15 | 15 | 1,230 | 2,350 | 19.7 | 317 | 16 |
| 5.5 × 9 × 5.1 | 40 | 20 | 20 | 1,400 | 2,740 | 26.8 | 552 | 20 |
| 6.6 × 11 × 6.1 | 56 | | | 1,560 | 3,140 | 43.4 | 916 | 25 |
| 6.6 × 11 × 6.1 | 61.5 | 25 | 25 | 2,490 | 5,490 | 82.8 | 1,217 | 30 |
| 9 × 14 × 8.1 | 67.5 | | | 2,650 | 6,270 | 110 | 1,880 | 35 |
| 9 × 14 × 8.1 | 75.5 | | | 3,430 | 8,040 | 147 | 2,140 | 40 |

1N \approx 0.102kgf 1N · m \approx 0.102kgf · m

TQK-W-E TYPE

— Square Flange Double-Wide Pilot End Type —



part number structure

example **TQK25GWUU-E-SK**

| | | | | | | |
|-----------------------------|----|---|---|----|---|--|
| TQK type | 25 | G | W | UU | E | SK |
| inner contact diameter (dr) | | | | | | |
| resin retainer | | | | | | |
| double-wide type | | | | | | |
| | | | | | | with pilot end |
| | | | | | | seal |
| | | | | | | UU: seals on both sides |
| | | | | | | ZZ: doublelip-seals on both sides |
| | | | | | | outer cylinder surface treatment |
| | | | | | | blank: no surface treatment |
| | | | | | | SK: electroless nickel plating |
| | | | | | | LF: low temperature black chrome treatment with fluoride coating |
| | | | | | | SB: black oxide |
| | | | | | | SC: industrial chrome plating |


Doublelip-seal is available for size 6 to 30.

| part number* | number of ball circuits | dr | | D | | major dimensions | | | | | flange | |
|--------------|-------------------------|----|-------------------------|----|-------------------------|------------------|------|-------|------|------|-----------|--|
| | | mm | tolerance μm | mm | tolerance μm | L ± 0.3 mm | f mm | Df mm | K mm | t mm | P.C.D. mm | |
| TQK16GWUU-E | 4 | 16 | 0/-10 | 32 | 0 | 70 | 8 | 54 | 42 | 8 | 43 | |
| TQK20GWUU-E | 5 | 20 | 0 | 40 | -19 | 80 | 8 | 62 | 50 | 8 | 51 | |
| TQK25GWUU-E | 6 | 25 | -12 | 45 | 0 | 112 | 10 | 74 | 58 | 10 | 60 | |
| TQK30GWUU-E | 6 | 30 | 0 | 52 | -22 | 123 | 10 | 82 | 64 | 10 | 67 | |
| TQK35GWUU-E | 6 | 35 | 0 | 60 | 0 | 135 | 13 | 96 | 75 | 13 | 78 | |
| TQK40GWUU-E | 6 | 40 | -15 | 65 | 0 | 151 | 13 | 101 | 80 | 13 | 83 | |

* Seals-on-both-sides is standard.

**TQK16G~25G : M3-1 grease fitting TQK30G~40G : A-M6x1

Surface treatment is optional.

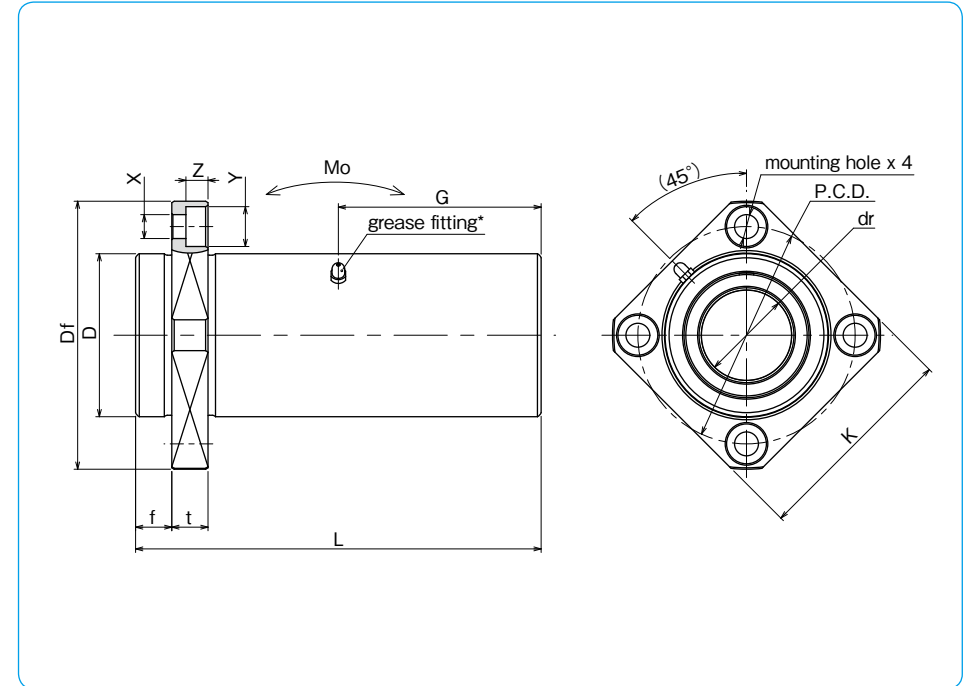

| X × Y × Z mm | grease fitting G mm | eccentricity μm | perpendicularity μm | basic load rating dynamic C N | static Co N | allowable static moment Mo N · m | mass g | shaft diameter mm |
|----------------|---------------------|----------------------------|--------------------------------|-------------------------------|-------------|----------------------------------|--------|-------------------|
| 5.5 × 9 × 5.1 | 35 | 15 | 15 | 1,230 | 2,350 | 19.7 | 282 | 16 |
| 5.5 × 9 × 5.1 | 40 | 20 | 20 | 1,400 | 2,740 | 26.8 | 515 | 20 |
| 6.6 × 11 × 6.1 | 56 | | | 1,560 | 3,140 | 43.4 | 838 | 25 |
| 6.6 × 11 × 6.1 | 61.5 | 25 | 25 | 2,490 | 5,490 | 82.8 | 1,120 | 30 |
| 9 × 14 × 8.1 | 67.5 | | | 2,650 | 6,270 | 110 | 1,710 | 35 |
| 9 × 14 × 8.1 | 75.5 | | | 3,430 | 8,040 | 147 | 1,960 | 40 |

1N \approx 0.102kgf 1N · m \approx 0.102kgf · m

KB TYPE (Euro Standard)

– Standard Type –



part number structure


example **KBS 25 G UU**

specification
KB: standard
KBS: anti-corrosion

inner contact diameter (dr)

retainer material
blank: standard/steel
G: anti-corrosion/stainless steel
G: resin

seal
blank: without seal
U: seal on one side
UU: seals on both sides

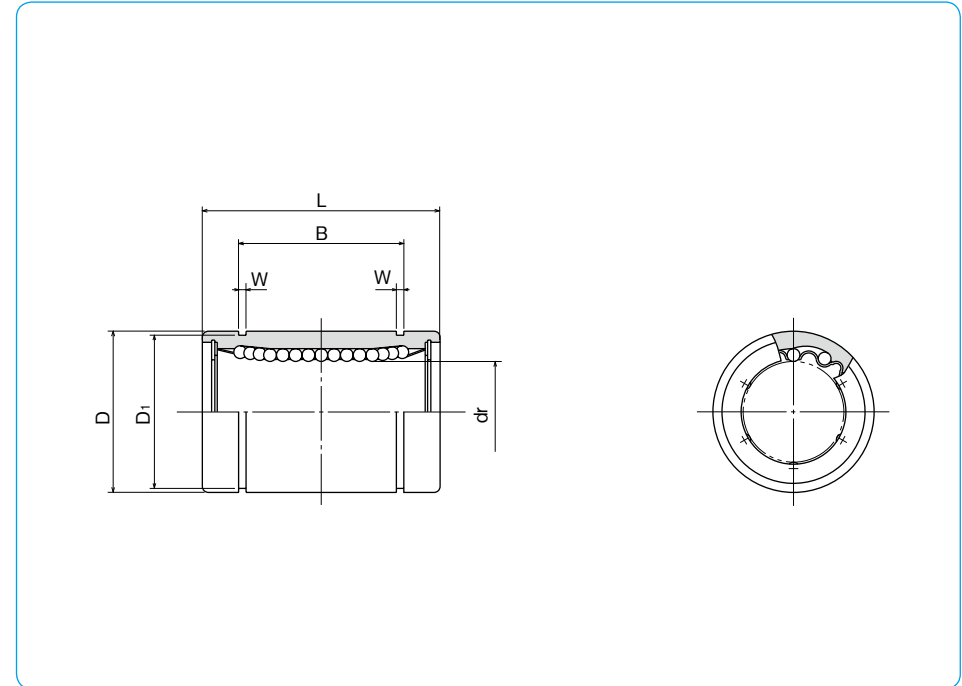

| part number | | | | number of ball circuits | dr | | major dimensions | |
|-------------------------|----------------|-----------------------------------|----------------|-------------------------|----|-------------------------|------------------|-------------------------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | resin retainer | | mm | tolerance μm | D mm | tolerance μm |
| KB 3 | KB 3G | KBS 3 | KBS 3G | 4 | 3 | | 7 | |
| KB 4 | KB 4G | KBS 4 | KBS 4G | 4 | 4 | | 8 | 0 |
| KB 5 | KB 5G | KBS 5 | KBS 5G | 4 | 5 | + 8 | 12 | - 8 |
| KB 8 | KB 8G | KBS 8 | KBS 8G | 4 | 8 | 0 | 16 | |
| KB10 | KB10G | KBS10 | KBS10G | 4 | 10 | | 19 | 0 |
| KB12 | KB12G | KBS12 | KBS12G | 4 | 12 | | 22 | - 9 |
| KB16 | KB16G | KBS16 | KBS16G | 4 | 16 | + 9 | 26 | |
| KB20 | KB20G | KBS20 | KBS20G | 5 | 20 | - 1 | 32 | 0 |
| KB25 | KB25G | KBS25 | KBS25G | 6 | 25 | +11 | 40 | -11 |
| KB30 | KB30G | KBS30 | KBS30G | 6 | 30 | - 1 | 47 | |
| KB40 | KB40G | KBS40 | KBS40G | 6 | 40 | +13 | 62 | 0 |
| KB50 | KB50G | KBS50 | KBS50G | 6 | 50 | - 2 | 75 | -13 |
| KB60 | KB60G | KBS60 | KBS60G | 6 | 60 | | 90 | 0 |
| KB80 | - | - | - | 6 | 80 | +16/-4 | 120 | -15 |

| mm | L | B | | W | D ₁ | eccentricity μm | radial clearance (maximum) μm | basic load rating | | mass g | shaft diameter mm | |
|-----|--------------|------|--------------|-------|----------------|----------------------------|--|-------------------|-------------|--------|-------------------|-------|
| | tolerance mm | mm | tolerance mm | mm | mm | | | dynamic C N | static Co N | | | |
| 10 | 0 | - | - | - | - | 10 | - 3 | 69 | 105 | 1.4 | 3 | |
| 12 | -0.12 | - | - | - | - | | | 88 | 127 | 2 | 4 | |
| 22 | 0 | 14.5 | -0.2 | 1.1 | 11.5 | | | 206 | 265 | 11 | 5 | |
| 25 | | 16.5 | | 1.1 | 15.2 | 265 | 402 | 22 | 8 | | | |
| 29 | | 22 | | 1.3 | 18 | 372 | 549 | 36 | 10 | | | |
| 32 | | -0.2 | | 22.9 | 1.3 | 21 | 510 | 784 | 45 | 12 | | |
| 36 | | - 6 | | 24.9 | 1.3 | 24.9 | 578 | 892 | 60 | 16 | | |
| 45 | 31.5 | | 1.6 | 30.3 | 862 | 1,370 | 102 | 20 | | | | |
| 58 | 44.1 | | 1.85 | 37.5 | 980 | 1,570 | 235 | 25 | | | | |
| 68 | 0 | 52.1 | 0 | 1.85 | 44.5 | 15 | - 8 | 1,570 | 2,740 | 360 | 30 | |
| 80 | -0.3 | 60.6 | -0.3 | 2.15 | 59 | | | 2,160 | 4,020 | 770 | 40 | |
| 100 | - 13 | 77.6 | 0 | 2.65 | 72 | 17 | - 13 | 3,820 | 7,940 | 1,250 | 50 | |
| 125 | | 0 | | 101.7 | 3.15 | | | 86.5 | 4,700 | 9,800 | 2,220 | 60 |
| 165 | | -0.4 | | 133.7 | -0.4 | | | 4.15 | 116 | 7,350 | 16,000 | 5,140 |

1N=0.102kgf

KB-AJ TYPE (Euro Standard)

– Clearance Adjustable Type –



part number structure

example **KBS 25 G UU -AJ**


specification
KB: standard
KBS: anti-corrosion

inner contact diameter (dr)

retainer material
blank: standard/steel
U: anti-corrosion/stainless steel
G: resin

clearance-adjustable

seal
blank: without seal
U: seal on one side
UU: seals on both sides

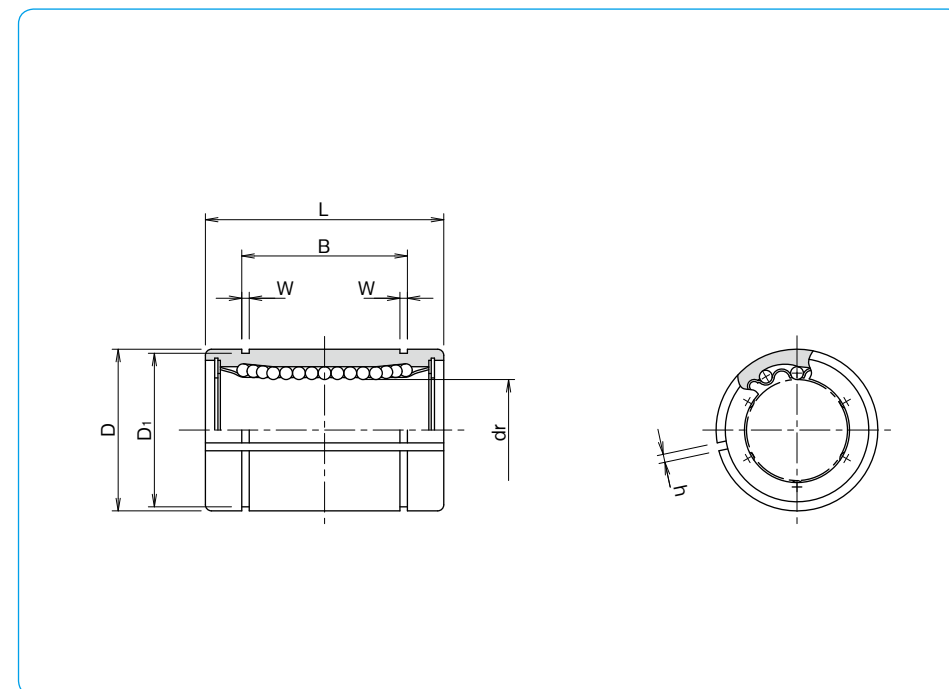

| part number | | number of ball circuits | dr | | major dimensions | | |
|----------------|-----------------|-------------------------|------------------|------------------|------------------|------------------|-----|
| standard | anti-corrosion | | mm | tolerance* μm | D | tolerance* μm | |
| steel retainer | resin retainer | stainless retainer | resin retainer | | | | |
| — | KB 5G-AJ | — | KBS 5G-AJ | 4 | 5 | 12 | 0 |
| — | KB 8G-AJ | — | KBS 8G-AJ | 4 | 8 | 16 | - 8 |
| — | KB10G-AJ | — | KBS10G-AJ | 4 | 10 | 19 | 0 |
| KB12-AJ | KB12G-AJ | KBS12-AJ | KBS12G-AJ | 4 | 12 | 22 | 0 |
| KB16-AJ | KB16G-AJ | KBS16-AJ | KBS16G-AJ | 4 | 16 | 26 | - 9 |
| KB20-AJ | KB20G-AJ | KBS20-AJ | KBS20G-AJ | 5 | 20 | 32 | 0 |
| KB25-AJ | KB25G-AJ | KBS25-AJ | KBS25G-AJ | 6 | 25 | 40 | 0 |
| KB30-AJ | KB30G-AJ | KBS30-AJ | KBS30G-AJ | 6 | 30 | 47 | -11 |
| KB40-AJ | KB40G-AJ | KBS40-AJ | KBS40G-AJ | 6 | 40 | 62 | 0 |
| KB50-AJ | KB50G-AJ | KBS50-AJ | KBS50G-AJ | 6 | 50 | 75 | -13 |
| KB60-AJ | KB60G-AJ | KBS60-AJ | KBS60G-AJ | 6 | 60 | 90 | 0 |
| KB80-AJ | — | — | — | 6 | 80 | 120 | -15 |


* Accuracy is measured prior to machining clearance slit.

| mm | L | B | | W | D ₁ | h | eccentricity* μm | basic load rating | | mass g | shaft diameter mm | |
|-----|-----------------|------|-----------------|------|----------------|------|---------------------|-------------------|-------------------|-----------|----------------------|----|
| | tolerance mm | mm | tolerance mm | | | | | dynamic C N | static Co N | | | |
| 22 | 0 | -0.2 | 14.5 | 0 | 1.1 | 11.5 | 12 | 206 | 265 | 10 | 5 | |
| 25 | | | 16.5 | | 1.1 | 15.2 | | 1 | 265 | 402 | 19.5 | 8 |
| 29 | | | 22 | | 1.3 | 18 | | 1 | 372 | 549 | 29 | 10 |
| 32 | | | 22.9 | | 1.3 | 21 | | 1.5 | 510 | 784 | 44 | 12 |
| 36 | -0.3 | -0.3 | 24.9 | -0.3 | 1.3 | 24.9 | 15 | 578 | 892 | 59 | 16 | |
| 45 | | | 31.5 | | 1.6 | 30.3 | | 2 | 862 | 1,370 | 100 | 20 |
| 58 | | | 44.1 | | 1.85 | 37.5 | | 2 | 980 | 1,570 | 230 | 25 |
| 68 | 0 | 0 | 52.1 | 0 | 1.85 | 44.5 | 17 | 1,570 | 2,740 | 355 | 30 | |
| 80 | | | 60.6 | | 2.15 | 59 | | 3 | 2,160 | 4,020 | 758 | 40 |
| 100 | 0 | 0 | 77.6 | 0 | 2.65 | 72 | 20 | 3,820 | 7,940 | 1,230 | 50 | |
| 125 | | | 101.7 | | 3.15 | 86.5 | | 3 | 4,700 | 9,800 | 2,170 | 60 |
| 165 | | | 133.7 | | 4.15 | 116 | | 3 | 7,350 | 16,000 | 5,000 | 80 |

1N≒0.102kgf

KB-OP TYPE (Euro Standard)

– Open Type –

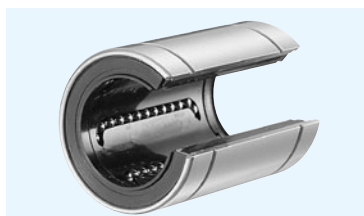

part number structure

example **KBS 25 G UU-OP**


specification
KB: standard
KBS: anti-corrosion

inner contact diameter (dr)

retainer material
blank: standard/steel
 anti-corrosion/stainless steel
G: resin

open type

seal
blank: without seal
U: seal on one side
UU: seals on both sides

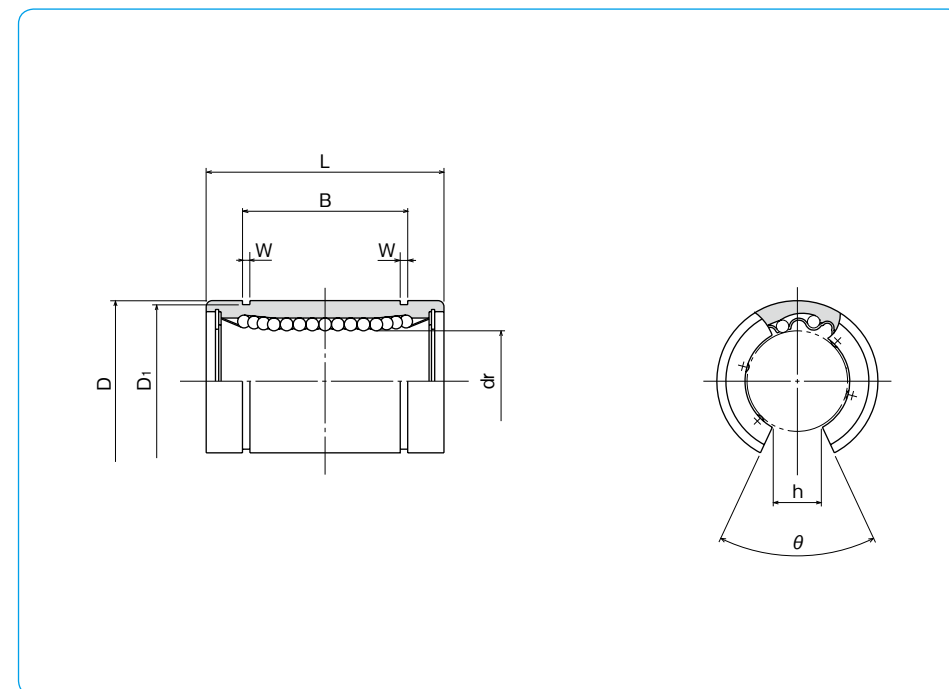

| part number | | | | number of ball circuits | dr | | major dimensions | |
|-------------------------|-----------------|-----------------------------------|------------------|-------------------------|----|--------------------------|------------------|--------------------------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | resin retainer | | mm | tolerance* μm | D mm | tolerance* μm |
| — | KB10G-OP | — | KBS10G-OP | 3 | 10 | + 8 | 19 | 0 |
| KB12-OP | KB12G-OP | KBS12-OP | KBS12G-OP | 3 | 12 | 0 | 22 | - 9 |
| KB16-OP | KB16G-OP | KBS16-OP | KBS16G-OP | 3 | 16 | + 9 | 26 | 0 |
| KB20-OP | KB20G-OP | KBS20-OP | KBS20G-OP | 4 | 20 | - 1 | 32 | -11 |
| KB25-OP | KB25G-OP | KBS25-OP | KBS25G-OP | 5 | 25 | +11 | 40 | 0 |
| KB30-OP | KB30G-OP | KBS30-OP | KBS30G-OP | 5 | 30 | - 1 | 47 | 0 |
| KB40-OP | KB40G-OP | KBS40-OP | KBS40G-OP | 5 | 40 | +13 | 62 | -13 |
| KB50-OP | KB50G-OP | KBS50-OP | KBS50G-OP | 5 | 50 | - 2 | 75 | 0 |
| KB60-OP | KB60G-OP | KBS60-OP | KBS60G-OP | 5 | 60 | | 90 | 0 |
| KB80-OP | — | — | — | 5 | 80 | +16/-4 | 120 | -15 |


* Accuracy is measured prior to machining open slit.

| mm | L tolerance mm | B tolerance mm | | W mm | D ₁ mm | h mm | θ | eccentricity* μm | basic load rating | | mass g | shaft diameter mm |
|-----|----------------|----------------|------|------|-------------------|------|----------|-----------------------------|-------------------|--------|--------|-------------------|
| | | mm | mm | | | | | | C N | Co N | | |
| 29 | | 22 | | 1.3 | 18 | 6.8 | 80° | 12 | 372 | 549 | 23 | 10 |
| 32 | 0 | 22.9 | 0 | 1.3 | 21 | 7.5 | 78° | | 510 | 784 | 35 | 12 |
| 36 | -0.2 | 24.9 | -0.2 | 1.3 | 24.9 | 10 | 78° | | 578 | 892 | 48 | 16 |
| 45 | | 31.5 | | 1.6 | 30.3 | 10 | 60° | 15 | 862 | 1,370 | 84 | 20 |
| 58 | | 44.1 | | 1.85 | 37.5 | 12.5 | 60° | | 980 | 1,570 | 195 | 25 |
| 68 | 0 | 52.1 | 0 | 1.85 | 44.5 | 12.5 | 50° | | 1,570 | 2,740 | 309 | 30 |
| 80 | -0.3 | 60.6 | -0.3 | 2.15 | 59 | 16.8 | 50° | 17 | 2,160 | 4,020 | 665 | 40 |
| 100 | | 77.6 | | 2.65 | 72 | 21 | 50° | | 3,820 | 7,940 | 1,080 | 50 |
| 125 | 0 | 101.7 | 0 | 3.15 | 86.5 | 27.2 | 54° | | 4,700 | 9,800 | 1,900 | 60 |
| 165 | -0.4 | 133.7 | -0.4 | 4.15 | 116 | 36.3 | 54° | 20 | 7,350 | 16,000 | 4,380 | 80 |

1N \approx 0.102kgf

KB-W TYPE (Euro Standard)

– Double-Wide Type –

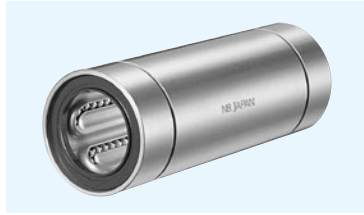

part number structure


example **KBS 25 G W UU**

specification
KB: standard
KBS: anti-corrosion

inner contact diameter (dr)
blank: without seal
UU: seals on both sides

retainer material
blank: standard/steel
 anti-corrosion/stainless steel
G: resin

double-wide type

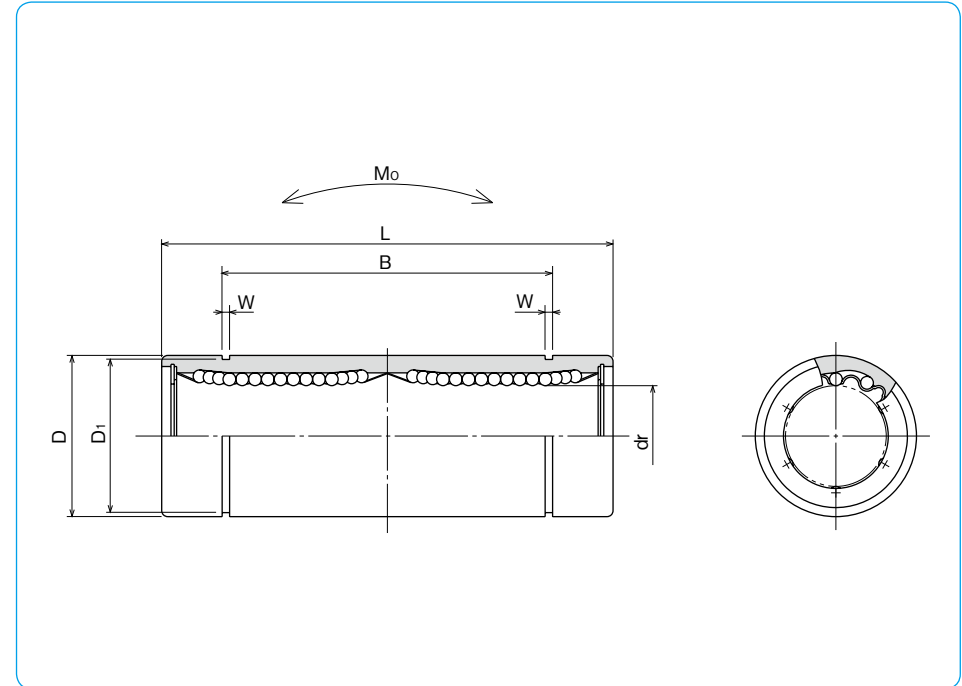


| part number | | | | number of ball circuits | dr | | major dimensions | |
|-------------------------|----------------|-----------------------------------|-----------------|-------------------------|----|-------------------------|------------------|-------------------------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | resin retainer | | mm | tolerance μm | D mm | tolerance μm |
| KB 8W | KB 8GW | KBS 8W | KBS 8GW | 4 | 8 | + 9 | 16 | 0/-9 |
| KB 12W | KB 12GW | KBS 12W | KBS 12GW | 4 | 12 | - 1 | 22 | 0 |
| KB 16W | KB 16GW | KBS 16W | KBS 16GW | 4 | 16 | + 11 | 26 | -11 |
| KB 20W | KB 20GW | KBS 20W | KBS 20GW | 5 | 20 | - 1 | 32 | 0 |
| KB 25W | KB 25GW | KBS 25W | KBS 25GW | 6 | 25 | + 13 | 40 | -13 |
| KB 30W | KB 30GW | KBS 30W | KBS 30GW | 6 | 30 | - 2 | 47 | 0 |
| KB 40W | KB 40GW | KBS 40W | KBS 40GW | 6 | 40 | + 16 | 62 | 0 |
| KB 50W | KB 50GW | KBS 50W | KBS 50GW | 6 | 50 | - 4 | 75 | -15 |
| KB 60W | KB 60GW | KBS 60W | KBS 60GW | 6 | 60 | | 90 | 0/-20 |

| mm | L tolerance mm | mm | B tolerance mm | W mm | D ₁ mm | eccentricity μm | basic load rating | | allowable static moment Mo N · m | mass g | shaft diameter mm |
|-----|----------------|-------|----------------|------|-------------------|----------------------------|-------------------|-------------|----------------------------------|--------|-------------------|
| | | | | | | | dynamic C N | static Co N | | | |
| 46 | | 33 | | 1.1 | 15.2 | 15 | 421 | 804 | 4.3 | 40 | 8 |
| 61 | 0 | 45.8 | 0 | 1.3 | 21 | | 813 | 1,570 | 11.7 | 80 | 12 |
| 68 | -0.3 | 49.8 | -0.3 | 1.3 | 24.9 | | 921 | 1,780 | 14.2 | 115 | 16 |
| 80 | | 61 | | 1.6 | 30.5 | 17 | 1,370 | 2,740 | 25.0 | 180 | 20 |
| 112 | | 82 | | 1.85 | 38 | | 1,570 | 3,140 | 44.0 | 430 | 25 |
| 123 | | 104.2 | | 1.85 | 44.5 | | 2,500 | 5,490 | 78.9 | 615 | 30 |
| 151 | 0 | 121.2 | 0 | 2.15 | 59 | 20 | 3,430 | 8,040 | 147 | 1,400 | 40 |
| 192 | -0.4 | 155.2 | -0.4 | 2.65 | 72 | | 6,080 | 15,900 | 396 | 2,320 | 50 |
| 209 | | 170 | | 3.15 | 86.5 | | 7,550 | 20,000 | 487 | 3,920 | 60 |

1N \approx 0.102kgf 1N · m \approx 0.102kgf · m

KBF TYPE (Euro Standard)


– Round Flange Type –

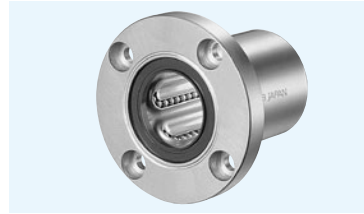

part number structure

example **KBSF 25 G UU-SK**

| | | | | |
|--|-----------------------------|--|--|--|
| specification KBF: standard KBSF: anti-corrosion | inner contact diameter (dr) | retainer material blank: standard/steel anti-corrosion/stainless steel G: resin | outer cylinder surface treatment blank: no surface treatment SK: electroless nickel plating LF: low temperature black chrome treatment with fluoride coating SB: black oxide (not available on anti-corrosion type) SC: industrial chrome plating | seal blank: without seal UU: seals on both sides |
|--|-----------------------------|--|--|--|

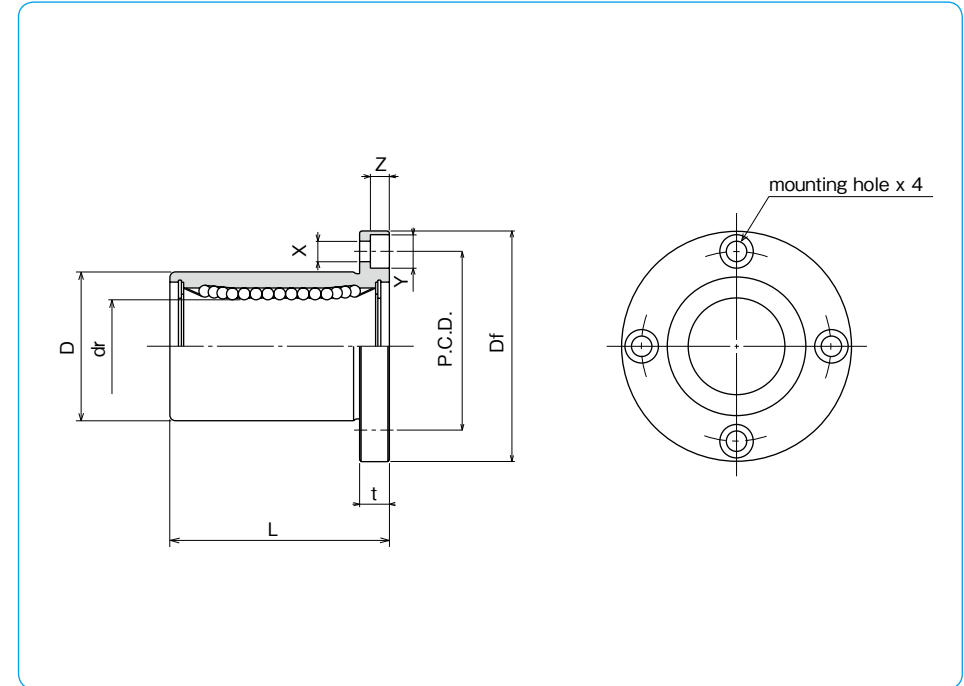

| part number | | | | number of ball circuits | dr | | major dimensions | | |
|-------------------------|----------------|-----------------------------------|----------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| — | KBF 5G | — | KBSF 5G | 4 | 5 | + 8 | 12 | 0 | 22 |
| KBF 8 | KBF 8G | KBSF 8 | KBSF 8G | 4 | 8 | 0 | 16 | -13 | 25 |
| KBF12 | KBF12G | KBSF12 | KBSF12G | 4 | 12 | 0 | 22 | 0 | 32 |
| KBF16 | KBF16G | KBSF16 | KBSF16G | 4 | 16 | + 9 | 26 | -16 | 36 |
| KBF20 | KBF20G | KBSF20 | KBSF20G | 5 | 20 | - 1 | 32 | 0 | 45 |
| KBF25 | KBF25G | KBSF25 | KBSF25G | 6 | 25 | +11 | 40 | 0 | 58 |
| KBF30 | KBF30G | KBSF30 | KBSF30G | 6 | 30 | - 1 | 47 | -19 | 68 |
| KBF40 | KBF40G | KBSF40 | KBSF40G | 6 | 40 | +13 | 62 | 0 | 80 |
| KBF50 | KBF50G | KBSF50 | KBSF50G | 6 | 50 | - 2 | 75 | -22 | 100 |
| KBF60 | KBF60G | KBSF60 | KBSF60G | 6 | 60 | 0 | 90 | 0 | 125 |
| KBF80 | — | — | — | 6 | 80 | +16/-4 | 120 | -25 | 165 |

| Df mm | t mm | flange P.C.D. mm | X×Y×Z mm | eccentricity μm | perpendicularity μm | basic load rating | | mass g | shaft diameter mm |
|-------|------|------------------|-------------|----------------------------|--------------------------------|-------------------|-------------|--------|-------------------|
| | | | | | | dynamic C N | static Co N | | |
| 28 | 5 | 20 | 3.5×6×3.1 | 12 | 12 | 206 | 265 | 26 | 5 |
| 32 | 5 | 24 | 3.5×6×3.1 | | | 265 | 402 | 41 | 8 |
| 42 | 6 | 32 | 4.5×7.5×4.1 | | | 510 | 784 | 80 | 12 |
| 46 | 6 | 36 | 4.5×7.5×4.1 | | | 578 | 892 | 103 | 16 |
| 54 | 8 | 43 | 5.5×9×5.1 | 15 | 15 | 862 | 1,370 | 182 | 20 |
| 62 | 8 | 51 | 5.5×9×5.1 | | | 980 | 1,570 | 335 | 25 |
| 76 | 10 | 62 | 6.6×11×6.1 | | | 1,570 | 2,740 | 560 | 30 |
| 98 | 13 | 80 | 9×14×8.1 | 17 | 17 | 2,160 | 4,020 | 1,175 | 40 |
| 112 | 13 | 94 | 9×14×8.1 | | | 3,820 | 7,940 | 1,745 | 50 |
| 134 | 18 | 112 | 11×17×11.1 | 20 | 20 | 4,700 | 9,800 | 3,220 | 60 |
| 164 | 18 | 142 | 11×17×11.1 | | | 7,350 | 16,000 | 6,420 | 80 |

1N \approx 0.102kgf

KBK TYPE (Euro Standard)


– Square Flange Type –



part number structure

example **KBSK 25 G UU-SK**

| | | | | |
|--|-----------------------------|--|--|--|
| specification KBK: standard KBSK: anti-corrosion | inner contact diameter (dr) | retainer material blank: standard/steel anti-corrosion/stainless steel G: resin | outer cylinder surface treatment blank: no surface treatment SK: electroless nickel plating LF: low temperature black chrome treatment with fluoride coating SB: black oxide (not available on anti-corrosion type) SC: industrial chrome plating | seal blank: without seal UU: seals on both sides |
|--|-----------------------------|--|--|--|

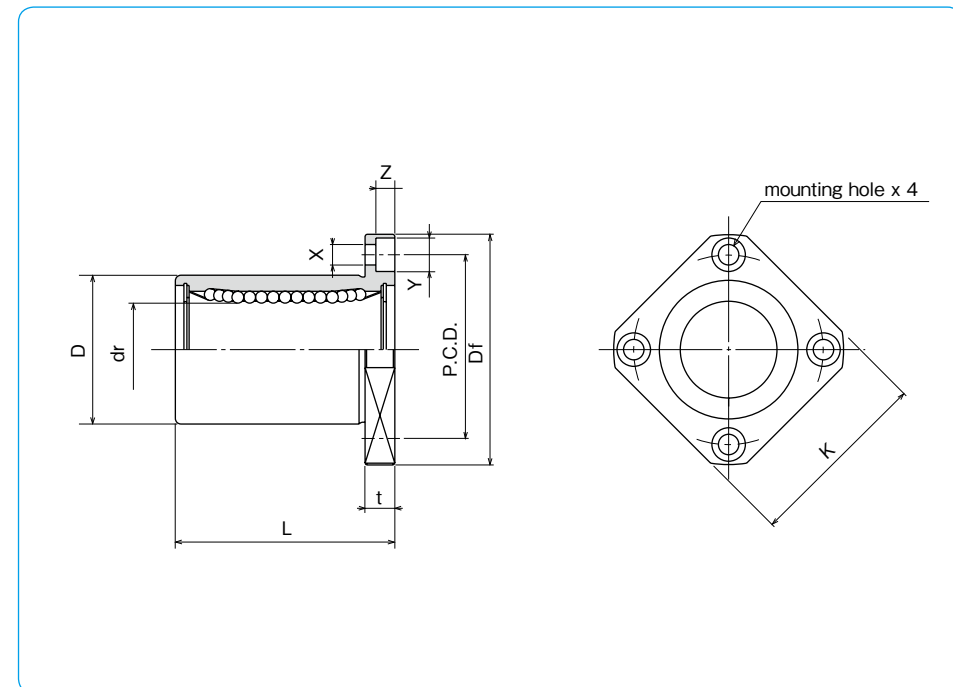

| part number | | | | number of ball circuits | dr | | major dimensions | | |
|-------------------------|----------------|-----------------------------------|-------------------------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | anti-corrosion resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| — | KBK 5G | — | KBSK 5G | 4 | 5 | 0 | 12 | 0 | 22 |
| KBK 8 | KBK 8G | KBSK 8 | KBSK 8G | 4 | 8 | + 8 | 16 | -13 | 25 |
| KBK 12 | KBK 12G | KBSK 12 | KBSK 12G | 4 | 12 | 0 | 22 | 0 | 32 |
| KBK 16 | KBK 16G | KBSK 16 | KBSK 16G | 4 | 16 | + 9 | 26 | -16 | 36 |
| KBK 20 | KBK 20G | KBSK 20 | KBSK 20G | 5 | 20 | - 1 | 32 | 0 | 45 |
| KBK 25 | KBK 25G | KBSK 25 | KBSK 25G | 6 | 25 | +11 | 40 | -19 | 58 |
| KBK 30 | KBK 30G | KBSK 30 | KBSK 30G | 6 | 30 | - 1 | 47 | 0 | 68 |
| KBK 40 | KBK 40G | KBSK 40 | KBSK 40G | 6 | 40 | +13 | 62 | 0 | 80 |
| KBK 50 | KBK 50G | KBSK 50 | KBSK 50G | 6 | 50 | - 2 | 75 | -22 | 100 |
| KBK 60 | KBK 60G | KBSK 60 | KBSK 60G | 6 | 60 | 0 | 90 | 0 | 125 |
| KBK 80 | — | — | — | 6 | 80 | +16/-4 | 120 | -25 | 165 |

| flange | | | | | eccentricity μm | perpendicularity μm | basic load rating | | mass g | shaft diameter mm |
|--------|------|------|-----------|-------------|----------------------------|--------------------------------|-------------------|-------------|--------|-------------------|
| Df mm | K mm | t mm | P.C.D. mm | X×Y×Z mm | | | dynamic C N | static Co N | | |
| 28 | 22 | 5 | 20 | 3.5×6×3.1 | 12 | 12 | 206 | 265 | 20 | 5 |
| 32 | 25 | 5 | 24 | 3.5×6×3.1 | | | 265 | 402 | 33 | 8 |
| 42 | 32 | 6 | 32 | 4.5×7.5×4.1 | | | 510 | 784 | 64 | 12 |
| 46 | 35 | 6 | 36 | 4.5×7.5×4.1 | | | 578 | 892 | 90 | 16 |
| 54 | 42 | 8 | 43 | 5.5×9×5.1 | 15 | 15 | 862 | 1,370 | 147 | 20 |
| 62 | 50 | 8 | 51 | 5.5×9×5.1 | | | 980 | 1,570 | 295 | 25 |
| 76 | 60 | 10 | 62 | 6.6×11×6.1 | | | 1,570 | 2,740 | 465 | 30 |
| 98 | 75 | 13 | 80 | 9×14×8.1 | 17 | 17 | 2,160 | 4,020 | 975 | 40 |
| 112 | 88 | 13 | 94 | 9×14×8.1 | | | 3,820 | 7,940 | 1,545 | 50 |
| 134 | 106 | 18 | 112 | 11×17×11.1 | | | 4,700 | 9,800 | 2,780 | 60 |
| 164 | 136 | 18 | 142 | 11×17×11.1 | 20 | 20 | 7,350 | 16,000 | 5,920 | 80 |

1N≒0.102kgf

KBF-W TYPE (Euro Standard)


– Round Flange Double-Wide Type –



part number structure

example **KBSF 25 G W UU-SK**

| | |
|--|--|
| specification KBF: standard KBSF: anti-corrosion | outer cylinder surface treatment blank: no surface treatment SK: electroless nickel plating LF: low temperature black chrome treatment with fluoride coating SB: black oxide (not available on anti-corrosion type) SC: industrial chrome plating |
| inner contact diameter (dr) | seal blank: without seal UU: seals on both sides |
| retainer material blank: standard/steel G: resin | double-wide type |

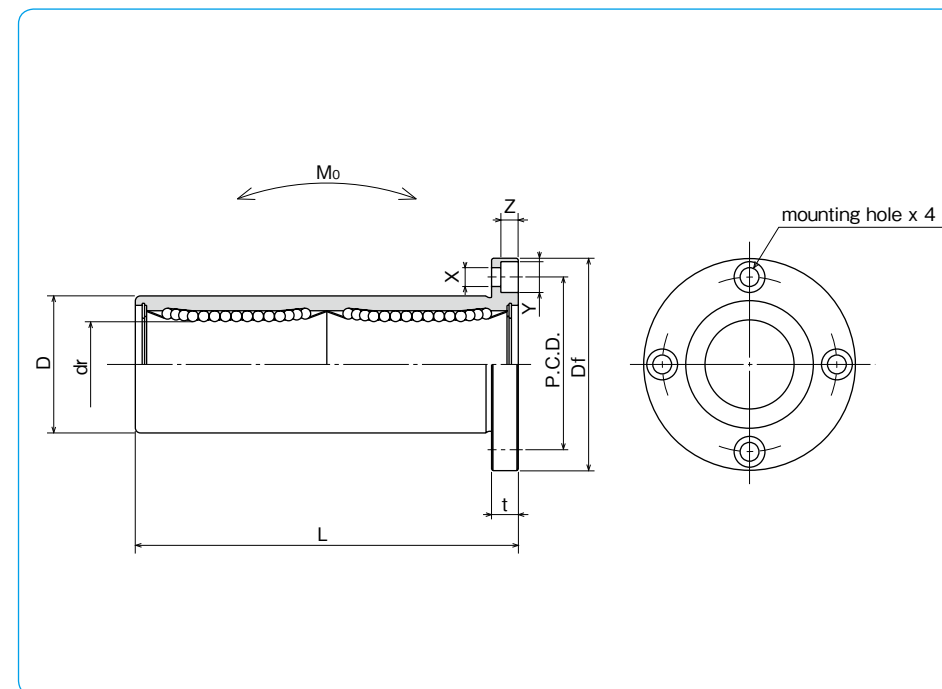

| part number | | | | number of ball circuits | dr | | major dimensions | | |
|-------------------------|-------------------------|-----------------------------------|-------------------------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| standard steel retainer | standard resin retainer | anti-corrosion stainless retainer | anti-corrosion resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| KBF 8W | KBF 8GW | KBSF 8W | KBSF 8GW | 4 | 8 | + 9 | 16 | 0/-13 | 46 |
| KBF12W | KBF12GW | KBSF12W | KBSF12GW | 4 | 12 | - 1 | 22 | 0 | 61 |
| KBF16W | KBF16GW | KBSF16W | KBSF16GW | 4 | 16 | + 11 | 26 | -16 | 68 |
| KBF20W | KBF20GW | KBSF20W | KBSF20GW | 5 | 20 | - 1 | 32 | 0 | 80 |
| KBF25W | KBF25GW | KBSF25W | KBSF25GW | 6 | 25 | + 13 | 40 | -19 | 112 |
| KBF30W | KBF30GW | KBSF30W | KBSF30GW | 6 | 30 | - 2 | 47 | 0 | 123 |
| KBF40W | KBF40GW | KBSF40W | KBSF40GW | 6 | 40 | + 16 | 62 | 0 | 151 |
| KBF50W | KBF50GW | KBSF50W | KBSF50GW | 6 | 50 | - 4 | 75 | -22 | 192 |
| KBF60W | KBF60GW | KBSF60W | KBSF60GW | 6 | 60 | | 90 | 0/-25 | 209 |

| Df mm | t mm | flange P.C.D. mm | X × Y × Z mm | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment M_o N · m | mass g | shaft diameter mm |
|-------|------|------------------|-----------------|----------------------------|--------------------------------|-------------------|----------------|-------------------------------------|--------|-------------------|
| | | | | | | dynamic C N | static C_o N | | | |
| 32 | 5 | 24 | 3.5 × 6 × 3.1 | 15 | 15 | 421 | 804 | 4.3 | 59 | 8 |
| 42 | 6 | 32 | 4.5 × 7.5 × 4.1 | | | 813 | 1,570 | 11.7 | 110 | 12 |
| 46 | 6 | 36 | 4.5 × 7.5 × 4.1 | | | 921 | 1,780 | 14.2 | 160 | 16 |
| 54 | 8 | 43 | 5.5 × 9 × 5.1 | 17 | 17 | 1,370 | 2,740 | 25.0 | 260 | 20 |
| 62 | 8 | 51 | 5.5 × 9 × 5.1 | | | 1,570 | 3,140 | 44.0 | 540 | 25 |
| 76 | 10 | 62 | 6.6 × 11 × 6.1 | | | 2,500 | 5,490 | 78.9 | 815 | 30 |
| 98 | 13 | 80 | 9 × 14 × 8.1 | 20 | 20 | 3,430 | 8,040 | 147 | 1,805 | 40 |
| 112 | 13 | 94 | 9 × 14 × 8.1 | | | 6,080 | 15,900 | 396 | 2,820 | 50 |
| 134 | 18 | 112 | 11 × 17 × 11.1 | | | 7,550 | 20,000 | 487 | 4,920 | 60 |

1N = 0.102kgf 1N · m = 0.102kgf · m

KBK-W TYPE (Euro Standard)


– Square Flange Double-Wide Type –



part number structure

example **KBSK 25 G W UU-SK**

| | |
|--|--|
| specification KBK : standard KBSK : anti-corrosion | outer cylinder surface treatment blank : no surface treatment SK : electroless nickel plating LF : low temperature black chrome treatment with fluoride coating SB : black oxide (not available on anti-corrosion type) SC : industrial chrome plating |
| inner contact diameter (dr) | seal blank : without seal UU : seals on both sides |
| retainer material blank : standard/steel anti-corrosion/stainless steel G : resin | double-wide type |

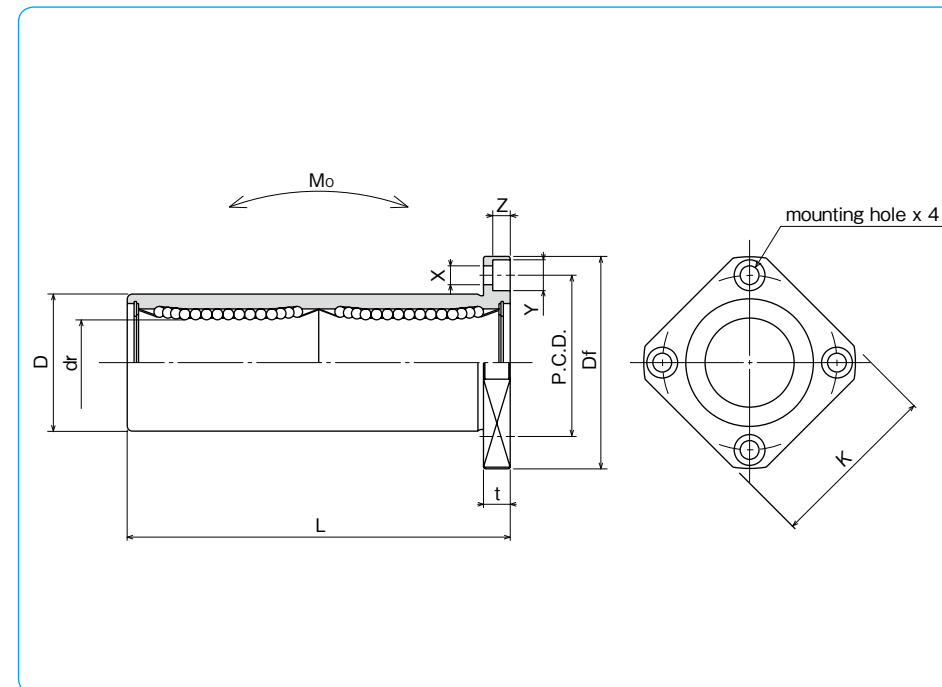

| part number | | | | number of ball circuits | dr | | major dimensions | | |
|----------------|-----------------|--------------------|------------------|-------------------------|----|-------------------------|------------------|-------------------------|-----|
| standard | | anti-corrosion | | | mm | tolerance μm | D | tolerance μm | L |
| steel retainer | resin retainer | stainless retainer | resin retainer | | | mm | μm | ± 0.3 mm | |
| KBK 8W | KBK 8GW | KBSK 8W | KBSK 8GW | 4 | 8 | + 9 | 16 | 0/-13 | 46 |
| KBK 12W | KBK 12GW | KBSK 12W | KBSK 12GW | 4 | 12 | - 1 | 22 | 0 | 61 |
| KBK 16W | KBK 16GW | KBSK 16W | KBSK 16GW | 4 | 16 | + 11 | 26 | -16 | 68 |
| KBK 20W | KBK 20GW | KBSK 20W | KBSK 20GW | 5 | 20 | - 1 | 32 | 0 | 80 |
| KBK 25W | KBK 25GW | KBSK 25W | KBSK 25GW | 6 | 25 | + 13 | 40 | -19 | 112 |
| KBK 30W | KBK 30GW | KBSK 30W | KBSK 30GW | 6 | 30 | - 2 | 47 | 0 | 123 |
| KBK 40W | KBK 40GW | KBSK 40W | KBSK 40GW | 6 | 40 | + 16 | 62 | 0 | 151 |
| KBK 50W | KBK 50GW | KBSK 50W | KBSK 50GW | 6 | 50 | - 4 | 75 | -22 | 192 |
| KBK 60W | KBK 60GW | KBSK 60W | KBSK 60GW | 6 | 60 | | 90 | 0/-25 | 209 |

| Df mm | K mm | flange | | | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment Mo N·m | mass g | shaft diameter mm |
|----------|---------|---------|--------------|-------------|-------------------------------|-----------------------------------|-------------------|-------------------|--------------------------------------|-----------|----------------------|
| | | t mm | P.C.D. mm | X×Y×Z mm | | | dynamic C N | static Co N | | | |
| 32 | 25 | 5 | 24 | 3.5×6×3.1 | 15 | 15 | 421 | 804 | 4.3 | 51 | 8 |
| 42 | 32 | 6 | 32 | 4.5×7.5×4.1 | | | 813 | 1,570 | 11.7 | 90 | 12 |
| 46 | 35 | 6 | 36 | 4.5×7.5×4.1 | | | 921 | 1,780 | 14.2 | 135 | 16 |
| 54 | 42 | 8 | 43 | 5.5×9×5.1 | 17 | 17 | 1,370 | 2,740 | 25.0 | 225 | 20 |
| 62 | 50 | 8 | 51 | 5.5×9×5.1 | | | 1,570 | 3,140 | 44.0 | 500 | 25 |
| 76 | 60 | 10 | 62 | 6.6×11×6.1 | | | 2,500 | 5,490 | 78.9 | 720 | 30 |
| 98 | 75 | 13 | 80 | 9×14×8.1 | 20 | 20 | 3,430 | 8,040 | 147 | 1,600 | 40 |
| 112 | 88 | 13 | 94 | 9×14×8.1 | | | 6,080 | 15,900 | 396 | 2,620 | 50 |
| 134 | 106 | 18 | 112 | 11×17×11.1 | | | 7,550 | 20,000 | 487 | 4,480 | 60 |

1N \div 0.102kgf 1N · m \div 0.102kgf · m

KBFC TYPE (Euro Standard)


– Center Mount Round Flange Type –



part number structure

example **KBSFC 25 G UU-SK**

| | |
|---|--|
| specification KBFC : standard KBSFC : anti-corrosion | outer cylinder surface treatment blank : no surface treatment SK : electroless nickel plating LF : low temperature black chrome treatment with fluoride coating SB : black oxide (not available on anti-corrosion type) SC : industrial chrome plating |
| inner contact diameter (dr) | seal blank : without seal UU : seals on both sides |
| retainer material blank : standard/steel G : anti-corrosion/stainless steel resin | |

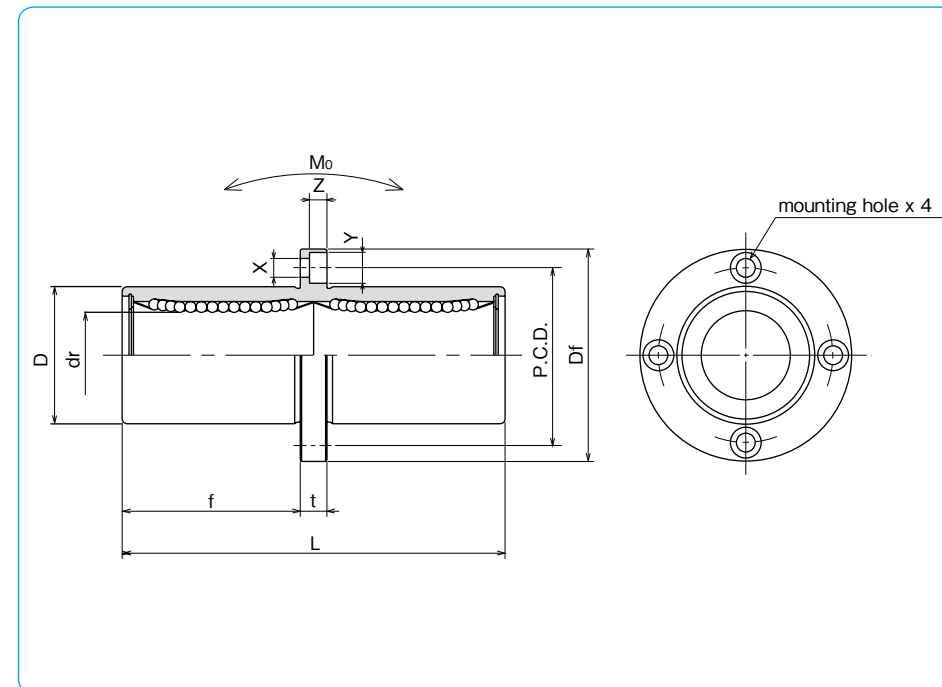


| part number | | | | number of ball circuits | dr | | major dimensions | | |
|-------------------------|----------------|-----------------------------------|-------------------------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| standard steel retainer | resin retainer | anti-corrosion stainless retainer | anti-corrosion resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| KBFC 8 | KBFC 8G | KBSFC 8 | KBSFC 8G | 4 | 8 | + 9 | 16 | 0/-13 | 46 |
| KBFC12 | KBFC12G | KBSFC12 | KBSFC12G | 4 | 12 | - 1 | 22 | 0 | 61 |
| KBFC16 | KBFC16G | KBSFC16 | KBSFC16G | 4 | 16 | + 11 | 26 | -16 | 68 |
| KBFC20 | KBFC20G | KBSFC20 | KBSFC20G | 5 | 20 | - 1 | 32 | 0 | 80 |
| KBFC25 | KBFC25G | KBSFC25 | KBSFC25G | 6 | 25 | + 13 | 40 | -19 | 112 |
| KBFC30 | KBFC30G | KBSFC30 | KBSFC30G | 6 | 30 | - 2 | 47 | 0 | 123 |
| KBFC40 | KBFC40G | KBSFC40 | KBSFC40G | 6 | 40 | + 16 | 62 | 0 | 151 |
| KBFC50 | KBFC50G | KBSFC50 | KBSFC50G | 6 | 50 | - 4 | 75 | -22 | 192 |
| KBFC60 | KBFC60G | KBSFC60 | KBSFC60G | 6 | 60 | | 90 | 0/-25 | 209 |

| flange | | | | | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment $\text{N} \cdot \text{m}$ | mass g | shaft diameter mm |
|--------|-------|------|-----------|-----------------|----------------------------|--------------------------------|-------------------|-------------|---|--------|-------------------|
| f mm | Df mm | t mm | P.C.D. mm | X × Y × Z mm | | | dynamic C N | static Co N | | | |
| 20.5 | 32 | 5 | 24 | 3.5 × 6 × 3.1 | 15 | 15 | 421 | 804 | 4.3 | 59 | 8 |
| 27.5 | 42 | 6 | 32 | 4.5 × 7.5 × 4.1 | | | 813 | 1,570 | 11.7 | 110 | 12 |
| 31 | 46 | 6 | 36 | 4.5 × 7.5 × 4.1 | | | 921 | 1,780 | 14.2 | 160 | 16 |
| 36 | 54 | 8 | 43 | 5.5 × 9 × 5.1 | 17 | 17 | 1,370 | 2,740 | 25.0 | 260 | 20 |
| 52 | 62 | 8 | 51 | 5.5 × 9 × 5.1 | | | 1,570 | 3,140 | 44.0 | 540 | 25 |
| 56.5 | 76 | 10 | 62 | 6.6 × 11 × 6.1 | | | 2,500 | 5,490 | 78.9 | 815 | 30 |
| 69 | 98 | 13 | 80 | 9 × 14 × 8.1 | 20 | 20 | 3,430 | 8,040 | 147 | 1,805 | 40 |
| 89.5 | 112 | 13 | 94 | 9 × 14 × 8.1 | | | 6,080 | 15,900 | 396 | 2,820 | 50 |
| 95.5 | 134 | 18 | 112 | 11 × 17 × 11.1 | | | 7,550 | 20,000 | 487 | 4,920 | 60 |

1N \div 0.102kgf 1N · m \div 0.102kgf · m

KBKC TYPE (Euro Standard)


– Center Mount Square Flange Type –

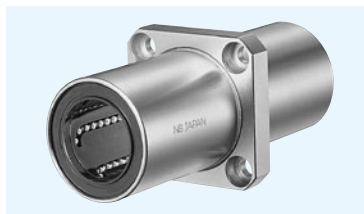

part number structure

example **KBSKC 25 G UU -SK**

| | |
|--|--|
| specification KBKC: standard KBSKC: anti-corrosion | outer cylinder surface treatment blank: no surface treatment SK: electroless nickel plating LF: low temperature black chrome treatment with fluoride coating SB: black oxide (not available on anti-corrosion type) SC: industrial chrome plating |
| inner contact diameter (dr) | seal blank: without seal UU: seals on both sides |
| retainer material blank: standard/steel G: resin | |

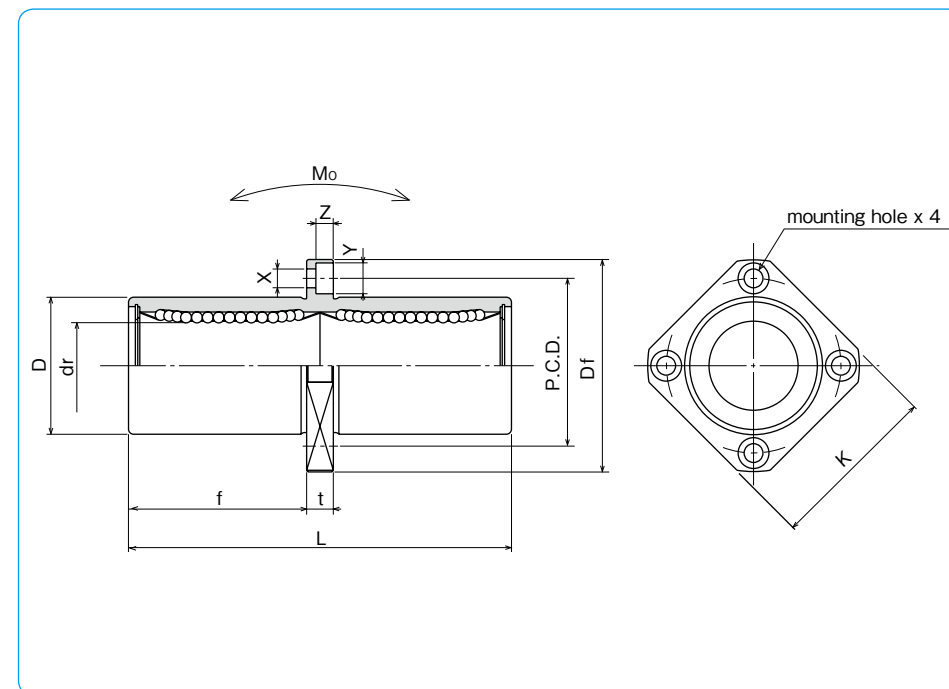

| part number | | | | number of ball circuits | dr | | major dimensions | | |
|-------------------------|-------------------------|-----------------------------------|-------------------------------|-------------------------|----|-------------------------|------------------|-------------------------|----------------|
| standard steel retainer | standard resin retainer | anti-corrosion stainless retainer | anti-corrosion resin retainer | | mm | tolerance μm | D mm | tolerance μm | L ± 0.3 mm |
| KBKC 8 | KBKC 8G | KBSKC 8 | KBSKC 8G | 4 | 8 | + 9 | 16 | 0/-13 | 46 |
| KBKC12 | KBKC12G | KBSKC12 | KBSKC12G | 4 | 12 | - 1 | 22 | 0 | 61 |
| KBKC16 | KBKC16G | KBSKC16 | KBSKC16G | 4 | 16 | + 11 | 26 | -16 | 68 |
| KBKC20 | KBKC20G | KBSKC20 | KBSKC20G | 5 | 20 | - 1 | 32 | 0 | 80 |
| KBKC25 | KBKC25G | KBSKC25 | KBSKC25G | 6 | 25 | + 13 | 40 | -19 | 112 |
| KBKC30 | KBKC30G | KBSKC30 | KBSKC30G | 6 | 30 | - 2 | 47 | 0 | 123 |
| KBKC40 | KBKC40G | KBSKC40 | KBSKC40G | 6 | 40 | + 16 | 62 | 0 | 151 |
| KBKC50 | KBKC50G | KBSKC50 | KBSKC50G | 6 | 50 | - 4 | 75 | -22 | 192 |
| KBKC60 | KBKC60G | KBSKC60 | KBSKC60G | 6 | 60 | | 90 | 0/-25 | 209 |

| f mm | Df mm | flange | | | P.C.D. mm | X×Y×Z mm | eccentricity μm | perpendicularity μm | basic load rating | | allowable static moment $\text{N} \cdot \text{m}$ | mass g | shaft diameter mm |
|------|-------|--------|------|-----|-------------|----------|----------------------------|--------------------------------|-------------------|------|---|--------|-------------------|
| | | K mm | t mm | C N | | | | | Co N | | | | |
| 20.5 | 32 | 25 | 5 | 24 | 3.5×6×3.1 | 15 | 15 | 421 | 804 | 4.3 | 51 | 8 | |
| 27.5 | 42 | 32 | 6 | 32 | 4.5×7.5×4.1 | | | 813 | 1,570 | 11.7 | 90 | 12 | |
| 31 | 46 | 35 | 6 | 36 | 4.5×7.5×4.1 | | | 921 | 1,780 | 14.2 | 135 | 16 | |
| 36 | 54 | 42 | 8 | 43 | 5.5×9×5.1 | 17 | 17 | 1,370 | 2,740 | 25.0 | 225 | 20 | |
| 52 | 62 | 50 | 8 | 51 | 5.5×9×5.1 | | | 1,570 | 3,140 | 44.0 | 500 | 25 | |
| 56.5 | 76 | 60 | 10 | 62 | 6.6×11×6.1 | | | 2,500 | 5,490 | 78.9 | 720 | 30 | |
| 69 | 98 | 75 | 13 | 80 | 9×14×8.1 | 20 | 20 | 3,430 | 8,040 | 147 | 1,600 | 40 | |
| 89.5 | 112 | 88 | 13 | 94 | 9×14×8.1 | | | 6,080 | 15,900 | 396 | 2,620 | 50 | |
| 95.5 | 134 | 106 | 18 | 112 | 11×17×11.1 | | | 7,550 | 20,000 | 487 | 4,480 | 60 | |

1N \div 0.102kgf 1N \cdot m \div 0.102kgf \cdot m

SW TYPE (Inch Standard)


– Standard Type –



part number structure

example **SWS16GRUU-P**

| | | | | |
|--|------|--|--|---|
| specification SW : standard SWS : anti-corrosion | size | retainer material blank : standard/steel anti-corrosion/stainless steel G : resin | accuracy grade blank : high P : precision * Precision grade is not available for the self-aligning type. seal blank : without seal U : seal on one side UU : seals on both sides *Seals are not available on SWS2 and SWS3. | self aligning blank : non self aligning R : self aligning * |
|--|------|--|--|---|

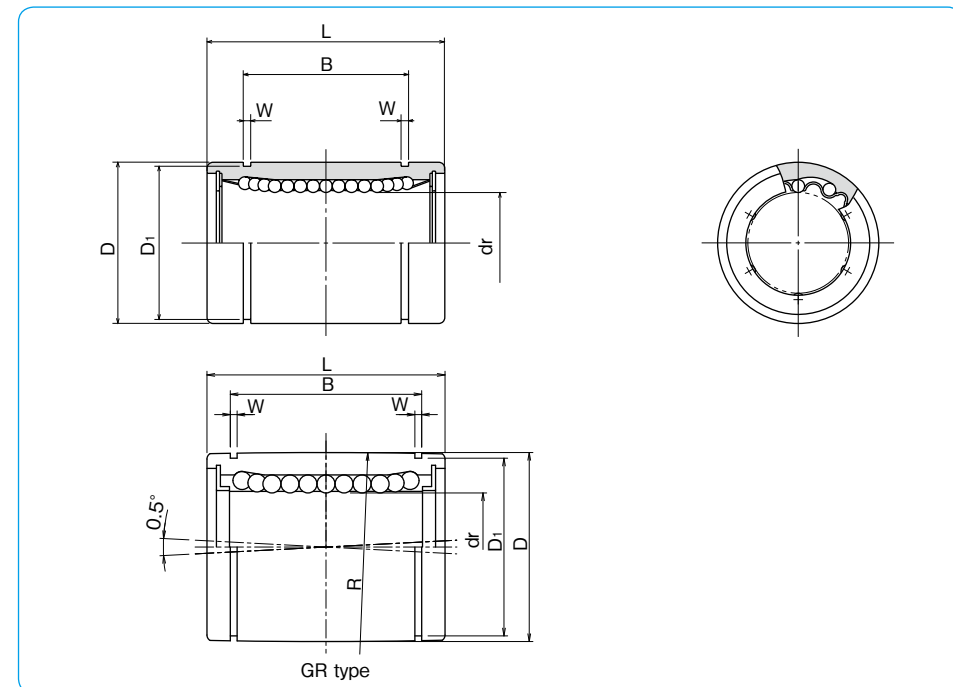

*Self-aligning is available only with resin retainer for size 4 to 32 of carbon steel cylinder.

| partnumber | | major dimensions | | number of ball circuits | dr | | D | | |
|----------------|------------------------|-----------------------------------|-------------------------------|-------------------------|-----------|---------------------|----------------|-------------------|---------------------|
| steel retainer | standard resinretainer | anti-corrosion stainless retainer | anti-corrosion resin retainer | | inch (mm) | tolerance precision | inch/(μm) high | inch (mm) | tolerance inch/(μm) |
| - | - | - | SWS2 | SWS2G | 4 | .1250 (3.175) | 0 | .3125 (7.938) | 0 |
| - | - | - | SWS3 | SWS3G | 4 | .1875 (4.763) | -0.00035 (-8) | .3750 (9.525) | -0.00040 (-9) |
| SW4 | SW4G | SW4GR | SWS4 | SWS4G | 4 | .2500 (6.350) | 0 | .5000 (12.700) | -0.00045 (-11) |
| SW6 | SW6G | SW6GR | SWS6 | SWS6G | 4 | .3750 (9.525) | -0.00025 (-6) | .6250 (15.875) | 0 |
| SW8 | SW8G | SW8GR | SWS8 | SWS8G | 4 | .5000 (12.700) | -0.00040 (-9) | .8750 (22.225) | -0.00050 (-13) |
| SW10 | SW10G | SW10GR | SWS10 | SWS10G | 4 | .625 (15.875) | 0 | 1.1250 (28.575) | 0 |
| SW12 | SW12G | SW12GR | SWS12 | SWS12G | 5 | .7500 (19.050) | -0.00030 (-7) | 1.2500 (31.750) | -0.00065 (-16) |
| SW16 | SW16G | SW16GR | SWS16 | SWS16G | 6 | 1.0000 (25.400) | 0 | 1.5625 (39.688) | -0.00075 (-19) |
| SW20 | SW20G | SW20GR | SWS20 | SWS20G | 6 | 1.2500 (31.750) | -0.00035 (-8) | 2.0000 (50.800) | -0.00075 (-19) |
| SW24 | SW24G | SW24GR | SWS24 | SWS24G | 6 | 1.5000 (38.100) | 0 | 2.3750 (60.325) | -0.00090 (-22) |
| SW32 | SW32G | SW32GR | SWS32 | SWS32G | 6 | 2.0000 (50.800) | -0.00040 (-9) | 3.0000 (76.200) | 0 |
| SW40 | - | - | - | - | 6 | 2.5000 (63.500) | -0.00040 (-9) | 3.7500 (95.250) | 0 |
| SW48 | - | - | - | - | 6 | 3.0000 (76.200) | -0.00060 (-15) | 4.50000 (114.300) | 0 |
| SW64 | - | - | - | - | 6 | 4.0000 (101.600) | -0.00080 (-20) | 6.0000 (152.400) | 0 |

| L | | B | | W | D ₁ | eccentricity | | radial clearance | basic load rating | | mass | shaft diameter |
|------------------|---------------------|-----------------|---------------------|---------------|------------------|---------------------|----------------|---------------------|-------------------|-------------|--------|----------------|
| inch (mm) | tolerance inch/(mm) | inch (mm) | tolerance inch/(mm) | inch (mm) | inch (mm) | precision inch/(μm) | high inch/(μm) | (maximum) inch/(μm) | dynamic C N | static Co N | g | inch (mm) |
| 5000 (12.700) | | .3681 (9.35) | | .0280 (0.710) | .2902 (7.370) | - | .0003 (8) | -.0001 (-2) | 59 | 76 | 2.8 | 1/8 (3.175) |
| .5625 (14.275) | | .4311 (10.95) | | .0280 (0.710) | .3520 (8.940) | | | | 91 | 110 | 3.6 | 3/16 (4.763) |
| .7500 (19.050) | 0 | .5110 (12.98) | 0 | .0390 (0.992) | .4687 (11.906) | | | -.0001 (-3) | 206 | 265 | 9.5 | 1/4 (6.350) |
| .8750 (22.225) | -.008 (-0.2) | .6358 (16.15) | -.008 (-0.2) | .0390 (0.992) | .5880 (14.935) | .0003 (8) | .0005 (12) | | 225 | 314 | 15 | 3/8 (9.525) |
| 1.2500 (31.750) | | .9625 (24.46) | | .0459 (1.168) | .8209 (20.853) | | | -.0001 (-4) | 510 | 784 | 42 | 1/2 (12.700) |
| 1.5000 (38.100) | | 1.1039 (28.575) | | .0559 (1.422) | 1.0590 (26.899) | | | | 774 | 1,180 | 85 | 5/8 (15.875) |
| 1.6250 (41.275) | | 1.1657 (29.61) | | .0559 (1.422) | 1.1760 (29.870) | .0004 (10) | .0006 (15) | -.0002 (-6) | 862 | 1,370 | 104 | 3/4 (19.050) |
| 2.2500 (57.150) | | 1.7547 (44.57) | | .0679 (1.727) | 1.4687 (37.306) | | | | 980 | 1,570 | 220 | 1 (25.400) |
| 2.6250 (66.675) | 0 | 2.0047 (50.92) | 0 | .0679 (1.727) | 1.8859 (47.904) | .0005 (12) | .0008 (20) | -.0003 (-8) | 1,570 | 2,740 | 465 | 1-1/4 (31.750) |
| 3.0000 (76.200) | -.012 (-0.3) | 2.4118 (61.26) | -.012 (-0.3) | .0859 (2.184) | 2.2389 (56.870) | | | | 2,180 | 4,020 | 720 | 1-1/2 (38.100) |
| 4.0000 (101.600) | | 3.1917 (81.07) | | .1029 (2.616) | 2.8379 (72.085) | | | -.0005 (-13) | 3,820 | 7,940 | 1,310 | 2 (50.800) |
| 5.0000 (127.000) | | 3.9760 (100.99) | | .1200 (3.048) | 3.5519 (90.220) | .0007 (17) | .0010 (25) | | 4,700 | 10,000 | 2,600 | 2-1/2 (63.500) |
| 6.0000 (152.400) | 0 | 4.726 (120.04) | 0 | .1200 (3.048) | 4.3100 (109.474) | | | -.0008 (-20) | 7,350 | 16,000 | 4,380 | 3 (76.200) |
| 8.0000 (203.200) | -.016 (-0.4) | 6.258 (158.95) | -.016 (-0.4) | .1389 (3.530) | 5.745 (145.923) | .0008 (20) | .0012 (30) | | 14,100 | 34,800 | 10,200 | 4 (101.600) |

1N≒0.225lbf 1kg≒2.205lbf

SW-AJ TYPE (Inch Standard)

– Clearance Adjustable Type –



part number structure

example **SWS16GRUU-AJ**

specification
SW: standard
SWS: anti-corrosion

size


retainer material
blank: standard/steel
 anti-corrosion/stainless steel
G: resin

clearance-adjustable

seal
blank: without seal
U: seal on one side
UU: seals on both sides

self aligning
blank: non self aligning
R: self aligning *

*Self-aligning is available only with resin retainer for size 8 to 32 of carbon steel cylinder.

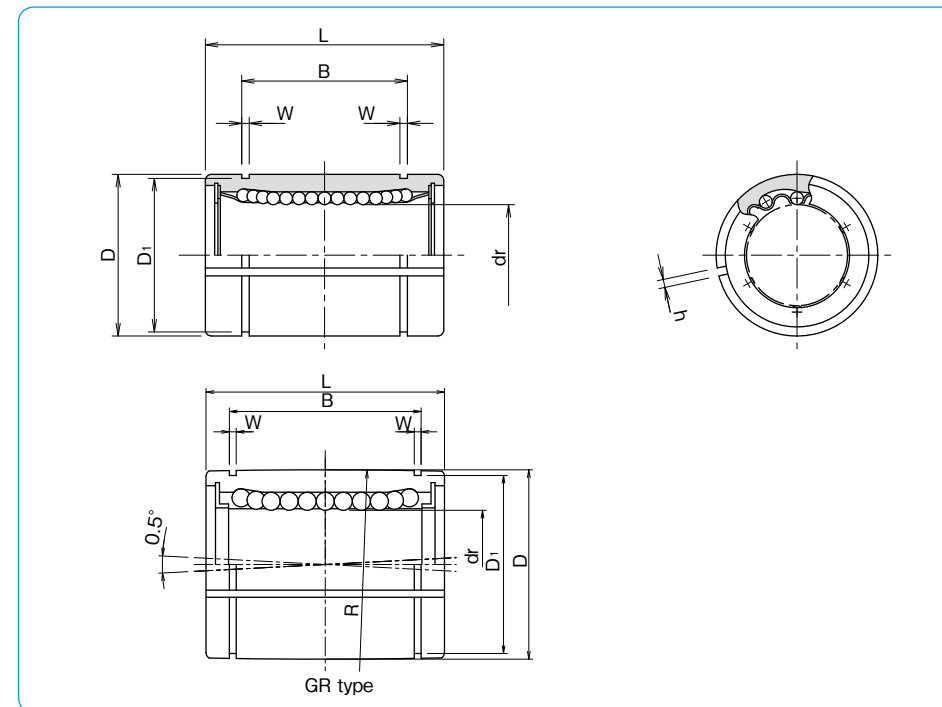

| steelretainer | partnumber | | number ofball circuits | majordimensions | | | | | |
|---------------|---------------|--------------------|------------------------|-----------------|----------------------|---------------------|-------------------------------|---------------------|-------------------------------|
| | standard | anti-corrosion | | dr | | D | | | |
| | resinretainer | stainless retainer | | inch (mm) | tolerance* inch/(μm) | inch (mm) | tolerance* inch/(μm) | | |
| - | SW4G-AJ | - | - | SWS4G-AJ | 4 | .2500 (6.350) | | .5000 (12.700) | ⁰ ₍₋₁₁₎ |
| - | SW6G-AJ | - | - | SWS6G-AJ | 4 | .3750 (9.525) | ⁰ ₍₋₉₎ | .6250 (15.875) | ⁰ ₍₋₁₃₎ |
| SW8-AJ | SW8G-AJ | SW8GR-AJ | SWS8-AJ | SWS8G-AJ | 4 | .5000 (12.700) | ⁰ ₍₋₉₎ | .8750 (22.225) | ⁰ ₍₋₁₃₎ |
| SW10-AJ | SW10G-AJ | SW10GR-AJ | SWS10-AJ | SWS10G-AJ | 4 | .625 (15.875) | | 1.1250 (28.575) | |
| SW12-AJ | SW12G-AJ | SW12GR-AJ | SWS12-AJ | SWS12G-AJ | 5 | .7500 (19.050) | ⁰ ₍₋₁₀₎ | 1.2500 (31.750) | ⁰ ₍₋₁₆₎ |
| SW16-AJ | SW16G-AJ | SW16GR-AJ | SWS16-AJ | SWS16G-AJ | 6 | 1.0000 (25.400) | ⁰ ₍₋₁₂₎ | 1.5625 (39.688) | |
| SW20-AJ | SW20G-AJ | SW20GR-AJ | SWS20-AJ | SWS20G-AJ | 6 | 1.2500 (31.750) | ⁰ ₍₋₁₂₎ | 2.0000 (50.800) | ⁰ ₍₋₁₉₎ |
| SW24-AJ | SW24G-AJ | SW24GR-AJ | SWS24-AJ | SWS24G-AJ | 6 | 1.5000 (38.100) | ⁰ ₍₋₁₅₎ | 2.3750 (60.325) | |
| SW32-AJ | SW32G-AJ | SW32GR-AJ | SWS32-AJ | SWS32G-AJ | 6 | 2.0000 (50.800) | | 3.0000 (76.200) | ⁰ ₍₋₂₂₎ |
| SW40-AJ | - | - | - | - | 6 | 2.5000 (63.500) | ⁰ ₍₋₁₅₎ | 3.7500 (95.250) | |
| SW48-AJ | - | - | - | - | 6 | 3.0000 (76.200) | ⁰ ₍₋₂₀₎ | 4.5000 (114.300) | |
| SW64-AJ | - | - | - | - | 6 | 4.0000 (101.600) | ⁰ ₍₋₂₀₎ | 6.0000 (152.400) | ⁰ ₍₋₂₅₎ |


* Accuracy is measured prior to machining clearance slit.

| L | | B | | W | D ₁ | h | eccentricity* inch (μm) | basicloadrating | | mass g | shaft diameter inch (mm) |
|---------------------|--------------------------------|--------------------|--------------------------------|------------------|---------------------|--------------|----------------------------|-------------------|-------------------|-----------|-----------------------------|
| inch (mm) | tolerance inch/(mm) | inch (mm) | tolerance inch/(mm) | inch (mm) | inch (mm) | inch (mm) | | dynamic C N | static Co N | | |
| .7500 (19.050) | | .5100 (12.98) | | .0390 (0.992) | .4687 (11.906) | .04 (1) | .0005 (12) | 206 | 265 | 7.5 | 1/4 (6.350) |
| .8750 (22.225) | ⁰ _(-0.2) | .6358 (12.15) | ⁰ _(-0.2) | .0390 (0.992) | .5880 (14.935) | .04 (1) | | 225 | 314 | 13.5 | 3/8 (9.525) |
| 1.2500 (31.750) | ⁰ _(-0.2) | .9625 (24.46) | ⁰ _(-0.2) | .0459 (1.168) | .8209 (20.853) | .06 (1.5) | | 510 | 784 | 41 | 1/2 (12.700) |
| 1.5000 (38.100) | | 1.1039 (28.04) | | .0559 (1.422) | 1.0590 (26.899) | .06 (1.5) | .0006 (15) | 774 | 1,180 | 83 | 5/8 (15.875) |
| 1.6250 (41.275) | | 1.1657 (29.61) | | .0559 (1.422) | 1.1760 (29.870) | .06 (1.5) | | 862 | 1,370 | 102 | 3/4 (19.050) |
| 2.2500 (57.150) | | 1.7547 (44.57) | | .0679 (1.727) | 1.4687 (37.306) | .06 (1.5) | | 980 | 1,570 | 218 | 1 (25.400) |
| 2.6250 (66.675) | ⁰ _(-0.3) | 2.0047 (50.92) | ⁰ _(-0.3) | .0679 (1.727) | 1.8859 (47.904) | .10 (2.5) | .0008 (20) | 1,570 | 2,740 | 455 | 1-1/4 (31.750) |
| 3.0000 (76.200) | ⁰ _(-0.3) | 2.4118 (61.26) | ⁰ _(-0.3) | 0.859 (2.184) | 2.2389 (56.870) | .12 (3) | | 2,180 | 4,020 | 710 | 1-1/2 (38.100) |
| 4.0000 (101.600) | | 3.1917 (81.07) | | .1029 (2.616) | 2.8379 (72.085) | .12 (3) | | 3,820 | 7,940 | 1,290 | 2 (50.800) |
| 5.0000 (127.000) | | 3.9760 (100.99) | | .1200 (3.048) | 3.5519 (90.220) | .12 (3) | .0010 (25) | 4,700 | 10,000 | 2,560 | 2-1/2 (63.500) |
| 6.0000 (152.400) | ⁰ _(-0.4) | 4.726 (120.04) | ⁰ _(-0.4) | .1200 (3.048) | 4.3100 (109.474) | .12 (3) | | 7,350 | 16,000 | 4,350 | 3 (76.200) |
| 8.0000 (203.200) | ⁰ _(-0.4) | 6.258 (158.95) | ⁰ _(-0.4) | .1389 (3.530) | 5.745 (145.923) | .12 (3) | | 14,100 | 34,800 | 10,150 | 4 (101.600) |



1N≒0.225lbf 1kg≒2.205lbs

SW-OP TYPE (Inch Standard)

– Open Type –

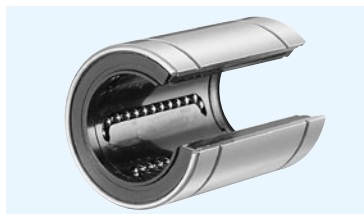

part number structure

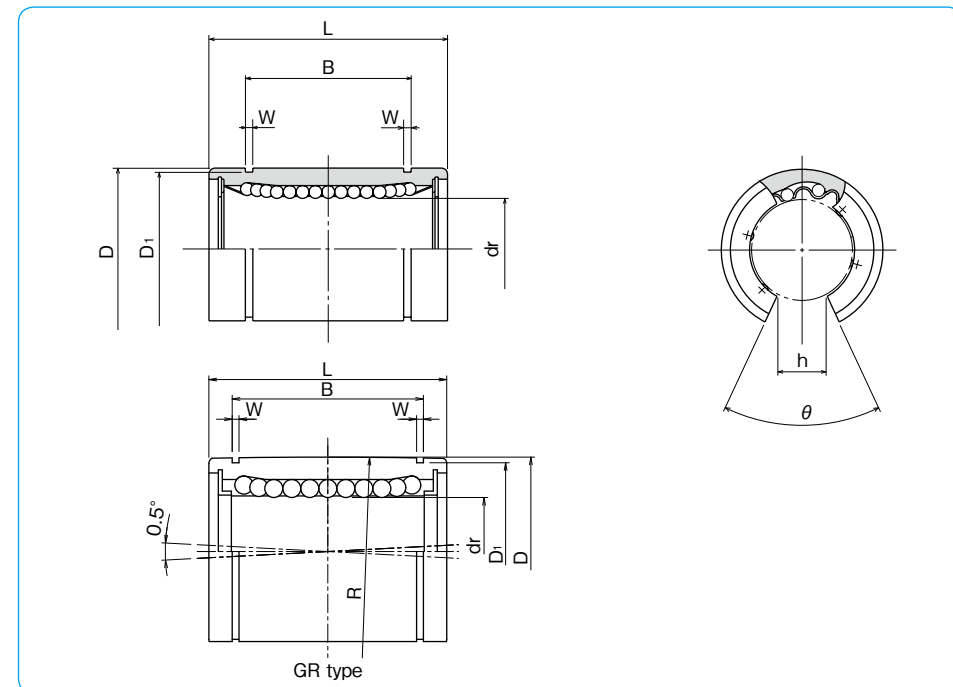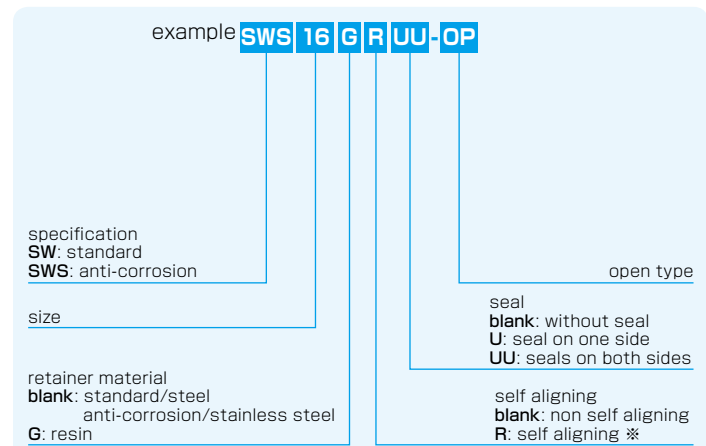

*Self-aligning is available only with resin retainer for size 8 to 32 of carbon steel cylinder.

| steel retainer | part number | | number of ball circuits | major dimensions | | | | | |
|----------------|----------------|----------------|-------------------------|------------------|----------------------|------------------|----------------------|------------------|-------------|
| | standard | anti-corrosion | | dr | | D | | | |
| retainer | resin retainer | steel retainer | resin retainer | inch (mm) | tolerance* inch/(μm) | inch (mm) | tolerance* inch/(μm) | | |
| SW 8-OP | SW 8G-OP | SW 8GR-OP | SWS 8-OP | SWS 8G-OP | 3 | .5000 (12.700) | 0 (-.00040) | .8750 (22.225) | 0 (-.00050) |
| SW10-OP | SW10G-OP | SW10GR-OP | SWS10-OP | SWS10G-OP | 3 | .625 (15.875) | 0 (-.00040) | 1.1250 (28.575) | 0 (-.00050) |
| SW12-OP | SW12G-OP | SW12GR-OP | SWS12-OP | SWS12G-OP | 4 | .7500 (19.050) | 0 (-.00040) | 1.2500 (31.750) | 0 (-.00065) |
| SW16-OP | SW16G-OP | SW16GR-OP | SWS16-OP | SWS16G-OP | 5 | 1.0000 (25.400) | 0 (-.00040) | 1.5625 (39.688) | 0 (-.00075) |
| SW20-OP | SW20G-OP | SW20GR-OP | SWS20-OP | SWS20G-OP | 5 | 1.2500 (31.750) | 0 (-.00050) | 2.0000 (50.800) | 0 (-.00075) |
| SW24-OP | SW24G-OP | SW24GR-OP | SWS24-OP | SWS24G-OP | 5 | 1.5000 (38.100) | 0 (-.00050) | 2.3750 (60.325) | 0 (-.00090) |
| SW32-OP | SW32G-OP | SW32GR-OP | SWS32-OP | SWS32G-OP | 5 | 2.0000 (50.800) | 0 (-.00060) | 3.0000 (76.200) | 0 (-.00100) |
| SW40-OP | - | - | - | - | 5 | 2.5000 (63.500) | 0 (-.00060) | 3.7500 (95.250) | 0 (-.00100) |
| SW48-OP | - | - | - | - | 5 | 3.0000 (76.200) | 0 (-.00060) | 4.5000 (114.300) | 0 (-.00100) |
| SW64-OP | - | - | - | - | 5 | 4.0000 (101.600) | 0 (-.00080) | 6.0000 (152.400) | 0 (-.00120) |


* Accuracy is measured prior to machining clearance slit.

| L | B | W | D1 | h | θ | eccentricity* | basic load rating | | mass | shaft diameter |
|------------------|-----------------|---------------|------------------|-----------------|-----------|---------------|-------------------|-----------|-------|----------------|
| | | | | | | | dynamic C | static Co | | |
| inch (mm) | inch (mm) | inch (mm) | inch (mm) | inch (mm) | inch (mm) | inch (mm) | N | N | g | inch (mm) |
| 1.2500 (31.750) | .9625 (24.46) | .0459 (1.168) | .8209 (20.853) | .3125 (7.9375) | 80° | .0005 (12) | 510 | 784 | 32 | 1/2 (12.700) |
| 1.5000 (38.100) | 1.1039 (28.04) | .0559 (1.422) | 1.0590 (26.899) | .375 (9.5250) | 80° | .0005 (12) | 774 | 1,180 | 64 | 5/8 (15.875) |
| 1.6250 (41.275) | 1.1657 (29.61) | .0559 (1.422) | 1.1760 (29.870) | .4375 (11.1125) | 60° | .0006 (15) | 862 | 1,370 | 86 | 3/4 (19.050) |
| 2.2500 (57.150) | 1.7547 (44.57) | .0679 (1.727) | 1.4687 (37.306) | .5625 (14.2875) | 50° | .0006 (15) | 980 | 1,570 | 190 | 1 (25.400) |
| 2.6250 (66.675) | 2.0047 (50.92) | .0679 (1.727) | 1.8859 (47.904) | .625 (15.875) | 50° | .0008 (20) | 1,570 | 2,740 | 390 | 1-1/4 (31.750) |
| 3.0000 (76.200) | 2.4118 (61.26) | .0859 (2.184) | 2.2389 (56.870) | .75 (19.05) | 50° | .0008 (20) | 2,180 | 4,020 | 610 | 1-1/2 (38.100) |
| 4.0000 (101.600) | 3.1917 (81.07) | .1029 (2.616) | 2.8379 (72.085) | 1.0 (25.40) | 50° | .0010 (25) | 3,820 | 7,940 | 1,120 | 2 (50.800) |
| 5.0000 (127.000) | 3.9760 (100.99) | .1200 (3.048) | 3.5519 (90.220) | 1.25 (31.75) | 50° | .0010 (25) | 4,700 | 10,000 | 2,230 | 2-1/2 (63.500) |
| 6.0000 (152.400) | 4.726 (120.04) | .1200 (3.048) | 4.3100 (109.474) | 1.5 (38.10) | 50° | .0012 (30) | 7,350 | 16,000 | 3,750 | 3 (76.200) |
| 8.0000 (203.200) | 6.258 (158.95) | .1389 (3.530) | 5.745 (145.923) | 2.0 (50.80) | 50° | .0012 (30) | 14,100 | 34,800 | 8,740 | 4 (101.60) |



1N≒0.225lbf 1kg≒2.205lbs

SW-W TYPE (Inch Standard)

– Double-Wide Type –

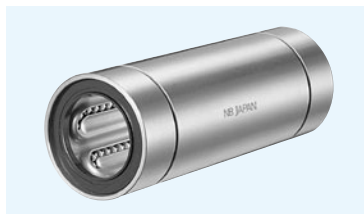

part number structure

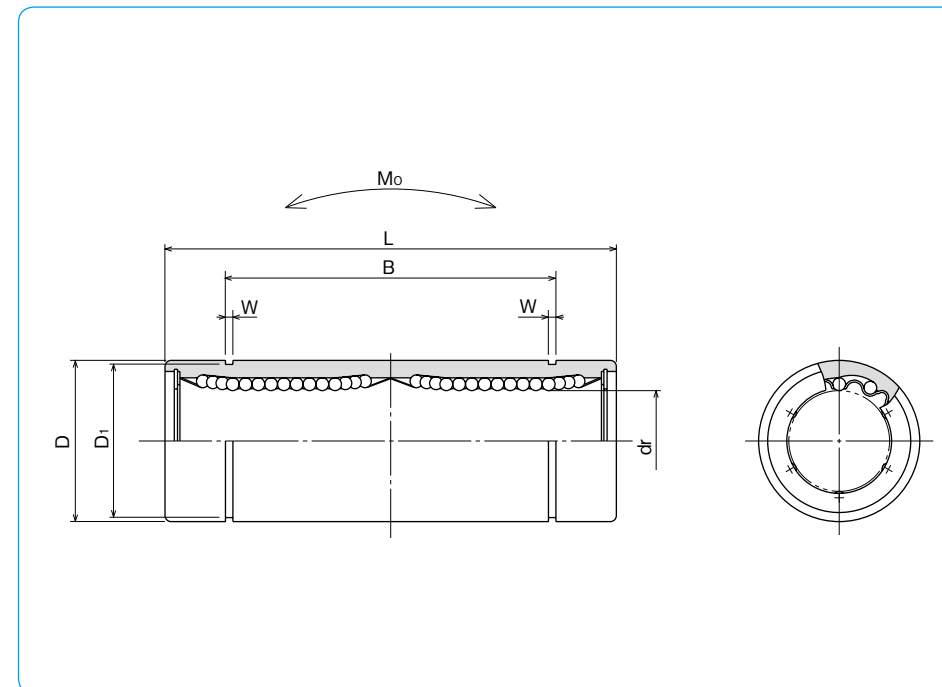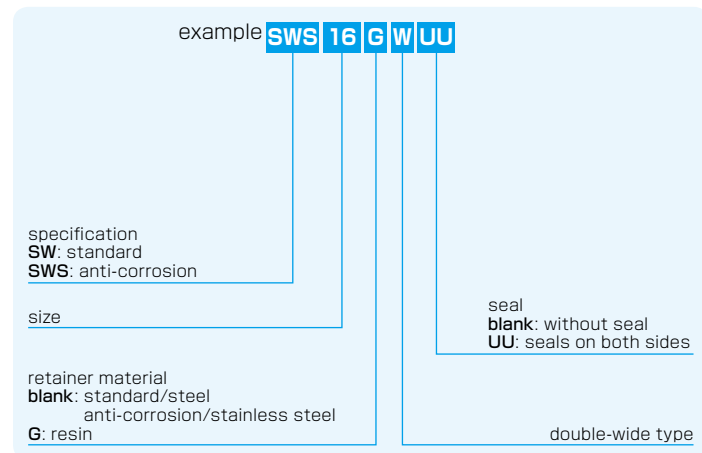

| part number | | number of ball circuits | major dimensions | | | | |
|----------------|----------------|-------------------------|------------------|-----------------|---|-----------------|---|
| standard | anti-corrosion | | dr | D | | | |
| steel retainer | resin retainer | stainless retainer | resin retainer | inch (mm) | tolerance inch/(μm) | inch (mm) | tolerance inch/(μm) |
| SW 4W | SW 4GW | SWS 4W | SWS 4GW | .2500 (6.350) | | .5000 (12.700) | ⁰ / _{-.00050 (-13)} |
| SW 6W | SW 6GW | SWS 6W | SWS 6GW | .3750 (9.525) | ⁰ / _{-.00040 (-10)} | .6250 (15.875) | ⁰ / _{-.00065 (-16)} |
| SW 8W | SW 8GW | SWS 8W | SWS 8GW | .5000 (12.700) | | .8750 (22.225) | ⁰ / _{-.00075 (-19)} |
| SW 10W | SW 10GW | SWS 10W | SWS 10GW | .6250 (15.875) | | 1.1250 (28.575) | ⁰ / _{-.00090 (-22)} |
| SW 12W | SW 12GW | SWS 12W | SWS 12GW | .7500 (19.050) | ⁰ / _{-.00050 (-12)} | 1.2500 (31.750) | ⁰ / _{-.00100 (-25)} |
| SW 16W | SW 16GW | SWS 16W | SWS 16GW | 1.0000 (25.400) | | 1.5625 (39.688) | ⁰ / _{-.00110 (-28)} |
| SW 20W | SW 20GW | SWS 20W | SWS 20GW | 1.2500 (31.750) | ⁰ / _{-.00060 (-15)} | 2.0000 (50.800) | ⁰ / _{-.00120 (-30)} |
| SW 24W | SW 24GW | SWS 24W | SWS 24GW | 1.5000 (38.100) | | 2.3750 (60.325) | ⁰ / _{-.00130 (-33)} |
| SW 32W | SW 32GW | SWS 32W | SWS 32GW | 2.0000 (50.800) | | 3.0000 (76.200) | ⁰ / _{-.00140 (-35)} |

| L | | B | | W | D ₁ | eccentricity | basic load rating | | allowable static moment | mass | shaft diameter |
|------------------|--|------------------|--|---------------|-----------------|--------------|-------------------|-------------|-------------------------|-------|----------------|
| inch (mm) | tolerance inch/(mm) | inch (mm) | tolerance inch/(mm) | | | | dynamic C N | static Co N | | | |
| 1.3750 (34.925) | | 1.0220 (25.959) | | .0390 (0.992) | .4687 (11.906) | .0006 (15) | 323 | 530 | 2.0 | 17.5 | 1/4 (6.350) |
| 1.5938 (40.481) | | 1.2716 (32.298) | | .0390 (0.992) | .5880 (14.935) | | 353 | 630 | 2.7 | 28 | 3/8 (9.525) |
| 2.3750 (60.325) | ⁰ / _{-.012 (-0.3)} | 1.9250 (48.895) | ⁰ / _{-.012 (-0.3)} | .0459 (1.168) | .8209 (20.853) | .0008 (20) | 813 | 1,570 | 11.5 | 80 | 1/2 (12.700) |
| 2.8125 (71.438) | | 2.2079 (56.080) | | .0559 (1.422) | 1.0590 (26.899) | | 1,230 | 2,350 | 20.0 | 160 | 5/8 (15.875) |
| 3.0937 (78.581) | | 2.3314 (59.218) | | .0559 (1.422) | 1.1760 (29.870) | .0010 (25) | 1,370 | 2,740 | 26.5 | 195 | 3/4 (19.050) |
| 4.2813 (108.744) | | 3.5094 (89.139) | | .0679 (1.727) | 1.4687 (37.306) | | 1,570 | 3,140 | 41.2 | 410 | 1 (25.400) |
| 5.0000 (127.000) | ⁰ / _{-.016 (-0.4)} | 4.0094 (101.839) | ⁰ / _{-.016 (-0.4)} | .0679 (1.727) | 1.8859 (47.904) | .0012 (30) | 2,500 | 5,490 | 84.8 | 820 | 1-1/4 (31.750) |
| 5.6875 (144.463) | | 4.8236 (122.519) | | .0859 (2.184) | 2.2389 (56.870) | | 3,430 | 8,040 | 143 | 1,250 | 1-1/2 (38.100) |
| 7.7500 (196.850) | | 6.3834 (162.138) | | .1029 (2.616) | 2.8379 (72.085) | | 6,080 | 15,900 | 399 | 2,350 | 2 (50.800) |

1N ≒ 0.225lbf 1N · m ≒ 0.738lb · ft
 1kg ≒ 2.205lbs

SWF TYPE (Inch Standard)

– Round Flange Type –



part number structure

example **SWSF 16 G UU-SK**


specification
SWF: standard
SWSF: anti-corrosion

size

retainer material
blank: standard/steel
 anti-corrosion/stainless steel
G: resin

outer cylinder surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome treatment with fluoride coating
SB: black oxide (not available on anti-corrosion type)
SC: industrial chrome plating

seal
blank: without seal
UU: seals on both sides

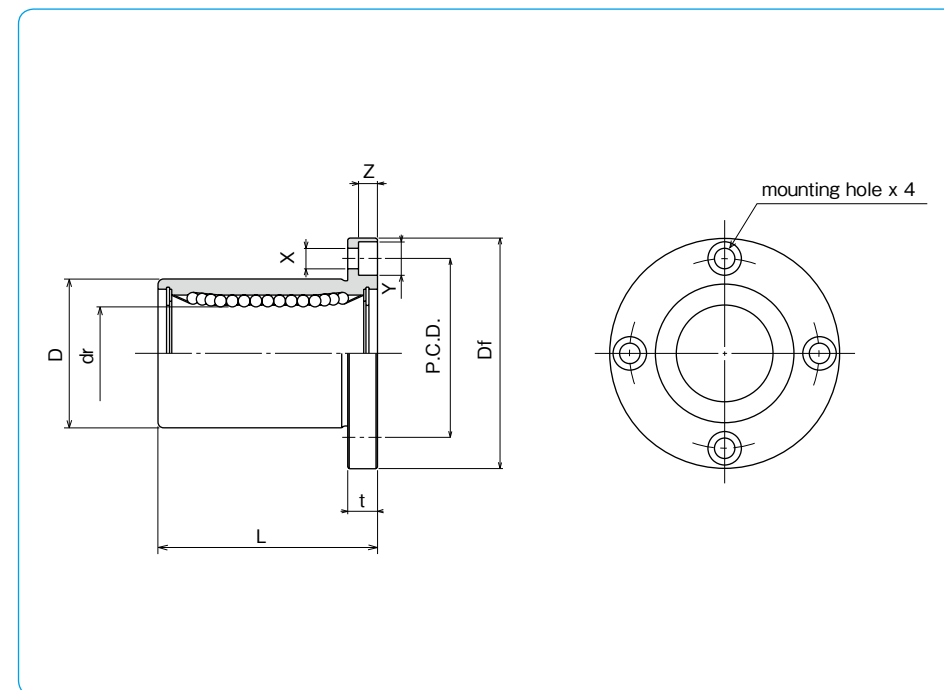


| part number | | | | number of ball circuits | major dimensions | | | | | |
|-------------------------|-------------------------------|--------------------------|----------------|-------------------------|---------------------|--------------------------------------|---------------------|---------------------------------------|------------------|--|
| standard steel retainer | anti-corrosion resin retainer | stainless steel retainer | resin retainer | | dr | | D | | L | |
| | | | | inch (mm) | tolerance inch/(μm) | inch (mm) | tolerance inch/(μm) | ±0.012 (±0.3) inch/(mm) | | |
| SWF 4 | SWF 4G | SWSF 4 | SWSF 4G | 4 | .2500 (6.350) | | .5000 (12.700) | ⁰ _{-.00050 (-13)} | .7500 (19.050) | |
| SWF 6 | SWF 6G | SWSF 6 | SWSF 6G | 4 | .3750 (9.525) | ⁰ _{-.00040 (-9)} | .6250 (15.875) | ⁰ _{-.00065 (-16)} | .8750 (22.225) | |
| SWF 8 | SWF 8G | SWSF 8 | SWSF 8G | 4 | .5000 (12.700) | | .7500 (19.050) | ⁰ _{-.00075 (-19)} | 1.2500 (31.750) | |
| SWF10 | SWF10G | SWSF10 | SWSF10G | 4 | .6250 (15.875) | | 1.1250 (28.575) | ⁰ _{-.00090 (-22)} | 1.5000 (38.100) | |
| SWF12 | SWF12G | SWSF12 | SWSF12G | 5 | .7500 (19.050) | | 1.2500 (31.750) | ⁰ _{-.00100 (-25)} | 1.6250 (41.275) | |
| SWF16 | SWF16G | SWSF16 | SWSF16G | 6 | 1.0000 (25.400) | | 1.5625 (39.688) | ⁰ _{-.00115 (-29)} | 2.2500 (57.150) | |
| SWF20 | SWF20G | SWSF20 | SWSF20G | 6 | 1.2500 (31.750) | | 2.0000 (50.800) | ⁰ _{-.00120 (-30)} | 2.6250 (66.675) | |
| SWF24 | SWF24G | SWSF24 | SWSF24G | 6 | 1.5000 (38.100) | | 2.3750 (60.325) | ⁰ _{-.00125 (-31)} | 3.0000 (76.200) | |
| SWF32 | SWF32G | SWSF32 | SWSF32G | 6 | 2.0000 (50.800) | | 3.0000 (76.200) | ⁰ _{-.00130 (-33)} | 4.0000 (101.600) | |
| SWF40 | – | – | – | 6 | 2.5000 (63.500) | | 3.7500 (95.250) | ⁰ _{-.00135 (-34)} | 5.0000 (127.000) | |
| SWF48 | – | – | – | 6 | 3.0000 (76.200) | | 4.5000 (114.300) | ⁰ _{-.00140 (-35)} | 6.0000 (152.400) | |
| SWF64 | – | – | – | 6 | 4.0000 (101.600) | | 6.0000 (152.400) | ⁰ _{-.00145 (-36)} | 8.0000 (203.200) | |

| Df | t | flange | | eccentricity | perpendicularity | basic load rating | | mass | shaft diameter |
|------------------|----------------|------------------|--|--------------|------------------|-------------------|-----------|--------|----------------|
| | | P.C.D. | X × Y × Z | | | dynamic C | static Co | | |
| inch/(mm) | inch/(mm) | inch/(mm) | inch/(mm) | inch (μm) | inch (μm) | N | N | g | inch (mm) |
| 1.2500 (31.750) | .2187 (5.556) | .8750 (22.225) | .1560 × .2500 × .1410 (3.969 × 6.350 × 3.572) | .0005 (12) | .0005 (12) | 206 | 265 | 32 | 1/4 (6.350) |
| 1.5000 (38.100) | .2500 (6.350) | 1.0620 (26.988) | .1875 × .2970 × .1720 (4.763 × 7.541 × 4.366) | | | 225 | 314 | 47 | 3/8 (9.525) |
| 1.7500 (44.450) | .2500 (6.350) | 1.312 (33.338) | .1875 × .2970 × .1720 (4.763 × 7.541 × 4.366) | | | 510 | 784 | 88 | 1/2 (12.700) |
| 2.0000 (50.800) | .2500 (6.350) | 1.5620 (39.688) | .1875 × .2970 × .1720 (4.763 × 7.541 × 4.366) | | | 774 | 1,180 | 140 | 5/8 (15.875) |
| 2.1875 (55.563) | .3125 (7.938) | 1.7180 (43.660) | .2187 × .3440 × .2030 (5.556 × 8.731 × 5.159) | .0006 (15) | .0006 (15) | 862 | 1,370 | 190 | 3/4 (19.050) |
| 2.5000 (63.500) | .3125 (7.938) | 2.0310 (51.594) | .2187 × .3440 × .2030 (5.556 × 8.731 × 5.159) | | | 980 | 1,570 | 325 | 1 (25.400) |
| 3.1250 (79.375) | .3750 (9.525) | 2.5625 (65.088) | .2812 × .4060 × .2656 (7.144 × 10.319 × 6.747) | .0008 (20) | .0008 (20) | 1,570 | 2,740 | 665 | 1-1/4 (31.750) |
| 3.7500 (95.250) | .5000 (12.700) | 3.0625 (77.788) | .3440 × .5000 × .3280 (8.731 × 12.700 × 8.334) | | | 2,180 | 4,020 | 1,100 | 1-1/2 (38.100) |
| 4.3750 (111.125) | .5000 (12.700) | 3.6875 (93.662) | .3440 × .5000 × .3280 (8.731 × 12.700 × 8.334) | .0010 (25) | .0010 (25) | 3,820 | 7,940 | 1,760 | 2 (50.800) |
| 5.3750 (136.525) | .7500 (19.050) | 4.5625 (115.887) | .4062 × .6250 × .3750 (10.319 × 15.875 × 9.525) | | | 4,700 | 10,000 | 3,570 | 2-1/2 (63.500) |
| 6.1250 (155.575) | .7500 (19.050) | 5.3125 (134.937) | .4062 × .6250 × .3750 (10.319 × 15.875 × 9.525) | .0012 (30) | .0012 (30) | 7,350 | 16,000 | 5,600 | 3 (76.200) |
| 8.0000 (203.200) | .8750 (22.225) | 7.0000 (177.800) | .5000 × .7125 × .5000 (12.700 × 18.097 × 12.700) | | | 14,100 | 34,800 | 12,000 | 4 (101.600) |

1N ≅ 0.225lbf 1kg ≅ 2.205lbf

SWK TYPE (Inch Standard)

– Square Flange Type –

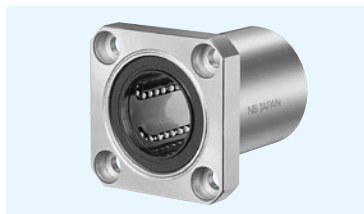

part number structure

example **SWSK 16 G UU-SK**


specification
SWK: standard
SWSK: anti-corrosion

size

retainer material
blank: standard/steel
 anti-corrosion/stainless steel
G: resin

outer cylinder
 surface treatment
blank: no surface treatment
SK: electroless nickel plating
LF: low temperature black chrome
 treatment with fluoride coating
SB: black oxide (not available on
 anti-corrosion type)
SC: industrial chrome plating

seal
blank: without seal
UU: seals on both sides

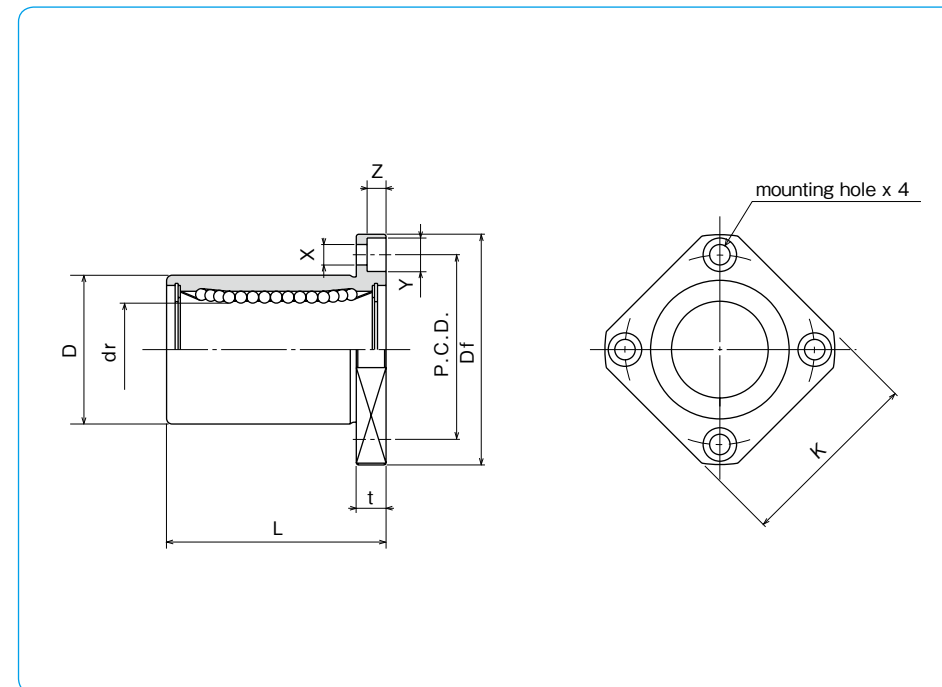


| part number | | | | number of ball circuits | major dimensions | | | | | |
|-------------------------|-------------------------------|--------------------------|-----------------|-------------------------|---------------------|--------------------------------------|---------------------|---------------------------------------|------------------|--|
| standard steel retainer | anti-corrosion resin retainer | stainless steel retainer | resin retainer | | dr | | D | | L | |
| inch (mm) | inch (mm) | inch (mm) | inch (mm) | inch (mm) | tolerance inch/(μm) | inch (mm) | tolerance inch/(μm) | ±0.012 (±0.3) inch/(mm) | | |
| SWK 4 | SWK 4G | SWSK 4 | SWSK 4G | 4 | .2500 (6.350) | | .5000 (12.700) | ⁰ _{-.00050 (-13)} | .7500 (19.050) | |
| SWK 6 | SWK 6G | SWSK 6 | SWSK 6G | 4 | .3750 (9.525) | ⁰ _{-.00040 (-9)} | .6250 (15.875) | ⁰ _{-.00065 (-16)} | .8750 (22.225) | |
| SWK 8 | SWK 8G | SWSK 8 | SWSK 8G | 4 | .5000 (12.700) | | .7500 (19.050) | ⁰ _{-.00075 (-19)} | 1.2500 (31.750) | |
| SWK 10 | SWK 10G | SWSK 10 | SWSK 10G | 4 | .6250 (15.875) | | 1.1250 (28.575) | ⁰ _{-.00090 (-22)} | 1.5000 (38.100) | |
| SWK 12 | SWK 12G | SWSK 12 | SWSK 12G | 5 | .7500 (19.050) | | 1.2500 (31.750) | ⁰ _{-.00100 (-25)} | 1.6250 (41.275) | |
| SWK 16 | SWK 16G | SWSK 16 | SWSK 16G | 6 | 1.0000 (25.400) | | 1.5625 (39.688) | ⁰ _{-.00115 (-29)} | 2.2500 (57.150) | |
| SWK20 | SWK20G | SWSK20 | SWSK20G | 6 | 1.2500 (31.750) | | 2.0000 (50.800) | ⁰ _{-.00125 (-32)} | 2.6250 (66.675) | |
| SWK24 | SWK24G | SWSK24 | SWSK24G | 6 | 1.5000 (38.100) | | 2.3750 (60.325) | ⁰ _{-.00135 (-34)} | 3.0000 (76.200) | |
| SWK32 | SWK32G | SWSK32 | SWSK32G | 6 | 2.0000 (50.800) | | 3.0000 (76.200) | ⁰ _{-.00145 (-37)} | 4.0000 (101.600) | |
| SWK40 | – | – | – | 6 | 2.5000 (63.500) | | 3.7500 (95.250) | ⁰ _{-.00155 (-39)} | 5.0000 (127.000) | |
| SWK48 | – | – | – | 6 | 3.0000 (76.200) | | 4.5000 (114.300) | ⁰ _{-.00165 (-42)} | 6.0000 (152.400) | |
| SWK64 | – | – | – | 6 | 4.0000 (101.600) | | 6.0000 (152.400) | ⁰ _{-.00175 (-44)} | 8.0000 (203.200) | |

| flange | | | | | eccentricity inch (μm) | perpendicularity inch (μm) | basic load rating | | mass g | shaft diameter inch (mm) |
|------------------|------------------|----------------|------------------|--|------------------------|----------------------------|-------------------|-------------|------------------|--------------------------|
| Df | K | t | P.C.D. | X×Y×Z | | | dynamic C N | static Co N | | |
| inch/(mm) | inch/(mm) | inch/(mm) | inch/(mm) | inch/(mm) | inch (μm) | inch (μm) | | | | |
| 1.2500 (31.750) | 1.0000 (25.400) | .2187 (5.556) | .8750 (22.225) | .1560 x .2500 x .1410 (3.969 x 6.350 x 3.572) | .0005 (12) | .0005 (12) | 206 | 265 | 25 (6.350) | |
| 1.5000 (38.100) | 1.2500 (31.750) | .2500 (6.350) | 1.0620 (26.988) | .1875 x .2970 x .1720 (4.763 x 7.541 x 4.366) | | | 225 | 314 | 32 (9.525) | |
| 1.7500 (44.450) | 1.3750 (34.925) | .2500 (6.350) | 1.312 (33.338) | .1875 x .2970 x .1720 (4.763 x 7.541 x 4.366) | | | 510 | 784 | 68 (12.700) | |
| 2.0000 (50.800) | 1.5000 (38.100) | .2500 (6.350) | 1.5620 (39.688) | .1875 x .2970 x .1720 (4.763 x 7.541 x 4.366) | | | 774 | 1,180 | 124 (15.875) | |
| 2.1875 (55.563) | 1.6875 (42.863) | .3125 (7.938) | 1.7180 (43.660) | 2.187 x .3440 x .2030 (5.556 x 8.731 x 5.159) | .0006 (15) | .0006 (15) | 862 | 1,370 | 150 (19.050) | |
| 2.5000 (63.500) | 2.0000 (50.800) | .3125 (7.938) | 2.0310 (51.594) | 2.187 x .3440 x .2030 (5.556 x 8.731 x 5.159) | | | 980 | 1,570 | 280 (25.400) | |
| 3.1250 (79.375) | 2.5000 (63.500) | .3750 (9.525) | 2.5625 (65.088) | 2.812 x .4060 x .2656 (7.144 x 10.319 x 6.747) | | | 1,570 | 2,740 | 580 (31.750) | |
| 3.7500 (95.250) | 3.0000 (76.200) | .5000 (12.700) | 3.0625 (77.788) | 3.440 x .5000 x .3280 (8.731 x 12.700 x 8.334) | | | 2,180 | 4,020 | 930 (38.100) | |
| 4.3750 (111.125) | 3.5000 (88.900) | .5000 (12.700) | 3.6875 (93.662) | 3.440 x .5000 x .3280 (8.731 x 12.700 x 8.334) | .0008 (20) | .0008 (20) | 3,820 | 7,940 | 1,580 (50.800) | |
| 5.3750 (136.525) | 4.3750 (111.125) | .7500 (19.050) | 4.5625 (115.887) | .4062 x .6250 x .3750 (10.319 x 15.875 x 9.525) | | | 4,700 | 10,000 | 3,200 (63.500) | |
| 6.1250 (155.575) | 5.0000 (127.000) | .7500 (19.050) | 5.3125 (134.937) | .4062 x .6250 x .3750 (10.319 x 15.875 x 9.525) | | | 7,350 | 16,000 | 5,000 (76.200) | |
| 8.0000 (203.200) | 6.7500 (171.450) | .8750 (22.225) | 7.0000 (177.800) | .5000 x .7125 x .5000 (12.700 x 18.097 x 12.700) | | | 14,100 | 34,800 | 11,300 (101.600) | |

1N ≅ 0.225lbf 1kg ≅ 2.205lbf

SWF-W TYPE (Inch Standard)


– Round Flange Double-Wide Type –

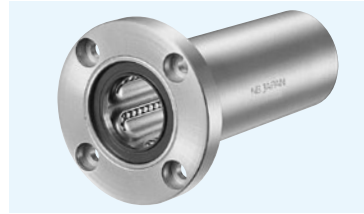

part number structure

example **SWSF 16 G W UU -SK**

| | | | | | |
|--|------|--|--|--|------------------|
| specification SWF : standard SWSF : anti-corrosion | size | retainer material blank : standard/steel anti-corrosion/stainless steel G : resin | outer cylinder surface treatment blank : no surface treatment SK : electroless nickel plating LF : low temperature black chrome treatment with fluoride coating SB : black oxide (not available on anti-corrosion type) SC : industrial chrome plating | seal blank : without seal UU : seals on both sides | double-wide type |
|--|------|--|--|--|------------------|

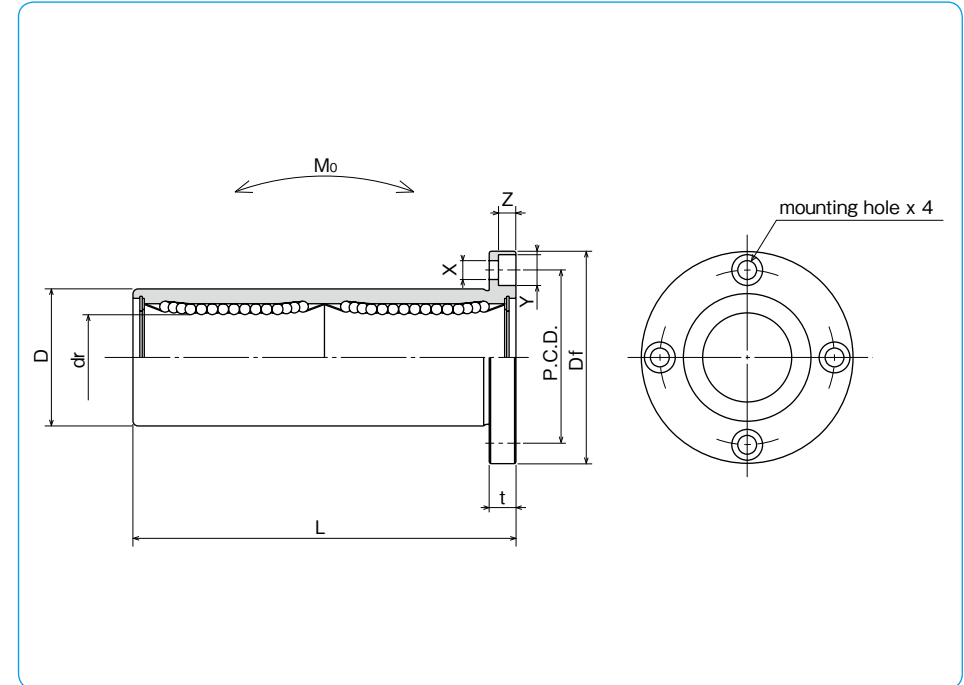

| part number | | | | number of ball circuits | major dimensions | | | | |
|----------------|----------------|--------------------|-----------------|-------------------------|------------------|---------------------------------------|-----------------|---------------------------------------|------------------------|
| standard | | anti-corrosion | | | dr | | D | | L |
| steel retainer | resin retainer | stainless retainer | resin retainer | | inch (mm) | tolerance inch/(μm) | inch (mm) | tolerance inch/(μm) | ±.012 (±0.3) inch/(mm) |
| SWF 4W | SWF 4GW | SWSF 4W | SWSF 4GW | 4 | .2500 (6.350) | | .5000 (12.700) | ⁰ _{-.00050 (-13)} | 1.3750 (34.925) |
| SWF 6W | SWF 6GW | SWSF 6W | SWSF 6GW | 4 | .3750 (9.525) | ⁰ _{-.00040 (-10)} | .6250 (15.875) | ⁰ _{-.00065 (-16)} | 1.5938 (40.481) |
| SWF 8W | SWF 8GW | SWSF 8W | SWSF 8GW | 4 | .5000 (12.700) | | .8750 (22.225) | ⁰ _{-.00065 (-16)} | 2.3750 (60.325) |
| SWF10W | SWF10GW | SWSF10W | SWSF10GW | 4 | .6250 (15.875) | | 1.1250 (28.575) | ⁰ _{-.00075 (-19)} | 2.8125 (71.438) |
| SWF12W | SWF12GW | SWSF12W | SWSF12GW | 5 | .7500 (19.050) | ⁰ _{-.00050 (-12)} | 1.2500 (31.750) | ⁰ _{-.00075 (-19)} | 3.0937 (78.581) |
| SWF16W | SWF16GW | SWSF16W | SWSF16GW | 6 | 1.0000 (25.400) | | 1.5625 (39.688) | ⁰ _{-.00090 (-22)} | 4.2813 (108.744) |
| SWF20W | SWF20GW | SWSF20W | SWSF20GW | 6 | 1.2500 (31.750) | ⁰ _{-.00060 (-15)} | 2.0000 (50.800) | ⁰ _{-.00090 (-22)} | 5.0000 (127.000) |
| SWF24W | SWF24GW | SWSF24W | SWSF24GW | 6 | 1.5000 (38.100) | | 2.3750 (60.325) | ⁰ _{-.00100 (-25)} | 5.6875 (144.463) |
| SWF32W | SWF32GW | SWSF32W | SWSF32GW | 6 | 2.0000 (50.800) | | 3.0000 (76.200) | ⁰ _{-.00100 (-25)} | 7.7500 (196.850) |

| flange | | | | eccentricity inch (μm) | perpendicularity inch (μm) | basic load rating | | allowable static moment Mo N·m | mass g | shaft diameter inch (mm) |
|------------------|----------------|------------------|--|------------------------|----------------------------|-------------------|-------------|--------------------------------|--------|--------------------------|
| Df inch/(mm) | t inch/(mm) | P.C.D. inch/(mm) | X×Y×Z inch/(mm) | | | dynamic C N | static Co N | | | |
| 1.2500 (31.750) | .2187 (5.556) | .8750 (22.225) | .1563×.2500×.1406 (3.969×6.350×3.572) | .0006 (15) | .0006 (15) | 323 | 530 | 2.0 | 40 | 1/4 (6.350) |
| 1.5000 (38.100) | .2500 (6.350) | 1.0625 (26.988) | .1875×.2969×.1719 (4.763×7.541×4.366) | | | 353 | 630 | 2.7 | 60 | 3/8 (9.525) |
| 1.7500 (44.450) | .2500 (6.350) | 1.3125 (33.338) | .1875×.2969×.1719 (4.763×7.541×4.366) | | | 813 | 1,570 | 11.5 | 126 | 1/2 (12.700) |
| 2.0000 (50.800) | .2500 (6.350) | 1.5625 (39.688) | .1875×.2969×.1719 (4.763×7.541×4.366) | | | 1,230 | 2,350 | 20.0 | 215 | 5/8 (15.875) |
| 2.1875 (55.563) | .3125 (7.938) | 1.7188 (43.656) | .2188×.3438×.2031 (5.556×8.731×5.159) | .0008 (20) | .0008 (20) | 1,370 | 2,740 | 26.5 | 280 | 3/4 (19.050) |
| 2.5000 (63.500) | .3125 (7.938) | 2.0313 (51.594) | .2188×.3438×.2031 (5.556×8.731×5.159) | | | 1,570 | 3,140 | 41.2 | 515 | 1 (25.400) |
| 3.1250 (79.375) | .3750 (9.525) | 2.5625 (65.088) | .2813×.4063×.2656 (7.144×10.319×6.747) | | | 2,500 | 5,490 | 84.8 | 1,020 | 1-1/4 (31.750) |
| 3.7500 (95.250) | .5000 (12.700) | 3.0625 (77.788) | .3437×.5000×.3281 (8.731×12.700×8.334) | .0012 (30) | .0012 (30) | 3,430 | 8,040 | 143 | 1,630 | 1-1/2 (38.100) |
| 4.3750 (111.125) | .5000 (12.700) | 3.6875 (93.662) | .3437×.5000×.3281 (8.731×12.700×8.334) | | | 6,080 | 15,900 | 399 | 2,800 | 2 (50.800) |



1N≒0.225lbf 1N·m≒0.738lb·ft
1kg≒2.205lbs

SWK-W TYPE (Inch Standard)

– Square Flange Double-Wide Type –



part number structure

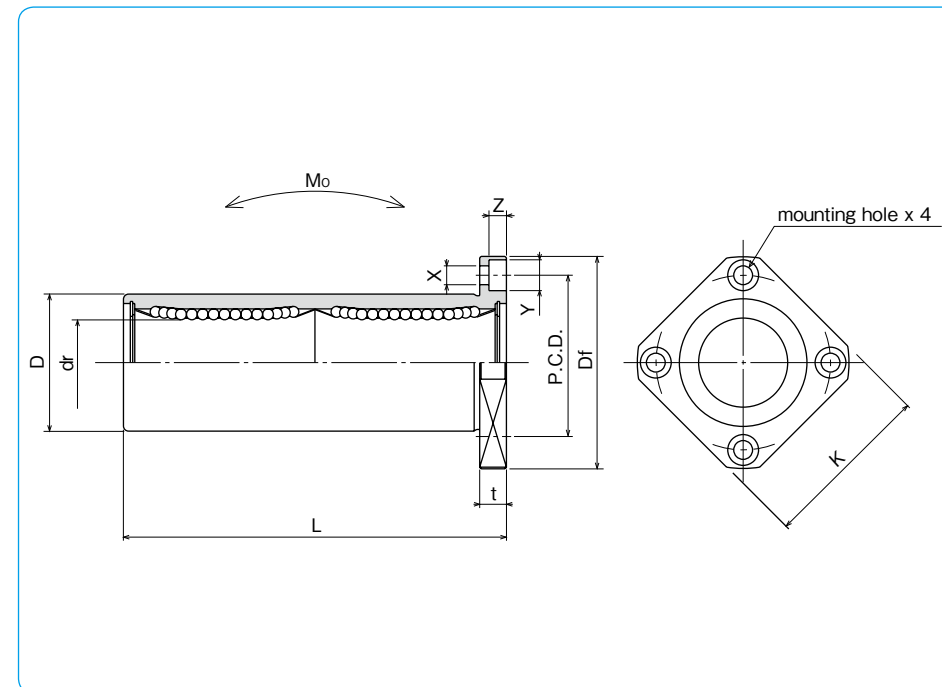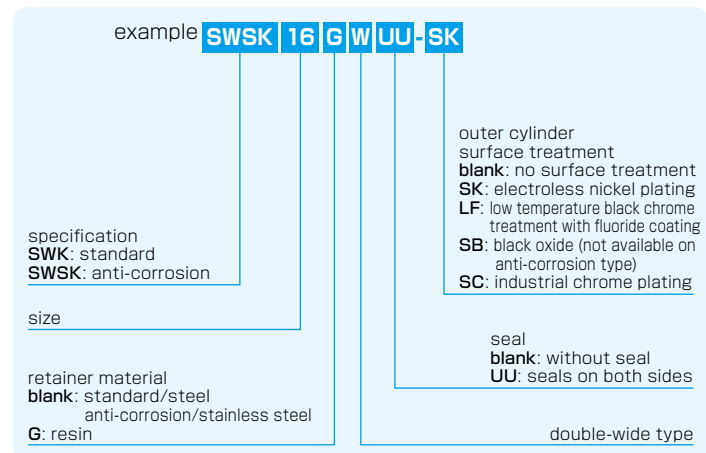

| part number | | | | number of ball circuits | major dimensions | | | | |
|----------------|----------------|--------------------|----------------|-------------------------|------------------|---------------------------------------|-----------------|---------------------------------------|--------------------------|
| standard | | anti-corrosion | | | dr | | D | | |
| steel retainer | resin retainer | stainless retainer | resin retainer | | inch (mm) | tolerance inch/(μm) | inch (mm) | tolerance inch/(μm) | L ±.012 (±0.3) inch/(mm) |
| SWK 4W | SWK 4GW | SWSK 4W | SWSK 4GW | 4 | .2500 (6.350) | | .5000 (12.700) | ⁰ _{-.00050 (-13)} | 1.3750 (34.925) |
| SWK 6W | SWK 6GW | SWSK 6W | SWSK 6GW | 4 | .3750 (9.525) | ⁰ _{-.00040 (-10)} | .6250 (15.875) | ⁰ _{-.00065 (-16)} | 1.5938 (40.481) |
| SWK 8W | SWK 8GW | SWSK 8W | SWSK 8GW | 4 | .5000 (12.700) | | .8750 (22.225) | ⁰ _{-.00075 (-19)} | 2.3750 (60.325) |
| SWK 10W | SWK 10GW | SWSK 10W | SWSK 10GW | 4 | .6250 (15.875) | | 1.1250 (28.575) | ⁰ _{-.00090 (-22)} | 2.8125 (71.438) |
| SWK 12W | SWK 12GW | SWSK 12W | SWSK 12GW | 5 | .7500 (19.050) | ⁰ _{-.00050 (-12)} | 1.2500 (31.750) | ⁰ _{-.00075 (-19)} | 3.0937 (78.581) |
| SWK 16W | SWK 16GW | SWSK 16W | SWSK 16GW | 6 | 1.0000 (25.400) | | 1.5625 (39.688) | ⁰ _{-.00090 (-22)} | 4.2813 (108.744) |
| SWK 20W | SWK 20GW | SWSK 20W | SWSK 20GW | 6 | 1.2500 (31.750) | ⁰ _{-.00060 (-15)} | 2.0000 (50.800) | ⁰ _{-.00100 (-25)} | 5.0000 (127.000) |
| SWK 24W | SWK 24GW | SWSK 24W | SWSK 24GW | 6 | 1.5000 (38.100) | | 2.3750 (60.325) | ⁰ _{-.00100 (-25)} | 5.6875 (144.463) |
| SWK 32W | SWK 32GW | SWSK 32W | SWSK 32GW | 6 | 2.0000 (50.800) | | 3.0000 (76.200) | ⁰ _{-.00100 (-25)} | 7.7500 (196.850) |

| flange | | | | | eccentricity inch (μm) | perpendicularity inch (μm) | basic load rating | | allowable static moment Mo N·m | mass g | shaft diameter inch/(mm) |
|------------------|-----------------|----------------|-----------------|--|------------------------|----------------------------|-------------------|-------------|--------------------------------|----------------|--------------------------|
| Df | K | t | P.C.D. | X×Y×Z | | | dynamic C N | static Co N | | | |
| 1.2500 (31.750) | 1.0000 (25.400) | .2188 (5.556) | .8750 (22.225) | .1563×.2500×.1406 (3.969×6.350×3.572) | .0006 (15) | .0006 (15) | 323 | 530 | 2.0 | 33 (6.350) | |
| 1.5000 (38.100) | 1.2500 (31.750) | .2500 (6.350) | 1.0625 (26.988) | .1875×.2969×.1719 (4.763×7.541×4.366) | | | 353 | 630 | 2.7 | 45 (9.525) | |
| 1.7500 (44.450) | 1.3750 (34.925) | .2500 (6.350) | 1.3125 (33.338) | .1875×.2969×.1719 (4.763×7.541×4.366) | | | 813 | 1,570 | 11.5 | 106 (12.700) | |
| 2.0000 (50.800) | 1.5000 (38.100) | .2500 (6.350) | 1.5625 (39.688) | .1875×.2969×.1719 (4.763×7.541×4.366) | | | 1,230 | 2,350 | 20.0 | 200 (15.875) | |
| 2.1875 (55.563) | 1.6875 (42.863) | .3125 (7.938) | 1.7188 (43.656) | .2188×.3438×.2031 (5.556×8.731×5.159) | .0008 (20) | .0008 (20) | 1,370 | 2,740 | 26.5 | 240 (19.050) | |
| 2.5000 (63.500) | 2.0000 (50.800) | .3125 (7.938) | 2.0313 (51.594) | .2188×.3438×.2031 (5.556×8.731×5.159) | | | 1,570 | 3,140 | 41.2 | 470 (25.400) | |
| 3.1250 (79.375) | 2.5000 (63.500) | .3750 (9.525) | 2.5625 (65.088) | .2813×.4063×.2656 (7.144×10.319×6.747) | | | 2,500 | 5,490 | 84.8 | 935 (31.750) | |
| 3.7500 (95.250) | 3.0000 (76.200) | .5000 (12.700) | 3.0625 (77.788) | .3437×.5000×.3281 (8.731×12.700×8.334) | | | 3,430 | 8,040 | 143 | 1,460 (38.100) | |
| 4.3750 (111.125) | 3.5000 (88.900) | .5000 (12.700) | 3.6875 (93.662) | .3437×.5000×.3281 (8.731×12.700×8.334) | .0012 (30) | .0012 (30) | 6,080 | 15,900 | 399 | 2,620 (50.800) | |



1N≒0.225lbf 1N·m≒0.738lb·ft
1kg≒2.205lbs

GM TYPE

– Single Type –



part number structure

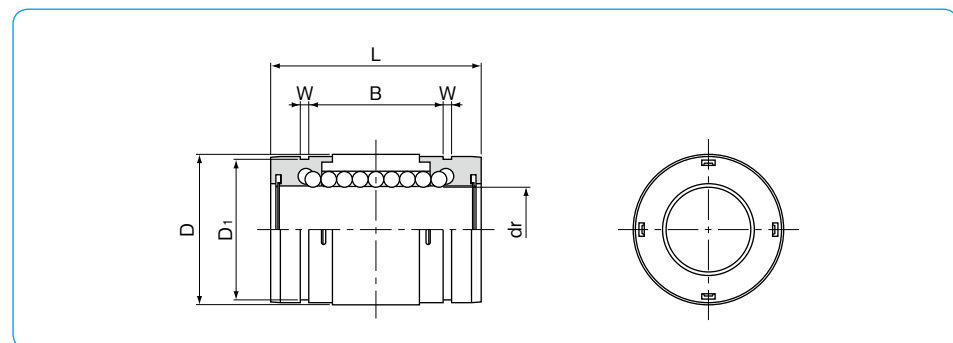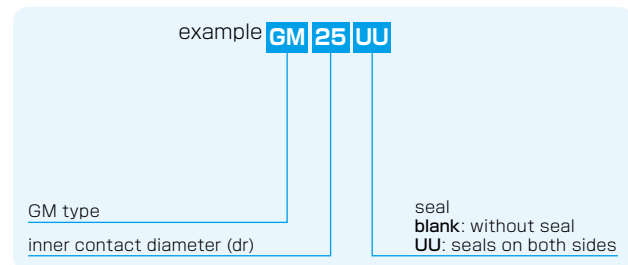


| part number | number of ball circuits | dr mm | major dimensions | | | | | | basic load rating dynamic C N | static Co N | mass g | | |
|-------------|-------------------------|----------|----------------------------|---------|----------------------------|---------|---------|---------|--|-------------------|-----------|----------------------|-----|
| | | | tolerance μm | D mm | tolerance μm | L mm | B mm | W mm | | | | D ₁ mm | |
| GM 6 | 4 | 6 | 0 | 12 | 0 | 19 | 11.3 | 1.1 | 11.5 | 206 | 265 | 5 | |
| GM 8 | 4 | 8 | | 15 | -11 | 24 | 15.3 | 1.1 | 14.3 | 274 | 392 | 10 | |
| GM10 | 4 | 10 | | 19 | -9 | 29 | 19.4 | 1.3 | 18 | 372 | 549 | 18 | |
| GM12 | 4 | 12 | | 21 | | 0 | 30 | 20.4 | 1.3 | 20 | 510 | 784 | 23 |
| GM13 | 4 | 13 | | 23 | -13 | 32 | 20.4 | 1.3 | 22 | 510 | 784 | 27 | |
| GM16 | 4 | 16 | | 28 | -10 | 37 | 23.3 | 1.6 | 27 | 774 | 1,180 | 45 | |
| GM20 | 6 | 20 | | 32 | | 0 | 42 | 27.3 | 1.6 | 30.5 | 882 | 1,370 | 70 |
| GM25 | 6 | 25 | | 40 | | -16 | 59 | 37.3 | 1.85 | 38 | 980 | 1,570 | 150 |
| GM30 | 6 | 30 | | 45 | | 64 | 40.8 | 1.85 | 43 | 1,570 | 2,740 | 180 | |

GM-AJ type (clearance adjustable type) is also manufactured. Please contact NB for details.



1N \approx 0.102kgf

GM-W TYPE

– Double-Wide Type –

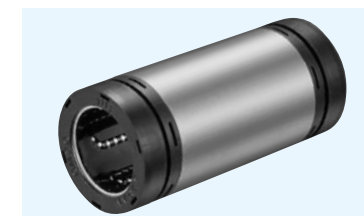

part number structure

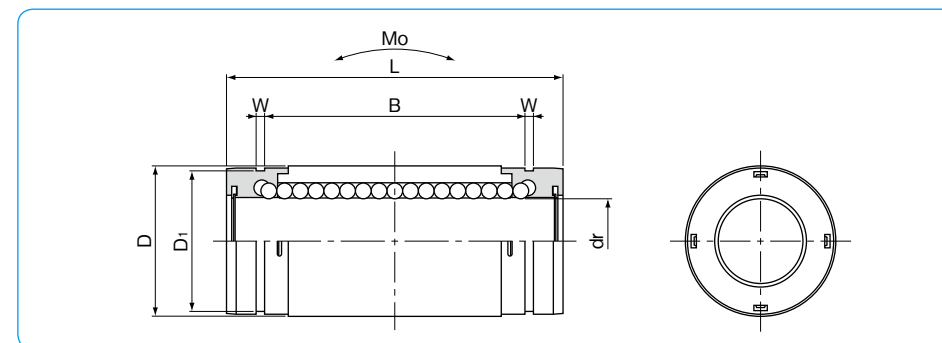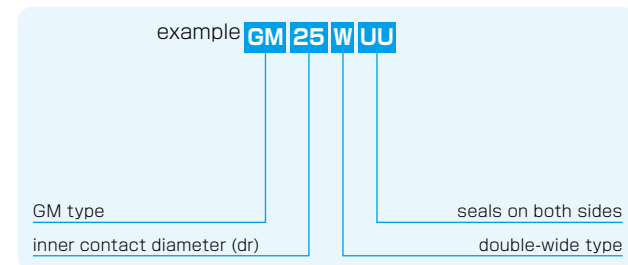

| part number | number of ball circuits | dr mm | tolerance μm | major dimensions | | | | | | basic load rating dynamic C N | static Co N | allowable static moment Mo N·m | mass g | |
|-------------|-------------------------|----------|----------------------------|------------------|----------------------------|---------|---------|---------|----------------------|--|-------------------|---|-----------|-----|
| | | | | D mm | tolerance μm | L mm | B mm | W mm | D ₁ mm | | | | | |
| GM 6W UU | 4 | 6 | 0 | 12 | 0 | 28 | 20.3 | 1.1 | 11.5 | 323 | 530 | 1.5 | 9 | |
| GM 8W UU | 4 | 8 | | 15 | -13 | 36 | 27.3 | 1.1 | 14.3 | 431 | 784 | 3.3 | 18 | |
| GM10W UU | 4 | 10 | | 19 | -10 | 41 | 31.4 | 1.3 | 18 | 588 | 1,100 | 5.0 | 31 | |
| GM12W UU | 4 | 12 | | 21 | | 0 | 46 | 36.4 | 1.3 | 20 | 813 | 1,570 | 7.6 | 42 |
| GM13W UU | 4 | 13 | | 23 | -16 | 48 | 36.4 | 1.3 | 22 | 813 | 1,570 | 8.1 | 50 | |
| GM16W UU | 4 | 16 | | 28 | -12 | 53 | 39.3 | 1.6 | 27 | 1,230 | 2,350 | 13.8 | 76 | |
| GM20W UU | 6 | 20 | | 32 | | 0 | 65 | 50.3 | 1.6 | 30.5 | 1,400 | 2,740 | 20.0 | 130 |
| GM25W UU | 6 | 25 | | 40 | | -19 | 91 | 69.3 | 1.85 | 38 | 1,560 | 3,140 | 34.8 | 280 |
| GM30W UU | 6 | 30 | | 45 | | 99 | 75.8 | 1.85 | 43 | 2,490 | 5,490 | 57.5 | 334 | |

*UU type is standard.

1N \approx 0.102kgf 1N·m \approx 0.102kgf·m

SMA TYPE


– Block Type –



part number structure

example **SMSA 25 G UU**

| | | | |
|--|------------------------|--|--|
| specification SMA: standard SMSA: anti-corrosion | inner contact diameter | retainer material blank: standard/steel anti-corrosion/stainless steel G: resin | seal blank: without seal UU: seals on both sides |
|--|------------------------|--|--|

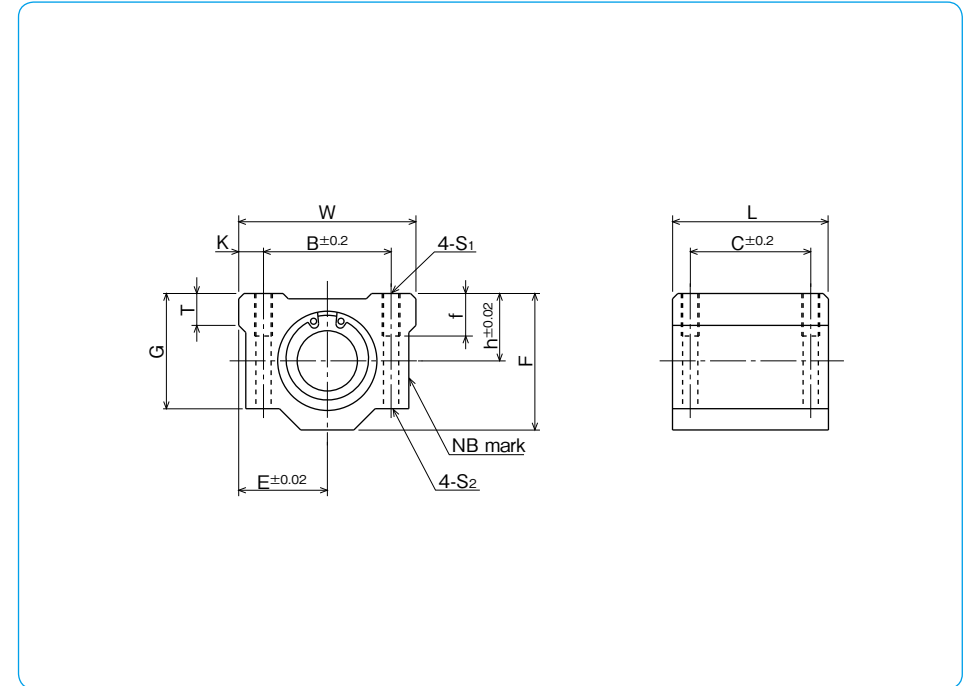

| part number | inner contact diameter | | major dimensions | | | | | | |
|-------------|------------------------|-----------------|------------------|---------|---------|---------|---------|---------|---------|
| | mm | tolerance μm | h mm | E mm | W mm | L mm | F mm | G mm | T mm |
| SMA 3GUU | 3 | | 5 | 8 | 16 | 13 | 10 | 8 | — |
| SMA 4GUU | 4 | 0 | 5.5 | 8.5 | 17 | 15 | 11 | 9 | — |
| SMA 5GUU | 5 | - 8 | 7 | 11 | 22 | 18 | 14 | 11 | — |
| SMA 6GUU | 6 | | 9 | 15 | 30 | 25 | 18 | 15 | 6 |
| SMA 8GUU | 8 | | 11 | 17 | 34 | 30 | 22 | 18 | 6 |
| SMA 10GUU | 10 | 0 | 13 | 20 | 40 | 35 | 26 | 21 | 8 |
| SMA 12GUU | 12 | - 9 | 15 | 21 | 42 | 36 | 28 | 24 | 8 |
| SMA 13GUU | 13 | | 15 | 22 | 44 | 39 | 30 | 24.5 | 8 |
| SMA 16GUU | 16 | | 19 | 25 | 50 | 44 | 38.5 | 32.5 | 9 |
| SMA 20GUU | 20 | 0 | 21 | 27 | 54 | 50 | 41 | 35 | 11 |
| SMA 25GUU | 25 | -10 | 26 | 38 | 76 | 67 | 51.5 | 42 | 12 |
| SMA 30GUU | 30 | | 30 | 39 | 78 | 72 | 59.5 | 49 | 15 |
| SMA 35GUU | 35 | 0 | 34 | 45 | 90 | 80 | 68 | 54 | 18 |
| SMA 40GUU | 40 | -12 | 40 | 51 | 102 | 90 | 78 | 62 | 20 |
| SMA 50GUU | 50 | | 52 | 61 | 122 | 110 | 102 | 80 | 25 |
| SMA 60GUU | 60 | 0/-15 | 58 | 66 | 132 | 122 | 114 | 94 | 30 |


| mounting dimensions | | | | | | basic load rating | | * mass g | shaft diameter mm |
|---------------------|---------|---------|----------------|---------|----------------------|-------------------|-------------------|-------------|-------------------------|
| B mm | C mm | K mm | S ₁ | f mm | S ₂ mm | dynamic C N | static Co N | | |
| 11 | 8 | 2.5 | M2 | — | — | 69 | 105 | 5 | 3 |
| 12 | 10 | 2.5 | M3 | — | — | 88 | 127 | 7 | 4 |
| 16 | 12 | 3 | M3 | — | — | 167 | 206 | 14 | 5 |
| 20 | 15 | 5 | M4 | 8 | 3.4 | 206 | 265 | 34 | 6 |
| 24 | 18 | 5 | M4 | 8 | 3.4 | 274 | 392 | 52 | 8 |
| 28 | 21 | 6 | M5 | 12 | 4.3 | 372 | 549 | 92 | 10 |
| 30.5 | 26 | 5.75 | M5 | 12 | 4.3 | 510 | 784 | 102 | 12 |
| 33 | 26 | 5.5 | M5 | 12 | 4.3 | 510 | 784 | 120 | 13 |
| 36 | 34 | 7 | M5 | 12 | 4.3 | 774 | 1,180 | 200 | 16 |
| 40 | 40 | 7 | M6 | 12 | 5.2 | 882 | 1,370 | 255 | 20 |
| 54 | 50 | 11 | M8 | 18 | 7 | 980 | 1,570 | 600 | 25 |
| 58 | 58 | 10 | M8 | 18 | 7 | 1,570 | 2,740 | 735 | 30 |
| 70 | 60 | 10 | M8 | 18 | 7 | 1,670 | 3,140 | 1,100 | 35 |
| 80 | 60 | 11 | M10 | 25 | 8.7 | 2,160 | 4,020 | 1,590 | 40 |
| 100 | 80 | 11 | M10 | 25 | 8.7 | 3,820 | 7,940 | 3,340 | 50 |
| 108 | 90 | 12 | M12 | 25 | 10.7 | 4,700 | 10,000 | 4,270 | 60 |

* Mass of resin retainer type



1N≒0.102kgf

SMA-W TYPE

– Double-Wide Block Type –

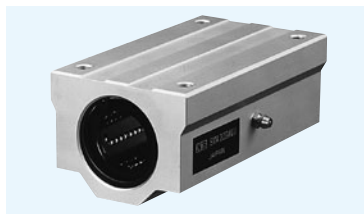

part number structure

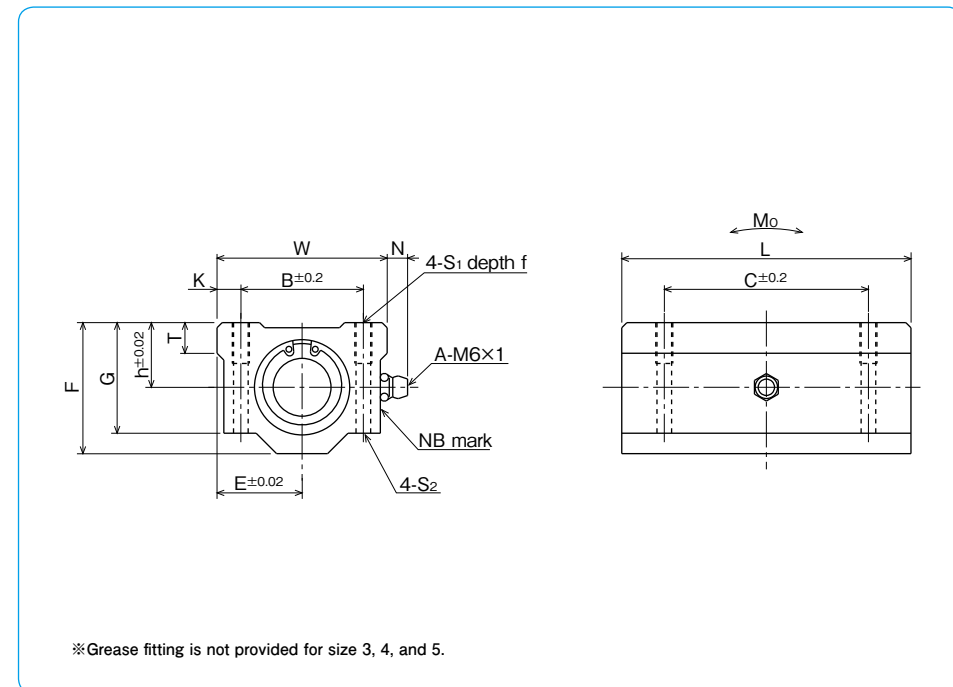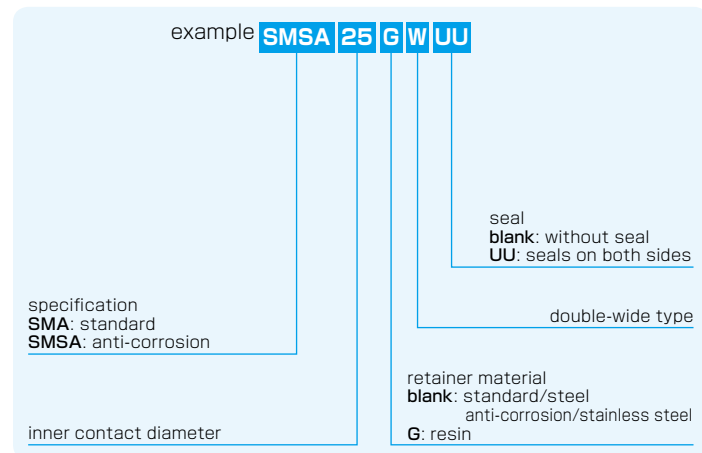

| part number | inner contact diameter | | major dimensions | | | | | | | |
|-------------|------------------------|-----------------|------------------|---------|---------|---------|---------|---------|---------|---------|
| | mm | tolerance μm | h mm | E mm | W mm | L mm | F mm | G mm | T mm | N mm |
| SMA 3GWUU | 3 | 0 - 8 | 5 | 8 | 16 | 23 | 10 | 8 | — | — |
| SMA 4GWUU | 4 | | 5.5 | 8.5 | 17 | 27 | 11 | 9 | — | — |
| SMA 5GWUU | 5 | | 7 | 11 | 22 | 33 | 14 | 11 | — | — |
| SMA 6GWUU | 6 | 0 - 9 | 9 | 15 | 30 | 48 | 18 | 15 | 6 | 7 |
| SMA 8GWUU | 8 | | 11 | 17 | 34 | 58 | 22 | 18 | 6 | 7 |
| SMA 10GWUU | 10 | | 13 | 20 | 40 | 68 | 26 | 21 | 8 | 7 |
| SMA 12GWUU | 12 | | 15 | 21 | 42 | 70 | 28 | 24 | 8 | 6.5 |
| SMA 13GWUU | 13 | | 15 | 22 | 44 | 75 | 30 | 24.5 | 8 | 6.5 |
| SMA 16GWUU | 16 | | 19 | 25 | 50 | 85 | 38.5 | 32.5 | 9 | 6 |
| SMA 20GWUU | 20 | 0 - 10 | 21 | 27 | 54 | 96 | 41 | 35 | 11 | 7 |
| SMA 25GWUU | 25 | | 26 | 38 | 76 | 130 | 51.5 | 42 | 12 | 4 |
| SMA 30GWUU | 30 | | 30 | 39 | 78 | 140 | 59.5 | 49 | 15 | 5 |
| SMA 35GWUU | 35 | 0 - 12 | 34 | 45 | 90 | 155 | 68 | 54 | 18 | 5.5 |
| SMA 40GWUU | 40 | | 40 | 51 | 102 | 175 | 78 | 62 | 20 | 5 |
| SMA 50GWUU | 50 | | 52 | 61 | 122 | 215 | 102 | 80 | 25 | 5 |
| SMA 60GWUU | 60 | 0/-15 | 58 | 66 | 132 | 240 | 114 | 94 | 30 | 5 |

| mounting dimensions | | | | | | basic load rating | | allowable static moment Mo N·m | ※ mass g | shaft diameter mm |
|---------------------|---------|---------|----------------|---------|----------------------|-------------------|-------------------|--------------------------------------|-------------|----------------------|
| B mm | C mm | K mm | S ₁ | f mm | S ₂ mm | dynamic C N | static Co N | | | |
| 11 | 16 | 2.5 | M2 | — | — | 108 | 206 | 0.49 | 10 | 3 |
| 12 | 20 | 2.5 | M3 | — | — | 137 | 255 | 0.72 | 13 | 4 |
| 16 | 25 | 3 | M3 | — | — | 265 | 412 | 1.54 | 27 | 5 |
| 20 | 36 | 5 | M4 | 8 | 3.4 | 323 | 530 | 2.18 | 63 | 6 |
| 24 | 42 | 5 | M4 | 8 | 3.4 | 431 | 784 | 4.31 | 102 | 8 |
| 28 | 46 | 6 | M5 | 12 | 4.3 | 588 | 1,100 | 7.24 | 180 | 10 |
| 30.5 | 50 | 5.75 | M5 | 12 | 4.3 | 813 | 1,570 | 10.9 | 205 | 12 |
| 33 | 50 | 5.5 | M5 | 12 | 4.3 | 813 | 1,570 | 11.6 | 240 | 13 |
| 36 | 60 | 7 | M5 | 12 | 4.3 | 1,230 | 2,350 | 19.7 | 400 | 16 |
| 40 | 70 | 7 | M6 | 12 | 5.2 | 1,400 | 2,740 | 26.8 | 570 | 20 |
| 54 | 100 | 11 | M8 | 18 | 7 | 1,560 | 3,140 | 43.4 | 1,200 | 25 |
| 58 | 110 | 10 | M8 | 18 | 7 | 2,490 | 5,490 | 82.8 | 1,480 | 30 |
| 70 | 120 | 10 | M8 | 18 | 7 | 2,650 | 6,270 | 110 | 2,200 | 35 |
| 80 | 140 | 11 | M10 | 25 | 8.7 | 3,430 | 8,040 | 147 | 3,200 | 40 |
| 100 | 160 | 11 | M10 | 25 | 8.7 | 6,080 | 15,900 | 397 | 6,700 | 50 |
| 108 | 180 | 12 | M12 | 25 | 10.7 | 7,550 | 20,000 | 530 | 8,560 | 60 |

* Mass of resin retainer type

1N≒0.102kgf 1N·m≒0.102kgf·m

AK TYPE

– Compact Block Type –



part number structure


example **AKS25G UU**

specification
AK: standard
AKS: anti-corrosion

seal
blank: without seal
UU: seals on both sides

retainer material
blank: standard/steel
 anti-corrosion/stainless steel
G: resin

inner contact diameter

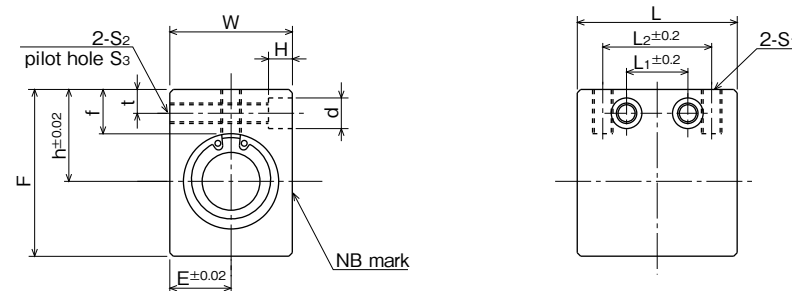

| part number | inner contact diameter | | outer dimensions | | | | | | | major dimensions | |
|-----------------|------------------------|-----------------|------------------|---------|---------|---------|---------|----------------------|----------------|------------------|--|
| | mm | tolerance μm | h mm | E mm | W mm | F mm | L mm | L ₂ mm | S ₁ | | |
| AK 6GUU | 6 | - 9 | 14 | 8 | 16 | 22 | 27 | 18 | M4 | | |
| AK 8GUU | 8 | | 16 | 10 | 20 | 26 | 32 | 20 | M5 | | |
| AK 10GUU | 10 | | 19 | 13 | 26 | 32 | 39 | 27 | M6 | | |
| AK 12GUU | 12 | | 20 | 14 | 28 | 34 | 40 | 27 | M6 | | |
| AK 13GUU | 13 | | 25 | 15 | 30 | 43 | 42 | 28 | M6 | | |
| AK 16GUU | 16 | | 27 | 18 | 36 | 49 | 47 | 32 | M6 | | |
| AK 20GUU | 20 | 0 | 31 | 21 | 42 | 54 | 52 | 36 | M8 | | |
| AK 25GUU | 25 | | 37 | 26 | 52 | 65 | 69 | 42 | M10 | | |
| AK 30GUU | 30 | | 40 | 29 | 58 | 71 | 74 | 44 | M10 | | |

| f mm | mounting dimensions | | | | | | basic load rating | | * mass g | shaft diameter mm |
|---------|----------------------|---------|----------------|----------------------|---------|---------|-------------------|-------------------------------|----------------|-------------------------|
| | L ₁ mm | t mm | S ₂ | S ₃ mm | d mm | H mm | dynamic C N | static C ₀ N | | |
| 8 | 9 | 5 | M4 | 3.5 | 6 | 5 | 206 | 265 | 21.5 | 6 |
| 8.5 | 10 | 5 | M4 | 3.5 | 6 | 5 | 274 | 392 | 40 | 8 |
| 9.5 | 15 | 6 | M5 | 4.5 | 8 | 6 | 372 | 549 | 80 | 10 |
| 9.5 | 15 | 6 | M5 | 4.5 | 8 | 6 | 510 | 784 | 90 | 12 |
| 13.5 | 16 | 7 | M6 | 5.2 | 9 | 7 | 510 | 784 | 132 | 13 |
| 13 | 18 | 7 | M6 | 5.2 | 9 | 7 | 774 | 1,180 | 204 | 16 |
| 15 | 18 | 8 | M8 | 7 | 11 | 8 | 882 | 1,370 | 272 | 20 |
| 17 | 22 | 9 | M10 | 8.9 | 14 | 10 | 980 | 1,570 | 574 | 25 |
| 17.5 | 22 | 9 | M10 | 8.9 | 14 | 10 | 1,570 | 2,740 | 710 | 30 |

* Mass of resin retainer type

1N≒0.102kgf

AK-W TYPE

– Double-Wide Compact Block Type –



part number structure

example **AKS 25 G W UU**


specification
 AK: standard
 AKS: anti-corrosion

inner contact diameter

retainer material
 blank: standard/steel
 anti-corrosion/stainless steel
 G: resin

seal
 blank: without seal
 UU: seals on both sides

double-wide type

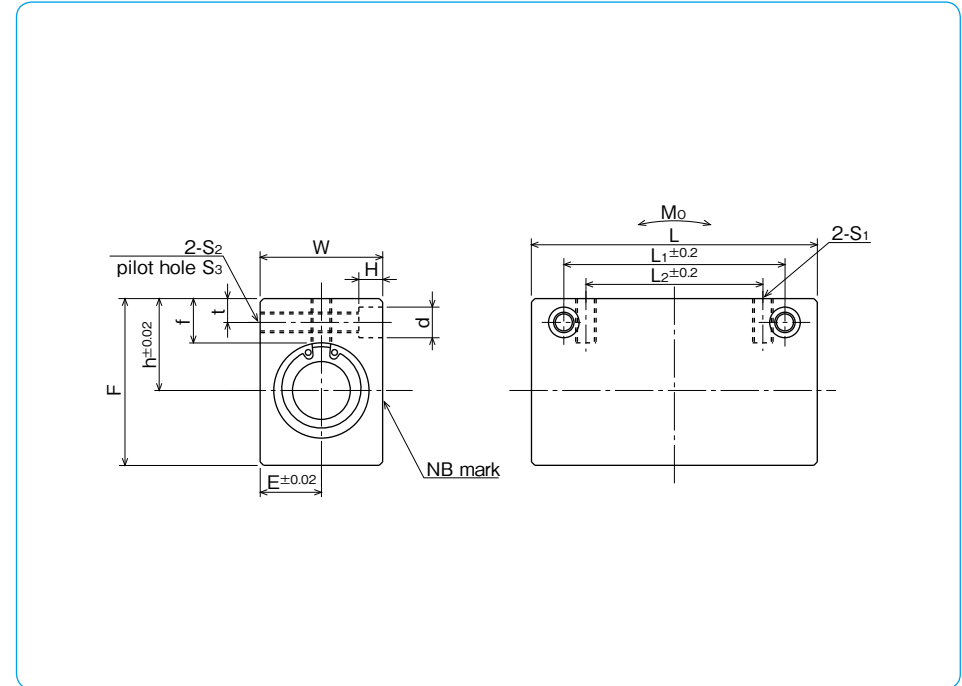

| part number | inner contact diameter | | outer dimensions | | | | | major dimensions | | |
|-------------|------------------------|-----------------|------------------|---------|---------|---------|---------|----------------------|----------------|--|
| | mm | tolerance μm | h mm | E mm | W mm | F mm | L mm | L ₂ mm | S ₁ | |
| AK 6GWUU | 6 | 0 - 9 | 14 | 8 | 16 | 22 | 46 | 20 | M4 | |
| AK 8GWUU | 8 | | 16 | 10 | 20 | 26 | 56 | 30 | M5 | |
| AK10GWUU | 10 | | 19 | 13 | 26 | 32 | 68 | 36 | M6 | |
| AK12GWUU | 12 | | 20 | 14 | 28 | 34 | 70 | 36 | M6 | |
| AK13GWUU | 13 | | 25 | 15 | 30 | 43 | 74 | 42 | M6 | |
| AK16GWUU | 16 | | 27 | 18 | 36 | 49 | 84 | 52 | M6 | |
| AK20GWUU | 20 | 0 -10 | 31 | 21 | 42 | 54 | 94 | 58 | M8 | |
| AK25GWUU | 25 | | 37 | 26 | 52 | 65 | 128 | 80 | M10 | |
| AK30GWUU | 30 | | 40 | 29 | 58 | 71 | 138 | 90 | M10 | |

| f mm | mounting dimensions | | | | | | basic load rating | | allowable static moment Mo N·m | ** mass g | shaft diameter mm |
|---------|----------------------|---------|----------------|----------------------|---------|---------|-------------------|-------------------|---|-----------------|-------------------------|
| | L ₁ mm | t mm | S ₂ | S ₃ mm | d mm | H mm | dynamic C N | static Co N | | | |
| 8 | 30 | 5 | M4 | 3.5 | 6 | 5 | 323 | 530 | 2.18 | 40 | 6 |
| 8.5 | 42 | 5 | M4 | 3.5 | 6 | 5 | 431 | 784 | 4.31 | 75 | 8 |
| 9.5 | 50 | 6 | M5 | 4.5 | 8 | 6 | 588 | 1,100 | 7.24 | 150 | 10 |
| 9.5 | 50 | 6 | M5 | 4.5 | 8 | 6 | 813 | 1,570 | 10.9 | 168 | 12 |
| 13.5 | 55 | 7 | M6 | 5.2 | 9 | 7 | 813 | 1,570 | 11.6 | 248 | 13 |
| 13 | 65 | 7 | M6 | 5.2 | 9 | 7 | 1,230 | 2,350 | 19.7 | 383 | 16 |
| 15 | 70 | 8 | M8 | 7 | 11 | 8 | 1,400 | 2,740 | 26.8 | 520 | 20 |
| 17 | 100 | 9 | M10 | 8.9 | 14 | 10 | 1,560 | 3,140 | 43.4 | 1,120 | 25 |
| 17.5 | 110 | 9 | M10 | 8.9 | 14 | 10 | 2,490 | 5,490 | 82.8 | 1,384 | 30 |

* Mass of resin retainer type

1N ≙ 0.102kgf 1N · m ≙ 0.102kgf · m

SMP TYPE

– Pillow Block Type –



part number structure


example **SMP 25 G UU**

SMP type

inner contact diameter

seal
blank: without seal
UU: seals on both sides

retainer material
blank: steel
G: resin

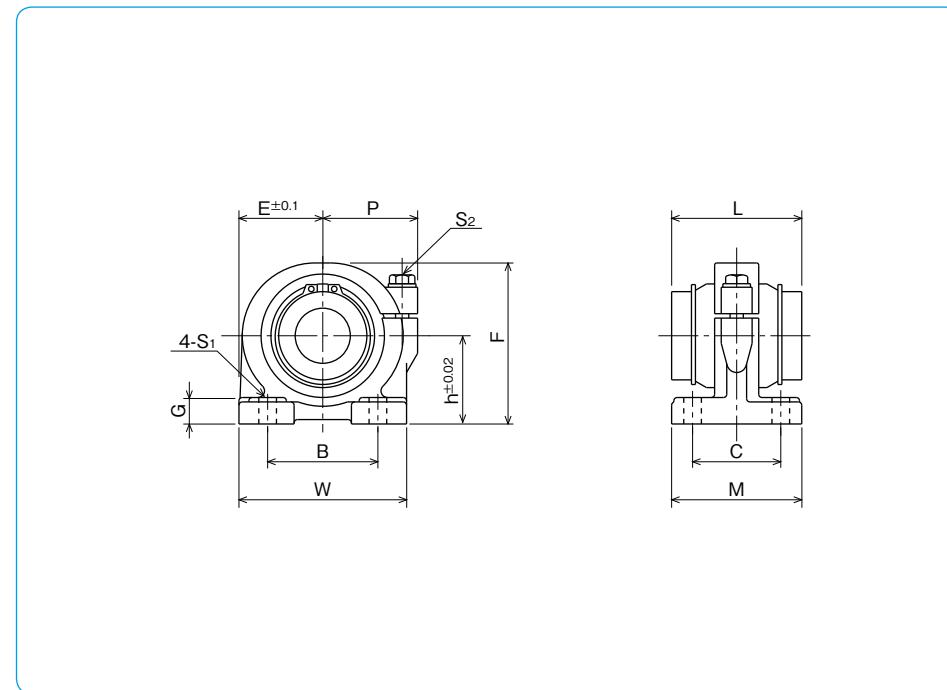

| part number | inner contact diameter | | outer dimensions | | | | | | | major dimensions | |
|-----------------|------------------------|-----------|------------------|------|------|------|------|------|------|------------------|--|
| | mm | tolerance | h mm | E mm | W mm | L mm | F mm | G mm | M mm | | |
| | | μm | | | | | | | | | |
| SMP13GUU | 13 | 0 | 25 | 25 | 50 | 32 | 46 | 8 | 36 | | |
| SMP16GUU | 16 | - 9 | 29 | 27.5 | 55 | 37 | 53 | 10 | 40 | | |
| SMP20GUU | 20 | 0 | 34 | 32.5 | 65 | 42 | 62 | 12 | 48 | | |
| SMP25GUU | 25 | | -10 | 40 | 38 | 76 | 59 | 73 | 12 | 59 | |
| SMP30GUU | 30 | 0 | 45 | 42.5 | 85 | 64 | 84 | 15 | 69 | | |
| SMP35GUU | 35 | | -12 | 50 | 49 | 98 | 70 | 94 | 15 | 76 | |
| SMP40GUU | 40 | 0 | 60 | 62 | 124 | 80 | 112 | 18 | 86 | | |
| SMP50GUU | 50 | | -15 | 70 | 72 | 144 | 100 | 134 | 20 | 105 | |
| SMP60GUU | 60 | 0/-15 | 82 | 84.5 | 169 | 110 | 154 | 23 | 115 | | |


| P mm | mounting dimensions | | | adjustment screw size S ₂ | basic load rating | | * mass g | shaft diameter mm |
|------|---------------------|------|-------------------|--------------------------------------|-------------------|-------------|----------|-------------------|
| | B mm | C mm | S ₁ mm | | dynamic C N | static Co N | | |
| 30 | 30 | 26 | 7 (M5) | M5 | 510 | 784 | 270 | 13 |
| 32 | 35 | 29 | 7 (M5) | M5 | 774 | 1,180 | 380 | 16 |
| 37 | 40 | 35 | 8 (M6) | M6 | 882 | 1,370 | 680 | 20 |
| 43 | 50 | 40 | 8 (M6) | M6 | 980 | 1,570 | 1,000 | 25 |
| 49 | 58 | 46 | 10 (M8) | M8 | 1,570 | 2,740 | 1,400 | 30 |
| 58 | 62 | 53 | 12 (M10) | M10 | 1,670 | 3,140 | 2,100 | 35 |
| 68 | 76 | 64 | 12 (M10) | M10 | 2,160 | 4,020 | 3,700 | 40 |
| 80 | 100 | 70 | 14 (M12) | M12 | 3,820 | 7,940 | 6,100 | 50 |
| 88 | 115 | 80 | 14 (M12) | M12 | 4,700 | 10,000 | 8,700 | 60 |

* Mass of resin retainer type

1N≒0.102kgf

SMJ TYPE

– Clearance Adjustable Type –

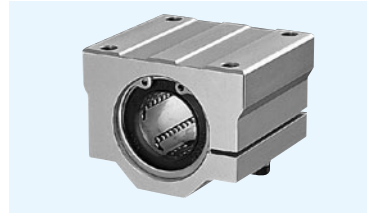


part number structure

example **SMSJ 25 G UU**

| | | | |
|--|-------------------------------------|--|--|
| specification SMJ : standard SMSJ : anti-corrosion | inner contact diameter 25 | retainer material blank : standard/steel* anti-corrosion/stainless steel* G : resin | seal blank : without seal UU : seals on both sides |
|--|-------------------------------------|--|--|

*Size 10 is provided with resin retainer type only.

| part number | inner contact diameter mm | major dimensions | | | | | | | |
|-------------|------------------------------|------------------|---------|------------------|---------|---------|---------|---------|---------|
| | | h mm | E mm | outer dimensions | | | G mm | T mm | B mm |
| | | | | W mm | L mm | F mm | | | |
| SMJ10GUU | 10 | 13 | 20 | 40 | 35 | 26 | 21 | 8 | 28 |
| SMJ12GUU | 12 | 15 | 21 | 42 | 36 | 28 | 24 | 8 | 30.5 |
| SMJ13GUU | 13 | 15 | 22 | 44 | 39 | 30 | 24.5 | 8 | 33 |
| SMJ16GUU | 16 | 19 | 25 | 50 | 44 | 38.5 | 32.5 | 9 | 36 |
| SMJ20GUU | 20 | 21 | 27 | 54 | 50 | 41 | 35 | 11 | 40 |
| SMJ25GUU | 25 | 26 | 38 | 76 | 67 | 51.5 | 42 | 12 | 54 |
| SMJ30GUU | 30 | 30 | 39 | 78 | 72 | 59.5 | 49 | 15 | 58 |
| SMJ35GUU | 35 | 34 | 45 | 90 | 80 | 68 | 54 | 18 | 70 |
| SMJ40GUU | 40 | 40 | 51 | 102 | 90 | 78 | 62 | 20 | 80 |
| SMJ50GUU | 50 | 52 | 61 | 122 | 110 | 102 | 80 | 25 | 100 |
| SMJ60GUU | 60 | 58 | 66 | 132 | 122 | 114 | 94 | 30 | 108 |

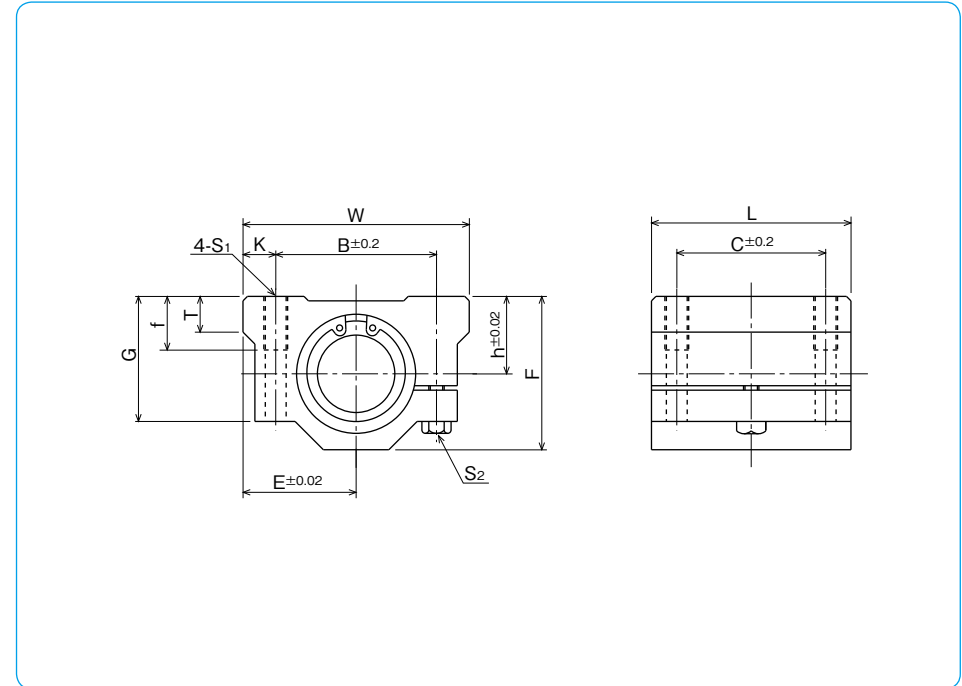

| mounting dimensions | | | | adjustment screw size S ₂ | basic load rating | | * mass g | shaft diameter mm |
|---------------------|---------|----------------|---------|---|-------------------|-------------------------------|-------------|----------------------|
| C mm | K mm | S ₁ | f mm | | dynamic C N | static C ₀ N | | |
| 21 | 6 | M5 | 12 | M4 | 372 | 549 | 92 | 10 |
| 26 | 5.75 | M5 | 12 | M4 | 510 | 784 | 102 | 12 |
| 26 | 5.5 | M5 | 12 | M4 | 510 | 784 | 120 | 13 |
| 34 | 7 | M5 | 12 | M4 | 774 | 1,180 | 200 | 16 |
| 40 | 7 | M6 | 12 | M5 | 882 | 1,370 | 255 | 20 |
| 50 | 11 | M8 | 18 | M6 | 980 | 1,570 | 600 | 25 |
| 58 | 10 | M8 | 18 | M6 | 1,570 | 2,740 | 735 | 30 |
| 60 | 10 | M8 | 18 | M6 | 1,670 | 3,140 | 1,100 | 35 |
| 60 | 11 | M10 | 25 | M8 | 2,160 | 4,020 | 1,590 | 40 |
| 80 | 11 | M10 | 25 | M8 | 3,820 | 7,940 | 3,340 | 50 |
| 90 | 12 | M12 | 25 | M10 | 4,700 | 10,000 | 4,270 | 60 |

* Mass of resin retainer type

1N≒0.102kgf

SME TYPE

– Open Block Type –




part number structure

example **SMSE 25 G UU**

| | | | |
|--|------------------------|--|--|
| specification SME: standard SMSE: anti-corrosion | inner contact diameter | retainer material blank: standard/steel* anti-corrosion/stainless steel* G: resin | seal blank: without seal UU: seals on both sides |
|--|------------------------|--|--|

*Size 10 is provided with resin retainer type only.

| part number | inner contact diameter mm | major dimensions | | | | | | | |
|-------------|------------------------------|------------------|---------|---------|------------------|---------|---------|----------------------|-----|
| | | h mm | E mm | W mm | outer dimensions | | | | |
| | | | | | L mm | F mm | T mm | h ₁ mm | θ |
| SME10GUU | 10 | 15 | 18 | 36 | 32 | 24 | 7 | 6 | 80° |
| SME13GUU | 13 | 17 | 20 | 40 | 39 | 28 | 8 | 8.5 | 80° |
| SME16GUU | 16 | 20 | 22.5 | 45 | 45 | 33 | 9 | 10 | 80° |
| SME20GUU | 20 | 23 | 24 | 48 | 50 | 39 | 11 | 10 | 60° |
| SME25GUU | 25 | 27 | 30 | 60 | 65 | 47 | 14 | 11.5 | 50° |
| SME30GUU | 30 | 33 | 35 | 70 | 70 | 56 | 15 | 14 | 50° |
| SME35GUU | 35 | 37 | 40 | 80 | 80 | 63 | 18 | 16 | 50° |
| SME40GUU | 40 | 42 | 45 | 90 | 90 | 72 | 20 | 19 | 50° |
| SME50GUU | 50 | 53 | 60 | 120 | 110 | 92 | 25 | 23 | 50° |

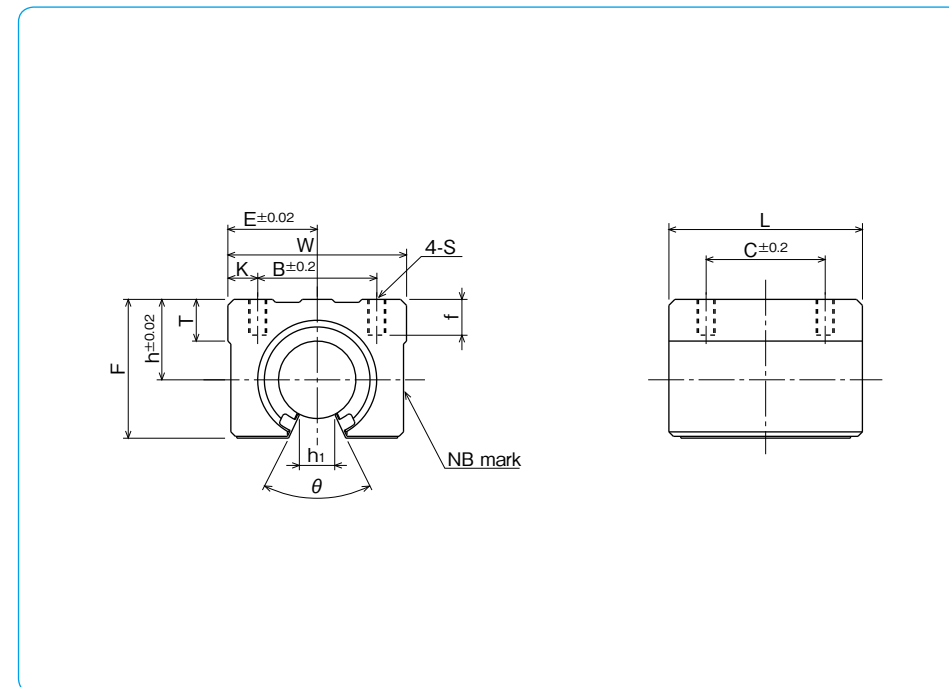


| mounting dimensions | | | | | basic load rating | | * mass g | shaft diameter mm |
|---------------------|---------|---------|-----|---------|-------------------|-------------------|-------------|----------------------|
| B mm | C mm | K mm | S | f mm | dynamic C N | static Co N | | |
| 25 | 20 | 5.5 | M5 | 10 | 372 | 549 | 65 | 10 |
| 28 | 26 | 6 | M5 | 10 | 510 | 784 | 100 | 13 |
| 32 | 30 | 6.5 | M5 | 12 | 774 | 1,180 | 150 | 16 |
| 35 | 35 | 6.5 | M6 | 12 | 882 | 1,370 | 200 | 20 |
| 40 | 40 | 10 | M6 | 12 | 980 | 1,570 | 450 | 25 |
| 50 | 50 | 10 | M8 | 18 | 1,570 | 2,740 | 630 | 30 |
| 55 | 55 | 12.5 | M8 | 18 | 1,670 | 3,140 | 925 | 35 |
| 65 | 65 | 12.5 | M10 | 20 | 2,160 | 4,020 | 1,330 | 40 |
| 94 | 80 | 13 | M10 | 20 | 3,820 | 7,940 | 3,000 | 50 |

* Mass of resin retainer type


1N≒0.102kgf

SME-W TYPE

– Double-wide Open Block Type –

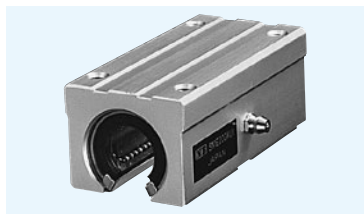


part number structure

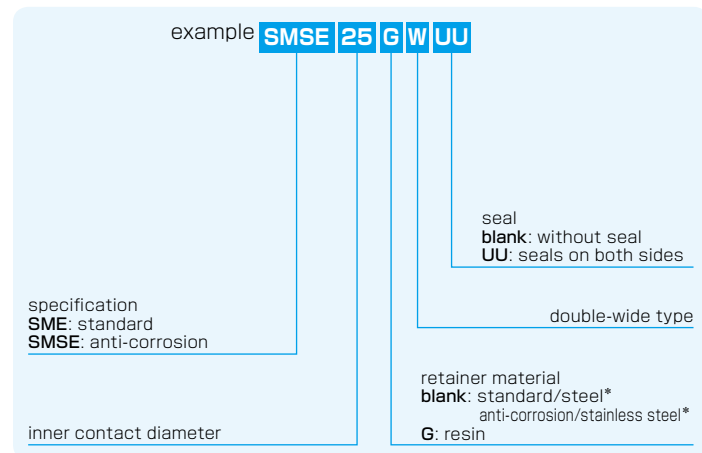

*Size 10 is provided with resin retainer type only.

| part number | inner contact diameter mm | major dimensions | | | | | | | | |
|------------------|------------------------------|------------------|---------|---------|------------------|---------|---------|---------|----------------------|-----|
| | | h mm | E mm | W mm | outer dimensions | | | N mm | h ₁ mm | θ |
| | | | | | L mm | F mm | T mm | | | |
| SME10GWUU | 10 | 15 | 18 | 36 | 65 | 24 | 7 | 7.5 | 6 | 80° |
| SME13GWUU | 13 | 17 | 20 | 40 | 75 | 28 | 8 | 7.5 | 8.5 | 80° |
| SME16GWUU | 16 | 20 | 22.5 | 45 | 85 | 33 | 9 | 7.5 | 10 | 80° |
| SME20GWUU | 20 | 23 | 24 | 48 | 95 | 39 | 11 | 7.5 | 10 | 60° |
| SME25GWUU | 25 | 27 | 30 | 60 | 130 | 47 | 14 | 7.5 | 11.5 | 50° |
| SME30GWUU | 30 | 33 | 35 | 70 | 140 | 56 | 15 | 7.5 | 14 | 50° |

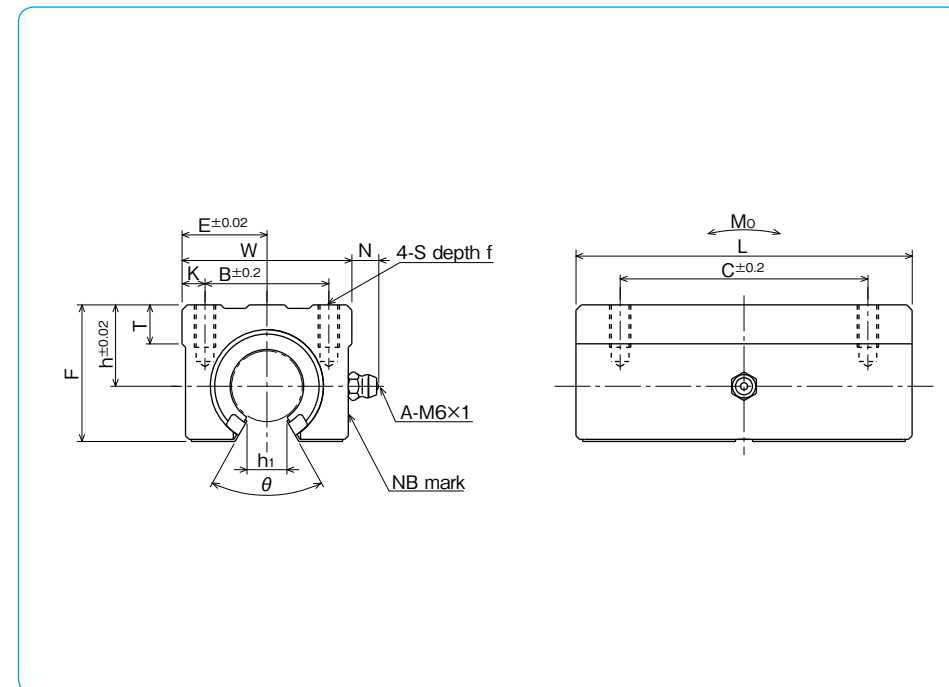

| B mm | mounting dimensions | | | | basic load rating | | allowable static moment Mo N · m | ** mass g | shaft diameter mm |
|---------|---------------------|---------|----|---------|-------------------|-------------------|--|--------------|----------------------|
| | C mm | K mm | S | f mm | dynamic C N | static Co N | | | |
| 25 | 40 | 5.5 | M5 | 10 | 588 | 1,100 | 4.63 | 140 | 10 |
| 28 | 50 | 6 | M5 | 10 | 813 | 1,570 | 7.42 | 200 | 13 |
| 32 | 60 | 6.5 | M5 | 12 | 1,230 | 2,350 | 12.6 | 300 | 16 |
| 35 | 70 | 6.5 | M6 | 12 | 1,400 | 2,740 | 14.5 | 400 | 20 |
| 40 | 90 | 10 | M6 | 12 | 1,560 | 3,140 | 24.7 | 900 | 25 |
| 50 | 100 | 10 | M8 | 18 | 2,490 | 5,490 | 47.2 | 1,260 | 30 |


* Mass of resin retainer type

1N ≅ 0.102kgf 1N · m ≅ 0.102kgf · m

SLIDE BUSH

SMD TYPE


— Open Block with Clearance Adjustable Type —

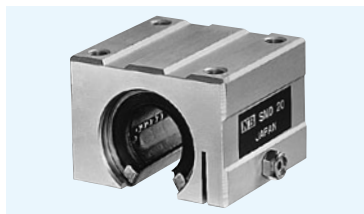

part number structure

example **SMSD 25 G UU**

| | | | |
|--|-------------------------------------|--|--|
| specification SMD : standard SMSD : anti-corrosion | inner contact diameter 25 | retainer material G : resin blank : standard/steel anti-corrosion/stainless steel | seal blank : without seal UU : seals on both sides |
|--|-------------------------------------|--|--|

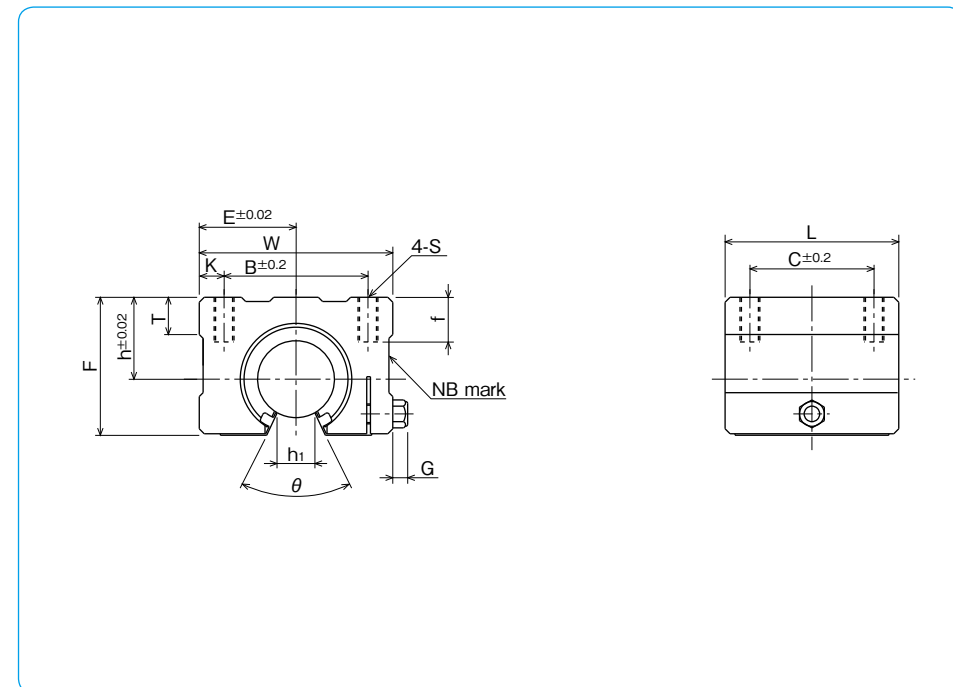

| part number | inner contact diameter mm | h mm | outer dimensions | | | | major dimensions | | | |
|-----------------|------------------------------|---------|------------------|---------|---------|---------|------------------|---------|----------------------|-----|
| | | | E mm | W mm | L mm | F mm | T mm | G mm | h ₁ mm | θ |
| SMD16GUU | 16 | 20 | 25 | 50 | 45 | 33 | 9 | 6 | 10 | 80° |
| SMD20GUU | 20 | 23 | 27 | 54 | 50 | 39 | 11 | 7 | 10 | 60° |
| SMD25GUU | 25 | 27 | 38 | 76 | 65 | 47 | 14 | 7 | 11.5 | 50° |
| SMD30GUU | 30 | 33 | 39 | 78 | 70 | 56 | 15 | 7 | 14 | 50° |


| mounting dimensions | | | | | basic load rating | | * mass g | shaft diameter mm |
|---------------------|---------|---------|----|---------|-------------------|-------------------|-------------|----------------------|
| B mm | C mm | K mm | S | f mm | dynamic C N | static Co N | | |
| 36 | 30 | 7 | M5 | 12 | 774 | 1,180 | 170 | 16 |
| 40 | 35 | 7 | M6 | 12 | 882 | 1,370 | 240 | 20 |
| 54 | 40 | 11 | M6 | 12 | 980 | 1,570 | 580 | 25 |
| 58 | 50 | 10 | M8 | 18 | 1,570 | 2,740 | 720 | 30 |

* Mass of resin retainer type


1N≐0.102kgf

CE TYPE

– Non-Clearance Adjustable Type –

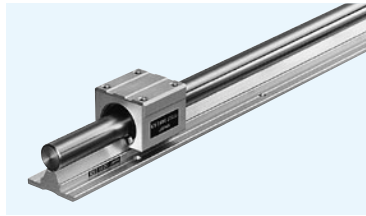


part number structure

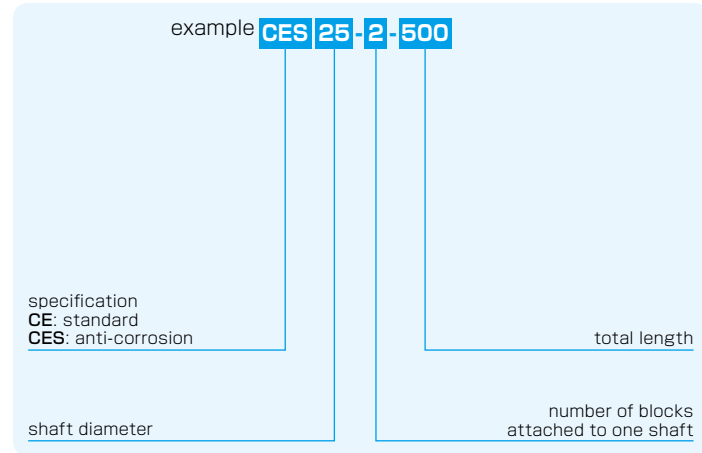

※Inside bush is a resin retainer type with seals.

| part number | | shaft diameter mm | assembly dimension tolerance g6 μm | block dimension | | | | | | | | | | major dimensions | | | | | | |
|-------------|----------------|----------------------|---|-----------------|----|----------------|----------------|----|----------------|----------------|----|-----|----------------|------------------|----|----------------|----------------|----------------|-----|----------------|
| standard | anti-corrosion | | | H | h | W ₁ | W ₂ | F | L ₁ | B ₁ | C | K | T ₁ | S ₁ | f | W ₃ | B ₂ | T ₂ | P | S ₂ |
| CE16 | CES16 | 16 | -6 -17 | 45 | 25 | 2.5 | 45 | 33 | 45 | 32 | 30 | 6.5 | 9 | M5 | 12 | 40 | 30 | 5 | 150 | 5.5 |
| CE20 | CES20 | 20 | -7 -20 | 50 | 27 | 1.5 | 48 | 39 | 50 | 35 | 35 | 6.5 | 11 | M6 | 12 | 45 | 30 | 5 | 150 | 5.5 |
| CE25 | CES25 | 25 | | 60 | 33 | 2.5 | 60 | 47 | 65 | 40 | 40 | 10 | 14 | M6 | 12 | 55 | 35 | 6 | 200 | 6.5 |
| CE30 | CES30 | 30 | | 70 | 37 | 5 | 70 | 56 | 70 | 50 | 50 | 10 | 15 | M8 | 18 | 60 | 40 | 7 | 200 | 6.5 |

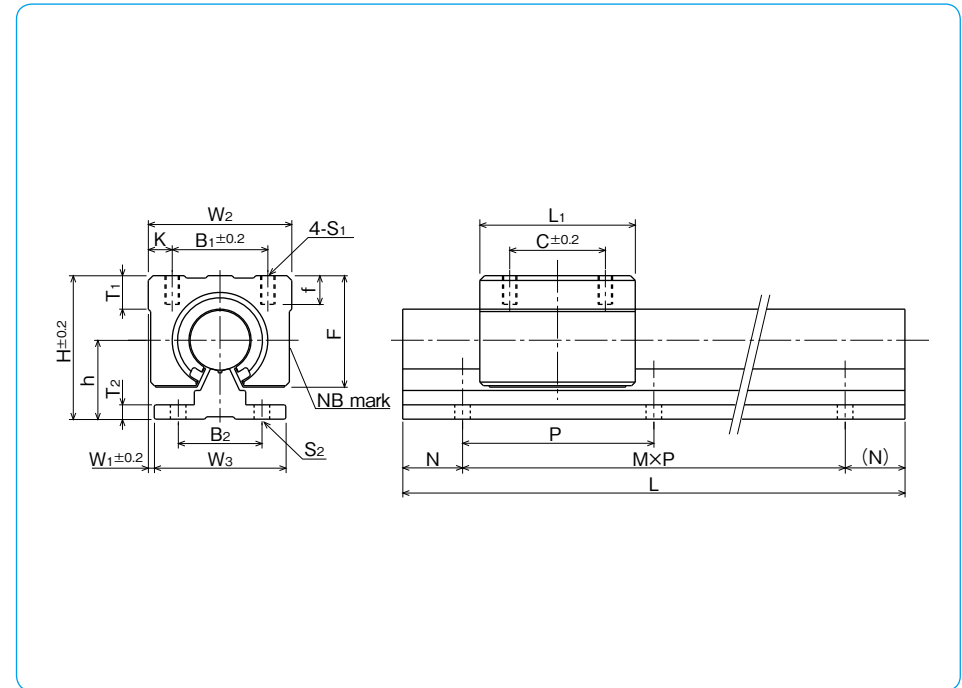


| support rail dimensions L (M,N) mm | | | | basic load rating dynamic C N | static Co N | block mass g | rail mass kg/m | size |
|--|------------|-------------|---------------|--|-------------------|--------------------|----------------------|-----------|
| 300 (1,75) | 500 (3,25) | 800 (5,25) | 1,000 (6,50) | 774 | 1,180 | 150 | 2.58 | 16 |
| 300 (1,75) | 500 (3,25) | 800 (5,25) | 1,000 (6,50) | 882 | 1,370 | 200 | 3.49 | 20 |
| 300 (1,50) | 500 (2,50) | 800 (3,100) | 1,000 (4,100) | 980 | 1,570 | 450 | 5.31 | 25 |
| 300 (1,50) | 500 (2,50) | 800 (3,100) | 1,000 (4,100) | 1,570 | 2,740 | 630 | 7.39 | 30 |


1N≒0.102kgf

CD TYPE

– Clearance Adjustable Type –

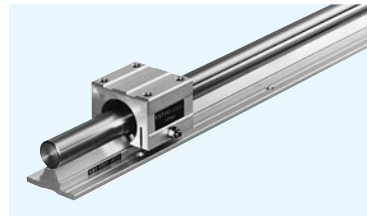


part number structure

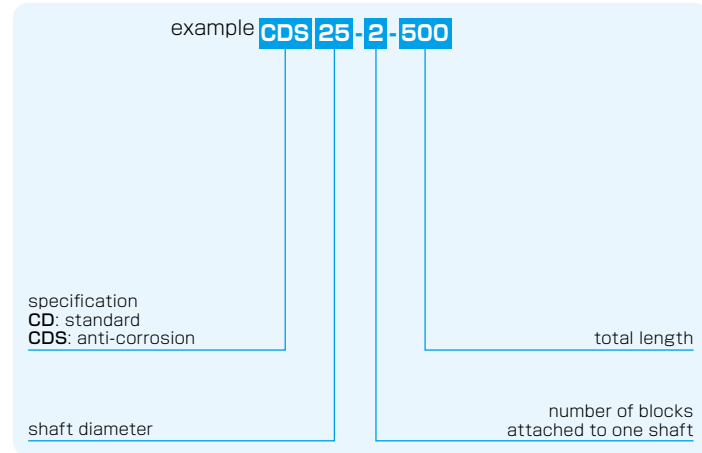

※Inside bush is a resin retainer type with seals.

| part number | | shaft diameter mm | assembly dimension | block dimension | | | | | | | | | | | major dimensions | | | | | | |
|-------------|----------------|----------------------|--------------------|-----------------------|----|------|----------------|----------------|----|----------------|----------------|----|----|----------------|------------------|---|----|----------------|----------------|----------------|-----|
| standard | anti-corrosion | | | tolerance g6 μm | H | h | W ₁ | W ₂ | F | L ₁ | B ₁ | C | K | T ₁ | S ₁ | f | G | W ₃ | B ₂ | T ₂ | P |
| CD16 | CDS16 | 16 | -6 -17 | 45 | 25 | 5 | 50 | 33 | 45 | 36 | 30 | 7 | 9 | M5 | 12 | 6 | 40 | 30 | 5 | 150 | 5.5 |
| CD20 | CDS20 | 20 | | 50 | 27 | 4.5 | 54 | 39 | 50 | 40 | 35 | 7 | 11 | M6 | 12 | 7 | 45 | 30 | 5 | 150 | 5.5 |
| CD25 | CDS25 | 25 | -7 -20 | 60 | 33 | 10.5 | 76 | 47 | 65 | 54 | 40 | 11 | 12 | M6 | 12 | 7 | 55 | 35 | 6 | 200 | 6.5 |
| CD30 | CDS30 | 30 | | 70 | 37 | 9 | 78 | 56 | 70 | 58 | 50 | 10 | 15 | M8 | 18 | 7 | 60 | 40 | 7 | 200 | 6.5 |

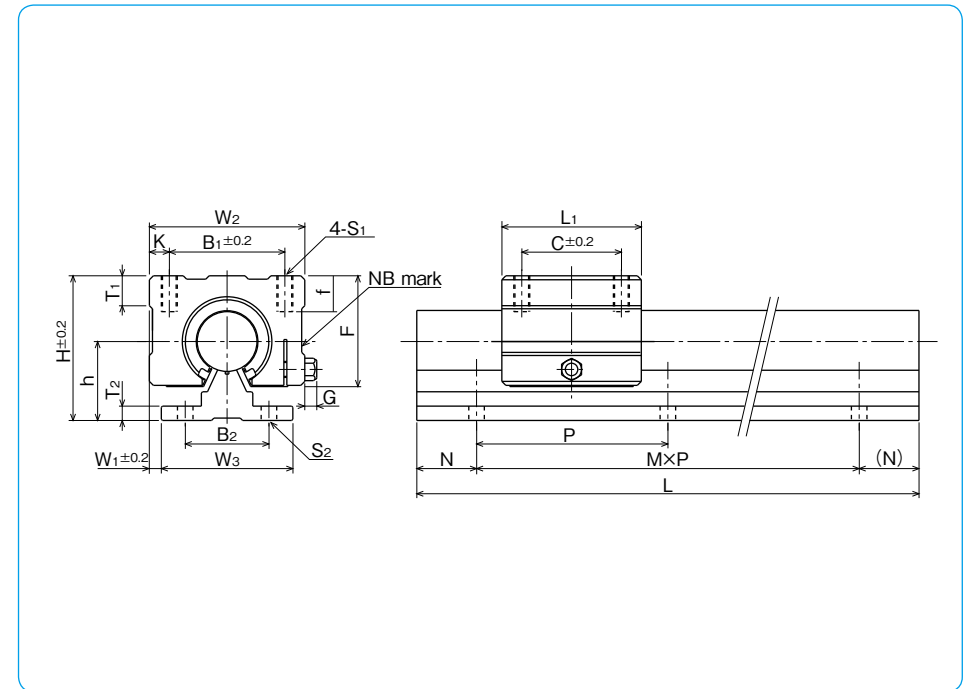

| support rail dimensions L (M,N) mm | | | | basic load rating dynamic C N | static Co N | block mass g | rail mass kg/m | size |
|--|------------|-------------|---------------|--|-------------------|--------------------|----------------------|-----------|
| 300 (1,75) | 500 (3,25) | 800 (5,25) | 1,000 (6,50) | 774 | 1,180 | 170 | 2.58 | 16 |
| 300 (1,75) | 500 (3,25) | 800 (5,25) | 1,000 (6,50) | 882 | 1,370 | 240 | 3.49 | 20 |
| 300 (1,50) | 500 (2,50) | 800 (3,100) | 1,000 (4,100) | 980 | 1,570 | 580 | 5.31 | 25 |
| 300 (1,50) | 500 (2,50) | 800 (3,100) | 1,000 (4,100) | 1,570 | 2,740 | 720 | 7.39 | 30 |

1N≒0.102kgf

SWA TYPE (Inch Standard)

– Block Type –



part number structure

example **SWA 20 G R UU**


specification
SWA: standard
SWSA: anti-corrosion

size

retainer material
blank: standard/steel
 anti-corrosion/stainless steel
G: resin

seal
blank: without seal
UU: seals on both sides

self-aligning
 (SWA-resin retainer only)

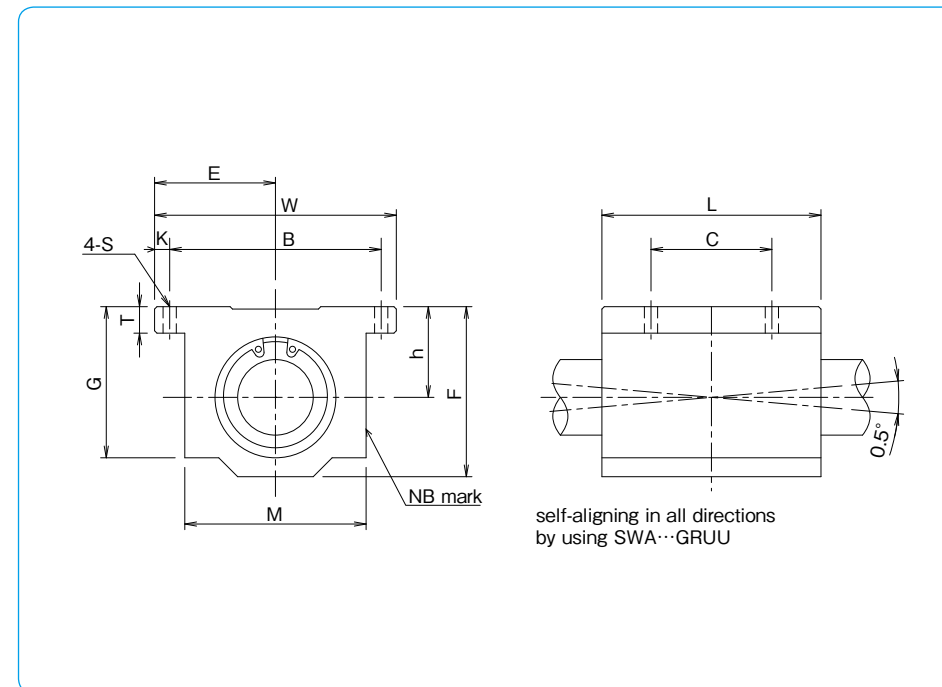

| part number | inner contact diameter | | major dimensions | | | | |
|------------------|------------------------|------------------------|---------------------------------|---------------------------------|-------------------|-------------------|-------------------|
| | tolerance | | outer dimensions | | | | |
| | inch/(mm) | inch/(μm) | h ±.001/(±0.02) inch/(mm) | E ±.001/(±0.02) inch/(mm) | W inch/(mm) | L inch/(mm) | F inch/(mm) |
| SWA 4GUU | .2500 (6.350) | 0 -0.00040 (-9) | .4370 (11.100) | .8125 (20.638) | 1.625 (41.28) | 1.188 (30.16) | .813 (20.64) |
| SWA 6GUU | .3750 (9.525) | | .5000 (12.700) | .8750 (22.225) | 1.750 (44.45) | 1.313 (33.34) | .938 (23.82) |
| SWA 8GUU | .5000 (12.700) | | .6870 (17.450) | 1.0000 (25.400) | 2.000 (50.80) | 1.688 (42.86) | 1.250 (31.75) |
| SWA 10GUU | .6250 (15.875) | 0 -0.00040 (-10) | .8750 (22.225) | 1.2500 (31.750) | 2.500 (63.50) | 1.938 (49.21) | 1.625 (41.28) |
| SWA 12GUU | .7500 (19.050) | | .9370 (23.800) | 1.3750 (34.925) | 2.750 (69.85) | 2.063 (52.39) | 1.750 (44.45) |
| SWA 16GUU | 1.0000 (25.400) | | 1.1870 (30.150) | 1.6250 (41.275) | 3.250 (82.55) | 2.813 (71.44) | 2.188 (55.56) |
| SWA 20GUU | 1.2500 (31.750) | 0 -0.00050 (-12) | 1.5000 (38.100) | 2.0000 (50.800) | 4.000 (101.60) | 3.625 (92.08) | 2.813 (71.44) |
| SWA 24GUU | 1.5000 (38.100) | | 1.7500 (44.450) | 2.3750 (60.325) | 4.750 (120.65) | 4.000 (101.60) | 3.250 (82.55) |
| SWA 32GUU | 2.0000 (50.800) | | 2.1250 (53.975) | 3.0000 (76.200) | 6.000 (152.40) | 5.000 (127.00) | 4.063 (103.19) |


Product of NB Corporation of America

| T | G | M | mounting dimensions | | | | S | basic load rating | | mass |
|-----------------|------------------|-------------------|--------------------------|--------------------------|----------------|-----------------|-------|-------------------|-------|------|
| | | | B | C | K | C | | Co | | |
| | | | ±.01/(±0.2) inch/(mm) | ±.01/(±0.2) inch/(mm) | inch/(mm) | inch/(mm) | | N | N | |
| .188 (4.76) | .750 (19.05) | 1.000 (25.40) | 1.312 (33.33) | .750 (19.05) | .156 (3.96) | .156 (3.96) | 206 | 265 | 45 | |
| .188 (4.76) | .875 (22.23) | 1.125 (28.58) | 1.437 (36.50) | .875 (22.23) | .156 (3.96) | .156 (3.96) | 225 | 314 | 62 | |
| .250 (6.35) | 1.125 (28.58) | 1.375 (34.93) | 1.688 (42.88) | 1.000 (25.40) | .156 (3.96) | .156 (3.96) | 510 | 784 | 130 | |
| .281 (7.14) | 1.437 (36.50) | 1.750 (44.45) | 2.125 (53.98) | 1.125 (28.58) | .188 (4.76) | .188 (4.76) | 774 | 1,180 | 240 | |
| .313 (7.94) | 1.563 (39.69) | 1.875 (47.63) | 2.375 (60.33) | 1.250 (31.75) | .188 (4.76) | .188 (4.76) | 862 | 1,370 | 290 | |
| .375 (9.53) | 1.938 (49.21) | 2.375 (60.33) | 2.875 (73.03) | 1.750 (44.45) | .188 (4.76) | .219 (5.56) | 980 | 1,570 | 615 | |
| .438 (11.11) | 2.500 (63.50) | 3.000 (76.20) | 3.500 (88.90) | 2.000 (50.80) | .250 (6.35) | .219 (5.56) | 1,570 | 2,740 | 1,300 | |
| .500 (12.70) | 2.875 (73.03) | 3.500 (88.90) | 4.125 (104.78) | 2.500 (63.50) | .313 (7.94) | .281 (7.14) | 2,160 | 4,020 | 1,900 | |
| .625 (15.88) | 3.625 (92.08) | 4.500 (114.30) | 5.250 (133.35) | 3.250 (82.55) | .375 (9.53) | .413 (10.50) | 3,820 | 7,940 | 3,600 | |

SI UNIT 1N≒0.225lbf
 1kg≒2.205lbs

SWJ TYPE (Inch Standard)


– Clearance Adjustable Block Type –

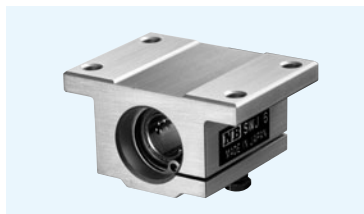

part number structure

example **SWJ 20 G R UU**

- specification**
SWJ: standard
SWSJ: anti-corrosion
- size**
- retainer material**
blank: standard/steel
anti-corrosion/stainless steel
G: resin
- seal**
blank: without seal
UU: seals on both sides
- self-aligning**
 (SWJ-resin retainer only)

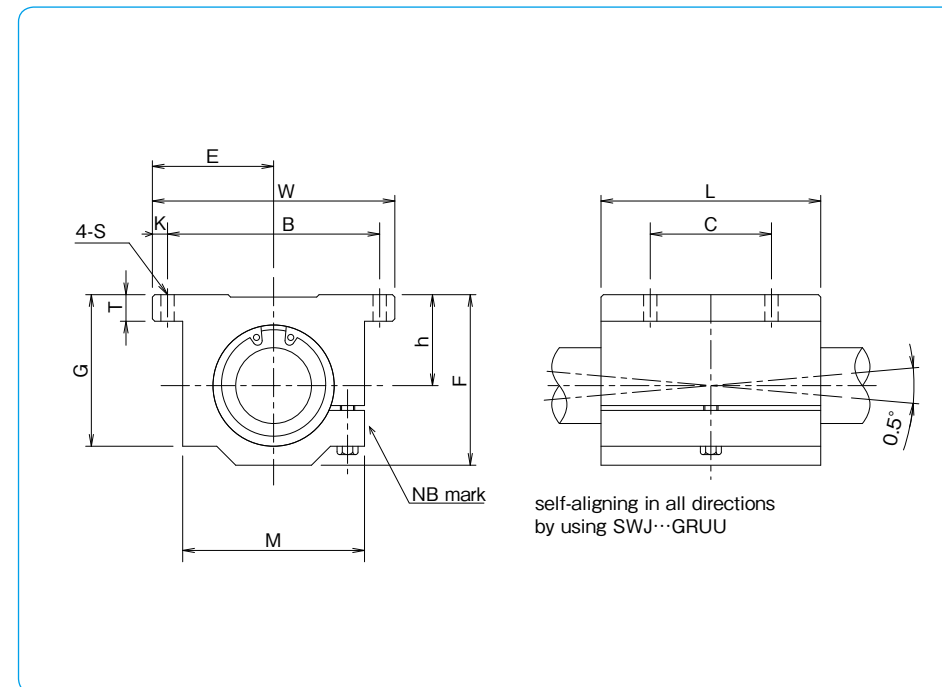

| part number | major dimensions | | | | | |
|------------------|------------------------------------|------------------------------------|--------------------|-------------------|-------------------|-------------------|
| | inner contact diameter | outer dimensions | | | | |
| | | h | E | W | L | F |
| inch/(mm) | $\pm .001/(\pm 0.02)$ inch/(mm) | $\pm .001/(\pm 0.02)$ inch/(mm) | inch/(mm) | inch/(mm) | inch/(mm) | |
| SWJ 4GUU | .2500 (6.350) | .4370 (11.100) | .8125 (20.638) | 1.625 (41.28) | 1.188 (30.16) | .813 (20.64) |
| SWJ 6GUU | .3750 (9.525) | .5000 (12.700) | .8750 (22.225) | 1.750 (44.45) | 1.313 (33.34) | .938 (23.82) |
| SWJ 8GUU | .5000 (12.700) | .6870 (17.450) | 1.0000 (25.400) | 2.000 (50.80) | 1.688 (42.86) | 1.250 (31.75) |
| SWJ 10GUU | .6250 (15.875) | .8750 (22.225) | 1.2500 (31.750) | 2.500 (63.50) | 1.938 (49.21) | 1.625 (41.28) |
| SWJ 12GUU | .7500 (19.050) | .9370 (23.800) | 1.3750 (34.925) | 2.750 (69.85) | 2.063 (52.39) | 1.750 (44.45) |
| SWJ 16GUU | 1.0000 (25.400) | 1.1870 (30.150) | 1.6250 (41.275) | 3.250 (82.55) | 2.813 (71.44) | 2.188 (55.56) |
| SWJ 20GUU | 1.2500 (31.750) | 1.5000 (38.100) | 2.0000 (50.800) | 4.000 (101.60) | 3.625 (92.08) | 2.813 (71.44) |
| SWJ 24GUU | 1.5000 (38.100) | 1.7500 (44.450) | 2.3750 (60.325) | 4.750 (120.65) | 4.000 (101.60) | 3.250 (82.55) |
| SWJ 32GUU | 2.0000 (50.800) | 2.1250 (53.975) | 3.0000 (76.200) | 6.000 (152.40) | 5.000 (127.00) | 4.063 (103.19) |


Product of NB Corporation of America

| T | G | M | mounting dimensions | | | | dynamic C | static Co | mass |
|-----------------|------------------|-------------------|----------------------------------|----------------------------------|----------------|-----------------|--------------|--------------|-------|
| | | | B | C | K | S | | | |
| | | | $\pm .01/(\pm 0.2)$ inch/(mm) | $\pm .01/(\pm 0.2)$ inch/(mm) | inch/(mm) | inch/(mm) | | | |
| .188 (4.76) | .750 (19.05) | 1.000 (25.40) | 1.312 (33.33) | .750 (19.05) | .156 (3.96) | .156 (3.96) | 206 | 265 | 45 |
| .188 (4.76) | .875 (22.23) | 1.125 (28.58) | 1.437 (36.50) | .875 (22.23) | .156 (3.96) | .156 (3.96) | 225 | 315 | 62 |
| .250 (6.35) | 1.125 (28.58) | 1.375 (34.93) | 1.688 (42.88) | 1.000 (25.40) | .156 (3.96) | .156 (3.96) | 510 | 784 | 130 |
| .281 (7.14) | 1.437 (36.50) | 1.750 (44.45) | 2.125 (53.98) | 1.125 (28.58) | .188 (4.76) | .188 (4.76) | 774 | 1,180 | 240 |
| .313 (7.94) | 1.563 (39.69) | 1.875 (47.63) | 2.375 (60.33) | 1.250 (31.75) | .188 (4.76) | .188 (4.76) | 862 | 1,370 | 290 |
| .375 (9.53) | 1.938 (49.21) | 2.375 (60.33) | 2.875 (73.03) | 1.750 (44.45) | .188 (4.76) | .219 (5.56) | 980 | 1,570 | 615 |
| .438 (11.11) | 2.500 (63.50) | 3.000 (76.20) | 3.500 (88.90) | 2.000 (50.80) | .250 (6.35) | .219 (5.56) | 1,570 | 2,740 | 1,300 |
| .500 (12.70) | 2.875 (73.03) | 3.500 (88.90) | 4.125 (104.78) | 2.500 (50.80) | .313 (7.94) | .281 (7.14) | 2,160 | 4,020 | 1,900 |
| .625 (15.88) | 3.625 (92.08) | 4.500 (114.30) | 5.250 (133.35) | 3.250 (82.55) | .375 (9.53) | .413 (10.50) | 3,820 | 7,940 | 3,600 |

SI UNIT 1N \approx 0.225lbf
1kg \approx 2.205lbs

SWD TYPE (Inch Standard)

– Open Block Type –

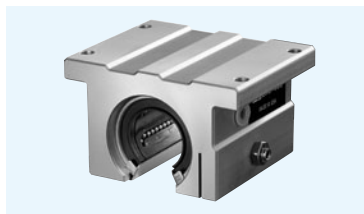

part number structure

example **SWD 20 G R UU**


specification
SWD: standard
SWSD: anti-corrosion

size

retainer material
blank: standard/steel
 anti-corrosion/stainless steel
G: resin

seal
blank: without seal
UU: seals on both sides

self-aligning
 (SWD-resin retainer only)

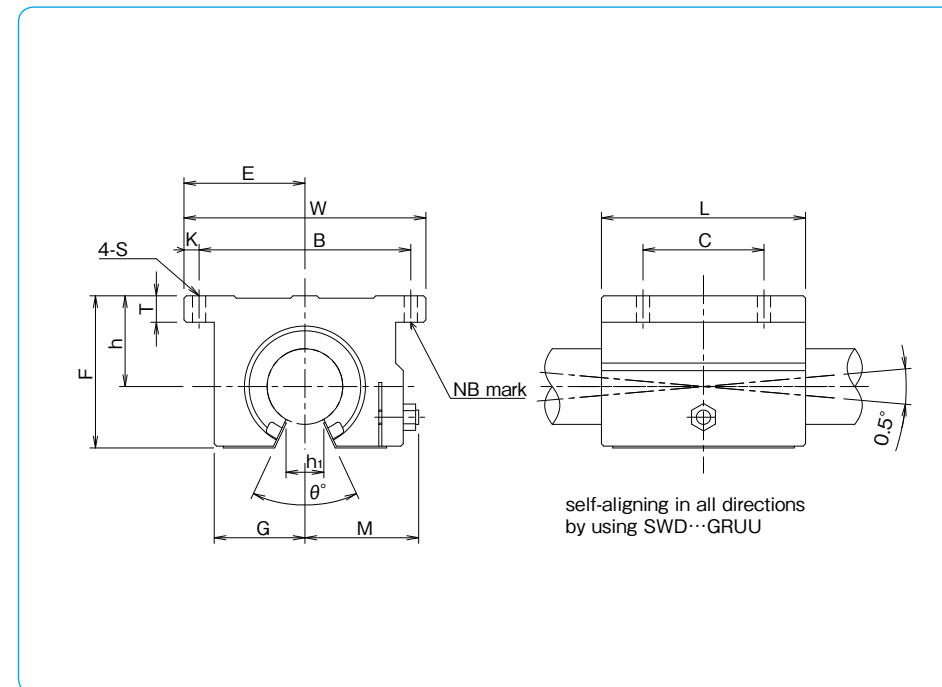

| part number | major dimensions | | | | | | | |
|------------------|-------------------------------------|---------------------------------|---------------------------------|-------------------|-------------------|------------------|------------------|------------------|
| | inner contact diameter inch/(mm) | h ±.001/(±0.02) inch/(mm) | E ±.001/(±0.02) inch/(mm) | W inch/(mm) | L inch/(mm) | F inch/(mm) | outer dimensions | |
| | | | | | | | T inch/(mm) | G inch/(mm) |
| SWD 8GUU | .5000 (12.700) | .6870 (17.450) | 1.0000 (25.400) | 2.000 (50.80) | 1.500 (38.10) | 1.100 (27.94) | .250 (6.35) | .688 (17.5) |
| SWD 10GUU | .6250 (15.875) | .8750 (22.225) | 1.2500 (31.750) | 2.500 (63.50) | 1.750 (44.45) | 1.375 (34.93) | .281 (7.14) | .875 (22.23) |
| SWD 12GUU | .7500 (19.050) | .9370 (23.800) | 1.3750 (34.950) | 2.750 (69.85) | 1.875 (47.63) | 1.535 (39.00) | .315 (8.00) | .937 (23.80) |
| SWD 16GUU | 1.0000 (25.400) | 1.1870 (30.150) | 1.6250 (41.300) | 3.250 (82.55) | 2.625 (66.68) | 1.975 (50.17) | .375 (9.53) | 1.188 (30.18) |
| SWD 20GUU | 1.2500 (31.750) | 1.5000 (38.100) | 2.0000 (50.800) | 4.000 (101.60) | 3.375 (85.73) | 2.485 (63.12) | .437 (11.10) | 1.500 (38.10) |
| SWD 24GUU | 1.5000 (38.100) | 1.7500 (44.450) | 2.3750 (60.325) | 4.750 (120.65) | 3.750 (95.25) | 2.910 (73.90) | .500 (12.70) | 1.750 (44.45) |
| SWD 32GUU | 2.0000 (50.800) | 2.1250 (53.975) | 3.0000 (76.200) | 6.000 (152.4) | 4.750 (120.65) | 3.660 (92.90) | .625 (15.88) | 2.250 (57.15) |

Product of NB Corporation of America

| M | h ₁ | θ | mounting dimensions | | | | basic load rating | | mass |
|-----------------|------------------|-----|-------------------------------|-------------------------------|----------------|-----------------|-------------------|--------------------------|-------|
| | | | B ±.01/(±0.2) inch/(mm) | C ±.01/(±0.2) inch/(mm) | K inch/(mm) | S inch/(mm) | dynamic C | static C ₀ | |
| inch/(mm) | inch/(mm) | | | | | | N | N | g |
| .98 (24.89) | .3425 (8.70) | 80° | 1.688 (42.88) | 1.000 (25.40) | .156 (3.96) | .156 (3.96) | 510 | 784 | 98 |
| 1.15 (29.21) | .375 (9.53) | 80° | 2.125 (53.98) | 1.125 (28.58) | .188 (4.76) | .188 (4.76) | 774 | 1,180 | 185 |
| 1.23 (31.24) | .4375 (11.11) | 60° | 2.375 (60.33) | 1.250 (31.75) | .188 (4.76) | .188 (4.76) | 862 | 1,370 | 235 |
| 1.48 (37.59) | .5625 (14.29) | 50° | 2.875 (73.03) | 1.750 (44.45) | .188 (4.76) | .219 (5.56) | 980 | 1,570 | 530 |
| 1.88 (47.75) | .625 (15.88) | 50° | 3.500 (88.90) | 2.000 (50.80) | .250 (6.35) | .219 (5.56) | 1,570 | 2,740 | 1,080 |
| 2.12 (53.85) | .750 (19.05) | 50° | 4.125 (104.78) | 2.500 (63.50) | .313 (7.94) | .281 (7.14) | 2,160 | 4,020 | 1,620 |
| 2.70 (68.58) | 1.00 (25.40) | 50° | 5.250 (133.35) | 3.250 (82.55) | .375 (9.53) | .413 (10.50) | 3,820 | 7,940 | 3,100 |

SI UNIT 1N≅0.225lbf
1kg≅2.205lbs

TOPBALL®

| | |
|--|---------------|
| TOPBALL | |
| STRUCTURE AND ADVANTAGES | · · · D-2 |
| TYPES | · · · · · D-3 |
| LIFE CALCULATION | · · · · · D-4 |
| RELATION BETWEEN BALL CIRCUITS AND LOAD RATING | D-4 |
| MOUNTING | · · · · · D-5 |
| ANTI-CORROSIVE TYPE | · · · · · D-6 |
| USE AND HANDLING PRECAUTIONS | D-7 |
| DIMENSION TABLE | · · · · · D-8 |

TOPBALL®

The NB TOPBALL is a linear motion mechanism utilizing the rotational motion of ball elements. NB's self-aligning TOPBALL can be designed into many different applications such as factory automated equipment, machine tools, industrial machines, electrical equipment, optical and measuring instruments.

STRUCTURE AND ADVANTAGES

Higher Load Capacity and Longer Travel life

NB's uniquely designed load plate provides circular arch contact to the ball element resulting in a greater dispersion of the load, enabling TOPBALL to provide up to three times the load capacity therefore 27 times the travel life of conventional slide bushings.

Self Aligning Capability

Load plates are thinner at the ends to provide a pivot point at the center of the plate. The center acts as a fulcrum to compensate for any slight misalignment between the shaft and the housing bore that might be caused by inaccurate machining, mounting errors or shaft deflection.

Straight load plate ST option is available for non self-alignment.

Floating Seal

NB's unique floating seal design allows for self-alignment while maintaining equal and constant contact to the shaft. Seals do not add to the overall length of the bushing allowing for more compact designs.

High Speed

TOPBALL meets high speed requirements. The maximum speed is 5m/s.

Clearance Adjustable

TOPBALL load plates are designed to "float" in the outer sleeve which allows for clearance between the ball elements and shaft to best suit application requirements.

TOPBALL Unit

This is a TOPBALL with a housing. The housing has the most appropriate bore tolerance that optimizes TOPBALL's performance.

Tolerance interchangeable with Asian Metric Slide Bush Type

Shaft diameter tolerance for TMF and TMA types is the same as Asian Metric slide Bush (refer to "Clearance and Fit" in page D-6).

TMF type is an easy to mount flange type. Mounting dimensions of TMA type are the same as those of Asian Metric SMA type which makes replacement easy.

Figure D-1 Circular Arch Design and Ground Surface Raceway

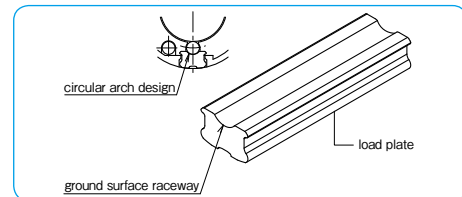


Figure D-3 Basic Structure of TK

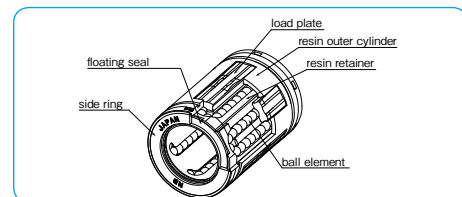
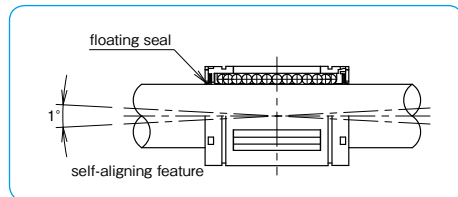




















Figure D-2 Floating Seal and Self-aligning Feature



TYPES

Table D-1 Types

| | | Metric Series | | Inch Series | |
|--------------|---|--|--|--|--|
| TOPBALL | closed type | TK  P.D-8 | TW  P.D-10 | | |
| | open type | TK-OP  P.D-8 | TW-OP  P.D-10 | | |
| TOPBALL Unit | closed type | TKA  P.D-12 | TKA-W  P.D-13 | TWA  P.D-20 | TWA-W  P.D-21 |
| | adjustable type | / | | TWJ  P.D-22 | TWJ-W  P.D-23 |
| | open type | TKE  P.D-14 | TKE-W  P.D-15 | / | |
| | adjustable-open type | TKD  P.D-16 | TKD-W  P.D-17 | TWD  P.D-24 | TWD-W  P.D-25 |
| | Tolerance interchangeable with Asian Metric Slide Bush Type | TMF  P.D-18 | TMA  P.D-19 | / | |

LIFE CALCULATION

Since ball elements are used as the rolling element in the NB TOPBALL, the following equation is used to calculate the rated life.

$$L = \left(\frac{f_H \cdot f_T \cdot f_C \cdot C}{f_w \cdot P} \right)^3 \cdot 50$$

L: rated life (km) f_H: hardness coefficient
 f_T: temperature coefficient f_C: contact coefficient
 f_w: applied load coefficient (Table D-2)
 C: basic dynamic load rating (N) P: applied load (N)
 *Refer to page Eng-5 for the coefficients.

Applied Load Coefficient (f_w)

When calculating the applied load, the weight of the mass, inertial force, moment resulting from the motion, and the variation with time should be accurately estimated. However, it is very difficult to accurately estimate the applied load due to the existence of numerous variables, including the start/stop conditions of the reciprocating motion and of the shock/vibration. Estimation is simplified by using the values given in Table D-2.

If the stroke and number of cycles per unit time are constant, the life time is calculated using the following equation.

$$L_h = \frac{L \cdot 10^3}{2 \cdot l_s \cdot n \cdot 60}$$

L_h: life time (hr) l_s: stroke length (m)
 L: rated life (km) n: number of cycles per minute (cpm)

Table D-2 Applied Load Coefficient

| operating conditions | applied load coefficient f _w |
|--|---|
| no shock/vibration 0.25m/s or less | 1.0~1.5 |
| low shock/vibration 1m/s or less | 1.5~2.0 |
| high shock/vibration 1.5m/s or less | 2.0~3.5 |
| high shock/vibration 3m/s or less | 3.5~4.0 |
| 5m/s or less | 4.0 or more |

RELATION BETWEEN BALL CIRCUITS AND LOAD RATING

The load rating varies according to the loaded position on the circumference. The value in the dimension table indicates the lowest load rating with the load placed on top of one ball circuit. Table D-3 shows the load ratio for the TK and TW TOPBALL.

Table D-3 Load Positions

| size | TK8 | TK10~TK16 | TK20~TK50 | TW3~TW8 | TW10 | TW12~TW32 |
|--|-------|-----------|-----------|---------|-------|-----------|
| C (dynamic load rating in the table) | | | | | | |
| C _{max} (maximum dynamic load rating) | | | | | | |
| load ratio C _{max} /C C _{MAX} /C | 1.414 | 1.463 | 1.280 | 1.414 | 1.463 | 1.280 |
| C _z (dynamic load rating in reverse direction) | none | | | | | |
| load ratio C _z /C C _Z /C | — | 0.44 | 0.60 | 0.70 | 0.44 | 0.57 |

MOUNTING

Clearance and Fit

An appropriate clearance between TOPBALL and shaft is required in TOPBALL operation. Inadequate clearance may cause early failure and/or poor, rough movement. Proper clearance is determined by shaft diameter and housing bore. Table D-4~6 show recommended tolerances of the shaft and housing bore.

Tolerance of TMF and TMA type

Shaft diameter tolerance of TMF and TMA types matches that of Asian Metric Slide Bush:g6. Table D-6 shows recommended tolerances of TMF and TMA types. Please insert TMF type into an installation bore which is slightly larger than the outer cylinder.

Shaft and Housing

To optimize NB TOPBALL performance, high precision shafts and housings are required.

- Shaft: Dimensional tolerance, surface roughness and hardness greatly affect the traveling performance of the TOPBALL.
 The shaft must be manufactured to the following tolerances.
 - Surface roughness of Ra0.4 or less.
 - Hardness of 58 HRC or more (refer to page Eng-5).
 - The proper tolerance of the shaft diameter is recommended on Table D-4 and D-5.
 The NB Shaft is an ideal component manufactured to meet these specifications. Please see pages F-1 ~ for details.
- Housing: There are a wide range of designs and manufacturing techniques for housings. NB TOPBALL Units are available as standard products. When housings are prepared separately please refer to Table D-4 and D-5 for a proper fit.

Table D-4: Recommended Tolerance for Shaft Dia. and Housing Bore

| part number | shaft dia. | | housing bore | |
|-------------|------------|--------------|--------------|--------------|
| | dr mm | tol. (h6) μm | D mm | tol. (H7) μm |
| TK 8 | 8 | 0 | 16 | +18/0 |
| TK10 | 10 | -9 | 19 | +21 |
| TK12 | 12 | 0 | 22 | 0 |
| TK16 | 16 | -11 | 26 | 0 |
| TK20 | 20 | 0 | 32 | +25 |
| TK25 | 25 | 0 | 40 | 0 |
| TK30 | 30 | -13 | 47 | 0 |
| TK40 | 40 | 0 | 62 | +30 |
| TK50 | 50 | -16 | 75 | 0 |

Table D-6: Recommended Tolerance (TMF,TMA type)

| part number | shaft dia. | |
|-------------|------------|--------------|
| | dr mm | tol. (g6) μm |
| TMF16 | — | 16 |
| TMF20 | TMA20 | 20 |
| TMF25 | TMA25 | 25 |

Table D-5: Recommended Tolerance for Shaft Dia. and Housing Bore

| part number | shaft dia. | | housing bore | |
|-------------|------------|----------------|--------------|----------------|
| | dr inch | tol. (g6) inch | D inch | tol. (H7) inch |
| TW 3 | .1875 | -.0002 | .3750 | +0.0005/0 |
| TW 4 | .2500 | -.0006 | .5000 | +0.0007 |
| TW 6 | .3750 | -.0006 | .6250 | 0 |
| TW 8 | .5000 | -.0002 | .8750 | +0.0008 |
| TW10 | .6250 | -.0007 | 1.1250 | 0 |
| TW12 | .7500 | -.0003 | 1.2500 | +0.0010 |
| TW16 | 1.0000 | -.0008 | 1.5625 | 0 |
| TW20 | 1.2500 | -.0004 | 2.0000 | +0.0012 |
| TW24 | 1.5000 | -.0010 | 2.3750 | 0 |
| TW32 | 2.0000 | -.0004/-0012 | 3.0000 | 0 |

Mounting

TK type TOPBALL is designed to be press fitted into the housing bore. When inserting bushing, however, don't apply excess force nor shock load which may cause permanent damage. For TW type TOPBALL, examples of mouting are shown in Figures D-4~7 and D-9.

Examples of Mounting

Figures D-4 to D-9 illustrate mounting methods as example.

Figure D-4 Use of Holding Plates




Figure D-5 Clearance Adjustable Type




Figure D-6 Use of Retaining Rings





Figure D-7 Open Type



* Please contact NB for SA type support rails' compatibility with the TOPBALL units.

Figure D-8 Press Fit (TK type)





Figure D-9 Pin Fixing



* Please fix by the pin for open type housing .

ANTI-CORROSIVE TYPE

A special TOPBALL is also available for anti-corrosive requirements. Please specify with a suffix "-SK" for either TOPBALL or TOPBALL Unit part number. The load plates are electroless nickel plated and balls are made of stainless steel.

Table D-7


| part number | material | |
|-------------|--------------------------|-----------------|
| | load plate | ball element |
| -SK | electroless nickel plate | stainless steel |

USE AND HANDLING PRECAUTIONS

Rotational motion not supported

The NB TOPBALL is designed only for linear motion, so that for applications in which a combination of linear and rotational motion is a requirement, Stroke Bush (P. E-2), Slide Rotary Bush (P. E-10), or Rotary Ball Spline (P. B-32) are recommended.

Figure D-10

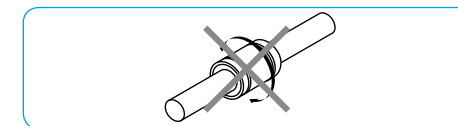

Self Alignment

When used with a single bearing on a single shaft or with a single bearing each on 2 shafts, Self-Alignment causes either shafts or bearings to tilt. To avoid tilting, 2 shafts with 2 bearings on each shaft is recommended. Non-self aligned "ST" type is available only for Euro Metric TK type TOPBALL in size 12 to 40. Please contact NB for details.

Operating Temperature Range

The operating temperature range is from -20°C to 80 °C . In case of operation at a temperature outside of this range, please contact NB.

Dust Prevention

Foreign particles and dust in the NB TOPBALL affect the motion accuracy and shorten product life. Standard seals will perform well for dust prevention under normal operating conditions, however, in harsh environment it may be necessary to attach protective covers.

Lubrication

It is important to lubricate the NB TOPBALL for an accurate operation and for a long life. Anti-rust oil is applied to the NB TOPBALL prior to shipment only. The NB selected anti-rust oil has a little to no effect on lubricants, however, please apply lubricant after cleaning the TOPBALL, for example, using kerosene, etc. For grease lubrication, lithium soap-based grease is recommended. A special low dust generating grease is also available for clean room application. Please refer to page Eng-40 for details.

Operating Speed


The maximum speed is 5m/s. Product life time may be shortened if operating speed is more than 3m/s due to wear of resin components. Please set applied load coefficient and static safety factor with a margin.

TK TYPE


– TOPBALL Metric Type –



part number structure

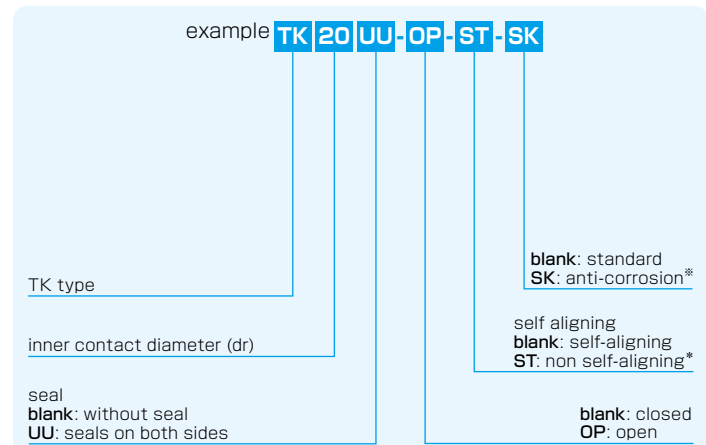

※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.
*ST option is available for size 12 to 40

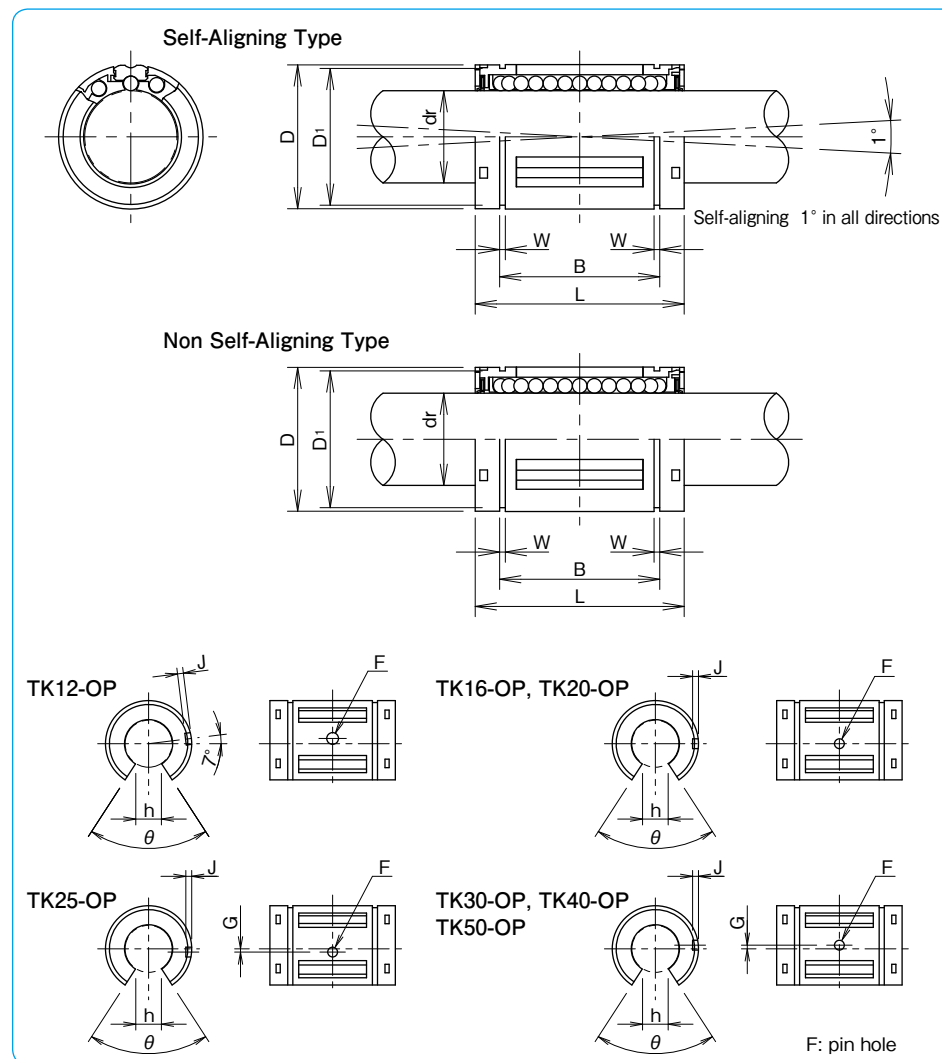

| part number | | major dimensions | | | | | | | | | |
|-------------------------|--------|-------------------------|---------|-----|--------------|-----|-----|----|--------------|-----|--|
| closed type | | open type | | dr* | | D | | L | | | |
| number of ball circuits | mass g | number of ball circuits | mass g | mm | tolerance μm | mm | mm | mm | tolerance mm | | |
| TK 8 | 4 | 7.2 | — | — | — | 8 | 16 | 25 | ±0.2 | | |
| TK10 | 5 | 13.9 | — | — | 10 | + 8 | 19 | 29 | | | |
| TK12 | 5 | 21 | TK12-OP | 4 | 17 | 12 | 0 | 22 | | 32 | |
| TK16 | 5 | 26 | TK16-OP | 4 | 35 | 16 | + 9 | 26 | | 36 | |
| TK20 | 6 | 54 | TK20-OP | 5 | 48 | 20 | - 1 | 32 | | 45 | |
| TK25 | 6 | 122 | TK25-OP | 5 | 103 | 25 | +11 | 40 | | 58 | |
| TK30 | 6 | 193 | TK30-OP | 5 | 177 | 30 | - 1 | 47 | | 68 | |
| TK40 | 6 | 354 | TK40-OP | 5 | 275 | 40 | +13 | 62 | | 80 | |
| TK50 | 6 | 615 | TK50-OP | 5 | 520 | 50 | -2 | 75 | | 100 | |

One-sided seal is also available. Please contact NB for details.
* Based on nominal housing bore


| mm | B tolerance mm | W mm | D ₁ mm | h mm | θ | open type | | | dynamic C N | static Co N | shaft diameter mm | |
|------|----------------|------|-------------------|------|-----|---------------------|------|-------|-------------|-------------|-------------------|----|
| | | | | | | F ^{H11} mm | G mm | J mm | | | | |
| 16.5 | -0.2 | 1.1 | 15.2 | — | — | — | — | — | 423 | 534 | 8 | |
| 22.0 | | 1.3 | 18 | — | — | — | — | — | 750 | 935 | 10 | |
| 22.9 | | 1.3 | 21 | 6.5 | 66° | 3 | — | 0.7 | 1,020 | 1,290 | 12 | |
| 24.9 | | 1.3 | 24.9 | 9 | 68° | | — | 1.0 | 1,250 | 1,550 | 16 | |
| 31.5 | | 1.6 | 30.3 | 9 | 55° | | — | 1.0 | 2,090 | 2,630 | 20 | |
| 44.1 | 1.85 | 37.5 | 11.5 | 57° | 1.5 | | 1.5 | 3,780 | 4,720 | 25 | | |
| 52.1 | 0 | 1.85 | 44.5 | 14 | 57° | | 2 | 1.7 | 5,470 | 6,810 | 30 | |
| 60.6 | -0.3 | 2.15 | 59 | 19.5 | 56° | | 1.5 | 2.4 | 6,590 | 8,230 | 40 | |
| 77.6 | | 2.65 | 72 | 22.5 | 54° | | 5 | 2.5 | 2.7 | 10,800 | 13,500 | 50 |

TW TYPE

- TOPBALL Inch Type -



part number structure

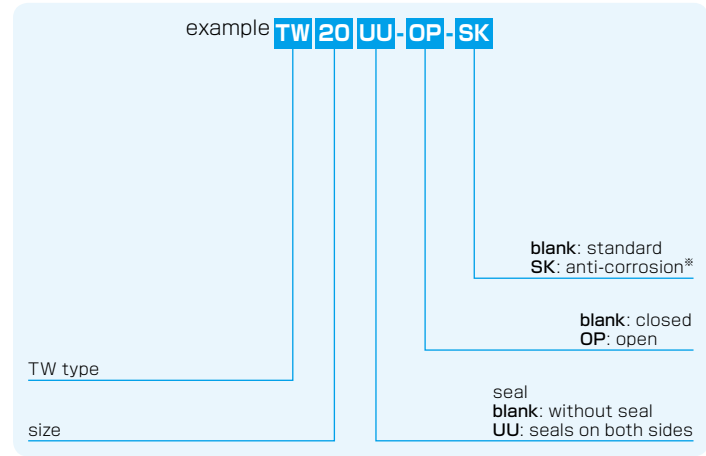


*For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

| part number | | major dimensions | | | | | | | | |
|-------------|-------------------------|------------------|-------------------------|----------|-------|--------|----------------|--------|-------|----------|
| closed type | number of ball circuits | mass lbs | open type | | dr* | D | | | L | |
| | | | number of ball circuits | mass lbs | | inch | tolerance inch | inch | | inch |
| TW 3 | 4 | .004 | — | — | — | .1875 | | .3750 | .562 | ±.008 |
| TW 4 | 4 | .009 | — | — | — | .2500 | | .5000 | .750 | 0 |
| TW 6 | 4 | .014 | — | — | — | .3750 | | .6250 | .875 | -.015 |
| TW 8 | 4 | .043 | TW 8-OP | 3 | .033 | .5000 | 0 | .8750 | 1.250 | |
| TW 10 | 5 | .103 | TW 10-OP | 4 | .083 | .6250 | -.0005 | 1.1250 | 1.500 | 0 |
| TW 12 | 6 | .123 | TW 12-OP | 5 | .102 | .7500 | | 1.2500 | 1.625 | -.020 |
| TW 16 | 6 | .265 | TW 16-OP | 5 | .220 | 1.0000 | | 1.5625 | 2.250 | |
| TW 20 | 6 | .485 | TW 20-OP | 5 | .419 | 1.2500 | 0 | 2.0000 | 2.625 | 0/- .025 |
| TW 24 | 6 | .750 | TW 24-OP | 5 | .639 | 1.5000 | -.0006 | 2.3750 | 3.000 | 0/- .030 |
| TW 32 | 6 | 1.411 | TW 32-OP | 5 | 1.168 | 2.0000 | 0/- .0008 | 3.0000 | 4.000 | 0/- .040 |

* Based on nominal housing bore

** Seals are not available on TW3.

*** One-sided seal is also available. Please contact NB for details.

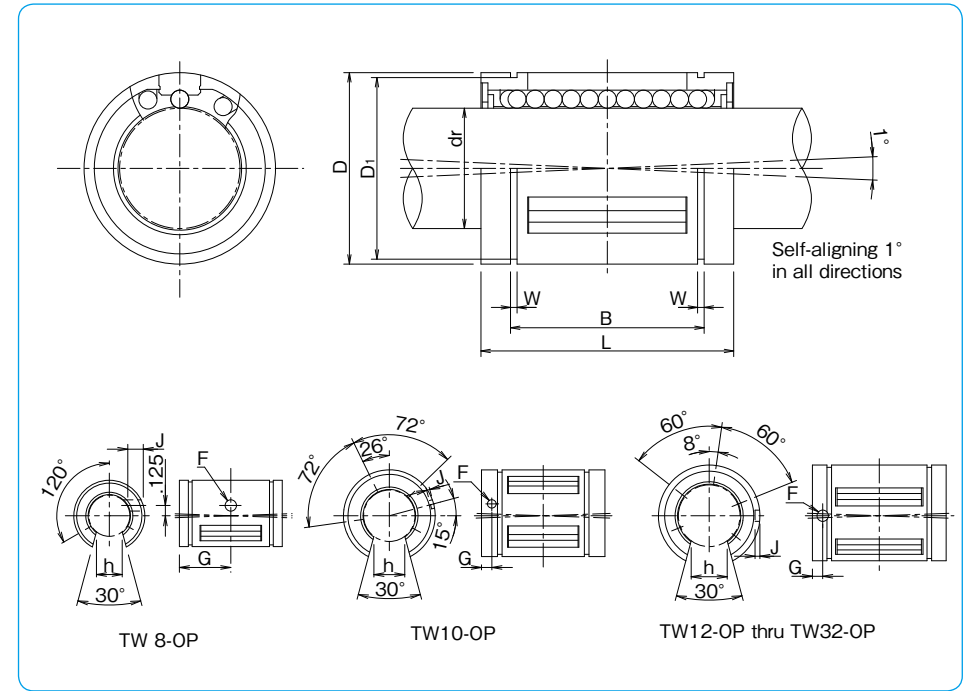

| B | W | D ₁ | h | open type | | | basic load rating | | nominal shaft diameter | |
|----------------|----------|----------------|--------|-----------|------|-------|-------------------|-------|------------------------|-------|
| inch | inch | inch | inch | F | G | J | C | Co | inch | |
| tolerance inch | inch | inch | inch | inch | inch | inch | lbf | lbf | inch | |
| — | — | — | — | — | — | — | 35 | 47 | 3/16 | |
| .515 | 0 | .0390 | .4687 | — | — | — | 60 | 80 | 1/4 | |
| .703 | -.015 | .0390 | .5880 | — | — | — | 95 | 120 | 3/8 | |
| 1.032 | 0 | .0459 | .8209 | .313 | .136 | .6250 | through | 230 | 290 | 1/2 |
| 1.112 | 0 | .0559 | 1.0590 | .375 | .105 | .1250 | .0390 | 400 | 500 | 5/8 |
| 1.272 | -.020 | .0559 | 1.1760 | .438 | .136 | .1250 | .0590 | 470 | 590 | 3/4 |
| 1.886 | 0 | .0679 | 1.4687 | .563 | .136 | .1250 | .0470 | 850 | 1,060 | 1 |
| 2.011 | 0/- .025 | .0679 | 1.8859 | .625 | .201 | .1875 | .0900 | 1,230 | 1,530 | 1-1/4 |
| 2.422 | 0/- .030 | .0859 | 2.2389 | .750 | .201 | .1875 | .0900 | 1,480 | 1,850 | 1-1/2 |
| 3.206 | 0/- .040 | .1029 | 2.8379 | 1.000 | .265 | .3125 | through | 2,430 | 3,040 | 2 |

1inch=25.4mm

1lbs≐0.454kg


1lbf≐4.448N

TKA TYPE (Euro Standard)


– Block Type –



part number structure

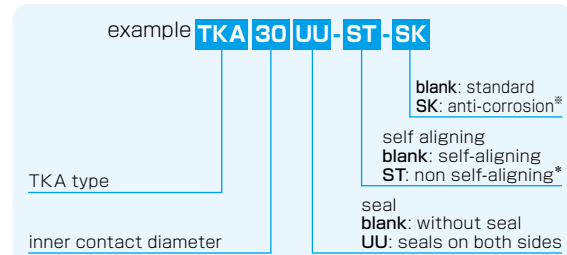

※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.
 ※ST option is available for size 12 to 40

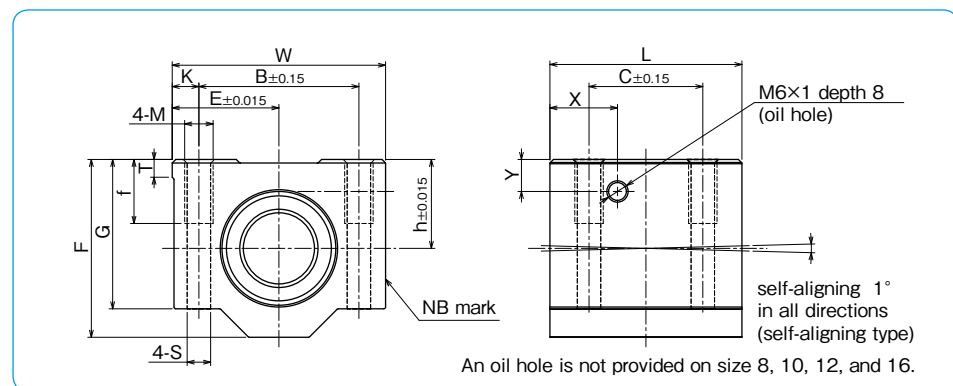

| part number | inner contact diameter mm | major dimensions | | | | | | | | | mounting dimensions | | | | | | basic load rating | | mass g |
|-------------|------------------------------|------------------|------|-----|-----|------|----|----|------|------|---------------------|----|-----|-----|----|------|---------------------------|-------------------|-----------|
| | | h | E | W | L | F | G | T | X | Y | B | C | K | M | f | S | dynamic C _N | static Co N | |
| TKA 8UU | 8 | 15 | 17.5 | 35 | 32 | 28 | 22 | 5 | — | — | 25 | 20 | 5 | M4 | 9 | 3.3 | 423 | 534 | 59 |
| TKA 10UU | 10 | 16 | 20 | 40 | 36 | 31.5 | 25 | 5 | — | — | 29 | 20 | 5.5 | M5 | 11 | 4.3 | 750 | 935 | 90 |
| TKA 12UU | 12 | 18 | 21.5 | 43 | 39 | 35 | 28 | 5 | — | — | 32 | 23 | 5.5 | M5 | 11 | 4.3 | 1,020 | 1,290 | 116 |
| TKA 16UU | 16 | 22 | 26.5 | 53 | 43 | 42 | 35 | 5 | — | — | 40 | 26 | 6.5 | M6 | 13 | 5.3 | 1,250 | 1,550 | 205 |
| TKA 20UU | 20 | 25 | 30 | 60 | 54 | 50 | 42 | 5 | 19 | 9 | 45 | 32 | 7.5 | M8 | 18 | 6.6 | 2,090 | 2,630 | 326 |
| TKA 25UU | 25 | 30 | 39 | 78 | 67 | 60 | 48 | 7 | 22.5 | 10 | 60 | 40 | 9 | M10 | 22 | 8.4 | 3,780 | 4,720 | 624 |
| TKA 30UU | 30 | 35 | 43.5 | 87 | 79 | 70 | 58 | 8 | 26 | 11.5 | 68 | 45 | 9.5 | M10 | 22 | 8.4 | 5,470 | 6,810 | 980 |
| TKA 40UU | 40 | 45 | 54 | 108 | 91 | 90 | 72 | 10 | 26.5 | 14 | 86 | 58 | 11 | M12 | 26 | 10.5 | 6,590 | 8,230 | 1,670 |
| TKA 50UU | 50 | 50 | 66 | 132 | 113 | 105 | 85 | 12 | 43.5 | 12.5 | 108 | 50 | 12 | M16 | 34 | 13.5 | 10,800 | 13,500 | 2,950 |


1N≒0.102kgf

TKA-W TYPE (Euro Standard)


– Double-Wide Block Type –



part number structure

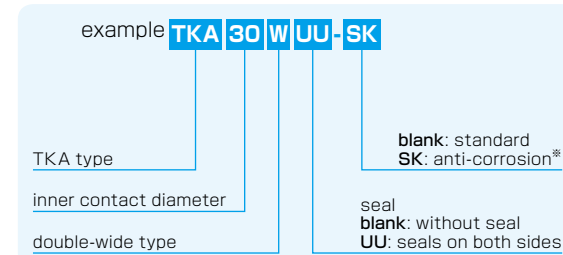

※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

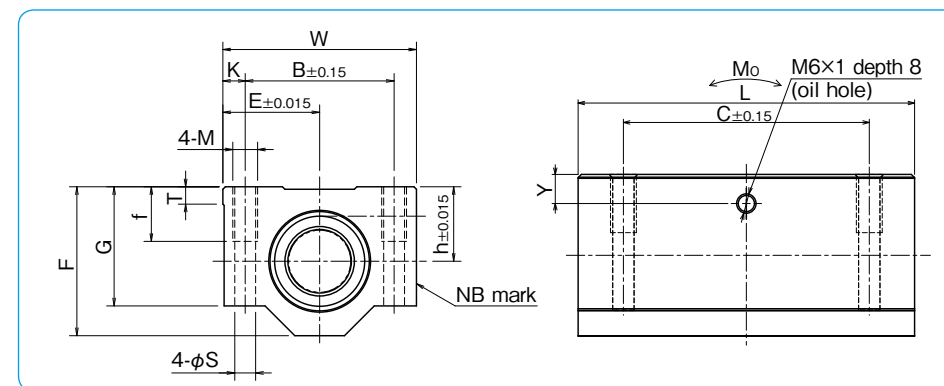

| part number | inner contact diameter mm | major dimensions | | | | | | | | | mounting dimensions | | | | | | basic load rating | | allowable static moment Mo N·m | mass g |
|-------------|------------------------------|------------------|------|-----|-----|------|----|----|------|----|---------------------|-----|-----|----|------|---------------------------|-------------------|------|--------------------------------------|-----------|
| | | h | E | W | L | F | G | T | Y | B | C | K | M | f | S | dynamic C _N | static Co N | | | |
| TKA 8WUU | 8 | 15 | 17.5 | 35 | 62 | 28 | 22 | 5 | 6.5 | 25 | 50 | 5 | M4 | 9 | 3.3 | 685 | 1,068 | 6.53 | 119 | |
| TKA 10WUU | 10 | 16 | 20 | 40 | 70 | 31.5 | 25 | 5 | 7 | 29 | 52 | 5.5 | M5 | 11 | 4.3 | 1,215 | 1,870 | 13.4 | 175 | |
| TKA 12WUU | 12 | 18 | 21.5 | 43 | 76 | 35 | 28 | 5 | 7.5 | 32 | 56 | 5.5 | M5 | 11 | 4.3 | 1,652 | 2,580 | 20.9 | 227 | |
| TKA 16WUU | 16 | 22 | 26.5 | 53 | 84 | 42 | 35 | 5 | 9.5 | 40 | 64 | 6.5 | M6 | 13 | 5.3 | 2,025 | 3,100 | 28.2 | 390 | |
| TKA 20WUU | 20 | 25 | 30 | 60 | 104 | 50 | 42 | 5 | 9 | 45 | 76 | 7.5 | M8 | 18 | 6.6 | 3,390 | 5,260 | 62.0 | 630 | |
| TKA 25WUU | 25 | 30 | 39 | 78 | 130 | 60 | 48 | 7 | 10 | 60 | 94 | 9 | M10 | 22 | 8.4 | 6,120 | 9,440 | 149 | 1,210 | |
| TKA 30WUU | 30 | 35 | 43.5 | 87 | 152 | 70 | 58 | 8 | 11.5 | 68 | 106 | 9.5 | M10 | 22 | 8.4 | 8,860 | 13,620 | 247 | 1,880 | |
| TKA 40WUU | 40 | 45 | 54 | 108 | 176 | 90 | 72 | 10 | 14 | 86 | 124 | 11 | M12 | 26 | 10.5 | 10,680 | 16,460 | 349 | 3,280 | |


1N≒0.102kgf

TKE TYPE (Euro Standard)


– Open Block Type –



part number structure

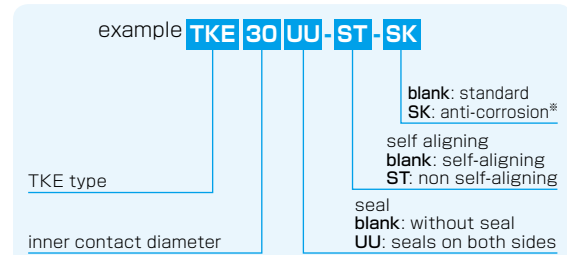

*For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

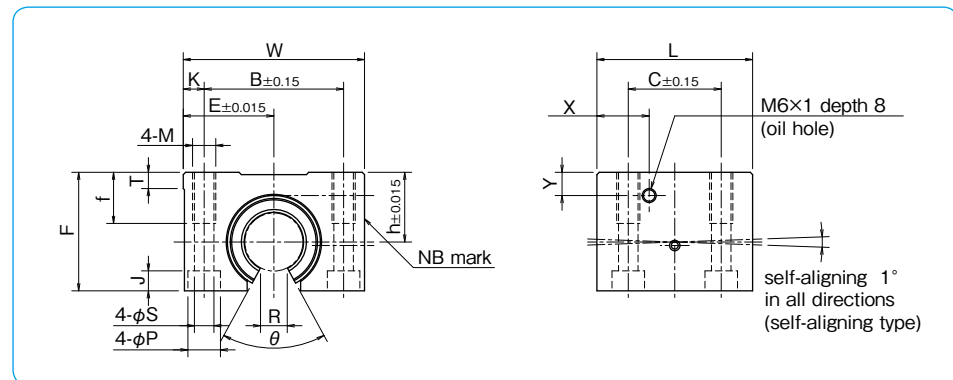

| part number | inner contact diameter | major dimensions | | | | | | | | | | mounting dimensions | | | | | | | | | | basic load rating | | |
|-------------|------------------------|------------------|------|-----|-----|----|----|------|-----|------|------|---------------------|----|-----|-----|----|------|------|------|-----------|-----------|-------------------|--|--|
| | | h | E | W | L | F | T | R | θ | X | Y | B | C | K | M | f | S | P | J | dynamic C | static Co | mass | | |
| TKE12UU | 12 | 18 | 21.5 | 43 | 39 | 28 | 5 | 6.5 | 66° | 14.5 | 7.5 | 32 | 23 | 5.5 | M5 | 11 | 4.3 | 8 | 4.5 | 1,020 | 1,290 | 99 | | |
| TKE16UU | 16 | 22 | 26.5 | 53 | 43 | 35 | 5 | 9 | 68° | 15.5 | 9.5 | 40 | 26 | 6.5 | M6 | 13 | 5.3 | 9.5 | 5.5 | 1,250 | 1,550 | 175 | | |
| TKE20UU | 20 | 25 | 30 | 60 | 54 | 42 | 5 | 9 | 55° | 19 | 9 | 45 | 32 | 7.5 | M8 | 18 | 6.6 | 11 | 6.5 | 2,090 | 2,630 | 275 | | |
| TKE25UU | 25 | 30 | 39 | 78 | 67 | 51 | 7 | 11.5 | 57° | 22.5 | 10 | 60 | 40 | 9 | M10 | 22 | 8.4 | 14 | 8.6 | 3,780 | 4,720 | 558 | | |
| TKE30UU | 30 | 35 | 43.5 | 87 | 79 | 60 | 8 | 14 | 57° | 26 | 11.5 | 68 | 45 | 9.5 | M10 | 22 | 8.4 | 14 | 8.6 | 5,470 | 6,810 | 860 | | |
| TKE40UU | 40 | 45 | 54 | 108 | 91 | 77 | 10 | 19.5 | 56° | 26.5 | 14 | 86 | 58 | 11 | M12 | 26 | 10.5 | 17.5 | 10.8 | 6,590 | 8,230 | 1,490 | | |
| TKE50UU | 50 | 50 | 66 | 132 | 113 | 88 | 12 | 22.5 | 54° | 43.5 | 12.5 | 108 | 50 | 12 | M16 | 34 | 13.5 | 20 | 13 | 10,800 | 13,500 | 2,500 | | |


1N≐0.102kgf

TKE-W TYPE (Euro Standard)


– Double-Wide Open Block Type –



part number structure

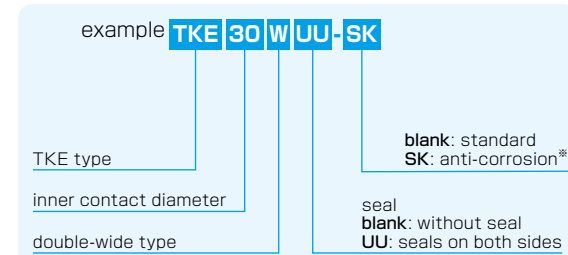

*For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

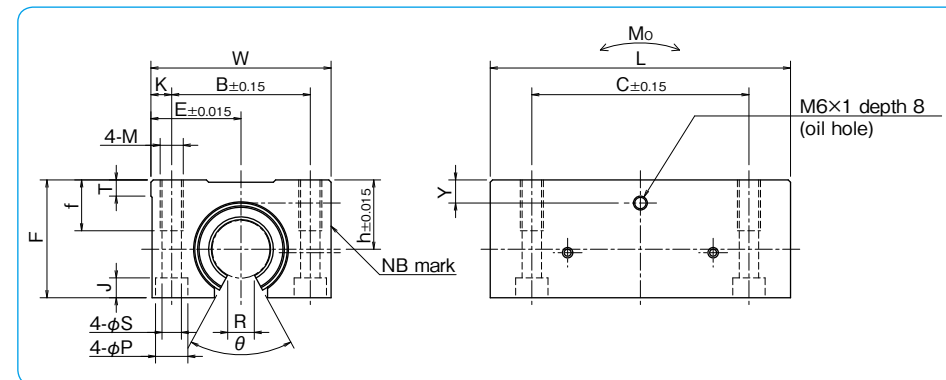

| part number | inner contact diameter | major dimensions | | | | | | | | | | mounting dimensions | | | | | | | | | | basic load rating | | | allowable static moment | |
|-------------|------------------------|------------------|------|-----|----|----|----|------|-----|------|------|---------------------|-----|-----|-----|-----|------|------|-----------|-----------|-------|-------------------|------|-------|-------------------------|--|
| | | h | E | W | L | F | T | R | θ | Y | B | C | K | M | f | S | P | J | dynamic C | static Co | mass | N | N·m | | | |
| TKE12WUU | 12 | 18 | 21.5 | 43 | 39 | 28 | 5 | 6.5 | 66° | 7.5 | 32 | 23 | 5.5 | M5 | 11 | 4.3 | 8 | 4.5 | 1,020 | 1,290 | 99 | 11.3 | 190 | | | |
| TKE16WUU | 16 | 22 | 26.5 | 53 | 43 | 35 | 5 | 9 | 68° | 9.5 | 40 | 26 | 6.5 | M6 | 13 | 5.3 | 9.5 | 5.5 | 1,250 | 1,550 | 175 | 15.2 | 312 | | | |
| TKE20WUU | 20 | 25 | 30 | 60 | 54 | 42 | 5 | 9 | 55° | 19 | 9 | 45 | 32 | 7.5 | M8 | 18 | 6.6 | 11 | 6.5 | 2,090 | 2,630 | 275 | 35.3 | 505 | | |
| TKE25WUU | 25 | 30 | 39 | 78 | 67 | 51 | 7 | 11.5 | 57° | 22.5 | 10 | 60 | 40 | 9 | M10 | 22 | 8.4 | 14 | 8.6 | 3,780 | 4,720 | 558 | 85.2 | 1,050 | | |
| TKE30WUU | 30 | 35 | 43.5 | 87 | 79 | 60 | 8 | 14 | 57° | 26 | 11.5 | 68 | 45 | 9.5 | M10 | 22 | 8.4 | 14 | 8.6 | 5,470 | 6,810 | 860 | 140 | 1,630 | | |
| TKE40WUU | 40 | 45 | 54 | 108 | 91 | 77 | 10 | 19.5 | 56° | 26.5 | 14 | 86 | 58 | 11 | M12 | 26 | 10.5 | 17.5 | 10.8 | 6,590 | 8,230 | 1,490 | 199 | 2,880 | | |


1N≐0.102kgf

TWA TYPE (Inch Standard)


– Block Type –



part number structure

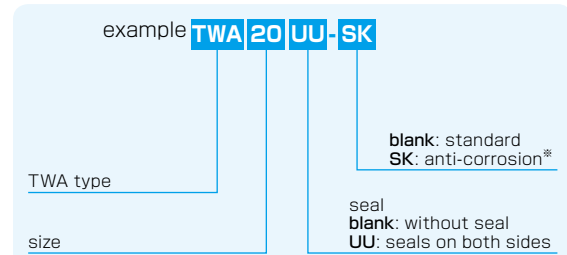

*For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

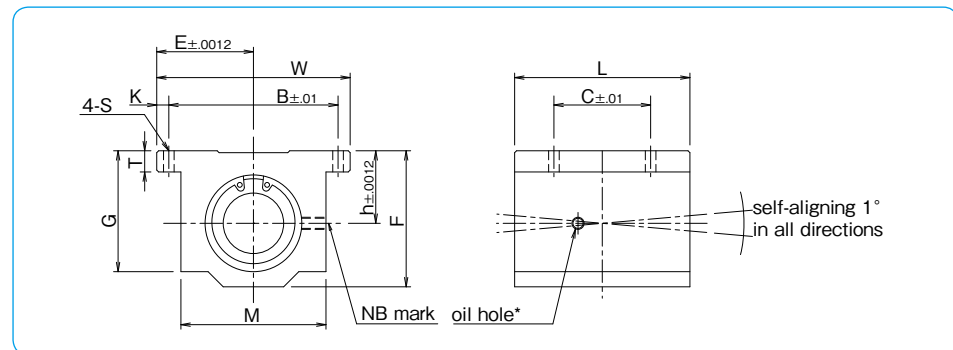

| part number | nom. shaft dia. | major dimensions | | | | | | | | mounting dimensions | | | | basic load rating | | mass |
|-------------|-----------------|------------------|--------|-------|-------|-------|------|-------|-------|---------------------|-------|------|------|-------------------|-----------|-------|
| | | h | E | W | L | F | T | G | M | B | C | K | S | dynamic C | static Co | |
| TWA 4UU | 1/4 | .4370 | .8125 | 1.625 | 1.188 | .813 | .188 | .750 | 1.000 | 1.312 | .750 | .156 | .156 | 60 | 80 | .090 |
| TWA 6UU | 3/8 | .5000 | .8750 | 1.750 | 1.313 | .938 | .188 | .875 | 1.125 | 1.437 | .875 | .156 | .156 | 95 | 120 | .120 |
| TWA 8UU | 1/2 | .6870 | 1.0000 | 2.000 | 1.688 | 1.250 | .250 | 1.125 | 1.375 | 1.688 | 1.000 | .156 | .156 | 230 | 290 | .248 |
| TWA 10UU | 5/8 | .8750 | 1.2500 | 2.500 | 1.938 | 1.625 | .281 | 1.437 | 1.750 | 2.125 | 1.125 | .188 | .188 | 400 | 500 | .465 |
| TWA 12UU | 3/4 | .9370 | 1.3750 | 2.750 | 2.063 | 1.750 | .313 | 1.563 | 1.875 | 2.375 | 1.250 | .188 | .188 | 470 | 590 | .553 |
| TWA 16UU | 1 | 1.1870 | 1.6250 | 3.250 | 2.813 | 2.188 | .375 | 1.938 | 2.375 | 2.875 | 1.750 | .188 | .219 | 850 | 1060 | 1.200 |
| TWA 20UU | 1-1/4 | 1.5000 | 2.0000 | 4.000 | 3.625 | 2.813 | .438 | 2.500 | 3.000 | 3.500 | 2.000 | .250 | .219 | 1230 | 1530 | 2.380 |
| TWA 24UU | 1-1/2 | 1.7500 | 2.3750 | 4.750 | 4.000 | 3.250 | .500 | 2.875 | 3.500 | 4.125 | 2.500 | .313 | .281 | 1480 | 1850 | 3.460 |
| TWA 32UU | 2 | 2.1250 | 3.0000 | 6.000 | 5.000 | 4.063 | .625 | 3.625 | 4.500 | 5.250 | 3.250 | .375 | .406 | 2430 | 3040 | 6.830 |

* Provided with push-in oil fitting for 1/4" to 1/2" sizes. Sizes from 5/8" to 2" offer a 1/4-28 tapped hole with a plug for adding a fitting if desired.
Product of NB Corporation of America


1inch=25.4mm
1lbs≐0.454kg
1lbf≐4.448N

TWA-W TYPE (Inch Standard)


– Double-Wide Block Type –



part number structure

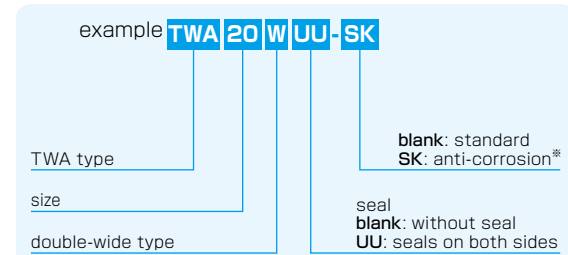

*For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

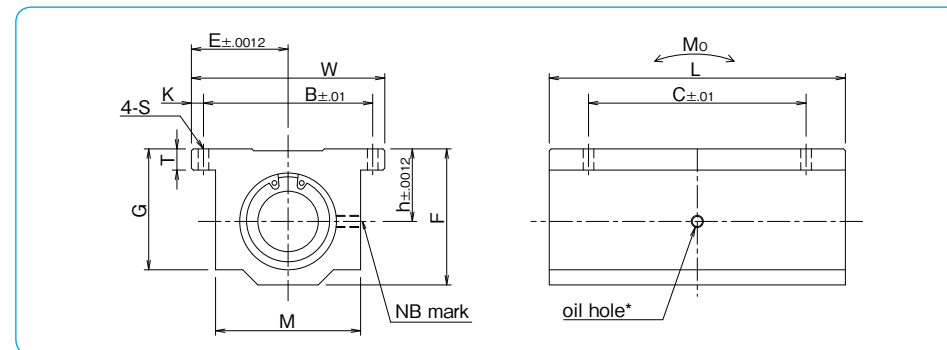

| part number | nom. shaft dia. | major dimensions | | | | | | | | mounting dimensions | | | | basic load rating | | allowable static moment | mass |
|-------------|-----------------|------------------|--------|-------|-------|-------|------|-------|-------|---------------------|-------|------|------|-------------------|-----------|-------------------------|-------|
| | | h | E | W | L | F | T | G | M | B | C | K | S | dynamic C | static Co | Mo | |
| TWA 4WUU | 1/4 | .4370 | .8125 | 1.625 | 2.500 | .813 | .188 | .750 | 1.000 | 1.312 | 2.000 | .156 | .156 | 96 | 160 | 26.8 | .190 |
| TWA 6WUU | 3/8 | .5000 | .8750 | 1.750 | 2.750 | .938 | .188 | .875 | 1.125 | 1.437 | 2.250 | .156 | .156 | 150 | 240 | 52.2 | .250 |
| TWA 8WUU | 1/2 | .6870 | 1.0000 | 2.000 | 3.500 | 1.250 | .250 | 1.125 | 1.375 | 1.688 | 2.500 | .156 | .156 | 370 | 580 | 183 | .510 |
| TWA 10WUU | 5/8 | .8750 | 1.2500 | 2.500 | 4.000 | 1.625 | .281 | 1.437 | 1.750 | 2.125 | 3.000 | .188 | .188 | 640 | 1000 | 373 | 1.000 |
| TWA 12WUU | 3/4 | .9370 | 1.3750 | 2.750 | 4.500 | 1.750 | .313 | 1.563 | 1.875 | 2.375 | 3.500 | .188 | .188 | 750 | 1180 | 496 | 1.200 |
| TWA 16WUU | 1 | 1.1870 | 1.6250 | 3.250 | 6.000 | 2.188 | .375 | 1.938 | 2.375 | 2.875 | 4.500 | .188 | .219 | 1360 | 2120 | 1260 | 2.400 |
| TWA 20WUU | 1-1/4 | 1.5000 | 2.0000 | 4.000 | 7.500 | 2.813 | .438 | 2.500 | 3.000 | 3.500 | 5.500 | .250 | .219 | 1970 | 3060 | 2100 | 5.000 |
| TWA 24WUU | 1-1/2 | 1.7500 | 2.3750 | 4.750 | 9.000 | 3.250 | .500 | 2.875 | 3.500 | 4.125 | 6.500 | .313 | .281 | 2370 | 3700 | 2900 | 7.800 |

* Provided with push-in oil fitting for 1/4" to 1/2" sizes. Sizes from 5/8" to 1-1/2" offer a 1/4-28 tapped hole with a plug for adding a fitting if desired.
Product of NB Corporation of America


1inch=25.4mm
1lbs≐0.454kg
1lbf≐4.448N
1lbf · in≐0.112N · m

TWJ TYPE (Inch Standard)


— Clearance Adjustable Block Type —



part number structure

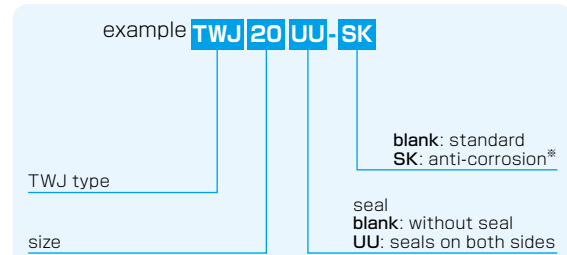

*For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

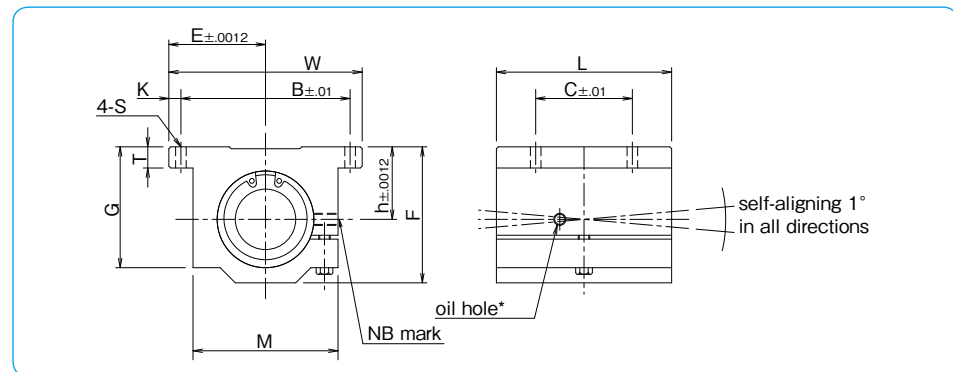

| part number | nom. shaft dia. inch | major dimensions | | | | | | | | mounting dimensions | | | | basic load rating | | mass lbs |
|-------------|----------------------|------------------|--------|-------|-------|-------|------|-------|-------|---------------------|-------|------|------|-------------------|--------|----------|
| | | h | E | W | L | F | T | G | M | B | C | K | S | C lbf | Co lbf | |
| TWJ 4UU | 1/4 | .4370 | .8125 | 1.625 | 1.188 | .813 | .188 | .750 | 1.000 | 1.312 | .750 | .156 | .156 | 60 | 80 | .090 |
| TWJ 6UU | 3/8 | .5000 | .8750 | 1.750 | 1.313 | .938 | .188 | .875 | 1.125 | 1.437 | .875 | .156 | .156 | 95 | 120 | .120 |
| TWJ 8UU | 1/2 | .6870 | 1.0000 | 2.000 | 1.688 | 1.250 | .250 | 1.125 | 1.375 | 1.688 | 1.000 | .156 | .156 | 230 | 290 | .248 |
| TWJ 10UU | 5/8 | .8750 | 1.2500 | 2.500 | 1.938 | 1.625 | .281 | 1.437 | 1.750 | 2.125 | 1.125 | .188 | .188 | 400 | 500 | .465 |
| TWJ 12UU | 3/4 | .9370 | 1.3750 | 2.750 | 2.063 | 1.750 | .313 | 1.563 | 1.875 | 2.375 | 1.250 | .188 | .188 | 470 | 590 | .553 |
| TWJ 16UU | 1 | 1.1870 | 1.6250 | 3.250 | 2.813 | 2.188 | .375 | 1.938 | 2.375 | 2.875 | 1.750 | .188 | .219 | 850 | 1060 | 1.200 |
| TWJ 20UU | 1-1/4 | 1.5000 | 2.0000 | 4.000 | 3.625 | 2.813 | .438 | 2.500 | 3.000 | 3.500 | 2.000 | .250 | .219 | 1230 | 1530 | 2.380 |
| TWJ 24UU | 1-1/2 | 1.7500 | 2.3750 | 4.750 | 4.000 | 3.250 | .500 | 2.875 | 3.500 | 4.125 | 2.500 | .313 | .281 | 1480 | 1850 | 3.460 |
| TWJ 32UU | 2 | 2.1250 | 3.0000 | 6.000 | 5.000 | 4.063 | .625 | 3.625 | 4.500 | 5.250 | 3.250 | .375 | .406 | 2430 | 3040 | 6.830 |

* Provided with push-in oil fitting for 1/4" to 1/2" size. Sizes from 5/8" to 2" offer a 1/4-28 tapped hole with a plug for adding a fitting if desired.
Product of NB Corporation of America


1inch=25.4mm
1lbs≈0.454kg
1lbf≈4.448N

TWJ-W TYPE (Inch Standard)


— Clearance Adjustable Double-Wide Block Type —



part number structure

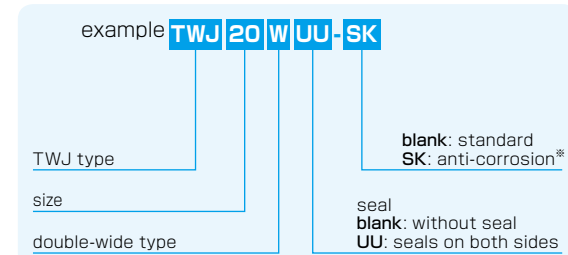

*For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

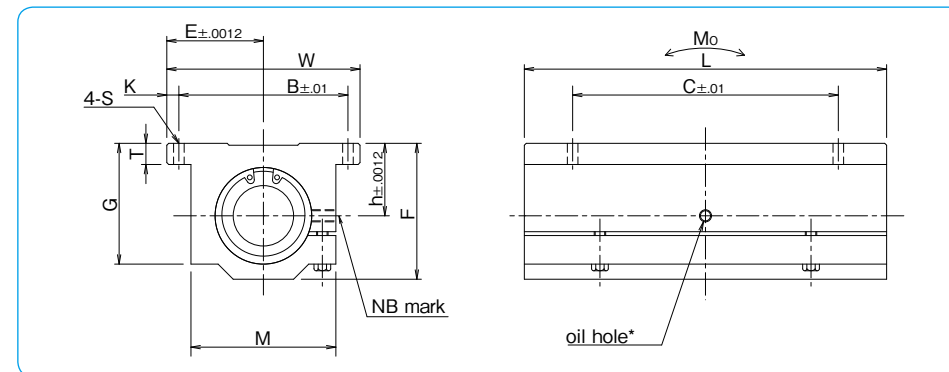


| part number | nom. shaft dia. inch | major dimensions | | | | | | | | mounting dimensions | | | | basic load rating | | allowable static moment | | mass lbs |
|-------------|----------------------|------------------|--------|-------|-------|-------|------|-------|-------|---------------------|-------|------|------|-------------------|--------|-------------------------|--------|----------|
| | | h | E | W | L | F | T | G | M | B | C | K | S | C lbf | Co lbf | lbf·in | lbf·in | |
| TWJ 4WUU | 1/4 | .4370 | .8125 | 1.625 | 2.500 | .813 | .188 | .750 | 1.000 | 1.312 | 2.000 | .156 | .156 | 96 | 160 | 26.8 | .190 | |
| TWJ 6WUU | 3/8 | .5000 | .8750 | 1.750 | 2.750 | .938 | .188 | .875 | 1.125 | 1.437 | 2.250 | .156 | .156 | 150 | 240 | 52.2 | .250 | |
| TWJ 8WUU | 1/2 | .6870 | 1.0000 | 2.000 | 3.500 | 1.250 | .250 | 1.125 | 1.375 | 1.688 | 2.500 | .156 | .156 | 370 | 580 | 183 | .510 | |
| TWJ 10WUU | 5/8 | .8750 | 1.2500 | 2.500 | 4.000 | 1.625 | .281 | 1.437 | 1.750 | 2.125 | 3.000 | .188 | .188 | 640 | 1000 | 373 | 1.000 | |
| TWJ 12WUU | 3/4 | .9370 | 1.3750 | 2.750 | 4.500 | 1.750 | .313 | 1.563 | 1.875 | 2.375 | 3.500 | .188 | .188 | 750 | 1180 | 496 | 1.200 | |
| TWJ 16WUU | 1 | 1.1870 | 1.6250 | 3.250 | 6.000 | 2.188 | .375 | 1.938 | 2.375 | 2.875 | 4.500 | .188 | .219 | 1360 | 2120 | 1260 | 2.400 | |
| TWJ 20WUU | 1-1/4 | 1.5000 | 2.0000 | 4.000 | 7.500 | 2.813 | .438 | 2.500 | 3.000 | 3.500 | 5.500 | .250 | .219 | 1970 | 3060 | 2100 | 5.000 | |
| TWJ 24WUU | 1-1/2 | 1.7500 | 2.3750 | 4.750 | 9.000 | 3.250 | .500 | 2.875 | 3.500 | 4.125 | 6.500 | .313 | .281 | 2370 | 3700 | 2900 | 7.800 | |

* Provided with push-in oil fitting for 1/4" to 1/2" size. Sizes from 5/8" to 1-1/2" offer a 1/4-28 tapped hole with a plug for adding a fitting if desired.
Product of NB Corporation of America


1inch=25.4mm
1lbs≈0.454kg
1lbf≈4.448N
1lbf·in≈0.112N·m

TWD TYPE (Inch Standard)


– Open Block Type –

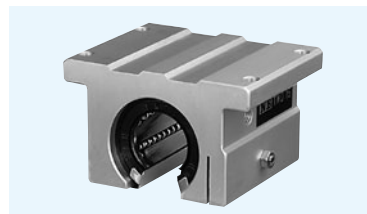

part number structure

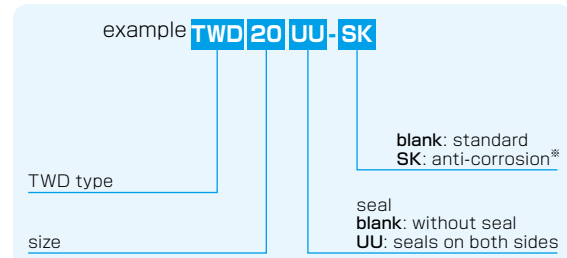

※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

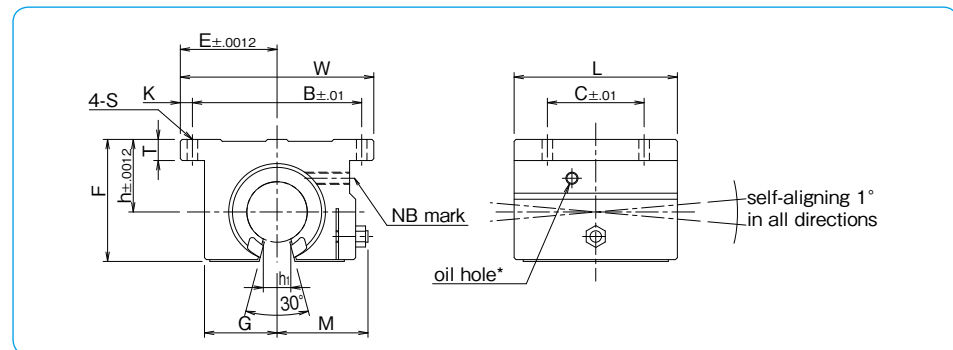

| part number | nom. shaft dia. inch | major dimensions | | | | | | | | | mounting dimensions | | | | basic load rating | | mass lbs |
|-------------|----------------------|------------------|--------|-------|-------|-------|------|-------|------|-------|---------------------|-------|------|------|-------------------|---------------|----------|
| | | h | E | W | L | F | T | G | M | h_1 | B | C | K | S | dynamic C lbf | static Co lbf | |
| TWD 8UU | 1/2 | .6870 | 1.000 | 2.000 | 1.500 | 1.100 | .250 | .688 | .86 | .260 | 1.688 | 1.000 | .156 | .156 | 230 | 290 | .188 |
| TWD 10UU | 5/8 | .8750 | 1.2500 | 2.500 | 1.750 | 1.405 | .281 | .875 | 1.06 | .319 | 2.125 | 1.125 | .188 | .188 | 400 | 500 | .365 |
| TWD 12UU | 3/4 | .9370 | 1.3750 | 2.750 | 1.875 | 1.535 | .315 | .937 | 1.12 | .386 | 2.375 | 1.250 | .188 | .188 | 470 | 590 | .452 |
| TWD 16UU | 1 | 1.1870 | 1.6250 | 3.250 | 2.625 | 1.975 | .375 | 1.188 | 1.40 | .512 | 2.875 | 1.750 | .188 | .218 | 850 | 1060 | 1.010 |
| TWD 20UU | 1-1/4 | 1.5000 | 2.0000 | 4.000 | 3.375 | 2.485 | .437 | 1.500 | 1.88 | .596 | 3.500 | 2.000 | .250 | .218 | 1230 | 1530 | 1.980 |
| TWD 24UU | 1-1/2 | 1.7500 | 2.3750 | 4.750 | 3.750 | 2.910 | .500 | 1.750 | 2.12 | .681 | 4.125 | 2.500 | .313 | .281 | 1480 | 1850 | 2.950 |
| TWD 32UU | 2 | 2.1250 | 3.0000 | 6.000 | 4.750 | 3.660 | .625 | 2.250 | 2.70 | .933 | 5.250 | 3.250 | .375 | .406 | 2430 | 3040 | 5.840 |

* Provided with push-in oil fitting for 1/2" size only. Sizes from 5/8" to 2" offer a 1/4-28 tapped hole with a plug for adding a fitting if desired.
Product of NB Corporation of America


1inch=25.4mm
1lbs≈0.454kg
1lbf≈4.448N

TWD-W TYPE (Inch Standard)


– Double-Wide Open Block Type –



part number structure

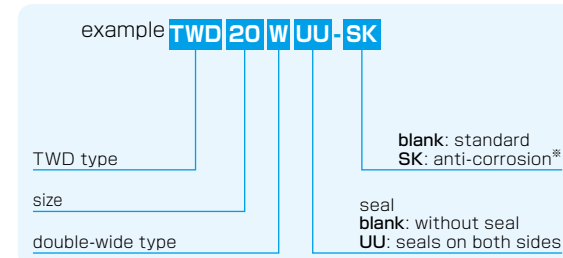

※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

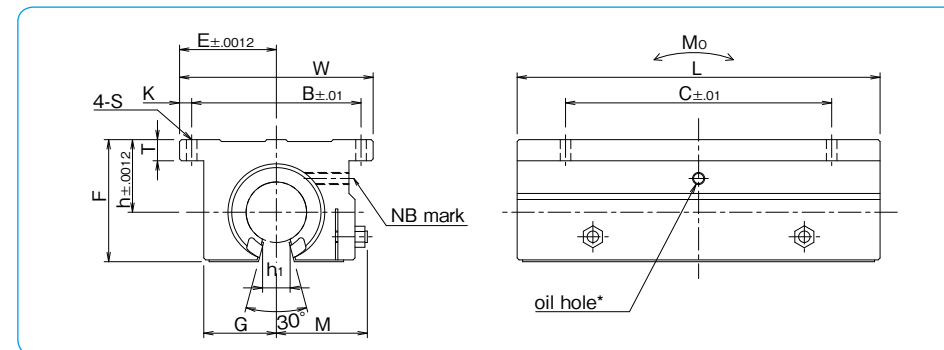

| part number | nom. shaft dia. inch | major dimensions | | | | | | | | | mounting dimensions | | | | basic load rating | | allowable static moment | | mass lbs |
|-------------|----------------------|------------------|--------|-------|-------|-------|------|-------|------|-------|---------------------|-------|------|------|-------------------|---------------|-------------------------|--------|----------|
| | | h | E | W | L | F | T | G | M | h_1 | B | C | K | S | dynamic C lbf | static Co lbf | Mo lbf-in | Mo lbs | |
| TWD 8WUU | 1/2 | .6870 | 1.000 | 2.000 | 3.500 | 1.100 | .250 | .688 | .86 | .260 | 1.688 | 2.500 | .156 | .156 | 370 | 580 | 128 | .400 | |
| TWD 10WUU | 5/8 | .8750 | 1.2500 | 2.500 | 4.000 | 1.405 | .281 | .875 | 1.06 | .319 | 2.125 | 3.000 | .188 | .188 | 640 | 1000 | 164 | .800 | |
| TWD 12WUU | 3/4 | .9370 | 1.3750 | 2.750 | 4.500 | 1.535 | .315 | .937 | 1.12 | .386 | 2.375 | 3.500 | .188 | .188 | 750 | 1180 | 283 | 1.000 | |
| TWD 16WUU | 1 | 1.1870 | 1.6250 | 3.250 | 6.000 | 1.975 | .375 | 1.188 | 1.40 | .512 | 2.875 | 4.500 | .188 | .218 | 1360 | 2120 | 719 | 2.000 | |
| TWD 20WUU | 1-1/4 | 1.5000 | 2.0000 | 4.000 | 7.500 | 2.485 | .437 | 1.500 | 1.88 | .569 | 3.500 | 5.500 | .250 | .218 | 1970 | 3060 | 1200 | 4.200 | |
| TWD 24WUU | 1-1/2 | 1.7500 | 2.3750 | 4.750 | 9.000 | 2.910 | .500 | 1.750 | 2.12 | .681 | 4.125 | 6.500 | .313 | .281 | 2370 | 3700 | 1650 | 6.700 | |

* Provided with push-in oil fitting for 1/2" size only. Sizes from 5/8" to 1-1/2" offer a 1/4-28 tapped hole with a plug for adding a fitting if desired.
Product of NB Corporation of America

1inch=25.4mm
1lbs≈0.454kg
1lbf≈4.448N
1lbf · in≈0.112N · m

STROKE BUSH SLIDE ROTARY BUSH

STROKE BUSH

| | |
|---|------|
| STRUCTURE AND ADVANTAGES | E-2 |
| ALLOWABLE SPEED FOR COMBINED ROTATION AND STROKE MOTION | E-2 |
| RATED LOAD AND RATED LIFE | E-2 |
| FIT | E-3 |
| USE AND HANDLING PRECAUTIONS | E-5 |
| DIMENSION TABLE | E-6~ |

SLIDE ROTARY BUSH SRE SERIES

| | |
|------------------------------|-------|
| STRUCTURE AND ADVANTAGES | E-10 |
| RATED LOAD AND RATED LIFE | E-12 |
| APPLICATION EXAMPLES | E-14 |
| USE AND HANDLING PRECAUTIONS | E-15 |
| FELT SEAL | E-15 |
| DIMENSION TABLE | E-16~ |

SLIDE ROTARY BUSH RK TYPE

| | |
|--------------------------|------|
| STRUCTURE AND ADVANTAGES | E-26 |
| LIFE CALCULATION | E-26 |
| DIMENSION TABLE | E-27 |

STROKE BUSH

The NB stroke bush is a linear and rotational motion mechanism utilizing the rotational motion of ball elements between an outer cylinder and a shaft. It is compact and can withstand high loading.

The retainer is made of a light metal alloy with high wear resistance. Smooth motion is achieved under high-speed and high-acceleration conditions.

Although the linear motion is limited to a specific stroke length, the combined rotation and stroke motion is achieved with very little frictional resistance. The NB stroke bush can be conveniently used in a variety of applications.

STRUCTURE AND ADVANTAGES

The retainer in the NB stroke bush positions the ball elements in a zigzag arrangement. The inner surface of the outer cylinder is finished by precision grinding, resulting in smooth motion of the ball elements. Each of the ball elements is held in a separate hole and smooth motion is achieved for both rotational motion and linear motion. The retainer moves half the length of the linear motion, therefore, the stroke length is limited to approximately twice the length the retainer can travel within the outer cylinder.

High Precision

High-carbon chromium bearing steel is used for the outer cylinder. It is heat treated and ground to achieve high rigidity and accuracy.

Ease of Mounting and Replacement

The highly accurate fabrication of the NB stroke bush results in uniform dimensions, facilitating parts replacement and housing fabrication.


Light Weight and Space Saving

The use of an aluminum alloy for the retainer and the thin-wall outer cylinder makes the NB stroke bush light weight and compact.

Lubrication



One lubrication hole is provided on each oil groove of the outer cylinder, making it easy to lubricate the SR stroke bush.

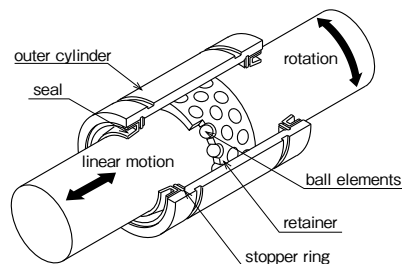Figure E-1 Structure of SR Stroke Bush



TYPE

Table E-1 Type

| | Standard Type | Double Retainer Type |
|---------|---|---|
| SR TYPE |  P.E-6 |  P.E-8 |

ALLOWABLE SPEED FOR COMBINED ROTATION AND STROKE MOTION

The allowable speed for combined rotation and stroke motion is obtained from the following equation:

The value of DN is given as follows depending on the lubrication method.

$$DN \geq dm \cdot n + 10 \cdot S \cdot n_1$$

| | |
|------------------------|------------|
| for oil lubrication | DN=600,000 |
| for grease lubrication | DN=300,000 |

note.....n ≤ 5,000 S · n₁ ≤ 50,000

RATED LOAD AND RATED LIFE

The relationship between the rated load and life of the stroke bush is expressed as follows:

$$L = \left(\frac{f_H \cdot f_T \cdot f_C}{f_W} \cdot \frac{C}{P} \right)^3 \times 10^6$$

L: rated life
 f_H: hardness coefficient
 f_T: temperature coefficient f_C: contact coefficient
 f_W: applied load coefficient
 C: basic dynamic load rating (N)
 P: applied load (N)
 ※Refer to page Eng-5 for the coefficients.

●For combined rotation and stroke motion

$$L_h = \frac{L}{60 \sqrt{(dm \cdot n)^2 + (10 \cdot S \cdot n_1)^2} / dm}$$

●For stroke motion

$$L_h = \frac{L}{600 \cdot S \cdot n_1 / (\pi \cdot dm)}$$

L_h: life time (hr) S: stroke length (mm)
 n: revolutions per min. (rpm)
 n₁: number of cycles per minute (cpm)
 dm: ball pitch diameter (mm) ≅ 1.15 dr

FIT

The fits generally used between the shaft and the housing are listed in Table E-2. The inner contact diameters of the SR stroke bush are listed in the dimension tables. The shaft diameter tolerance should be selected to achieve the desired amount of radial clearance (see Table E-3). Please pay attention that high-speed linear motion can cause the retainer to slip due to inertial force. In selecting a shaft, please take note of:
 Hardness: 58HRC or more (refer to hardness coefficient on page Eng-5) recommended
 Surface Roughness: less than Ra0.4 recommended

Table E-2

| normal operating condition | | vertical use or highly accurate case | |
|----------------------------|---------|--------------------------------------|---------|
| shaft | housing | shaft | housing |
| k5,m5 | H6,H7 | n5,p6 | J6,J7 |


Table E-3 Radial Clearance Negative Limit

| part number | limit (μm) |
|-------------|------------|
| 6 | - 2 |
| 8~10 | - 3 |
| 12~16 | - 4 |
| 20~30 | - 5 |
| 35~50 | - 6 |
| 60~80 | - 8 |
| 100 | -10 |

MOUNTING

Examples of mounting methods of Stroke Bush are shown in Figure E-2. To avoid deformation, do not fix outer cylinder by using set screw.

Figure E-2 Mounting Method

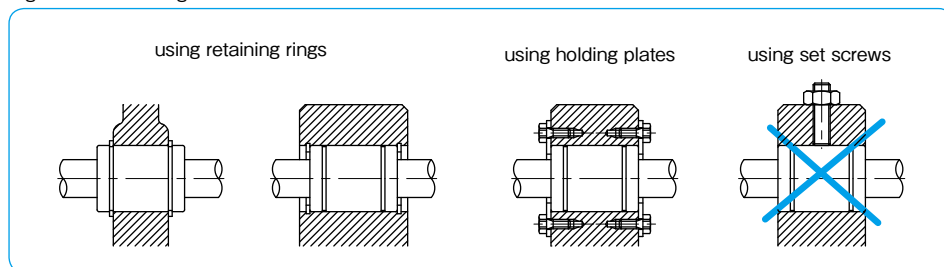

LUBRICATION

Appropriate lubrication is needed to ensure the accuracy of NB Stroke Bush and to maintain bearing life. Anti-rust oil is applied to NB Stroke Bush prior to shipment. The NB selected anti-rust oil has a little to no effect on lubricants, however, please apply lubricant only after cleaning Stroke Bush with kerosene, etc.

Grease Lubricant


Prior to usage, please apply grease, and re-lubricate periodically according to the operating conditions. (Lithium soap-based grease is recommended.) Relubrication can be done by directly applying grease inside the ball bush or by using oil hole as Figure E-3 shows.

A special low dust generation grease is optional for clean room application. Please refer to page Eng-40.

Oil Lubricant

Prior to usage, please apply oil directly to the shaft surface or by using oil hole as Figure E-3 shows. Turbine oil (ISO standard VG32-68) is recommended.

Figure E-3 Oil hole

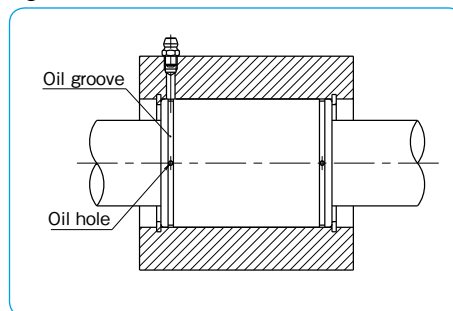

USE AND HANDLING PRECAUTIONS

Maximum Stroke

The maximum stroke in the dimension table is the stroke limit.

Retainer Slippage

The retainer can slip under high-speed motion, vertical application, unbalanced-loading, and vibrating conditions. It is suggested that the stroke to be set as a 80% of the maximum stroke in the dimension table. It is also recommended that the bush be cycled to perform the maximum stroke several times, so that the retainer returns to its central position.

Accuracy


The accuracies of the SR stroke bush are stated in the dimension tables. Since the outer cylinder deforms due to tension from the retaining ring, the dimension of the outer cylinder is an average value at points P, where calculated using the following equation:

$$W = 4 + L/8$$

W: the distance from the end of the outer cylinder to measurement point P

L: the length of the outer cylinder

Figure E-4 Outer Cylinder Measurement Points

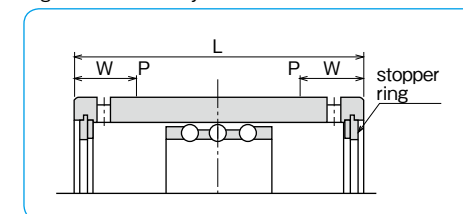

Operating Temperature Range

The operating temperature is ranging from -20 °C to 110°C. In case of operation at temperature outside this range, please contact NB.

Dust Prevention

Dust and other contaminations affect the bush's lifetime and accuracy if dust or particle enter into inside of bush. Although seals work under a normal environment, in a harsh environment, it is necessary to attach protective covers.

SR TYPE

—Standard Type—




part number structure

example **SR 20**

SR type

inner contact diameter (dr)

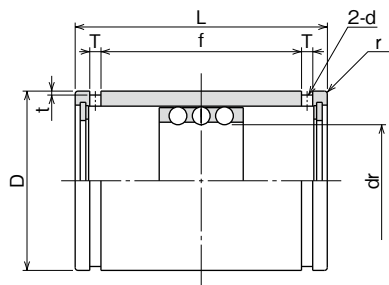

SR-UU TYPE

—Standard Type with Seals—




part number structure

example **SR 20 UU**

SR type

inner contact diameter (dr)

seals on both sides

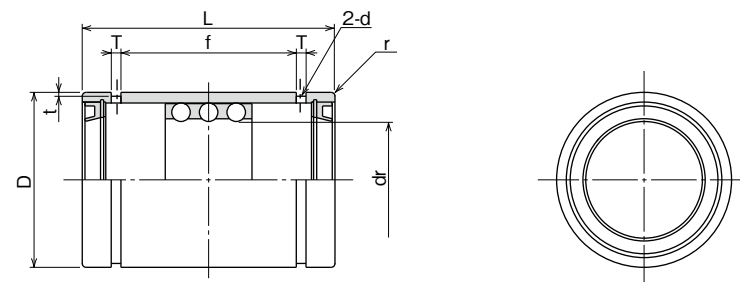

| part number | maximum stroke mm | number of rows | dr | | D | | major dimensions | | | | | basic load rating | | mass g | |
|-------------|----------------------|----------------|-----|-----------------|-----|-----------------|------------------|------|-----|-----|-----|-------------------|-------------------|-----------|-------------------|
| | | | mm | tolerance μm | mm | tolerance μm | L | f | T | t | d | r | dynamic C N | | static Co N |
| SR 6 | 19 | 3 | 6 | +22 | 12 | 0 | 20 | 11.3 | 1.1 | 0.5 | 1 | 0.5 | 216 | 147 | 8.9 |
| SR 8 | 24 | 3 | 8 | +13 | 15 | -11 | 24 | 17.1 | 1.5 | 0.5 | 1.2 | 0.5 | 343 | 245 | 15.6 |
| SR 10 | 30 | 3 | 10 | +19 | 19 | 0 | 30 | 22.7 | 1.5 | 0.5 | 1.2 | 0.5 | 637 | 461 | 28.8 |
| SR 12 | 32 | 3 | 12 | +27 | 23 | -13 | 32 | 24.5 | 1.5 | 0.5 | 1.2 | 0.5 | 1,070 | 813 | 42 |
| SR 16 | 40 | 3 | 16 | +16 | 28 | -13 | 37 | 29.1 | 1.5 | 0.7 | 1.3 | 0.5 | 1,180 | 990 | 71 |
| SR 20 | 50 | 3 | 20 | +33 | 32 | 0 | 45 | 35.8 | 2 | 0.7 | 1.5 | 0.5 | 1,260 | 1,170 | 99 |
| SR 25 | 50 | 3 | 25 | +20 | 37 | -16 | 45 | 35.8 | 2 | 0.7 | 1.6 | 1 | 1,330 | 1,330 | 117 |
| SR 30 | 82 | 3 | 30 | +45 | 45 | -19 | 65 | 53.5 | 2.5 | 1 | 2 | 1 | 2,990 | 3,140 | 205 |
| SR 35 | 92 | 3 | 35 | +52 | 52 | 0 | 70 | 58.5 | 2.5 | 1 | 2 | 1.5 | 3,140 | 3,530 | 329 |
| SR 40 | 108 | 3 | 40 | +41 | 60 | 0 | 80 | 68.3 | 2.5 | 1 | 2 | 1.5 | 4,120 | 4,800 | 516 |
| SR 50 | 138 | 3 | 50 | +25 | 72 | -19 | 100 | 86.4 | 3 | 1 | 2.5 | 1.5 | 5,540 | 6,910 | 827 |
| SR 60 | 138 | 3 | 60 | +49 | 85 | 0 | 100 | 86.4 | 3 | 1 | 2.5 | 2 | 5,980 | 8,230 | 1,240 |
| SR 80 | 132 | 3 | 80 | +30 | 110 | -22 | 100 | 86 | 3 | 1.5 | 2.5 | 2 | 7,840 | 12,200 | 2,050 |
| SR100 | 132 | 3 | 100 | +58/+36 | 130 | 0/-25 | 100 | 86 | 3 | 1.5 | 2.5 | 2 | 8,430 | 14,700 | 2,440 |

1N≒0.102kgf

| part number | maximum stroke mm | number of rows | dr | | D | | major dimensions | | | | | basic load rating | | mass g | |
|-------------|----------------------|----------------|-----|-----------------|-----|-----------------|------------------|------|-----|-----|-----|-------------------|-------------------|-----------|-------------------|
| | | | mm | tolerance μm | mm | tolerance μm | L | f | T | t | d | r | dynamic C N | | static Co N |
| SR 8UU | 14 | 3 | 8 | +22 | 15 | 0/-11 | 24 | 12.3 | 1.5 | 0.5 | 1.2 | 0.5 | 343 | 245 | 15.6 |
| SR 10UU | 16 | 3 | 10 | +13 | 19 | 0 | 30 | 15.5 | 1.5 | 0.5 | 1.2 | 0.5 | 637 | 461 | 28.8 |
| SR 12UU | 18 | 3 | 12 | +27 | 23 | -13 | 32 | 17.1 | 1.5 | 0.5 | 1.2 | 0.5 | 1,070 | 813 | 42 |
| SR 16UU | 26 | 3 | 16 | +16 | 28 | -13 | 37 | 21.1 | 1.5 | 0.7 | 1.3 | 0.5 | 1,180 | 990 | 71 |
| SR 20UU | 36 | 3 | 20 | +33 | 32 | 0 | 45 | 26.8 | 2 | 0.7 | 1.5 | 0.5 | 1,260 | 1,170 | 99 |
| SR 25UU | 36 | 3 | 25 | +20 | 37 | -16 | 45 | 26.8 | 2 | 0.7 | 1.6 | 1 | 1,330 | 1,330 | 117 |
| SR 30UU | 68 | 3 | 30 | +45 | 45 | -16 | 65 | 45.1 | 2.5 | 1 | 2 | 1 | 2,990 | 3,140 | 205 |
| SR 35UU | 76 | 3 | 35 | +52 | 52 | 0 | 70 | 50.1 | 2.5 | 1 | 2 | 1.5 | 3,140 | 3,530 | 329 |
| SR 40UU | 91 | 3 | 40 | +41 | 60 | 0 | 80 | 59.9 | 2.5 | 1 | 2 | 1.5 | 4,120 | 4,800 | 516 |
| SR 50UU | 116 | 3 | 50 | +25 | 72 | -19 | 100 | 77.4 | 3 | 1 | 2.5 | 1.5 | 5,540 | 6,910 | 827 |
| SR 60UU | 117 | 3 | 60 | +49 | 85 | 0 | 100 | 77.4 | 3 | 1 | 2.5 | 2 | 5,980 | 8,230 | 1,240 |
| SR 80UU | 110 | 3 | 80 | +30 | 110 | -22 | 100 | 77 | 3 | 1.5 | 2.5 | 2 | 7,840 | 12,200 | 2,050 |
| SR100UU | 110 | 3 | 100 | +58/+36 | 130 | 0/-25 | 100 | 77 | 3 | 1.5 | 2.5 | 2 | 8,430 | 14,700 | 2,440 |



1N≒0.102kgf

SR-B TYPE

–Double Retainer Type–



part number structure

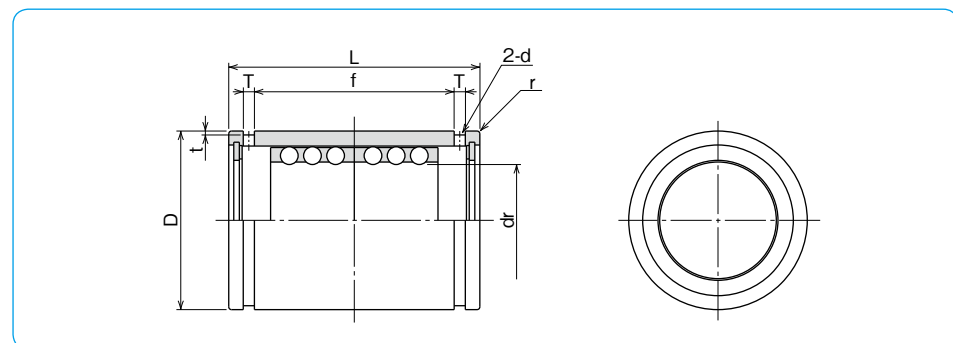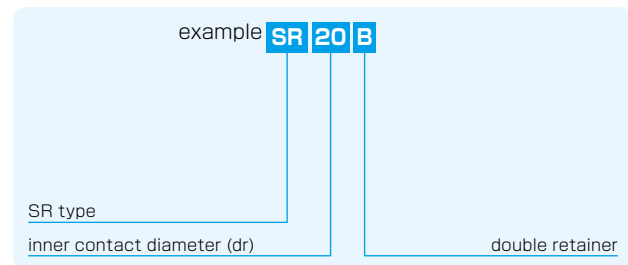

| part number | maximum stroke mm | number of rows | major dimensions | | | | | | | | | | basic load rating | | mass g | |
|-------------|----------------------|----------------|------------------|-----------------|---------|-----------------|---------|-----------------|---------|---------|---------|---------|-------------------|--------|-----------|---------|
| | | | dr mm | tolerance μm | D mm | tolerance μm | L mm | tolerance mm | f mm | T mm | t mm | d mm | r mm | C N | | Co N |
| SR 8B | 8 | 6 | 8 | +22 | 15 | 0/-11 | 24 | | 17.1 | 1.5 | 0.5 | 1.2 | 0.5 | 549 | 490 | 16.8 |
| SR 10B | 8 | 6 | 10 | +13 | 19 | 0 | 30 | 0 | 22.7 | 1.5 | 0.5 | 1.2 | 0.5 | 1,030 | 931 | 31.2 |
| SR 12B | 8 | 6 | 12 | +27 | 23 | -13 | 32 | -0.2 | 24.5 | 1.5 | 0.5 | 1.2 | 0.5 | 1,720 | 1,630 | 46 |
| SR 16B | 16 | 6 | 16 | +16 | 28 | | 37 | | 29.1 | 1.5 | 0.7 | 1.3 | 0.5 | 1,910 | 1,980 | 75 |
| SR 20B | 20 | 6 | 20 | | 32 | | 45 | | 35.8 | 2 | 0.7 | 1.5 | 0.5 | 2,060 | 2,320 | 106 |
| SR 25B | 20 | 6 | 25 | +33 | 37 | 0 | 45 | | 35.8 | 2 | 0.7 | 1.6 | 1 | 2,170 | 2,670 | 125 |
| SR 30B | 44 | 6 | 30 | +20 | 45 | -16 | 65 | | 53.5 | 2.5 | 1 | 2 | 1 | 4,800 | 6,270 | 220 |
| SR 35B | 54 | 6 | 35 | | 52 | | 70 | 0 | 58.5 | 2.5 | 1 | 2 | 1.5 | 5,050 | 7,060 | 346 |
| SR 40B | 66 | 6 | 40 | +41 | 60 | 0 | 80 | -0.3 | 68.3 | 2.5 | 1 | 2 | 1.5 | 6,710 | 9,560 | 540 |
| SR 50B | 88 | 6 | 50 | +25 | 72 | -19 | 100 | | 86.4 | 3 | 1 | 2.5 | 1.5 | 8,970 | 13,800 | 862 |
| SR 60B | 88 | 6 | 60 | +49 | 85 | 0 | 100 | | 86.4 | 3 | 1 | 2.5 | 2 | 9,700 | 16,500 | 1,290 |
| SR 80B | 76 | 6 | 80 | +30 | 110 | -22 | 100 | 0 | 86 | 3 | 1.5 | 2.5 | 2 | 12,700 | 24,300 | 2,110 |
| SR100B | 76 | 6 | 100 | +58/+36 | 130 | 0/-25 | 100 | -0.4 | 86 | 3 | 1.5 | 2.5 | 2 | 13,700 | 29,400 | 2,520 |



1N≒0.102kgf

SR-BUU TYPE

–Double Retainer Type with Seals–



part number structure

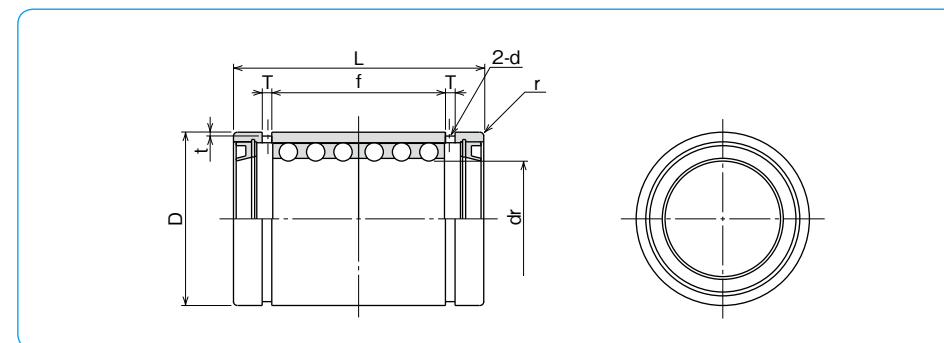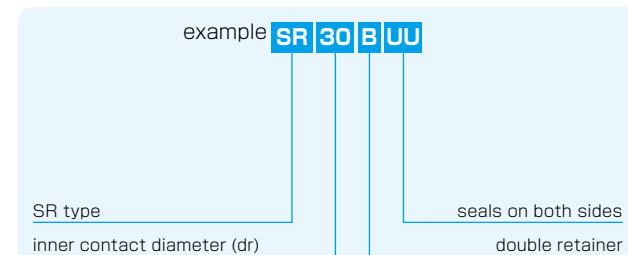

| part number | maximum stroke mm | number of rows | major dimensions | | | | | | | | | | basic load rating | | mass g | |
|-------------|----------------------|----------------|------------------|-----------------|---------|-----------------|---------|-----------------|---------|---------|---------|---------|-------------------|--------|-----------|---------|
| | | | dr mm | tolerance μm | D mm | tolerance μm | L mm | tolerance mm | f mm | T mm | t mm | d mm | r mm | C N | | Co N |
| SR 30BUU | 30 | 6 | 30 | +33/+20 | 45 | 0/-16 | 65 | | 45.1 | 2.5 | 1 | 2 | 1 | 4,800 | 6,270 | 220 |
| SR 35BUU | 38 | 6 | 35 | | 52 | 0 | 70 | 0 | 50.1 | 2.5 | 1 | 2 | 1.5 | 5,050 | 7,060 | 346 |
| SR 40BUU | 49 | 6 | 40 | +25 | 60 | -19 | 80 | -0.3 | 59.9 | 2.5 | 1 | 2 | 1.5 | 6,710 | 9,560 | 540 |
| SR 50BUU | 66 | 6 | 50 | | 72 | | 100 | | 77.4 | 3 | 1 | 2.5 | 1.5 | 8,970 | 13,800 | 862 |
| SR 60BUU | 67 | 6 | 60 | +49 | 85 | 0 | 100 | | 77.4 | 3 | 1 | 2.5 | 2 | 9,700 | 16,500 | 1,290 |
| SR 80BUU | 54 | 6 | 80 | +30 | 110 | -22 | 100 | 0 | 77 | 3 | 1.5 | 2.5 | 2 | 12,700 | 24,300 | 2,110 |
| SR100BUU | 54 | 6 | 100 | +58/+36 | 130 | 0/-25 | 100 | -0.4 | 77 | 3 | 1.5 | 2.5 | 2 | 13,700 | 29,400 | 2,520 |

1N≒0.102kgf

SLIDE ROTARY BUSH SRE SERIES

The NB Slide Rotary Bush SRE Series provides rotary and linear motion functions. Linear motion with unlimited stroke and rotary motion are merged into a single bush resulting in great space saving compared with a combination of any conventional bearings. There are three types; standard, flange, and unit type with sizes ranging from 6 to 40.

STRUCTURE AND ADVANTAGES

NB Slide Rotary Bush features a special retainer fitted into cylindrical steel outer cylinder and is designed to guide steel balls for smooth circulation in its retainer. The retainer is also designed to rotate freely towards radial direction and offers smooth linear and rotary motions.

Smooth Operation

The inner surface of the outer cylinder allows smooth operation of linear and rotary motions while maintaining a uniform load distribution.

High Load Capacity

The use of comparatively large diameter steel balls enhances the load capacity.


Smooth Rotation

The positioning of the steel balls in a cylindrical formation inside the retainer enables a smooth rotational motion regardless of the installation direction.

Complete Interchangeability

NB Slide Rotary series is completely interchangeable with SM type Slide Bush, SMK type Flanged Slide Bush and SMA(W) type, AK(W) type and SMP type.

Figure E-5 Structure of Slide Rotary Bush SRE type

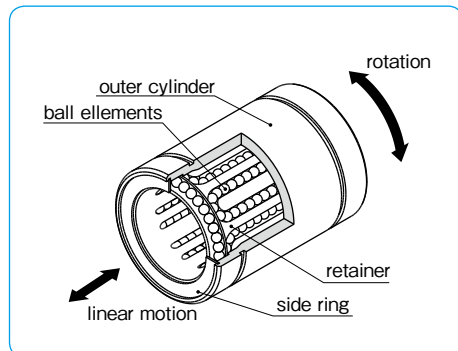

TYPE

Table E-4 Type

| Standard Type | Square Flange Type |
|--|--|
| <p>SRE TYPE</p>  <p>P.E-16</p> | <p>SREK TYPE</p>  <p>P.E-18</p> |
| Unit | |
| Block Type | Double-Wide Block Type |
| <p>SMA-R TYPE</p>  <p>P.E-20</p> | <p>SMA-RW TYPE</p>  <p>P.E-21</p> |
| <p>AK-R TYPE</p>  <p>P.E-22</p> | <p>AK-RW TYPE</p>  <p>P.E-23</p> |
| <p>SMP-R TYPE</p>  <p>P.E-24</p> | |

RATED LOAD AND RATED LIFE

The rated life and load rating are defined as follows.

Rated Life

When a group of slide rotary bearings of the same type are used under the same conditions, the rated life is defined as the total number of rotations made without causing flaking by 90% of the bearings.

Basic Dynamic Load Rating

The basic dynamic load rating is defined as the load with a constant magnitude and direction at which a rated life of 10⁶ rotations can be achieved.

Basic Static Load Rating

The basic static load rating is defined as the load with a constant direction that would result in a certain contact stress at the mid-point of the rolling element and tracking surface that are experiencing the maximum stress.

Equation (1) gives the relation between the applied load and the rated life of the slide rotary bush.

$$L = \left(\frac{f_H \cdot f_T \cdot f_C \cdot C}{f_W \cdot P} \right)^3 \times 10^6 \dots \dots \dots (1)$$

L: rated life (rotations) f_H: hardness coefficient f_T: temperature coefficient f_C: contact coefficient f_W: applied load coefficient C: basic dynamic load rating (N) P: applied load (N)
 ※Refer to page Eng-5 for the coefficients.

Since the slide rotary bush is used in applications with combined linear and rotary motions, the life time is obtained using Equations (2) and (3).

- When linear and rotary motions are combined

$$L_h = \frac{L}{60\sqrt{(dm \cdot n)^2 + (10 \cdot S \cdot n_1)^2} / dm} \dots \dots (2)$$

- When only linear motion is involved

$$L_h = \frac{L}{600 \cdot S \cdot n_1 / (\pi \cdot dm)} \dots \dots \dots (3)$$

L_h: life time (hr) S: stroke length (mm) n: revolutions per minute (rpm) n₁: number of cycles per minute (cpm)
 dm: ball pitch diameter (mm) ≅ 1.15dr (dr is the inner contact diameter of the SRE series)

Calculation Example

The life of SRE20 type NB slide rotary bush is calculated based on the following conditions.

- Conditions
 Motion: Linear and rotational combined Load: P=30N Stroke: S=200mm
 Revolutions per minute: n=15rpm Number of cycles per minute: n₁=10cpm
 Shaft surface hardness: greater than 58 HRC
 Operating temperature: room temperature Other: single shaft with single bush

- Calculation
 Basic dynamic load rating: C=647 N
 Based on the above conditions, the life is calculated using the following coefficient values.
 Hardness coefficient f_H=1, Temperature coefficient f_T=1, Contact coefficient f_C=1
 Applied load coefficient, f_W=1.5

Rated life

$$L = \left(\frac{f_H \cdot f_T \cdot f_C \cdot C}{f_W \cdot P} \right)^3 \times 10^6$$

$$= \left(\frac{1 \times 1 \times 1 \cdot 647}{1.5 \cdot 30} \right)^3 = 2,972 \times 10^6 \text{ (rotations)}$$

Life (in hours)

$$L_h = \frac{L}{60\sqrt{(dm \cdot n)^2 + (10 \cdot S \cdot n_1)^2} / dm}$$

$$= \frac{2,972 \times 10^6}{60\sqrt{(1.15 \times 20 \times 15)^2 + (10 \times 200 \times 10)^2} / (1.15 \times 20)}$$

$$= 56,900 \text{ (h)}$$

FIT

Shaft

In order to ensure high accuracy motion of Slide Rotary Bush SRE type, it is essential to select a high quality shaft. In selecting a shaft, please take note of:

- Outer diameter tolerance: g6 recommended
- Surface hardness: 58HRC or higher
 For a shaft with surface hardness less than 58HRC, make a correction in life calculation by adding hardness coefficient.
- Surface roughness: lower than Ra0.4 or better


Housing

Inner diameter tolerance: H7 recommended

MOUNTING


Examples of mounting methods are shown in Figure E-6. Please do not fix outer cylinder by using set screw to avoid deformation.

Figure E-6 Mounting Method

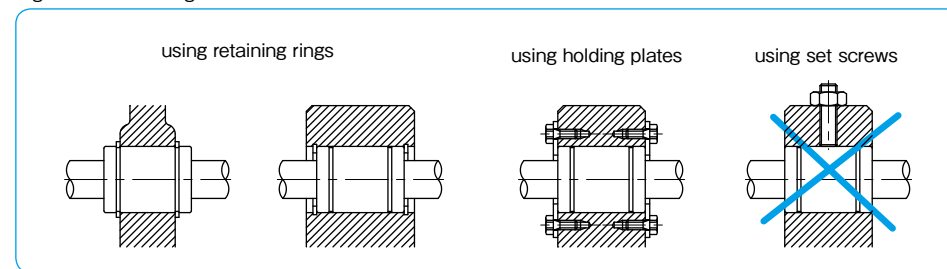


APPLICATION EXAMPLES


Application Example 1 Vertical Shaft Robot Arm

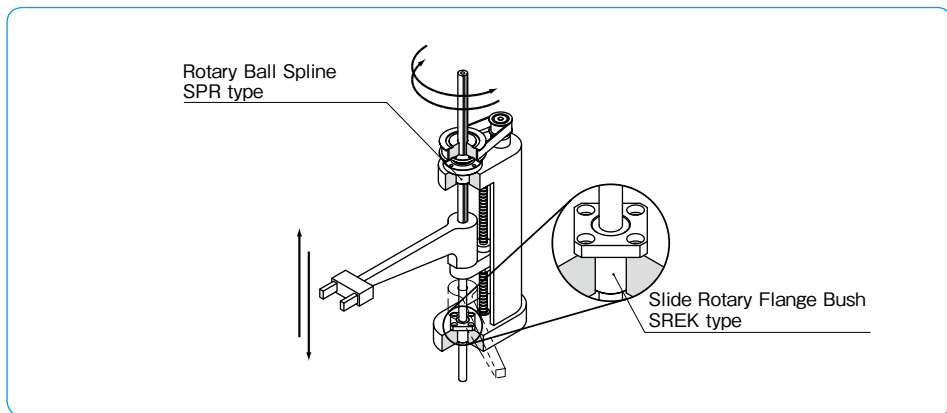


Application Example 2 Multiple Gearing Idler

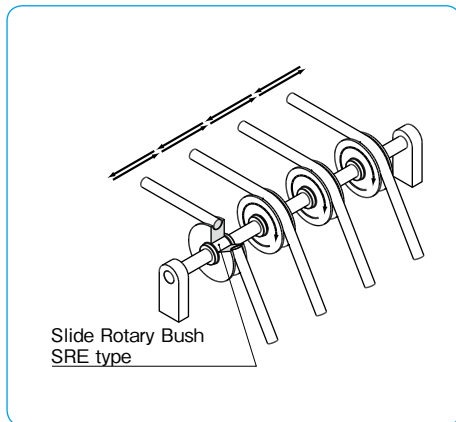

Application Example 4 Turntable

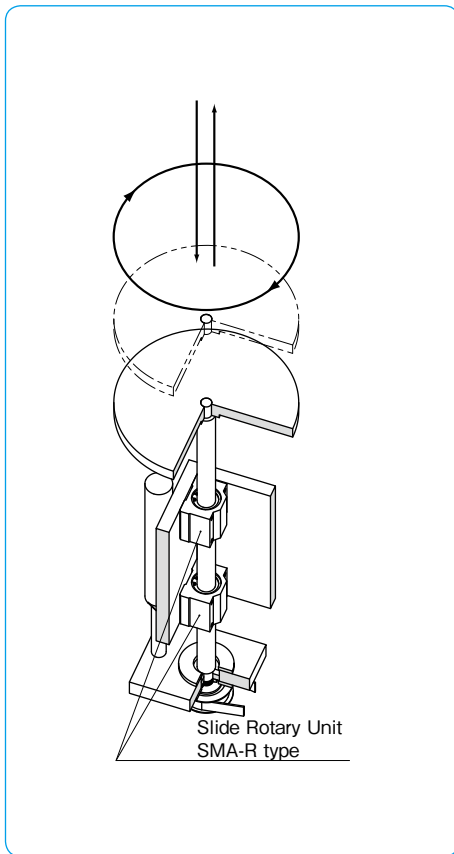

Application Example 3 Tool Changer

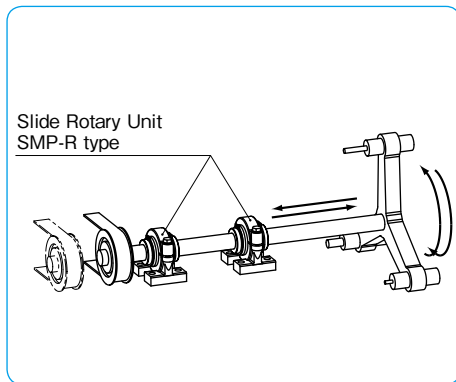

USE AND HANDLING PRECAUTIONS

Lubrication

Lubrication is needed (1) to prevent heat fusing by reducing friction between the rolling elements and the tracking surface, (2) to reduce wear of the structural elements, and (3) to prevent rusting. Lubrication affects both the performance and life of the bush. A lubrication method and a lubrication agent appropriate to the operating conditions should be selected. For oil lubrication, turbine oil (ISO standard VG32-68) is recommended. For grease lubrication, lithium soap based grease No. 2 is recommended. The replenishment interval depends on the operating conditions.

Dust Prevention

Dust and other contaminants affect the bush's lifetime and accuracy. Appropriate prevention methods are thus important.

Operating Temperature Range

The operating temperature is ranging from -20°C to 110°C . In case of operation at a temperature outside this range, please contact NB.


Retainer Material

The standard material of SRE Retainer is stainless steel. When requiring other material, please contact NB.

FELT SEAL

A felt seal FLM strengthens lubrication characteristics and extends relubrication period of the slide rotary bush.

Figure E-7 Felt Seal

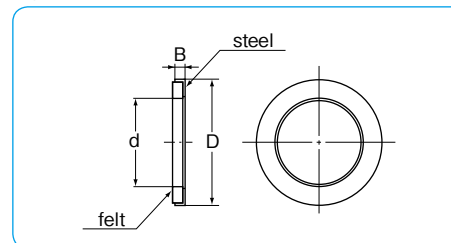


Installation

The felt seal does not work as a retaining ring. Figure E-8 shows how to install the felt seal.

Table E-4 Felt Seal Dimensions

| part number | major dimensions (mm) | | | applicable slide rotary bush |
|-------------|-----------------------|----|---|------------------------------|
| | d | D | B | |
| FLM 6 | 6 | 12 | 2 | SRE 6 |
| FLM 8 | 8 | 15 | 2 | SRE 8 |
| FLM 10 | 10 | 19 | 3 | SRE 10 |
| FLM 12 | 12 | 21 | 3 | SRE 12 |
| FLM 13 | 13 | 23 | 3 | SRE 13 |
| FLM 16 | 16 | 28 | 4 | SRE 16 |
| FLM 20 | 20 | 32 | 4 | SRE 20 |
| FLM 25 | 25 | 40 | 5 | SRE 25 |
| FLM 30 | 30 | 45 | 5 | SRE 30 |
| FLM 40 | 40 | 60 | 5 | SRE 40 |

Figure E-8 Example of Installation

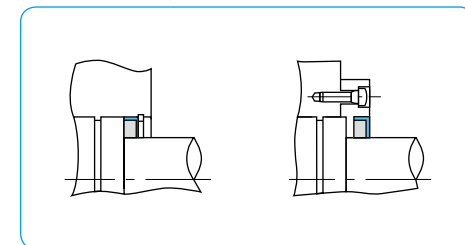

SRE TYPE

– Standard type –




part number structure

example **SRE 25**

SRE type

inner contact diameter (dr)

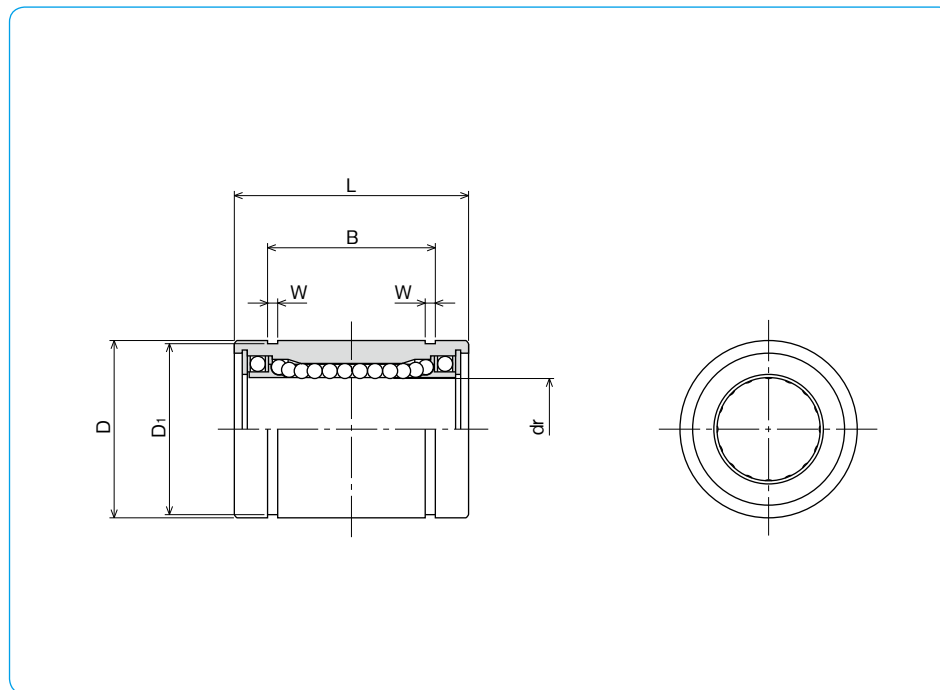

| part number | dr | | D | | major dimensions | | | B | tolerance mm |
|--------------|----|-------------------------|----|-------------------------|------------------|------|------|------|--------------|
| | mm | tolerance μm | mm | tolerance μm | L | L | mm | | |
| SRE 6 | 6 | | 12 | 0 | 19 | 0 | 13.5 | 0 | |
| SRE 8 | 8 | +4 | 15 | -11 | 24 | | 17.5 | | |
| SRE10 | 10 | -5 | 19 | | 29 | | 22 | | |
| SRE12 | 12 | | 21 | 0 | 30 | | 23 | | |
| SRE13 | 13 | +3 | 23 | -13 | 32 | -0.2 | 23 | -0.2 | |
| SRE16 | 16 | -6 | 28 | | 37 | | 26.5 | | |
| SRE20 | 20 | | 32 | 0 | 42 | 0 | 30.5 | 0 | |
| SRE25 | 25 | +3 | 40 | -16 | 59 | | 41 | | |
| SRE30 | 30 | -7 | 45 | | 64 | | 44.5 | | |
| SRE40 | 40 | +3/-8 | 60 | 0/-19 | 80 | | -0.3 | | 60.5 |


※If the inner contact diameter exceeds 40 mm, please contact NB.

| W | D ₁ | basic load rating | | allowable revolutions per minute rpm | mass g | part number |
|------|----------------|-------------------|-------------|--------------------------------------|--------|--------------|
| | | dynamic C N | static Co N | | | |
| 1.1 | 11.5 | 78 | 176 | 300 | 10 | SRE 6 |
| 1.1 | 14.3 | 137 | 314 | 300 | 20 | SRE 8 |
| 1.3 | 18 | 157 | 372 | 300 | 39 | SRE10 |
| 1.3 | 20 | 274 | 588 | 300 | 42 | SRE12 |
| 1.3 | 22 | 323 | 686 | 300 | 56 | SRE13 |
| 1.6 | 27 | 451 | 882 | 250 | 97 | SRE16 |
| 1.6 | 30.5 | 647 | 1,180 | 250 | 133 | SRE20 |
| 1.85 | 38 | 882 | 1,860 | 250 | 293 | SRE25 |
| 1.85 | 43 | 1,180 | 2,650 | 200 | 371 | SRE30 |
| 2.1 | 57 | 1,960 | 4,020 | 200 | 778 | SRE40 |

1N≒0.102kgf

SREK TYPE

– Square Flange type –

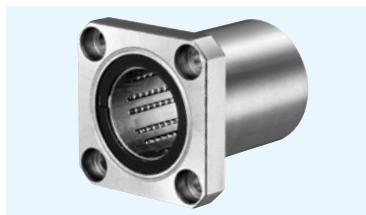


part number structure

example **SREK 25**

SREK type

inner contact diameter (dr)

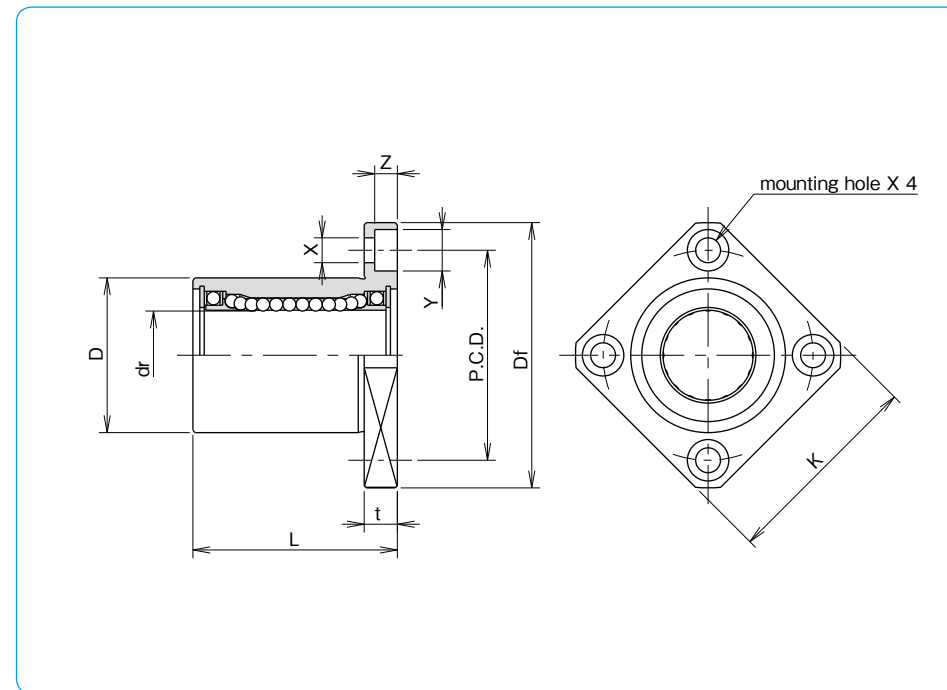

| part number | dr | | D | | major dimensions | | | |
|---------------|----|-------------------------|----|-------------------------|------------------|-------|------|-------------|
| | mm | tolerance μm | mm | tolerance μm | L ± 0.3 mm | Df mm | K mm | flange t mm |
| SREK 6 | 6 | | 12 | 0 | 19 | 28 | 22 | 5 |
| SREK 8 | 8 | +4 | 15 | -13 | 24 | 32 | 25 | 5 |
| SREK10 | 10 | -5 | 19 | | 29 | 40 | 30 | 6 |
| SREK12 | 12 | +3 | 21 | 0 | 30 | 42 | 32 | 6 |
| SREK13 | 13 | -6 | 23 | -16 | 32 | 43 | 34 | 6 |
| SREK16 | 16 | | 28 | | 37 | 48 | 37 | 6 |
| SREK20 | 20 | +3 | 32 | 0 | 42 | 54 | 42 | 8 |
| SREK25 | 25 | -7 | 40 | -19 | 59 | 62 | 50 | 8 |
| SREK30 | 30 | | 45 | | 64 | 74 | 58 | 10 |

| P.C.D. mm | X×Y×Z mm | perpendicularity μm | basic load rating | | allowable revolutions per minute | mass g | part number |
|-----------|-------------|--------------------------------|-------------------|-------------|----------------------------------|--------|---------------|
| | | | dynamic C N | static Co N | | | |
| 20 | 3.5×6×3.1 | 12 | 78 | 176 | 300 | 21 | SREK 6 |
| 24 | 3.5×6×3.1 | | 137 | 314 | 300 | 33 | SREK 8 |
| 29 | 4.5×7.5×4.1 | | 157 | 372 | 300 | 61 | SREK10 |
| 32 | 4.5×7.5×4.1 | | 274 | 588 | 300 | 67 | SREK12 |
| 33 | 4.5×7.5×4.1 | | 323 | 686 | 300 | 83 | SREK13 |
| 38 | 4.5×7.5×4.1 | | 451 | 882 | 250 | 126 | SREK16 |
| 43 | 5.5×9×5.1 | 15 | 647 | 1,180 | 250 | 178 | SREK20 |
| 51 | 5.5×9×5.1 | | 882 | 1,860 | 250 | 355 | SREK25 |
| 60 | 6.6×11×6.1 | | 1,180 | 2,650 | 200 | 483 | SREK30 |



1N≐0.102kgf

SMA-R TYPE

—Block type—



part number structure

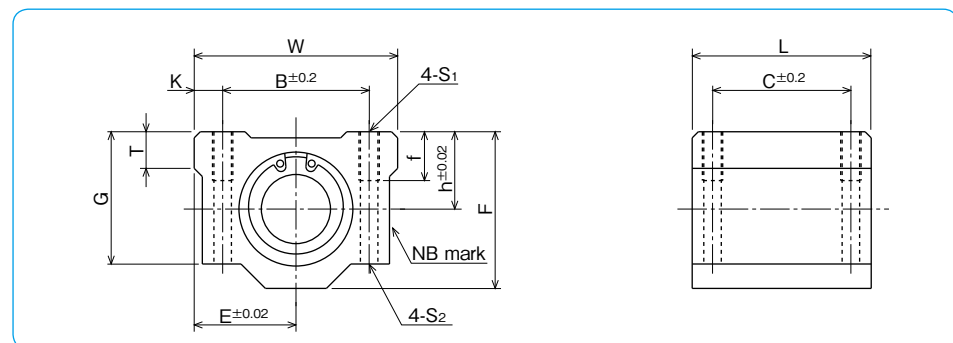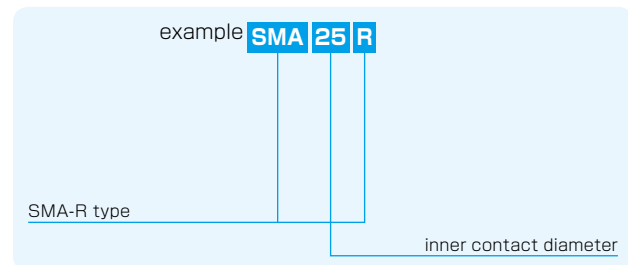

| part number | inner contact diameter | | major dimensions | | | | | | | | | | | | | basic load rating | | allowable revolutions per minute | mass | | |
|-------------|------------------------|-------|------------------|----|-----|---------------------|------|------|----|------|----|-----|----------------|--------|----------------|-------------------|-------|----------------------------------|-------|-----|---|
| | mm | μm | outer dimensions | | | mounting dimensions | | | | | | | dynamic | static | | | | | | | |
| | | | h | E | W | L | F | G | T | B | C | K | S ₁ | f | S ₂ | C | Co | N | N | rpm | g |
| SMA 6R | 6 | +4 | 9 | 15 | 30 | 25 | 18 | 15 | 6 | 20 | 15 | 5 | M4 | 8 | 3.4 | 78 | 176 | 300 | 33 | | |
| SMA 8R | 8 | -5 | 11 | 17 | 34 | 30 | 22 | 18 | 6 | 24 | 18 | 5 | M4 | 8 | 3.4 | 137 | 314 | 300 | 55 | | |
| SMA 10R | 10 | | 13 | 20 | 40 | 35 | 26 | 21 | 8 | 28 | 21 | 6 | M5 | 12 | 4.3 | 157 | 372 | 300 | 93 | | |
| SMA 12R | 12 | +3 | 15 | 21 | 42 | 36 | 28 | 24 | 8 | 30.5 | 26 | 5.5 | M5 | 12 | 4.3 | 274 | 588 | 300 | 104 | | |
| SMA 13R | 13 | -6 | 15 | 22 | 44 | 39 | 30 | 24.5 | 8 | 33 | 26 | 5.5 | M5 | 12 | 4.3 | 323 | 686 | 300 | 128 | | |
| SMA 16R | 16 | | 19 | 25 | 50 | 44 | 38.5 | 32.5 | 9 | 36 | 34 | 7 | M5 | 12 | 4.3 | 451 | 882 | 250 | 216 | | |
| SMA 20R | 20 | +3 | 21 | 27 | 54 | 50 | 41 | 35 | 11 | 40 | 40 | 7 | M6 | 12 | 5.2 | 647 | 1,180 | 250 | 286 | | |
| SMA 25R | 25 | -7 | 26 | 38 | 76 | 67 | 51.5 | 42 | 12 | 54 | 50 | 11 | M8 | 18 | 7 | 882 | 1,860 | 250 | 645 | | |
| SMA 30R | 30 | | 30 | 39 | 78 | 72 | 59.5 | 49 | 15 | 58 | 58 | 10 | M8 | 18 | 7 | 1,180 | 2,650 | 200 | 824 | | |
| SMA 40R | 40 | +3/-8 | 40 | 51 | 102 | 90 | 78 | 62 | 20 | 80 | 60 | 11 | M10 | 25 | 8.7 | 1,960 | 4,020 | 200 | 1,719 | | |



1N=0.102kgf

SMA-RW TYPE

—Double-Wide Block type—



part number structure

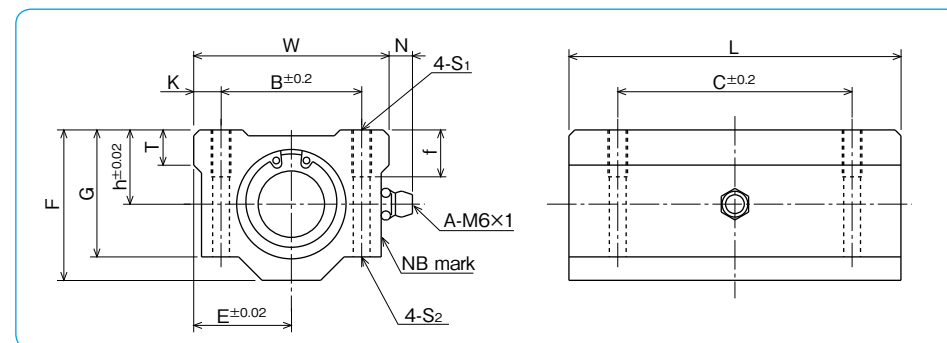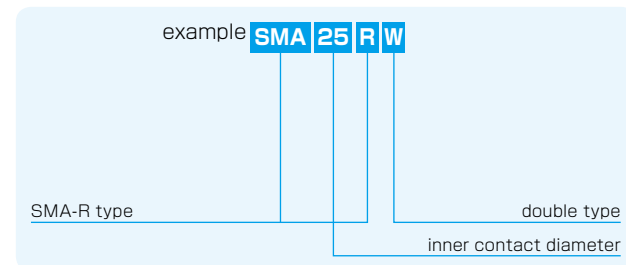

| part number | inner contact diameter | | major dimensions | | | | | | | | | | | | | basic load rating | | allowable revolutions per minute | mass | | | |
|-------------|------------------------|-------|------------------|----|-----|---------------------|------|------|----|-----|------|-----|---------|----------------|----|-------------------|-------|----------------------------------|------|-------|-----|---|
| | mm | μm | outer dimensions | | | mounting dimensions | | | | | | | dynamic | static | | | | | | | | |
| | | | h | E | W | L | F | G | T | N | B | C | K | S ₁ | f | S ₂ | C | Co | N | N | rpm | g |
| SMA 6RW | 6 | +4 | 9 | 15 | 30 | 48 | 18 | 15 | 6 | 7 | 20 | 36 | 5 | M4 | 8 | 3.4 | 126 | 352 | 300 | 68 | | |
| SMA 8RW | 8 | -5 | 11 | 17 | 34 | 58 | 22 | 18 | 6 | 7 | 24 | 42 | 5 | M4 | 8 | 3.4 | 222 | 628 | 300 | 113 | | |
| SMA 10RW | 10 | | 13 | 20 | 40 | 68 | 26 | 21 | 8 | 7 | 28 | 46 | 6 | M5 | 12 | 4.3 | 254 | 744 | 300 | 188 | | |
| SMA 12RW | 12 | +3 | 15 | 21 | 42 | 70 | 28 | 24 | 8 | 6.5 | 30.5 | 50 | 5.75 | M5 | 12 | 4.3 | 444 | 1,180 | 300 | 210 | | |
| SMA 13RW | 13 | -6 | 15 | 22 | 44 | 75 | 30 | 24.5 | 8 | 6.5 | 33 | 50 | 5.5 | M5 | 12 | 4.3 | 523 | 1,370 | 300 | 254 | | |
| SMA 16RW | 16 | | 19 | 25 | 50 | 85 | 38.5 | 32.5 | 9 | 6 | 36 | 60 | 7 | M5 | 12 | 4.3 | 731 | 1,760 | 250 | 431 | | |
| SMA 20RW | 20 | +3 | 21 | 27 | 54 | 96 | 41 | 35 | 11 | 7 | 40 | 70 | 7 | M6 | 12 | 5.2 | 1,050 | 2,360 | 250 | 568 | | |
| SMA 25RW | 25 | -7 | 26 | 38 | 76 | 130 | 51.5 | 42 | 12 | 4 | 54 | 100 | 11 | M8 | 18 | 7 | 1,430 | 3,720 | 250 | 1,282 | | |
| SMA 30RW | 30 | | 30 | 39 | 78 | 140 | 59.5 | 49 | 15 | 5 | 58 | 110 | 10 | M8 | 18 | 7 | 1,910 | 5,300 | 200 | 1,638 | | |
| SMA 40RW | 40 | +3/-8 | 40 | 51 | 102 | 175 | 78 | 62 | 20 | 5 | 80 | 140 | 11 | M10 | 25 | 8.7 | 3,180 | 8,040 | 200 | 3,419 | | |



1N=0.102kgf

AK-R TYPE

-Compact Block type-



part number structure

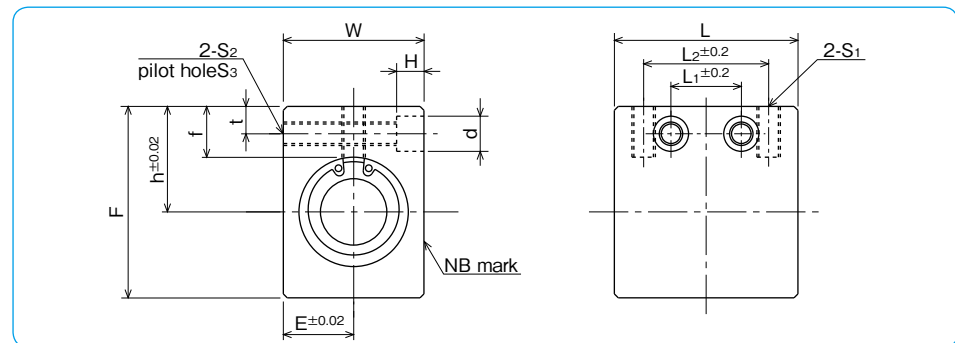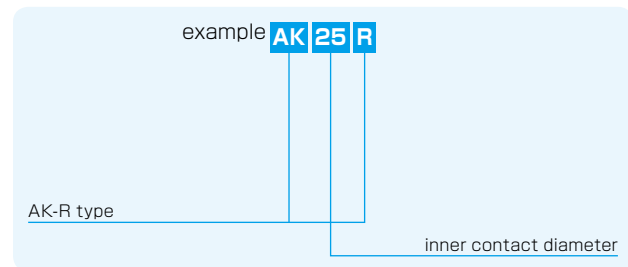

| part number | inner contact diameter | | major dimensions | | | | | | | | | | | | | | basic load rating | | allowable revolutions per minute | mass | | |
|-------------|------------------------|-----------------|------------------|----|----|----|----|---------------------|----------------|------|----------------|---|----------------|----------------|----|----|-------------------|--------|----------------------------------|------|-----|---|
| | mm | tolerance μm | outer dimensions | | | | | mounting dimensions | | | | | | | | | dynamic | static | | | | |
| | | | h | E | W | L | F | L ₂ | S ₁ | f | L ₁ | t | S ₂ | S ₃ | d | H | C | Co | N | N | rpm | g |
| AK 6R | 6 | | 14 | 8 | 16 | 27 | 22 | 18 | M4 | 8 | 9 | 5 | M4 | 3.5 | 6 | 5 | 78 | 176 | 300 | 27 | | |
| AK 8R | 8 | +4 | 16 | 10 | 20 | 32 | 26 | 20 | M5 | 8.5 | 10 | 5 | M4 | 3.5 | 6 | 5 | 137 | 314 | 300 | 48 | | |
| AK10R | 10 | -5 | 19 | 13 | 26 | 39 | 32 | 27 | M6 | 9.5 | 15 | 6 | M5 | 4.5 | 8 | 6 | 157 | 372 | 300 | 94 | | |
| AK12R | 12 | | 20 | 14 | 28 | 40 | 34 | 27 | M6 | 9.5 | 15 | 6 | M5 | 4.5 | 8 | 6 | 274 | 588 | 300 | 105 | | |
| AK13R | 13 | +3 | 25 | 15 | 30 | 42 | 43 | 28 | M6 | 13.5 | 16 | 7 | M6 | 5.2 | 9 | 7 | 323 | 686 | 300 | 151 | | |
| AK16R | 16 | -6 | 27 | 18 | 36 | 47 | 49 | 32 | M6 | 13 | 18 | 7 | M6 | 5.2 | 9 | 7 | 451 | 882 | 250 | 238 | | |
| AK20R | 20 | | 31 | 21 | 42 | 52 | 54 | 36 | M8 | 15 | 18 | 8 | M8 | 7 | 11 | 8 | 647 | 1,180 | 250 | 328 | | |
| AK25R | 25 | +3 | 37 | 26 | 52 | 69 | 65 | 42 | M10 | 17 | 22 | 9 | M10 | 8.9 | 14 | 10 | 882 | 1,860 | 250 | 669 | | |
| AK30R | 30 | -7 | 40 | 29 | 58 | 74 | 71 | 44 | M10 | 17.5 | 22 | 9 | M10 | 8.9 | 14 | 10 | 1,180 | 2,650 | 200 | 856 | | |



1N≒0.102kgf

AK-RW TYPE

-Double-Wide Compact Block type-



part number structure

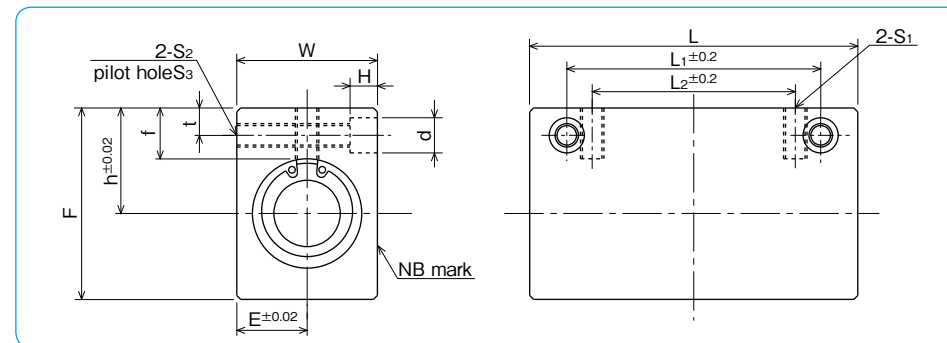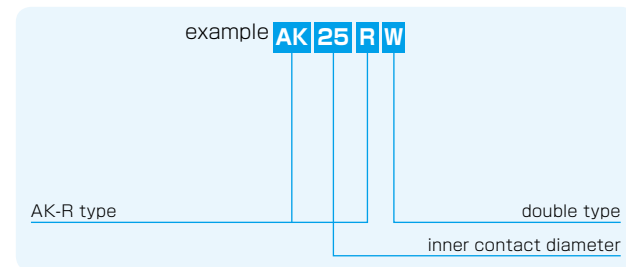

| part number | inner contact diameter | | major dimensions | | | | | | | | | | | | | | basic load rating | | allowable revolutions per minute | mass | | |
|-------------|------------------------|-----------------|------------------|----|----|-----|----|---------------------|----------------|------|----------------|---|----------------|----------------|----|----|-------------------|--------|----------------------------------|-------|-----|---|
| | mm | tolerance μm | outer dimensions | | | | | mounting dimensions | | | | | | | | | dynamic | static | | | | |
| | | | h | E | W | L | F | L ₂ | S ₁ | f | L ₁ | t | S ₂ | S ₃ | d | H | C | Co | N | N | rpm | g |
| AK 6RW | 6 | | 14 | 8 | 16 | 46 | 22 | 20 | M4 | 8 | 30 | 5 | M4 | 3.5 | 6 | 5 | 126 | 352 | 300 | 48 | | |
| AK 8RW | 8 | +4 | 16 | 10 | 20 | 56 | 26 | 30 | M5 | 8.5 | 42 | 5 | M4 | 3.5 | 6 | 5 | 222 | 628 | 300 | 89 | | |
| AK10RW | 10 | -5 | 19 | 13 | 26 | 68 | 32 | 36 | M6 | 9.5 | 50 | 6 | M5 | 4.5 | 8 | 6 | 254 | 744 | 300 | 175 | | |
| AK12RW | 12 | | 20 | 14 | 28 | 70 | 34 | 36 | M6 | 9.5 | 50 | 6 | M5 | 4.5 | 8 | 6 | 444 | 1,180 | 300 | 196 | | |
| AK13RW | 13 | +3 | 25 | 15 | 30 | 74 | 43 | 42 | M6 | 13.5 | 55 | 7 | M6 | 5.2 | 9 | 7 | 523 | 1,370 | 300 | 281 | | |
| AK16RW | 16 | -6 | 27 | 18 | 36 | 84 | 49 | 52 | M6 | 13 | 65 | 7 | M6 | 5.2 | 9 | 7 | 731 | 1,760 | 250 | 450 | | |
| AK20RW | 20 | | 31 | 21 | 42 | 94 | 54 | 58 | M8 | 15 | 70 | 8 | M8 | 7 | 11 | 8 | 1,050 | 2,360 | 250 | 626 | | |
| AK25RW | 25 | +3 | 37 | 26 | 52 | 128 | 65 | 80 | M10 | 17 | 100 | 9 | M10 | 8.9 | 14 | 10 | 1,430 | 3,720 | 250 | 1,299 | | |
| AK30RW | 30 | -7 | 40 | 29 | 58 | 138 | 71 | 90 | M10 | 17.5 | 110 | 9 | M10 | 8.9 | 14 | 10 | 1,910 | 5,300 | 200 | 1,662 | | |

1N≒0.102kgf

SMP-R TYPE

—Pillow Block type—




part number structure

example **SMP 25 R**

SMP-R type

inner contact diameter

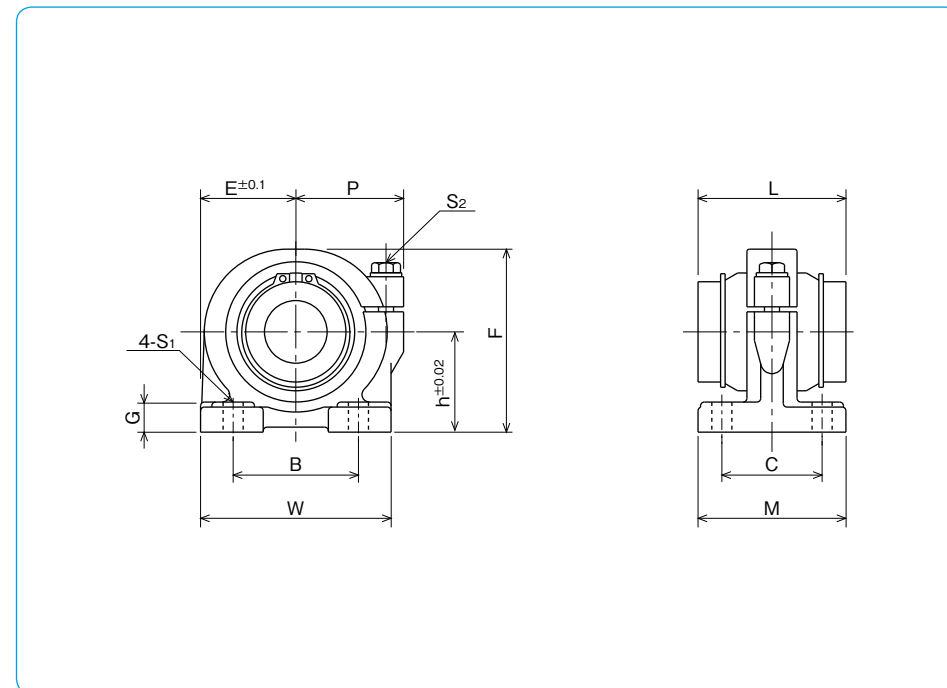

| part number | major dimensions | | | | | | | | | |
|---------------|------------------------|----------|------------------|------|------|------|------|------|------|--|
| | inner contact diameter | | outer dimensions | | | | | | | |
| | mm | μm | h mm | E mm | W mm | L mm | F mm | G mm | M mm | |
| SMP13R | 13 | +3 | 25 | 25 | 50 | 32 | 46 | 8 | 36 | |
| SMP16R | 16 | -6 | 29 | 27.5 | 55 | 37 | 53 | 10 | 40 | |
| SMP20R | 20 | +3 -7 | 34 | 32.5 | 65 | 42 | 62 | 12 | 48 | |
| SMP25R | 25 | | 40 | 38 | 76 | 59 | 73 | 12 | 59 | |
| SMP30R | 30 | +3/-8 | 45 | 42.5 | 85 | 64 | 84 | 15 | 69 | |
| SMP40R | 40 | | 60 | 62 | 124 | 80 | 112 | 18 | 86 | |

| P mm | mounting dimensions | | | adjustment screw size S2 | basic load rating | | allowable revolutions per minute rpm | mass g | part number |
|------|---------------------|------|----------|--------------------------|-------------------|-------------|--------------------------------------|--------|---------------|
| | B mm | C mm | S1 mm | | dynamic C N | static Co N | | | |
| 30 | 30 | 26 | 7 (M5) | M5 | 323 | 686 | 300 | 266 | SMP13R |
| 32 | 35 | 29 | 7 (M5) | M5 | 451 | 882 | 250 | 369 | SMP16R |
| 37 | 40 | 35 | 8 (M6) | M6 | 647 | 1,180 | 250 | 690 | SMP20R |
| 43 | 50 | 40 | 8 (M6) | M6 | 882 | 1,860 | 250 | 970 | SMP25R |
| 49 | 58 | 46 | 10 (M8) | M8 | 1,180 | 2,650 | 200 | 1,420 | SMP30R |
| 68 | 76 | 64 | 12 (M10) | M10 | 1,960 | 4,020 | 200 | 3,585 | SMP40R |

1N≐0.102kgf


SLIDE ROTARY BUSH RK TYPE

NB's RK type slide rotary bush is a highly accurate and high load capacity bearing providing smooth continuous linear and rotational motions. Its structure imposes no constraints on linear and rotational motions. It is much more compact than a standard slide bush with separate rotational bearing.

STRUCTURE AND ADVANTAGES

The RK type slide rotary bush uses a retainer similar to that used in the SR type stroke bush. This retainer gives a smooth motion in a high rotational application. SM type slide bush is incorporated, providing the stable and smooth linear motion. Relatively large ball elements are used for high load capacity.

Figure E-9 Structure of RK Slide Rotary Bush

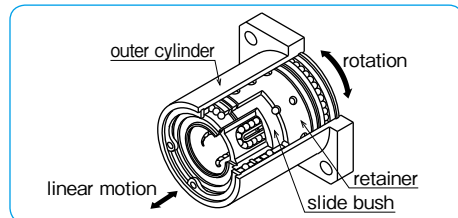

FIT

Shaft

In order to ensure high accuracy motion of Slide Rotary Bush RK type, it is essential to select a high quality shaft. In selecting a shaft, please take note of:

- Outer diameter tolerance: h5 recommended
- Surface hardness: 58HRC or higher

For a shaft with surface hardness less than 58HRC, make a correction in life calculation by adding hardness coefficient.

Surface roughness: lower than Ra0.4 or better

Life Calculation

$$L = \left(\frac{f_H \cdot f_T \cdot f_C \cdot C}{f_W \cdot P} \right)^3 \times 50$$

1. A smooth unlimited linear and rotational motion is obtained.
2. There is no need to machine separate housing.
3. High accuracy is ensured for extended period of usage.
4. Its high compatibility eliminates replacement problems.
5. High rigidity enables it to withstand an unbalanced load and large load.

※For best performance, please select tolerance of h5 for the shaft.


Housing

Inner diameter tolerance is not requested. Please insert into an installation bore which is slightly larger than the outer cylinder.


RK TYPE



part number structure

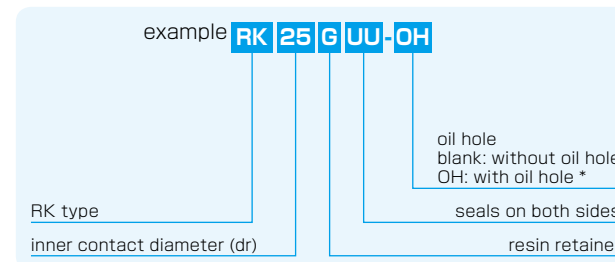

*Oil hole is for rotary-portion lubrication.

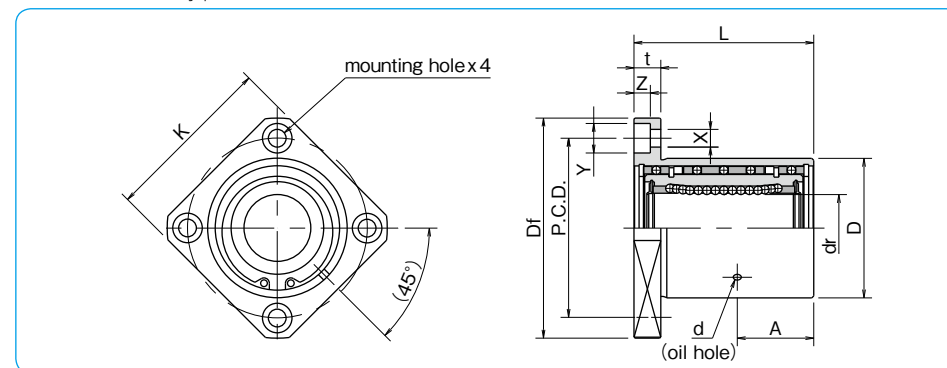

| part number | dr | | D | | L | | A | | d | | flange | | | basic load rating | | allowable revolutions per minute | mass |
|----------------|----|-----------|----|-----------|----|-----------|------|----|----|----|--------|----|------------|-------------------|-------|----------------------------------|------|
| | mm | tolerance | mm | tolerance | mm | tolerance | mm | mm | mm | mm | Df | K | t | P.C.D. | X×Y×Z | | |
| RK12GUU | 12 | 0 | 32 | 0 | 36 | | 15 | 2 | 54 | 42 | 8 | 43 | 5.5×9×5.1 | 510 | 784 | 500 | 180 |
| RK16GUU | 16 | -9 | 40 | -25 | 45 | | 19.5 | 2 | 62 | 50 | 8 | 51 | 5.5×9×5.1 | 774 | 1,180 | 500 | 280 |
| RK20GUU | 20 | 0 | 45 | 0 | 50 | ±0.3 | 21.5 | 3 | 74 | 58 | 10 | 60 | 6.6×11×6.1 | 882 | 1,370 | 400 | 420 |
| RK25GUU | 25 | -10 | 52 | 0 | 67 | | 28.5 | 3 | 82 | 64 | 10 | 67 | 6.6×11×6.1 | 980 | 1,570 | 400 | 680 |
| RK30GUU | 30 | | 60 | -30 | 74 | | 31 | 3 | 96 | 75 | 13 | 78 | 9×14×8.1 | 1,570 | 2,740 | 400 | 990 |

1N≒0.102kgf

SLIDE SHAFT SPINDLE SHAFT

SLIDE SHAFT

| | |
|--|------|
| ADVANTAGES | F-2 |
| TYPES | F-3 |
| CALCULATION OF DEFLECTION AND DEFLECTION ANGLE | F-4 |
| NB SHAFT SN TYPE | F-6 |
| NB STAINLESS STEEL SHAFT SNS TYPE | F-7 |
| NB HOLLOW SHAFT SNT TYPE | F-8 |
| NB CENTER-LINED TAPPED SHAFT SN(S)B TYPE | F-9 |
| SHAFT SUPPORTER AND SHAFT SUPPORT RAIL | F-10 |
| ACCURACY OF SA TYPE SUPPORT RAIL | F-10 |
| SHAFT SUPPORTER SH-A TYPE | F-11 |
| SHAFT SUPPORTER SH TYPE | F-12 |
| SHAFT SUPPORTER SHF TYPE | F-13 |
| SHAFT SUPPORT RAIL SA TYPE | F-14 |
| SHAFT SUPPORTER WH-A TYPE (INCH SIZE) | F-16 |
| SHAFT SUPPORT RAIL WA TYPE (INCH SIZE) | F-18 |
| LOW SHAFT SUPPORT RAIL LWA TYPE (INCH SIZE) | F-19 |
| SHAFT SUPPORT ASSEMBLY WSS TYPE (STANDARD TYPE) | F-20 |
| SHAFT SUPPORT ASSEMBLY WSS-SS TYPE (STAINLESS TYPE) | F-21 |
| NBCA SHAFT SF TYPE | F-22 |
| NBCA STAINLESS STEEL SHAFT SFS TYPE | F-23 |
| NBCA INCH SHAFT SFW TYPE | F-24 |
| NBCA INCH STAINLESS STEEL SHAFT SFWS TYPE | F-25 |
| NBCA INCH PRE-DRILLED SHAFT SFW-PD TYPE | F-26 |
| NBCA INCH PRE-DRILLED STAINLESS STEEL SHAFT SFWS-PD TYPE | F-27 |
| FORMAT SINGLE END TAPPED INCH SHAFT SFW TYPE | F-28 |
| FORMAT BOTH ENDS TAPPED INCH SHAFT SFW TYPE | F-29 |
| FORMAT THREADED INCH SHAFTS SFW TYPE (SINGLE END THREADED) | F-30 |
| FORMAT THREADED INCH SHAFTS SFW TYPE (BOTH ENDS THREADED) | F-31 |
| PRE-CUT SLIDE SHAFTS PC TYPE | F-32 |
| FIT SERIES | F-33 |

SPINDLE SHAFT/SPINDLE UNIT

| | |
|---|------|
| ADVANTAGES | F-34 |
| SPINDLE UNIT SPECIFICATIONS (EXAMPLE) | F-36 |
| EXAMPLES OF MACHINING | F-36 |
| EXAMPLE OF DRAWING① | F-37 |
| EXAMPLE OF DRAWING② | F-38 |
| EXAMPLE OF DRAWING③ | F-39 |

GENERAL MACHINE SHAFTING

| | |
|--------------------------------|------|
| ADVANTAGES | F-40 |
| MACHINING SPECIFICATIONS | F-40 |
| EXAMPLES OF MACHINING① | F-41 |
| EXAMPLES OF MACHINING② | F-42 |

SHAFT

The NB shaft can be used in a wide range of applications as a mechanical component from straight shaft to spindle shaft. NB's expertise in machining and heat-treatment turns into manufacturing spindle shaft, roll shaft, and general machinery shaft for rotational motion. NB's high accuracy technology answers various shaft machining requirements.


ADVANTAGES

Advanced Machining Technology

NB performs a wide variety of highly accurate machining processes to provide custom shafting from relatively simple machining, such as tapping and shaft stepping to the more demanding high-speed rotating shafts and spindles. NB can also answer the special grinding and bore machining requirements.

Excellent Wear Resistance

Most commonly used materials are high-carbon chromium bearing steel (SUJ2) and martensite stainless steel (SUS440C or equivalent). NB's advanced heat-treatment technology gives these materials an excellent wear resistance by quenching and tempering to achieve a uniform hardened layer in the circumferential and axial directions. The cross-sectional picture below shows the hardened layer-depth of the NB shaft.



Surface Roughness

Precision grinding results in a surface roughness of less than Ra0.4.

Wide Selection of Shaft Types

SN type, SNS type, SNT type,
SNB, SNSB type (Center-lined tapped shaft)
Spindle shaft, roll shaft

Special Requirements

Based on the customer drawings and specifications NB will answer the customer requirements in material (SCM, SKS etc.), heat-treatment, surface treatment, etc.

Shaft Supporter and Shaft Support Rail


These components ease the shaft installation and help save the design/assembling time. (refer to page F-10)

FIT Series


This series is a set of NB slide bush and NB shaft. By precise shaft-grinding, FIT series achieves the best-fit clearance adjustment for a smooth, high accuracy linear motion. (refer to page F-33)

TYPES


SN/SNS/SNT type (NB Shaft)

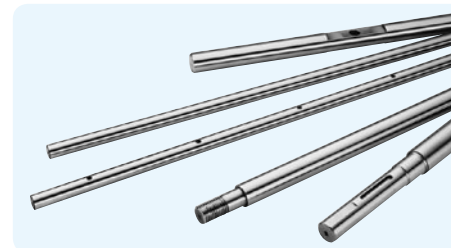


SNB/SNSB type (NB Center-lined Tapped Shaft)

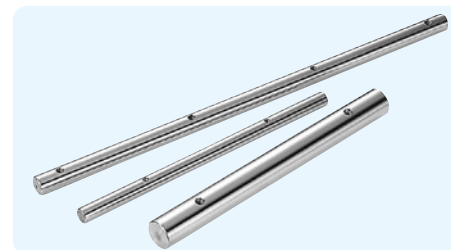

Shaft Supporter and Shaft Support Rail

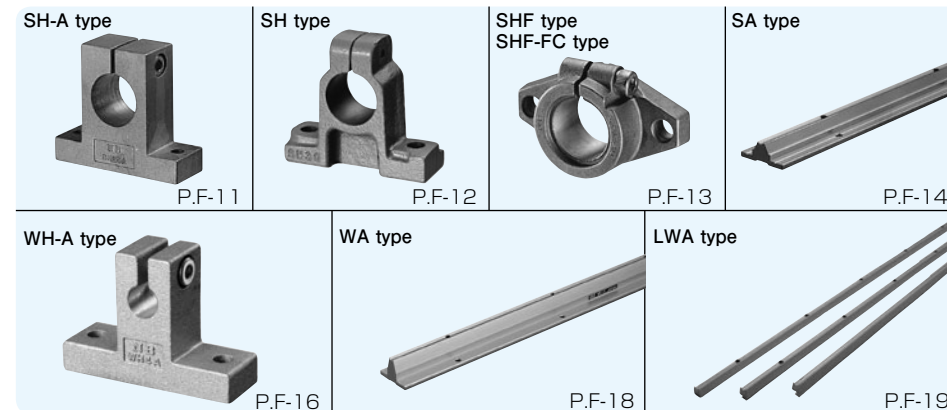

Special Specifications

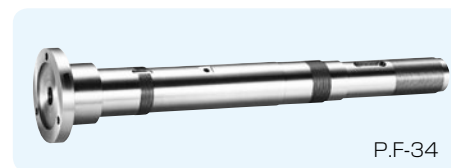

NB shaft is a high-precision shaft that can be used with slide bush or any other bearings. A wide range of machining is provided for customer drawings and requirements.

Table F-1 Specifications

| type | SN type | SNS type | SNT type |
|--------------------------|-----------------------|-----------------------|---------------------|
| material | SUJ2 | equivalent to SUS440C | SUJ2 (hollow shaft) |
| outer diameter tolerance | g6 or to be specified | | |
| hardness | 60HRC or more | 56HRC or more | 60HRC or more |
| surface roughness | Ra0.4 or less | | |
| page | page F-6 | page F-7 | page F-8 |

Center-lined tapped shafts are standardized series for easy selection that can be used with the SA shaft support rails. (refer to page F-14)

Table F-2 Specifications

| type | SNB type | SNSB type |
|--------------------------|-----------------------|-----------------------|
| material | SUJ2 | equivalent to SUS440C |
| outer diameter tolerance | g6 or to be specified | |
| hardness | 60HRC or more | 56HRC or more |
| surface roughness | Ra0.4 or less | |
| page | page F-9 | |

Based on drawings and specifications, NB manufactures spindle shafts, and roll shafts for the rotary motion application. Material, heat-treatment (hardening/tempering), surface treatment, etc, NB meets customer requirements. Please contact NB for details.

CALCULATION OF DEFLECTION AND DEFLECTION ANGLE

The following formulas are used to obtain the deflection and its angle of the shaft. Typical conditions are listed in Table F-3.

Table F-3 Formulas for Calculating Deflection and Deflection Angle

| support method | specification | formula for deflection | formula for deflection angle |
|------------------------------|---------------|---|--|
| 1 support support | | $\delta_{max} = \frac{P\ell^3}{48EI} = P\ell^3C$ | $i_1 = 0$ $i_2 = \frac{P\ell^2}{16EI} = 3P\ell^2C$ |
| 2 fixed fixed | | $\delta_{max} = \frac{P\ell^3}{192EI} = \frac{1}{4}P\ell^3C$ | $i_1 = 0$ $i_2 = 0$ |
| 3 support support | | $\delta_{max} = \frac{5p\ell^4}{384EI} = \frac{5}{8}p\ell^4C$ | $i_2 = \frac{p\ell^3}{24EI} = 2p\ell^3C$ |
| 4 fixed fixed | | $\delta_{max} = \frac{p\ell^4}{384EI} = \frac{1}{8}p\ell^4C$ | $i_2 = 0$ |
| 5 support support | | $\delta_1 = \frac{Pa^2}{6EI} \left(2 + \frac{3b}{a} \right) = 8Pa^3 \left(2 + \frac{3b}{a} \right) C$ $\delta_{max} = \frac{Pa^3}{24EI} \left(\frac{3\ell^2}{a^2} - 4 \right) = 2Pa^3 \left(\frac{3\ell^2}{a^2} - 4 \right) C$ | $i_1 = \frac{Pab}{2EI} = 24PabC$ $i_2 = \frac{Pa(a+b)}{2EI} = 24Pa(a+b)C$ |
| 6 fixed fixed | | $\delta_1 = \frac{Pa^2}{6EI} \left(2 - \frac{3a}{\ell} \right) = 8Pa^3 \left(2 - \frac{3a}{\ell} \right) C$ $\delta_{max} = \frac{Pa^3}{24EI} \left(2 + \frac{3b}{a} \right) = 2Pa^3 \left(2 + \frac{3b}{a} \right) C$ | $i_1 = \frac{Pa^2b}{2EI\ell} = \frac{24Pa^2bC}{\ell}$ $i_2 = 0$ |
| 7 fixed free | | $\delta_{max} = \frac{P\ell^3}{3EI} = 16P\ell^3C$ | $i_1 = \frac{P\ell^2}{2EI} = 24P\ell^2C$ $i_2 = 0$ |
| 8 fixed free | | $\delta_{max} = \frac{p\ell^4}{8EI} = 6p\ell^4C$ | $i_1 = \frac{p\ell^3}{6EI} = 8p\ell^3C$ $i_2 = 0$ |
| 9 support support | | $\delta_{max} = \frac{\sqrt{3}Mo\ell^2}{216EI} = \frac{2\sqrt{3}}{9}Mo\ell^2C$ | $i_1 = \frac{Mo\ell}{12EI} = 4Mo\ell C$ $i_2 = \frac{Mo\ell}{24EI} = 2Mo\ell C$ |
| 10 fixed fixed | | $\delta_{max} = \frac{Mo\ell^2}{216EI} = \frac{2}{9}Mo\ell^2C$ | $i_1 = \frac{Mo\ell}{16EI} = 3Mo\ell C$ $i_2 = 0$ |

δ_1 : deflection at the concentrated load point (mm) δ_{max} : maximum deflection (mm) i_1 : deflection angle at the concentrated load point (rad)
 i_2 : deflection angle at the support point (rad) Mo: moment (N·mm) P: concentrated load (N)
 p: uniformly distributed load (N/mm) a,b: concentrated load point distance (mm) ℓ : span (mm) I: moment of inertia of area (mm⁴)
 E: modulus of longitudinal elasticity (SUJ2) 2.06×10^5 (N/mm²) (SUS) 2.0×10^5 (N/mm²) C: $1/48EI$ (1/N·mm²)

The moment of inertia of area (I) is obtained using the following formulas:

● For solid shaft

● For hollow shaft

$$I = \frac{\pi D^4}{64}$$

$$I = \frac{\pi}{64} (D^4 - d^4)$$

I: moment of inertia of area (mm⁴)

D: outer diameter (mm) d: inner diameter (mm)

The values of the moment of inertia of area and C (=1/48 EI) for NB shafts are listed in Table F-4 and F-5.

Calculation Examples

1. Calculating the maximum deflection of a 30mm shaft with a 500mm span when a concentrated load of 980 N is applied at the mid-point of the shaft ... (neglecting the shaft weight)

① In case the support method is support-support:

From the given conditions, P = 980 N, $\ell = 500$ mm
 From Table F-4, C for an outer diameter of 30 mm,
 C = 2.54×10^{-12} (N·mm²).

Substituting these values into the corresponding formula (No. 1) in Table F-3,
 $\delta_{max} = P\ell^3C = 0.31$ (mm)

② In case the support method is fixed-fixed:

Substituting the values into the corresponding formula (No. 2) given in Table F-3,

$$\delta_{max} = \frac{1}{4}P\ell^3C = 0.08$$
 (mm)

2. Calculating the maximum deflection of a 60mm shaft with an inner diameter of 32 mm and a 2,000 mm span by its own weight ...

From Table F-5, C for an outer diameter of 60 mm,
 C = 1.73×10^{-13} (N·mm²)

The mass per unit length of a shaft with an outer diameter of 60 mm and an inner diameter of 32 mm is 15.9kg/m. Therefore, a uniformly distributed load of 0.156 N/mm is applied. Substituting these values into the formula (No. 3) given in Table F-3.

$$\delta_{max} = \frac{5}{8}p\ell^4C = 0.27$$
 (mm)

Table F-4 Solid Shaft

| outer diameter D (mm) | moment of inertia of area I (mm ⁴) | C=1/48EI (1/N·mm ²) SUJ2 | equivalent to SUS440C |
|--------------------------|---|---|------------------------|
| 3 | 3.98 | 2.54×10^{-8} | 2.62×10^{-8} |
| 4 | 1.26×10 | 8.05×10^{-9} | 8.29×10^{-9} |
| 5 | 3.07×10 | 3.30×10^{-9} | 3.40×10^{-9} |
| 6 | 6.36×10 | 1.59×10^{-9} | 1.64×10^{-9} |
| 8 | 2.01×10^2 | 5.03×10^{-10} | 5.18×10^{-10} |
| 10 | 4.91×10^2 | 2.06×10^{-10} | 2.12×10^{-10} |
| 12 | 1.02×10^3 | 9.94×10^{-11} | 1.02×10^{-10} |
| 13 | 1.40×10^3 | 7.21×10^{-11} | 7.43×10^{-11} |
| 15 | 2.49×10^3 | 4.07×10^{-11} | 4.19×10^{-11} |
| 16 | 3.22×10^3 | 3.14×10^{-11} | 3.24×10^{-11} |
| 20 | 7.85×10^3 | 1.29×10^{-11} | 1.33×10^{-11} |
| 25 | 1.92×10^4 | 5.27×10^{-12} | 5.43×10^{-12} |
| 30 | 3.98×10^4 | 2.54×10^{-12} | 2.62×10^{-12} |
| 35 | 7.37×10^4 | 1.37×10^{-12} | 1.41×10^{-12} |
| 40 | 1.26×10^5 | 8.05×10^{-13} | 8.29×10^{-13} |
| 50 | 3.07×10^5 | 3.30×10^{-13} | 3.40×10^{-13} |
| 60 | 6.36×10^5 | 1.59×10^{-13} | 1.64×10^{-13} |
| 80 | 2.01×10^6 | 5.03×10^{-14} | 5.18×10^{-14} |
| 100 | 4.91×10^6 | 2.06×10^{-14} | 2.12×10^{-14} |
| 120 | 1.02×10^7 | 9.94×10^{-15} | — |
| 150 | 2.49×10^7 | 4.07×10^{-15} | — |




Table F-5 Hollow Shaft

| outer diameter D (mm) | inner diameter d (mm) | moment of inertia of area I (mm ⁴) | C=1/48EI (1/N·mm ²) |
|--------------------------|--------------------------|---|---------------------------------|
| 6 | 2 | 6.28×10 | 1.61×10^{-9} |
| 8 | 3 | 1.97×10^2 | 5.13×10^{-10} |
| 10 | 4 | 4.78×10^2 | 2.11×10^{-10} |
| 12 | 5 | 9.87×10^2 | 1.02×10^{-10} |
| 13 | 6 | 1.34×10^3 | 7.55×10^{-11} |
| 16 | 8 | 3.02×10^3 | 3.36×10^{-11} |
| 20 | 10 | 7.36×10^3 | 1.37×10^{-11} |
| 25 | 15 | 1.67×10^4 | 6.06×10^{-12} |
| 30 | 16 | 3.65×10^4 | 2.77×10^{-12} |
| 35 | 19 | 6.73×10^4 | 1.50×10^{-12} |
| 40 | 20 | 1.18×10^5 | 8.57×10^{-13} |
| 50 | 26 | 2.84×10^5 | 3.56×10^{-13} |
| 60 | 32 | 5.85×10^5 | 1.73×10^{-13} |
| 80 | 48 | 1.75×10^6 | 5.78×10^{-14} |
| 100 | 60 | 4.27×10^6 | 2.37×10^{-14} |

SN TYPE

– NB Shaft –

part number structure

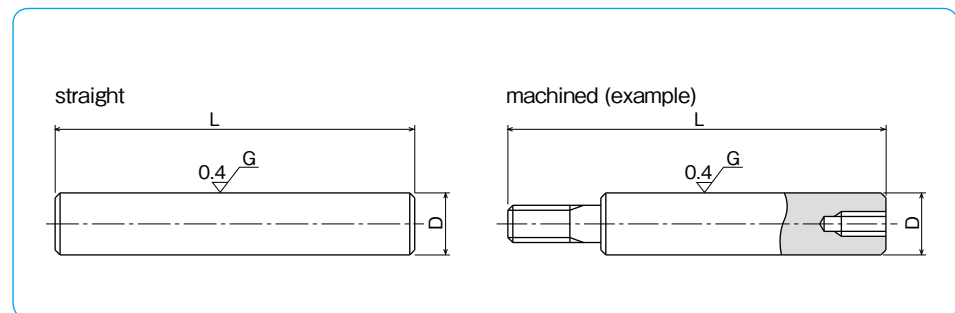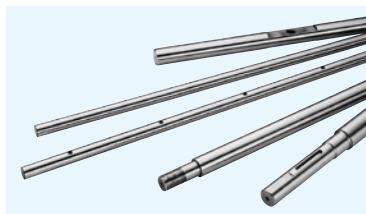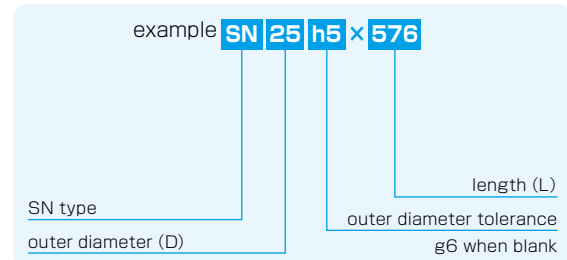




| part number | outer diameter D | | length L | mass |
|-------------|------------------|-----------------|-------------|------|
| | mm | tolerance g6 μm | | |
| SN 3 | 3 | -2/-8 | 50 → 400 | 0.06 |
| SN 4 | 4 | -4 | 100 → 500 | 0.10 |
| SN 5 | 5 | -12 | 100 → 700 | 0.16 |
| SN 6 | 6 | -12 | 100 → 1000 | 0.23 |
| SN 8 | 8 | -5 | 200 → 1500 | 0.40 |
| SN 10 | 10 | -14 | 200 → 2000 | 0.62 |
| SN 12 | 12 | -6 | 200 → 3000 | 0.89 |
| SN 13 | 13 | -6 | 200 → 3000 | 1.04 |
| SN 15 | 15 | -17 | 300 → 4000 | 1.39 |
| SN 16 | 16 | -17 | 300 → 4000 | 1.58 |
| SN 20 | 20 | -7 | 300 → 5000 | 2.47 |
| SN 25 | 25 | -20 | 300 → 6000 | 3.85 |
| SN 30 | 30 | -20 | 300 → 6000 | 5.55 |
| SN 35 | 35 | -9 | 400 → 6000 | 7.55 |
| SN 40 | 40 | -9 | 400 → 6000 | 9.87 |
| SN 50 | 50 | -25 | 500 → 6000 | 15.4 |
| SN 60 | 60 | -10 | 600 → 6000 | 22.2 |
| SN 80 | 80 | -29 | 800 → 6000 | 39.5 |
| SN100 | 100 | -12 | 1000 → 6000 | 61.7 |
| SN120 | 120 | -34 | 1500 → 4500 | 88.8 |
| SN150 | 150 | -14/-39 | 1500 → 4500 | 139 |

material: high-carbon chromium bearing steel (SUJ2) hardness: 60HRC (HV697) or more
Tolerances other than g6 are available upon request.

SNS TYPE

– NB Stainless Steel Shaft –

part number structure

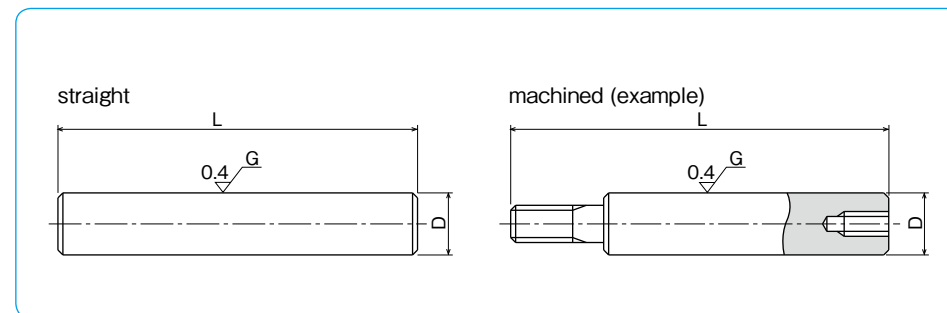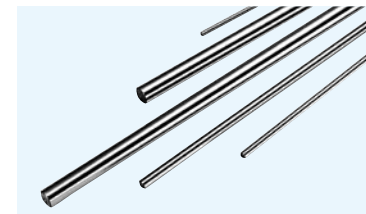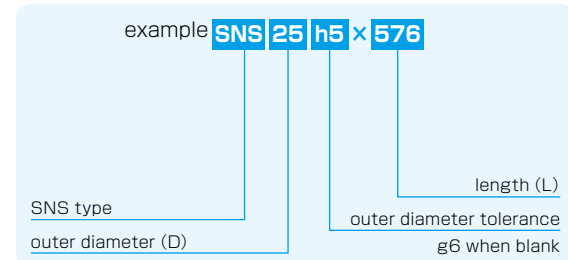



| part number | outer diameter D | | length L | mass |
|-------------|------------------|-----------------|-------------|------|
| | mm | tolerance g6 μm | | |
| SNS 3 | 3 | -2/-8 | 50 → 300 | 0.06 |
| SNS 4 | 4 | -4 | 100 → 400 | 0.10 |
| SNS 5 | 5 | -12 | 100 → 500 | 0.16 |
| SNS 6 | 6 | -12 | 100 → 600 | 0.22 |
| SNS 8 | 8 | -5 | 200 → 1000 | 0.39 |
| SNS 10 | 10 | -14 | 200 → 1500 | 0.61 |
| SNS 12 | 12 | -6 | 200 → 2500 | 0.88 |
| SNS 13 | 13 | -6 | 200 → 3000 | 1.03 |
| SNS 16 | 16 | -17 | 300 → 4000 | 1.56 |
| SNS 20 | 20 | -7 | 300 → 5000 | 2.43 |
| SNS 25 | 25 | -20 | 300 → 6000 | 3.80 |
| SNS 30 | 30 | -20 | 300 → 6000 | 5.48 |
| SNS 35 | 35 | -9 | 400 → 6000 | 7.46 |
| SNS 40 | 40 | -9 | 400 → 6000 | 9.75 |
| SNS 50 | 50 | -25 | 500 → 6000 | 15.2 |
| SNS 60 | 60 | -10 | 600 → 6000 | 21.9 |
| SNS 80 | 80 | -29 | 800 → 6000 | 39.0 |
| SNS100 | 100 | -12/-34 | 1000 → 6000 | 60.9 |

material: martensite stainless steel (equivalent to SUS440C)
hardness: 56HRC (HV613) or more
The maximum length of hardening is up to 4500mm for shafts with diameter over 80mm.
Tolerances other than g6 are available upon request.

SNT TYPE

— NB Hollow Shaft —

part number structure

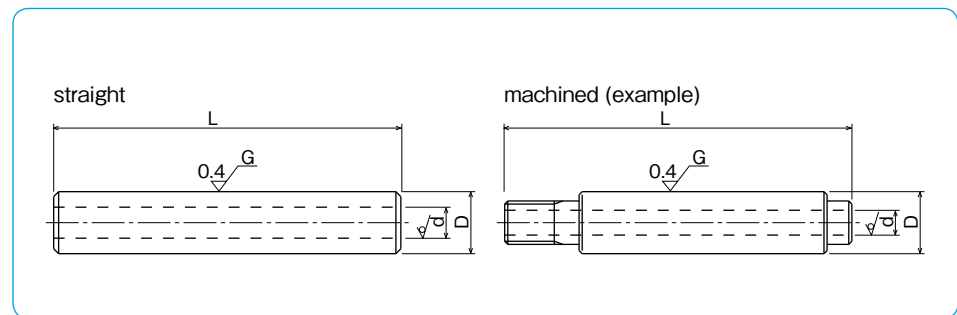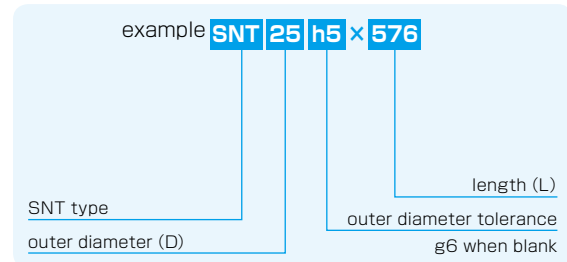




| part number | outer diameter | | inner diameter | length L | | mass |
|---------------|----------------|-----------|----------------|----------|------|------|
| | D | tolerance | | L | L | |
| | mm | g6 | d | mm | mm | Kg/m |
| SNT 6 | 6 | -4/-12 | 2 | 100 | 400 | 0.20 |
| SNT 8 | 8 | -5 | 3 | 200 | 600 | 0.34 |
| SNT 10 | 10 | -14 | 4 | 200 | 1000 | 0.52 |
| SNT 12 | 12 | -6 | 5 | 200 | 1500 | 0.73 |
| SNT 13 | 13 | -6 | 6 | 200 | 1500 | 0.82 |
| SNT 16 | 16 | -17 | 8 | 300 | 2500 | 1.18 |
| SNT 20 | 20 | -7 | 10 | 300 | 4000 | 1.85 |
| SNT 25 | 25 | -20 | 15 | 300 | 4000 | 2.46 |
| SNT 30 | 30 | -9 | 16 | 300 | 4500 | 3.97 |
| SNT 35 | 35 | -25 | 19 | 400 | 4500 | 5.32 |
| SNT 40 | 40 | -9 | 20 | 400 | 4500 | 7.39 |
| SNT 50 | 50 | -10 | 26 | 500 | 4500 | 11.3 |
| SNT 60 | 60 | -29 | 32 | 600 | 4500 | 15.9 |
| SNT 80 | 80 | -34 | 48 | 800 | 4500 | 25.3 |
| SNT100 | 100 | -12/-34 | 60 | 1000 | 4500 | 39.5 |

material: high-carbon chromium bearing steel (SUJ2)
 hardness: 60HRC (HV697) or more
 Tolerances other than g6 are available upon request.

NB CENTER-LINED TAPPED SHAFT

A larger diameter shaft can overcome problems in maintaining precision functionality when a high or unbalanced load is applied. A combination of the center-lined tapped shaft together with the SA type support rail is ideal in such cases. (see pages F-18,19) The center-lined tapped shaft is standardized to simplify shaft selection.

part number structure

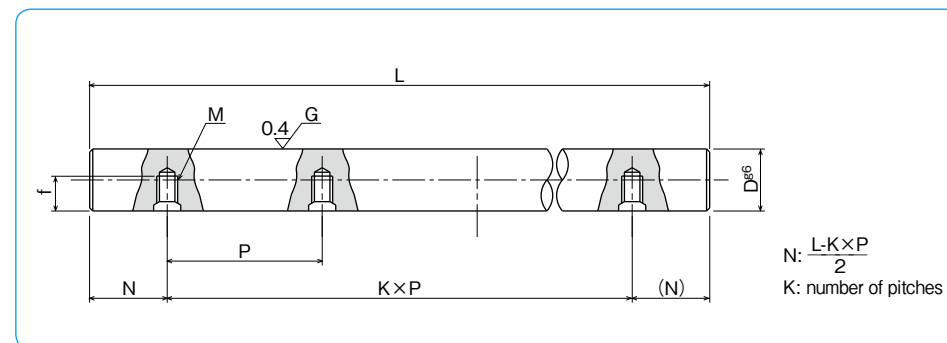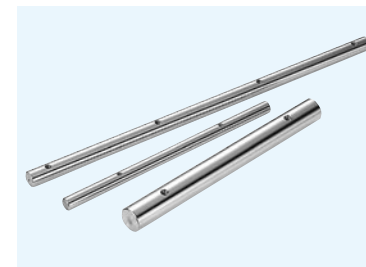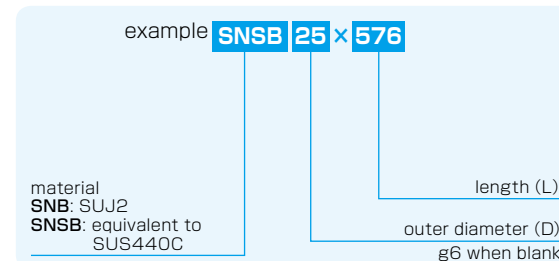

NB Center-Lined Tapped Shaft

| part number | outer diameter | tolerance | pitch | screw | tap | maximum |
|--------------|----------------|-----------|-------|-------|-------|------------------|
| | D | g6* | P | size | depth | length |
| | mm | μm | mm | M | f | L _{max} |
| SNB10 | 10 | -5/-14 | 100 | M4 | 4.5 | 1,500 |
| SNB12 | 12 | -6 | 100 | M4 | 5.5 | 1,800 |
| SNB13 | 13 | -17 | 100 | M4 | 6 | 2,000 |
| SNB16 | 16 | -17 | 150 | M5 | 7 | 4,000 |
| SNB20 | 20 | -7 | 150 | M6 | 9 | 4,000 |
| SNB25 | 25 | -20 | 200 | M6 | 12 | 4,000 |
| SNB30 | 30 | -20 | 200 | M8 | 15 | 4,500 |
| SNB35 | 35 | -9 | 200 | M8 | 15 | 5,000 |
| SNB40 | 40 | -25 | 300 | M8 | 18 | 6,000 |
| SNB50 | 50 | -25 | 300 | M10 | 22 | 6,000 |

material: high-carbon chromium bearing steel (SUJ2)
 hardness: 60HRC (HV697) or more
 *g6 is a standard tolerance of the outer diameter.

NB Center-Lined Tapped Stainless Steel Shaft

| part number | outer diameter | tolerance | pitch | screw | tap | maximum |
|---------------|----------------|-----------|-------|-------|-------|------------------|
| | D | g6* | P | size | depth | length |
| | mm | μm | mm | M | f | L _{max} |
| SNSB16 | 16 | -6/-17 | 150 | M5 | 7 | 2,000 |
| SNSB20 | 20 | -7 | 150 | M6 | 9 | 3,000 |
| SNSB25 | 25 | -20 | 200 | M6 | 12 | 4,000 |
| SNSB30 | 30 | -20 | 200 | M8 | 15 | 4,500 |
| SNSB35 | 35 | -9 | 200 | M8 | 15 | 5,000 |
| SNSB40 | 40 | -25 | 300 | M8 | 18 | 6,000 |
| SNSB50 | 50 | -25 | 300 | M10 | 22 | 6,000 |


material: martensite stainless steel (equivalent to SUS440C)
 hardness: 56HRC (HV613) or more
 *g6 is a standard tolerance of the outer diameter.

SHAFT SUPPORTER AND SHAFT SUPPORT RAIL

These components save design/assembling time and ease shaft installation.



SH·SH-A·WH-A type

These are most commonly used compact shaft supporters. SH type is made of cast iron and SH-A/WH-A type is made of aluminum alloy.

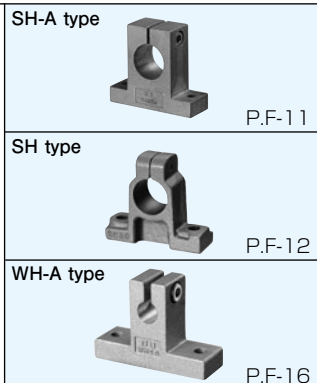


SHF·SHF-FC type

These are flanged type shaft supporters for a compact design. SHF is made of aluminum alloy and SHF-FC (shaft diameter 35 and over) is made of cast iron.



SA·WA·LWA type (shaft support rail)

These support rails support shafts from below to avoid shaft deflection for a long-stroke/high load application. This type is made of aluminum alloy.



ACCURACY OF SA TYPE SUPPORT RAIL

The accuracy of the SA support rails are measured as shown in Figure F-1.

Figure F-1 Measurement Method



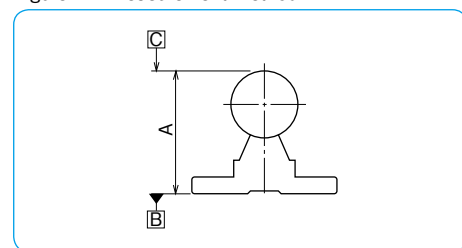


Figure F-2 Accuracy of SA type Support Rail


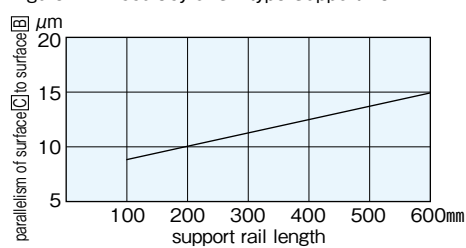


SH-A TYPE

– Shaft Supporter –

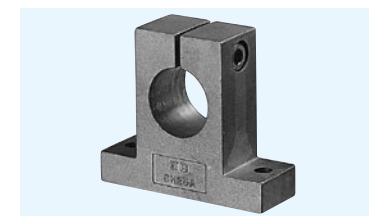


part number structure

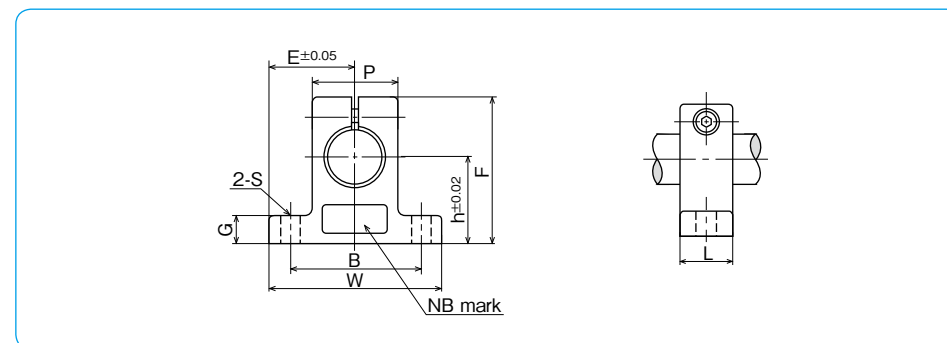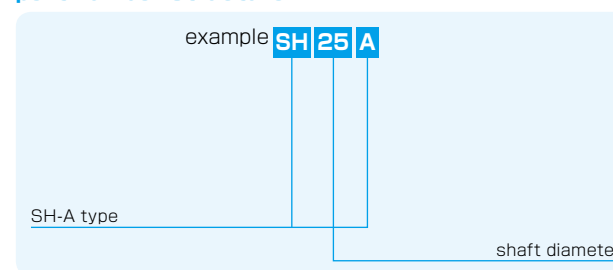

| part number | shaft diameter mm | major dimensions | | | | | | | | | tightening screw size | recommended torque N·m | mass g |
|-------------|-------------------|------------------|------|------|------|------|------|------|------|----------|-----------------------|------------------------|--------|
| | | h mm | E mm | W mm | L mm | F mm | G mm | P mm | B mm | S mm | | | |
| SH 8A | 8 | 20 | 21 | 42 | 14 | 32.8 | 6 | 18 | 32 | 5.5 (M5) | M4 | 2 | 24 |
| SH10A | 10 | 20 | 21 | 42 | 14 | 32.8 | 6 | 18 | 32 | 5.5 (M5) | M4 | 2 | 24 |
| SH12A | 12 | 23 | 21 | 42 | 14 | 37.5 | 6 | 20 | 32 | 5.5 (M5) | M4 | 2 | 30 |
| SH13A | 13 | 23 | 21 | 42 | 14 | 37.5 | 6 | 20 | 32 | 5.5 (M5) | M4 | 2 | 30 |
| SH16A | 16 | 27 | 24 | 48 | 16 | 44 | 8 | 25 | 38 | 5.5 (M5) | M4 | 2 | 40 |
| SH20A | 20 | 31 | 30 | 60 | 20 | 51 | 10 | 30 | 45 | 6.6 (M6) | M5 | 3 | 70 |
| SH25A | 25 | 35 | 35 | 70 | 24 | 60 | 12 | 38 | 56 | 6.6 (M6) | M6 | 5.5 | 130 |
| SH30A | 30 | 42 | 42 | 84 | 28 | 70 | 12 | 44 | 64 | 9 (M8) | M6 | 5.5 | 180 |
| SH35A | 35 | 50 | 49 | 98 | 32 | 82 | 15 | 50 | 74 | 11 (M10) | M8 | 13.5 | 270 |
| SH40A | 40 | 60 | 57 | 114 | 36 | 96 | 15 | 60 | 90 | 11 (M10) | M8 | 13.5 | 420 |
| SH50A | 50 | 70 | 63 | 126 | 40 | 120 | 18 | 74 | 100 | 14 (M12) | M12 | 29 | 750 |
| SH60A | 60 | 80 | 74 | 148 | 45 | 136 | 18 | 90 | 120 | 14 (M12) | M12 | 29 | 1,100 |



SA TYPE

– Shaft Support Rail –

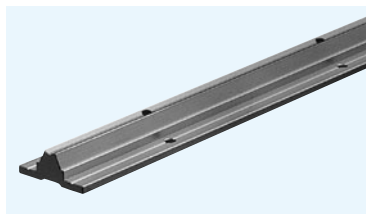

part number structure

example SA 25-500

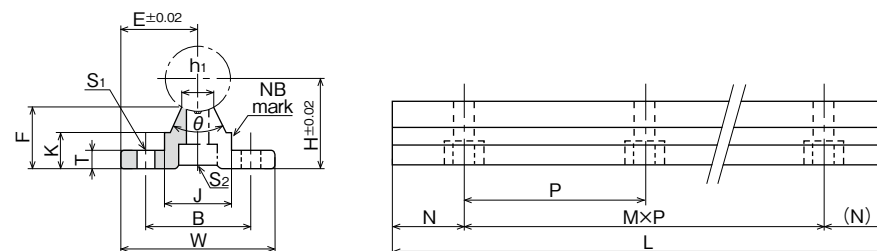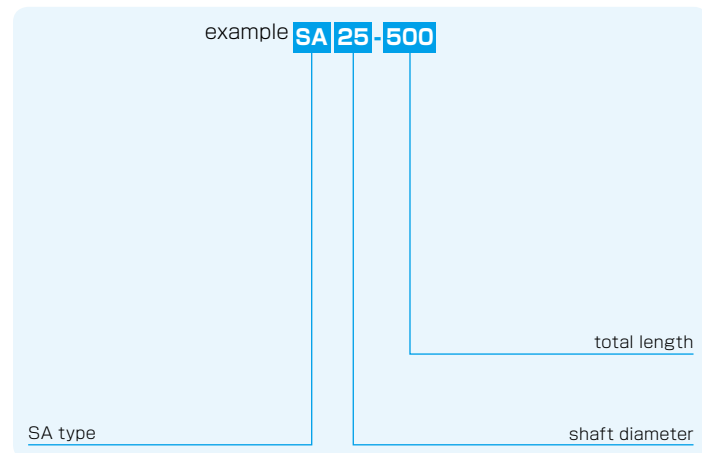


※ Mounting screws for the SN(S)B center-lined tapped shaft are included.

| part number | shaft diameter mm | major dimensions | | | | | | | | | | | mass g | | | | | |
|-------------|----------------------|------------------|------|----|-----|------|-----|------|------|----------------|-----|----|-----------|-------|-----|----------------|----------------|-----|
| | | H | E | W | L | F | T | K | J | h ₁ | θ | B | | N | M×P | S ₁ | S ₂ | |
| SA10-200 | 10 | 18 | 16 | 32 | 200 | 13.5 | 4 | 8.9 | 12.4 | 4.7 | 80° | 22 | 50 | 1×100 | 4.5 | M4 | 110 | |
| SA10-300 | | | | | 300 | | | | | | | | 50 | 2×100 | | | | 160 |
| SA10-400 | | | | | 400 | | | | | | | | 50 | 3×100 | | | | 220 |
| SA10-500 | | | | | 500 | | | | | | | | 50 | 4×100 | | | | 270 |
| SA10-600 | | | | | 600 | | | | | | | | 50 | 5×100 | | | | 330 |
| SA13-200 | 13 | 21 | 17 | 34 | 200 | 15 | 4.5 | 9.8 | 15 | 6 | 80° | 25 | 50 | 1×100 | 4.5 | M4 | 140 | |
| SA13-300 | | | | | 300 | | | | | | | | 50 | 2×100 | | | | 210 |
| SA13-400 | | | | | 400 | | | | | | | | 50 | 3×100 | | | | 280 |
| SA13-500 | | | | | 500 | | | | | | | | 50 | 4×100 | | | | 350 |
| SA13-600 | | | | | 600 | | | | | | | | 50 | 5×100 | | | | 420 |
| SA16-200 | 16 | 25 | 20 | 40 | 200 | 17.8 | 5 | 11.7 | 18.5 | 8 | 80° | 30 | 25 | 1×150 | 5.5 | M5 | 200 | |
| SA16-300 | | | | | 300 | | | | | | | | 75 | 1×150 | | | | 300 |
| SA16-400 | | | | | 400 | | | | | | | | 50 | 2×150 | | | | 400 |
| SA16-500 | | | | | 500 | | | | | | | | 25 | 3×150 | | | | 500 |
| SA16-600 | | | | | 600 | | | | | | | | 75 | 3×150 | | | | 600 |
| SA20-200 | 20 | 27 | 22.5 | 45 | 200 | 17.7 | 5 | 10 | 19 | 8 | 50° | 30 | 25 | 1×150 | 5.5 | M6 | 200 | |
| SA20-300 | | | | | 300 | | | | | | | | 75 | 1×150 | | | | 300 |
| SA20-400 | | | | | 400 | | | | | | | | 50 | 2×150 | | | | 400 |
| SA20-500 | | | | | 500 | | | | | | | | 25 | 3×150 | | | | 510 |
| SA20-600 | | | | | 600 | | | | | | | | 75 | 3×150 | | | | 610 |
| SA25-200 | 25 | 33 | 27.5 | 55 | 200 | 21 | 6 | 12 | 21.5 | 8 | 50° | 35 | 25 | 1×150 | 6.5 | M6 | 290 | |
| SA25-300 | | | | | 300 | | | | | | | | 50 | 1×200 | | | | 430 |
| SA25-400 | | | | | 400 | | | | | | | | 100 | 1×200 | | | | 580 |
| SA25-500 | | | | | 500 | | | | | | | | 50 | 2×200 | | | | 730 |
| SA25-600 | | | | | 600 | | | | | | | | 100 | 2×200 | | | | 880 |

| part number | shaft diameter mm | major dimensions | | | | | | | | | | | mass g | | | | | |
|-------------|----------------------|------------------|------|----|-----|------|----|------|------|----------------|-----|----|-----------|-------|-----|----------------|----------------|-------|
| | | H | E | W | L | F | T | K | J | h ₁ | θ | B | | N | M×P | S ₁ | S ₂ | |
| SA30-200 | 30 | 37 | 30 | 60 | 200 | 22.8 | 7 | 13 | 26.5 | 10.3 | 50° | 40 | 25 | 1×150 | 6.5 | M8 | 360 | |
| SA30-300 | | | | | 300 | | | | | | | | 50 | 1×200 | | | | 550 |
| SA30-400 | | | | | 400 | | | | | | | | 100 | 1×200 | | | | 730 |
| SA30-500 | | | | | 500 | | | | | | | | 50 | 2×200 | | | | 920 |
| SA30-600 | | | | | 600 | | | | | | | | 100 | 2×200 | | | | 1,100 |
| SA35-200 | 35 | 43 | 32.5 | 65 | 200 | 26.5 | 8 | 15.5 | 28 | 13 | 50° | 45 | 25 | 1×150 | 9 | M8 | 460 | |
| SA35-300 | | | | | 300 | | | | | | | | 50 | 1×200 | | | | 700 |
| SA35-400 | | | | | 400 | | | | | | | | 100 | 1×200 | | | | 950 |
| SA35-500 | | | | | 500 | | | | | | | | 50 | 2×200 | | | | 1,190 |
| SA35-600 | | | | | 600 | | | | | | | | 100 | 2×200 | | | | 1,420 |
| SA40-200 | 40 | 48 | 37.5 | 75 | 200 | 29.4 | 9 | 17 | 38 | 16 | 50° | 55 | 25 | 1×150 | 9 | M8 | 630 | |
| SA40-300 | | | | | 300 | | | | | | | | 75 | 1×150 | | | | 960 |
| SA40-400 | | | | | 400 | | | | | | | | 50 | 1×300 | | | | 1,290 |
| SA40-500 | | | | | 500 | | | | | | | | 100 | 1×300 | | | | 1,610 |
| SA40-600 | | | | | 600 | | | | | | | | 150 | 1×300 | | | | 1,950 |
| SA50-200 | 50 | 62 | 47.5 | 95 | 200 | 38.8 | 11 | 21 | 45 | 20 | 50° | 70 | 25 | 1×150 | 11 | M10 | 1,000 | |
| SA50-300 | | | | | 300 | | | | | | | | 75 | 1×150 | | | | 1,500 |
| SA50-400 | | | | | 400 | | | | | | | | 50 | 1×300 | | | | 2,000 |
| SA50-500 | | | | | 500 | | | | | | | | 100 | 1×300 | | | | 2,500 |
| SA50-600 | | | | | 600 | | | | | | | | 150 | 1×300 | | | | 3,000 |

WH-A TYPE

– Shaft Supporter –
(Inch Standard)

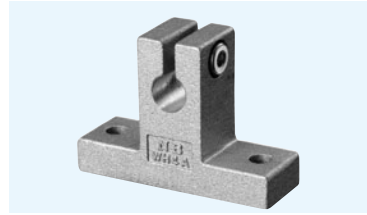


part number structure

example **WH 24 A**

WH-A type

size

| part number | shaft diameter inch | major dimensions | | | | |
|---------------|------------------------|--------------------|--------------------|-----------|-----------|-----------|
| | | h ±.001 inch | E ±.005 inch | W inch | L inch | F inch |
| WH 4A | .2500 | .6875 | .7500 | 1.500 | .500 | 1.063 |
| WH 6A | .3750 | .7500 | .8125 | 1.625 | .563 | 1.187 |
| WH 8A | .5000 | 1.0000 | 1.0000 | 2.000 | .625 | 1.625 |
| WH 10A | .6250 | 1.0000 | 1.2500 | 2.500 | .688 | 1.750 |
| WH 12A | .7500 | 1.2500 | 1.2500 | 2.500 | .750 | 2.063 |
| WH 16A | 1.0000 | 1.5000 | 1.5315 | 3.063 | 1.000 | 2.500 |
| WH 20A | 1.2500 | 1.7500 | 1.8750 | 3.750 | 1.125 | 3.000 |
| WH 24A | 1.5000 | 2.0000 | 2.1875 | 4.375 | 1.250 | 3.437 |
| WH 32A | 2.0000 | 2.5000 | 2.7500 | 5.500 | 1.500 | 4.375 |

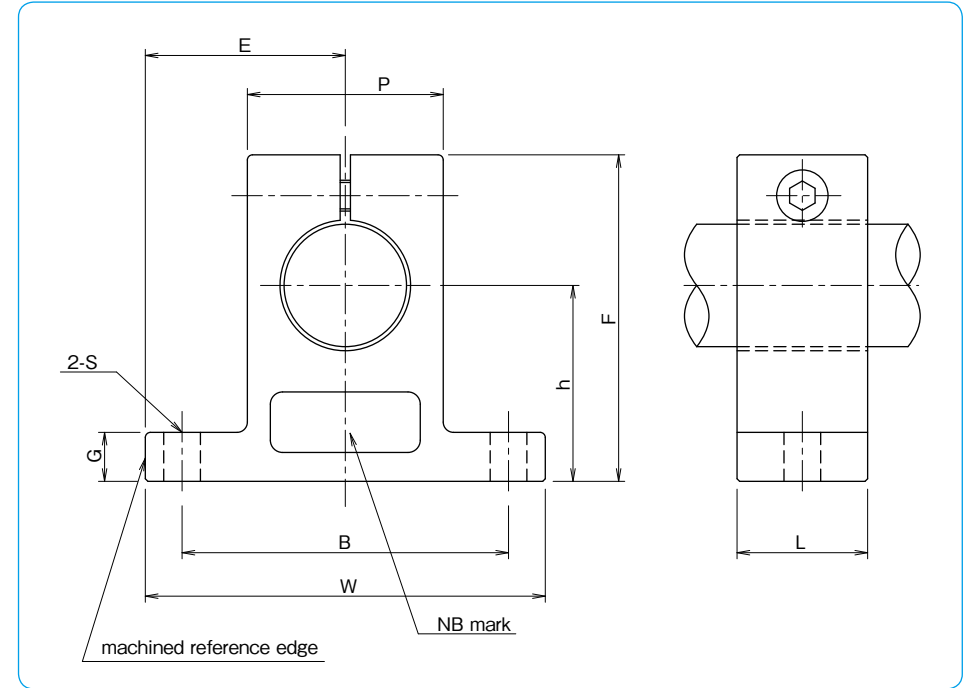


| major dimensions | | | | | mass lbs | part number |
|------------------|-----------|-------------------|-----------|-------|-------------|---------------|
| G inch | P inch | B ±.01 inch | S inch | bolt# | | |
| .250 | .500 | 1.125 | .156 | # 6 | .033 | WH 4A |
| .250 | .688 | 1.250 | .156 | # 6 | .044 | WH 6A |
| .250 | .875 | 1.500 | .188 | # 8 | .075 | WH 8A |
| .313 | 1.000 | 1.875 | .218 | # 10 | .106 | WH 10A |
| .313 | 1.250 | 2.000 | .218 | # 10 | .156 | WH 12A |
| .375 | 1.500 | 2.500 | .281 | 1/4 | .294 | WH 16A |
| .438 | 2.000 | 3.000 | .346 | 5/16 | .531 | WH 20A |
| .500 | 2.250 | 3.500 | .346 | 5/16 | .725 | WH 24A |
| .625 | 3.000 | 4.500 | .406 | 3/8 | 1.400 | WH 32A |



1kg≒2.205lbs
1lb≒0.454kg

WA TYPE

– Shaft Support Rail –
(Inch Standard)

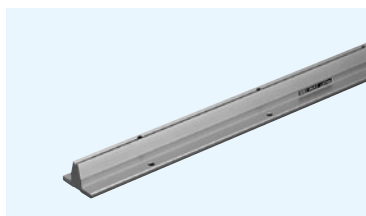

part number structure

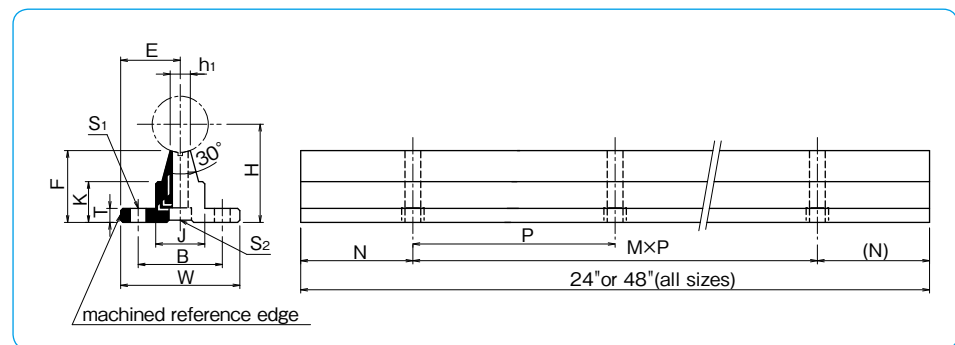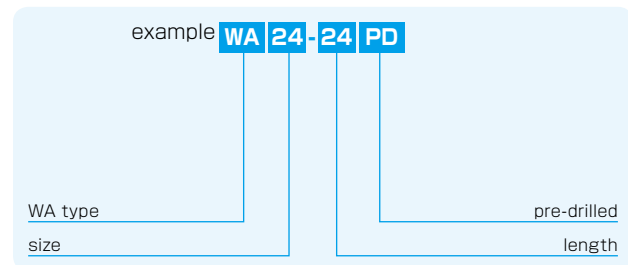


| part number | shaft diameter inch | major dimensions | | | | | | | | mounting dimensions | | | | mass lbs | | | | |
|-------------|------------------------|--------------------|--------------------|-----------|-----------|-----------|-----------|-----------|------------------------|---------------------|-----------|-------------|--------------------------------|-------------|--------------------------------|------|--------|-------|
| | | H ±.001 inch | E ±.005 inch | W inch | F inch | T inch | K inch | J inch | h ₁ inch | B ±.01 inch | N inch | M×P inch | S ₁ hole inch | | S ₂ hole inch | | | |
| WA 8- | 24PD | .5000 | 1.125 | .7500 | 1.500 | .903 | .188 | .466 | .500 | .255 | 1.000 | 2 | 5×4 | .169 | #6 | .169 | #6 | 1.326 |
| | 48PD | | | | | | | | | | | | 11×4 | | | | 2.652 | |
| WA10- | 24PD | .6250 | 1.125 | .8125 | 1.625 | .841 | .250 | .423 | .500 | .276 | 1.125 | 2 | 5×4 | .193 | #8 | .193 | #8 | 1.488 |
| | 48PD | | | | | | | | | | | | 11×4 | | | | 2.976 | |
| WA12- | 24PD | .7500 | 1.500 | .8750 | 1.750 | 1.158 | .250 | .592 | .625 | .322 | 1.250 | 3 | 3×6 | .221 | #10 | .221 | #10 | 2.100 |
| | 48PD | | | | | | | | | | | | 7×6 | | | | 4.200 | |
| WA16- | 24PD | 1.0000 | 1.750 | 1.0625 | 2.125 | 1.280 | .250 | .727 | .875 | .359 | 1.500 | 3 | 3×6 | .281 | 1/4 | .281 | 1/4 | 2.776 |
| | 48PD | | | | | | | | | | | | 7×6 | | | | 5.552 | |
| WA20- | 24PD | 1.2500 | 2.125 | 1.2500 | 2.500 | 1.537 | .313 | .799 | 1.100 | .437 | 1.875 | 3 | 3×6 | .343 | 5/16 | .343 | 5/16 | 4.060 |
| | 48PD | | | | | | | | | | | | 7×6 | | | | 8.120 | |
| WA24- | 24PD | 1.5000 | 2.500 | 1.5000 | 3.000 | 1.798 | .375 | .922 | 1.375 | .558 | 2.250 | 4 | 2×8 | .343 | 5/16 | .406 | 3/8 | 5.840 |
| | 48PD | | | | | | | | | | | | 5×8 | | | | 11.680 | |
| WA32- | 24PD | 2.0000 | 3.250 | 1.8750 | 3.750 | 2.322 | .500 | 1.450 | 1.500 | .800 | 2.750 | 4 | 2×8 | .406 | 3/8 | .531 | 1/2 | 9.500 |
| | 48PD | | | | | | | | | | | | 5×8 | | | | 19.000 | |

All sizes are also available without pre-drilled mounting holes.
Complete shaft-rail assemblies are also available as well as custom drilling and lengths.
Please send drawings with customer specifications.
Product of NB Corporation of America



1kg≐2.205lbs
1lb≐0.454kg

LWA TYPE

– Low Shaft Support Rail –
(Inch Standard)

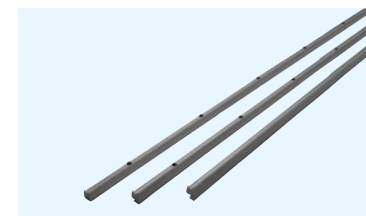

part number structure

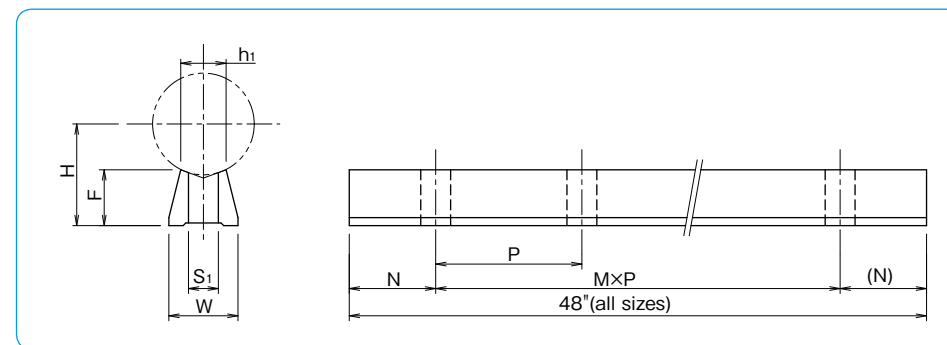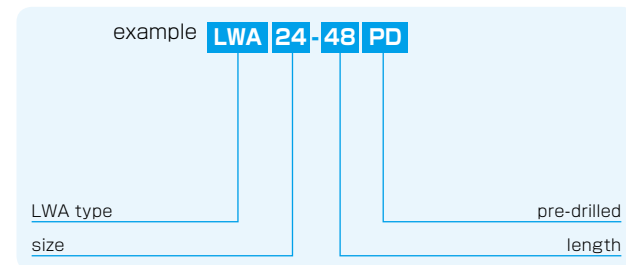


| part number | shaft diameter inch | major dimensions | | | mounting dimensions | | | | mass lb |
|--------------|------------------------|--------------------|-----------|-----------|---------------------|-------------|------------------------|------------------------|------------|
| | | H ±.002 inch | W inch | F inch | N inch | M×P inch | h ₁ inch | S ₁ inch | |
| LWA 8-48 PD | .5000 | .5625 | .37 | .342 | 2 | 11×4 | 0.25 | .169 | 0.11 |
| LWA 10-48 PD | .6250 | .6875 | .45 | .405 | 2 | 11×4 | 0.276 | .193 | 0.17 |
| LWA 12-48 PD | .7500 | .7500 | .51 | .409 | 3 | 7×6 | 0.317 | .220 | 0.20 |
| LWA 16-48 PD | 1.0000 | 1.0000 | .69 | .545 | 3 | 7×6 | 0.422 | .283 | 0.35 |
| LWA 20-48 PD | 1.2500 | 1.1875 | .78 | .617 | 3 | 7×6 | 0.520 | .343 | 0.44 |
| LWA 24-48 PD | 1.5000 | 1.3750 | .93 | .691 | 4 | 5×8 | 0.630 | .406 | 0.58 |
| LWA 32-48 PD | 2.0000 | 1.7500 | 1.18 | .836 | 4 | 5×8 | 0.824 | .531 | 0.89 |

Product of NB Corporation of America

1kg≐2.205lbs
1lb≐0.454kg

WSS TYPE

– Shaft Support Assembly –
(Standard Type)

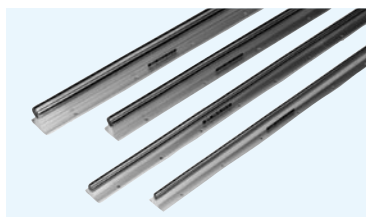


part number structure

example **WSS 16 x 36**

outer diameter

length

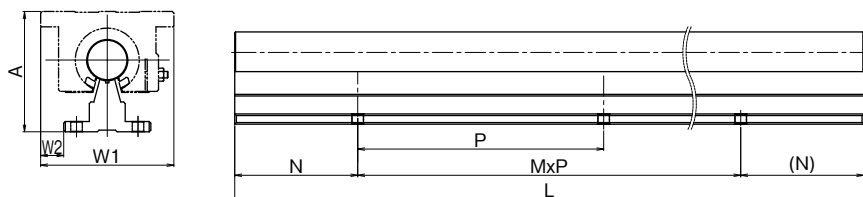


| Part Number | Outer Diameter inch/mm | Outer Assembly Dimensions | | | Base Mounting Holes | | Maximum Length | Weight lbs/ft kg/m |
|---------------|---------------------------|---------------------------|---------------|---------------|---------------------|--------------|----------------|--------------------------|
| | | A inch/mm | W1 inch/mm | W2 inch/mm | N inch/mm | P inch/mm | | |
| WSS 8 | 1/2 | 1.812 | 2.000 | 0.2500 | 2.000 | 4.000 | 168 | 1.26 |
| | 12.700 | 46.02 | 50.80 | 6.35 | 50.80 | 101.60 | 4267.2 | 1.88 |
| WSS 10 | 5/8 | 2.000 | 2.500 | 0.4375 | 2.000 | 4.000 | 180 | 1.83 |
| | 15.875 | 50.80 | 63.50 | 11.11 | 50.80 | 101.60 | 4572.0 | 2.72 |
| WSS 12 | 3/4 | 2.437 | 2.750 | 0.5000 | 3.000 | 6.000 | 204 | 2.50 |
| | 19.050 | 61.90 | 69.85 | 12.70 | 76.20 | 152.40 | 5181.6 | 3.72 |
| WSS 16 | 1 | 2.937 | 3.250 | 0.5625 | 3.000 | 6.000 | 204 | 4.06 |
| | 25.400 | 74.60 | 82.55 | 14.29 | 76.20 | 152.40 | 5181.6 | 6.04 |
| WSS 20 | 1-1/4 | 3.625 | 4.000 | 0.7500 | 3.000 | 6.000 | 204 | 6.28 |
| | 31.750 | 92.08 | 101.60 | 19.05 | 76.20 | 152.40 | 5181.6 | 9.35 |
| WSS 24 | 1-1/2 | 4.250 | 4.750 | 0.8750 | 4.000 | 8.000 | 204 | 8.60 |
| | 38.100 | 107.95 | 120.65 | 22.23 | 101.60 | 203.20 | 5181.6 | 12.8 |
| WSS 32 | 2 | 5.375 | 6.000 | 1.1250 | 4.000 | 8.000 | 204 | 14.88 |
| | 50.800 | 136.53 | 152.40 | 28.58 | 101.60 | 203.20 | 5181.6 | 22.14 |

Product of NB Corporation of America

WSS-SS TYPE

– Shaft Support Assembly –
(Stainless Steel Type)

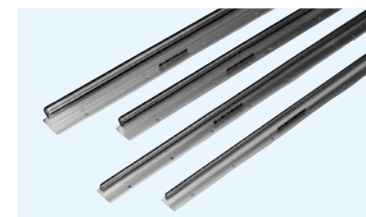


part number structure

example **WSS 8 x 36-SS**

outer diameter

length

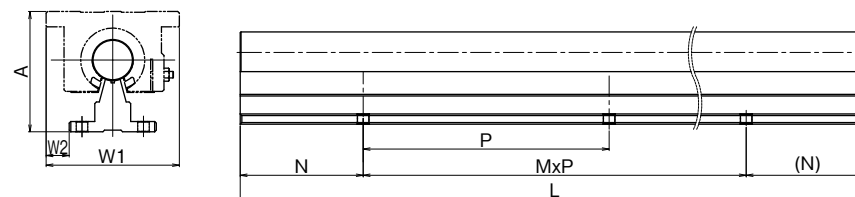




| Part Number | Outer Diameter inch/mm | Outer Assembly Dimensions | | | Base Mounting Holes | | Maximum Length | Weight lbs/ft kg/m |
|------------------|---------------------------|---------------------------|---------------|---------------|---------------------|--------------|----------------|--------------------------|
| | | A inch/mm | W1 inch/mm | W2 inch/mm | N inch/mm | P inch/mm | | |
| WSS 8-SS | 1/2 | 1.812 | 2.000 | 0.2500 | 2.000 | 4.000 | 158 | 1.26 |
| | 12.700 | 46.02 | 50.80 | 6.35 | 50.80 | 101.60 | 4013.2 | 1.88 |
| WSS 10-SS | 5/8 | 2.000 | 2.500 | 0.4375 | 2.000 | 4.000 | 158 | 1.83 |
| | 15.875 | 50.80 | 63.50 | 11.11 | 50.80 | 101.60 | 4013.2 | 2.72 |
| WSS 12-SS | 3/4 | 2.437 | 2.750 | 0.5000 | 3.000 | 6.000 | 158 | 2.50 |
| | 19.050 | 61.90 | 69.85 | 12.70 | 76.20 | 152.40 | 4013.2 | 3.72 |
| WSS 16-SS | 1 | 2.937 | 3.250 | 0.5625 | 3.000 | 6.000 | 158 | 4.06 |
| | 25.400 | 74.60 | 82.55 | 14.29 | 76.20 | 152.40 | 4013.2 | 6.04 |
| WSS 20-SS | 1-1/4 | 3.625 | 4.000 | 0.7500 | 3.000 | 6.000 | 158 | 6.28 |
| | 31.750 | 92.08 | 101.60 | 19.05 | 76.20 | 152.40 | 4013.2 | 9.35 |
| WSS 24-SS | 1-1/2 | 4.250 | 4.750 | 0.8750 | 4.000 | 8.000 | 158 | 8.60 |
| | 38.100 | 107.95 | 120.65 | 22.23 | 101.60 | 203.20 | 4013.2 | 12.8 |
| WSS 32-SS | 2 | 5.375 | 6.000 | 1.1250 | 4.000 | 8.000 | 204 | 14.88 |
| | 50.800 | 136.53 | 152.40 | 28.58 | 101.60 | 203.20 | 5181.6 | 22.14 |

Product of NB Corporation of America

SF TYPE

– NBCA Shaft –

part number structure

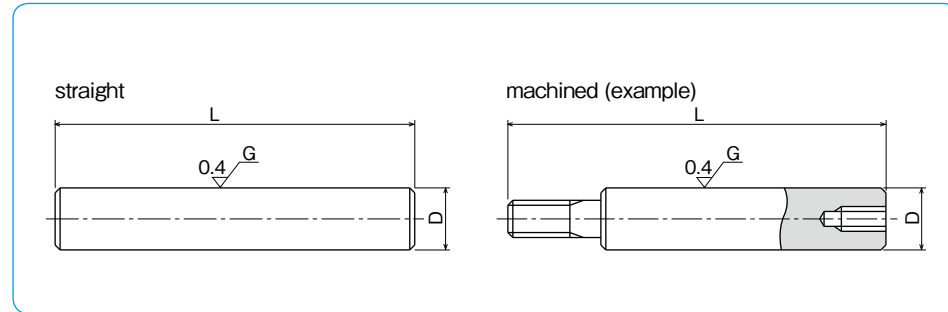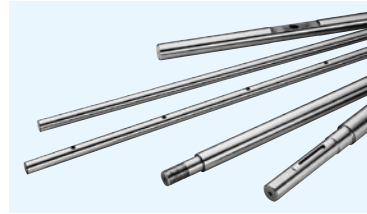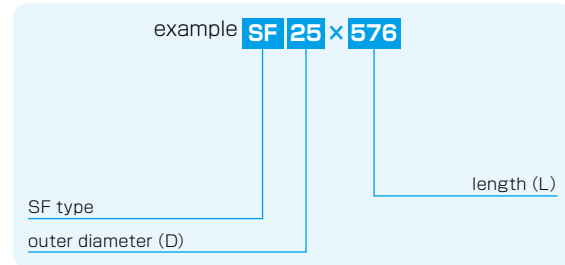




| part number | outer diameter | | length L | mass |
|-------------|----------------|------------|--------------|------|
| | D | tolerance | | |
| | mm | g6 μm | mm | Kg/m |
| SF 6 | 6 | -13 -25 | 100 ← → 3000 | 0.23 |
| SF 8 | 8 | | 100 ← → 3000 | 0.40 |
| SF 10 | 10 | | 100 ← → 3000 | 0.62 |
| SF 12 | 12 | | 100 ← → 3000 | 0.89 |
| SF 13 | 13 | | 100 ← → 3000 | 1.04 |
| SF 15 | 15 | | 100 ← → 3000 | 1.39 |
| SF 16 | 16 | | 100 ← → 3000 | 1.58 |
| SF 20 | 20 | | 100 ← → 3000 | 2.47 |
| SF 25 | 25 | | 100 ← → 3000 | 3.85 |
| SF 30 | 30 | | 100 ← → 3000 | 5.55 |
| SF 35 | 35 | | 100 ← → 3000 | 7.55 |
| SF 40 | 40 | | 100 ← → 3000 | 9.87 |
| SF 50 | 50 | | 100 ← → 3000 | 15.4 |

material: CF53 or Equivalent hardness: 60HRC (HV697) or more
Product of NB Corporation of America

SFS TYPE

– NBCA Stainless Steel Shaft –

part number structure

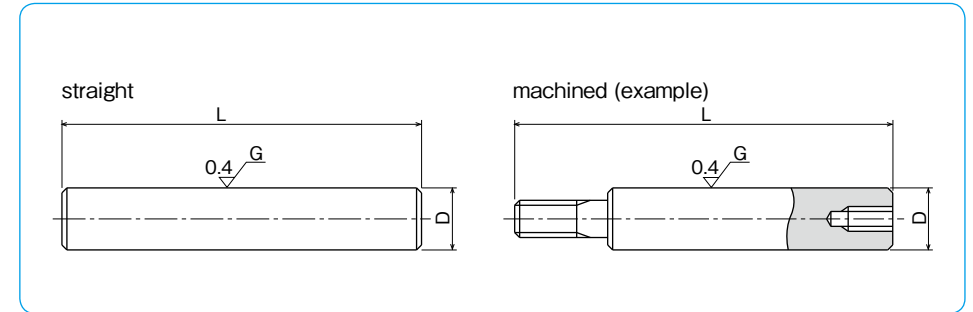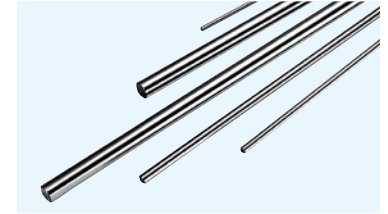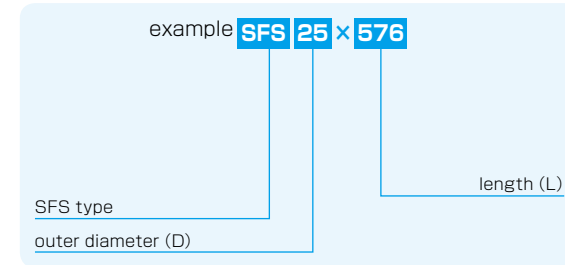


| part number | outer diameter | | length L | mass |
|-------------|----------------|------------|--------------|------|
| | D | tolerance | | |
| | mm | g6 μm | mm | Kg/m |
| SFS 6 | 6 | -13 -25 | 100 ← → 3000 | 0.22 |
| SFS 8 | 8 | | 100 ← → 3000 | 0.39 |
| SFS 10 | 10 | | 100 ← → 3000 | 0.61 |
| SFS 12 | 12 | | 100 ← → 3000 | 0.88 |
| SFS 13 | 13 | | 100 ← → 3000 | 1.03 |
| SFS 16 | 16 | | 100 ← → 3000 | 1.56 |
| SFS 20 | 20 | | 100 ← → 3000 | 2.43 |
| SFS 25 | 25 | | 100 ← → 3000 | 3.80 |
| SFS 30 | 30 | | 100 ← → 3000 | 5.48 |
| SFS 35 | 35 | | 100 ← → 3000 | 7.46 |
| SFS 40 | 40 | | 100 ← → 3000 | 9.75 |
| SFS 50 | 50 | | 100 ← → 3000 | 15.2 |



material: X46Cr13 or Equivalent
hardness: 52HRC (HV544) or more
Product of NB Corporation of America

SFW TYPE

– NBCA Inch Shaft –

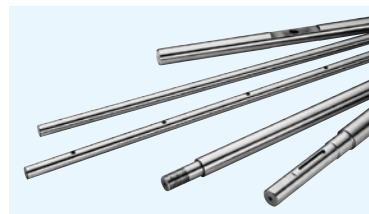

part number structure

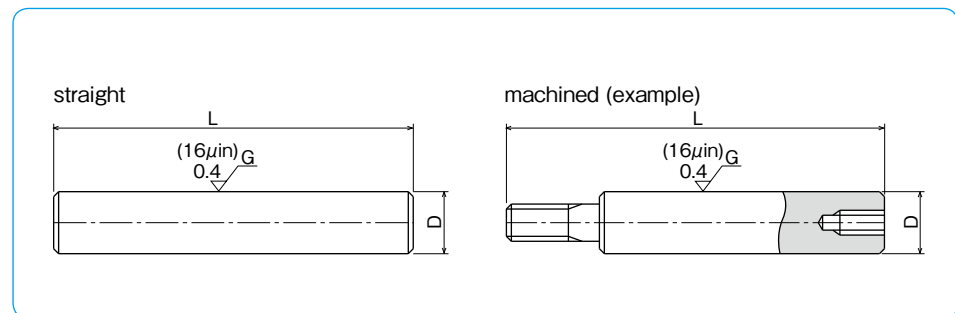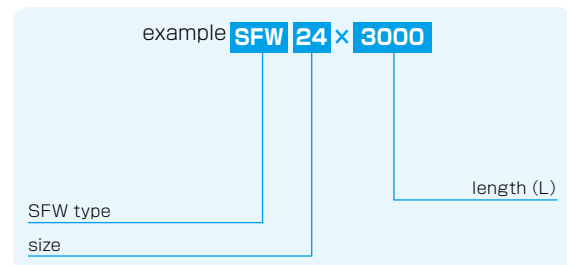


| Part Number | Outer Diameter D inch/mm | Diameter g6 inch/µm | Length L inch/mm | Mass lbs/inch kg/m |
|-------------|-----------------------------|-------------------------|---------------------|--------------------------|
| SFW 4 | 1/4 6.350 | | 2 → 120 | 0.014 |
| | | | 50.8 ← 3048 | 0.25 |
| SFW 6 | 3/8 9.525 | | 2 → 120 | 0.031 |
| | | | 50.8 ← 3048 | 0.56 |
| SFW 8 | 1/2 12.700 | -.0005 | 2 → 120 | 0.056 |
| | | | 50.8 ← 3048 | 0.99 |
| SFW 10 | 5/8 15.875 | -.0010 | 2 → 120 | 0.086 |
| | | | 50.8 ← 3048 | 1.55 |
| SFW 12 | 3/4 19.050 | -.13 | 2 → 120 | 0.125 |
| | | | 50.8 ← 3048 | 2.24 |
| SFW 16 | 1 25.400 | -.25 | 2 → 120 | 0.222 |
| | | | 50.8 ← 3048 | 3.98 |
| SFW 20 | 1-1/4 31.750 | | 2 → 120 | 0.348 |
| | | | 50.8 ← 3048 | 6.22 |
| SFW 24 | 1-1/2 38.100 | -.0006~-.0011 -15~27 | 2 → 120 | 0.500 |
| | | | 50.8 ← 3048 | 8.95 |
| SFW 32 | 2 50.800 | -.0006~-.0013 -15~33 | 2 → 120 | 0.890 |
| | | | 50.8 ← 3048 | 15.91 |

material: CF53 or Equivalent
hardness: 60 HRC or more
Product of NB Corporation of America



1kg≒2.205lbs

SFWS TYPE

– NBCA Inch Stainless Steel Shaft –

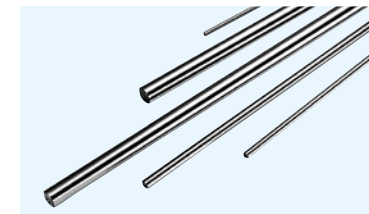

part number structure

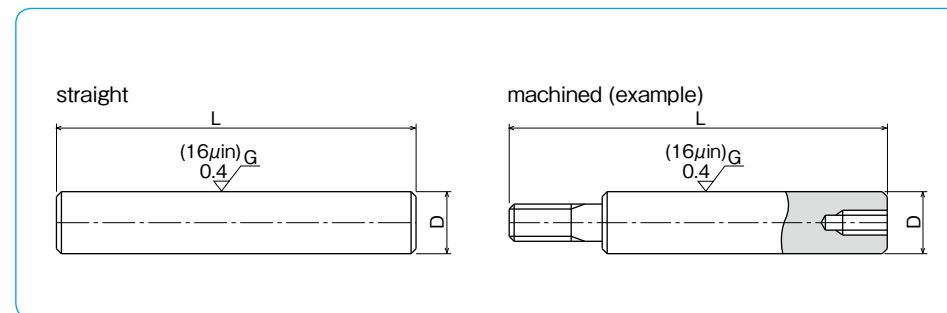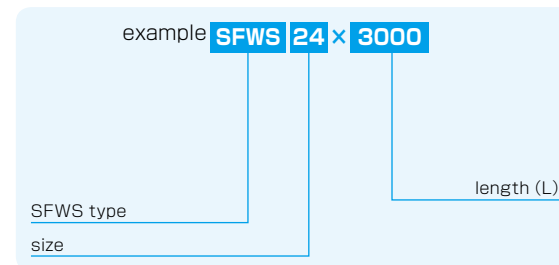


| Part Number | Outer Diameter D inch/mm | Diameter g6 inch/µm | Length L inch/mm | Mass lbs/inch kg/m |
|-------------|-----------------------------|-------------------------|---------------------|--------------------------|
| SFWS 2 | 1/8 3.175 | -.0002~-.0005 -5~12 | 2 → 16 | 0.004 |
| | | | 50.8 ← 406.4 | 0.10 |
| SFWS 3 | 3/16 4.763 | -.0002~-.0006 -5~14 | 2 → 16 | 0.008 |
| | | | 50.8 ← 406.4 | 0.20 |
| SFWS 4 | 1/4 6.350 | | 2 → 120 | 0.014 |
| | | | 50.8 ← 3048 | 0.25 |
| SFWS 6 | 3/8 9.525 | | 2 → 120 | 0.031 |
| | | | 50.8 ← 3048 | 0.56 |
| SFWS 8 | 1/2 12.700 | -.0005 | 2 → 120 | 0.056 |
| | | | 50.8 ← 3048 | 0.99 |
| SFWS 10 | 5/8 15.875 | -.0010 | 2 → 120 | 0.086 |
| | | | 50.8 ← 3048 | 1.55 |
| SFWS 12 | 3/4 19.050 | -.13 | 2 → 120 | 0.125 |
| | | | 50.8 ← 3048 | 2.24 |
| SFWS 16 | 1 25.400 | -.25 | 2 → 120 | 0.222 |
| | | | 50.8 ← 3048 | 3.98 |
| SFWS 20 | 1-1/4 31.750 | | 2 → 120 | 0.348 |
| | | | 50.8 ← 3048 | 6.22 |
| SFWS 24 | 1-1/2 38.100 | -.0006~-.0011 -15~27 | 2 → 120 | 0.500 |
| | | | 50.8 ← 3048 | 8.95 |
| SFWS 32 | 2 50.800 | -.0006~-.0013 -15~33 | 2 → 120 | 0.890 |
| | | | 50.8 ← 3048 | 15.91 |

material: X46Cr13 or Equivalent
hardness: 52 HRC or more
Product of NB Corporation of America

1kg≒2.205lbs

SFW-PD


– NBCA Inch Pre-Drilled Shaft –

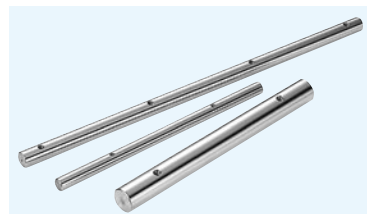

part number structure

example **SFW 24 x 72 - PD**

SFW type size pre-drilled shaft length (L in inches)

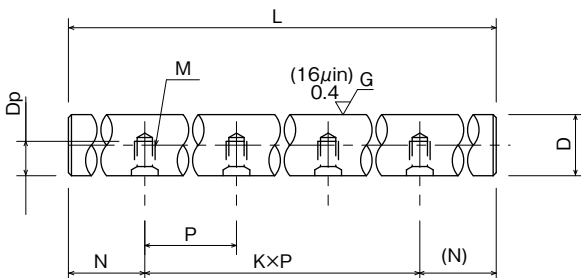

$$N: \frac{L-K \times P}{2}$$

K: number of pitches


| Part Number | Outer Diameter | | Pitch P inch/mm | Bolt Size M | Tapped Hole Depth Dp inch/mm | Maximum Length L inch/mm |
|------------------|----------------|---------------|-----------------------|----------------|---------------------------------------|-----------------------------------|
| | D inch/mm | inch/ μ m | | | | |
| SFW 8-PD | 1/2 | -.0005 | 4 | # 6-32 | 0.280 | 168 |
| | 12.700 | -.0010 | | | 7.1 | 4267.2 |
| SFW 10-PD | 5/8 | -13 | 101.6 | # 8-32 | 0.350 | 180 |
| | 15.875 | -25 | | | 8.9 | 4572 |
| SFW 12-PD | 3/4 | -.0005 | 6 | # 10-32 | 0.400 | 204 |
| | 19.050 | | | | 10.2 | 5181.6 |
| SFW 16-PD | 1 | -.0010 | 152.4 | 1/4-20 | 0.500 | 204 |
| | 25.400 | -13 | | | 12.7 | 5181.6 |
| SFW 20-PD | 1-1/4 | -25 | 203.2 | 5/16-18 | 0.650 | 204 |
| | 31.750 | -25 | | | 16.5 | 5181.6 |
| SFW 24-PD | 1-1/2 | -.0005 | 8 | 3/8-16 | 0.700 | 204 |
| | 38.100 | -.0010 | | | 17.8 | 5181.6 |
| SFW 32-PD | 2 | -13 | 203.2 | 1/2-13 | 0.850 | 204 |
| | 50.800 | -25 | | | 21.6 | 5181.6 |

material: CF53 or Equivalent
hardness: 60 HRC or more
Product of NB Corporation of America

1kg \approx 2.205lbs

SFWS-PD


– NBCA Inch Pre-Drilled Stainless Steel Shaft –

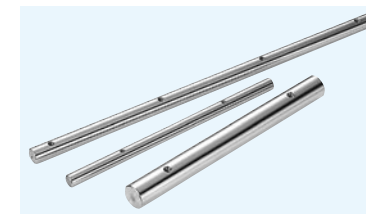

part number structure

example **SFWS 24 x 72 - PD**

SFWS type size pre-drilled shaft length (L in inches)

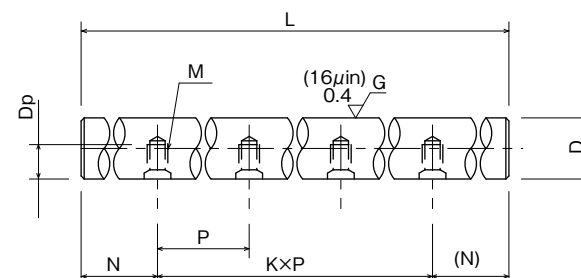

$$N: \frac{L-K \times P}{2}$$

K: number of pitches

| Part Number | Outer Diameter | | Pitch P inch/mm | Bolt Size M | Tapped Hole Depth Dp inch/mm | Maximum Length L inch/mm |
|-------------------|----------------|---------------|-----------------------|----------------|---------------------------------------|-----------------------------------|
| | D inch/mm | inch/ μ m | | | | |
| SFWS 8-PD | 1/2 | -.0005 | 4 | # 6-32 | 0.280 | 158 |
| | 12.700 | -.0010 | | | 7.1 | 4013.2 |
| SFWS 10-PD | 5/8 | -13 | 101.6 | # 8-32 | 0.350 | 158 |
| | 15.875 | -25 | | | 8.9 | 4013.2 |
| SFWS 12-PD | 3/4 | -.0005 | 6 | # 10-32 | 0.400 | 158 |
| | 19.050 | | | | 10.2 | 4013.2 |
| SFWS 16-PD | 1 | -.0010 | 152.4 | 1/4-20 | 0.500 | 158 |
| | 25.400 | -13 | | | 12.7 | 4013.2 |
| SFWS 20-PD | 1-1/4 | -25 | 203.2 | 5/16-18 | 0.650 | 158 |
| | 31.750 | -25 | | | 16.5 | 4013.2 |
| SFWS 24-PD | 1-1/2 | -.0005 | 8 | 3/8-16 | 0.700 | 158 |
| | 38.100 | -.0010 | | | 17.8 | 4013.2 |
| SFWS 32-PD | 2 | -13 | 203.2 | 1/2-13 | 0.850 | 158 |
| | 50.800 | -25 | | | 21.6 | 4013.2 |

material: X46Cr13 or Equivalent
hardness: 52 HRC or more
Product of NB Corporation of America



1kg \approx 2.205lbs

SFW-FS102/SFWS-FS102 TYPE

– Format Single End Tapped Inch Shaft –



part number structure

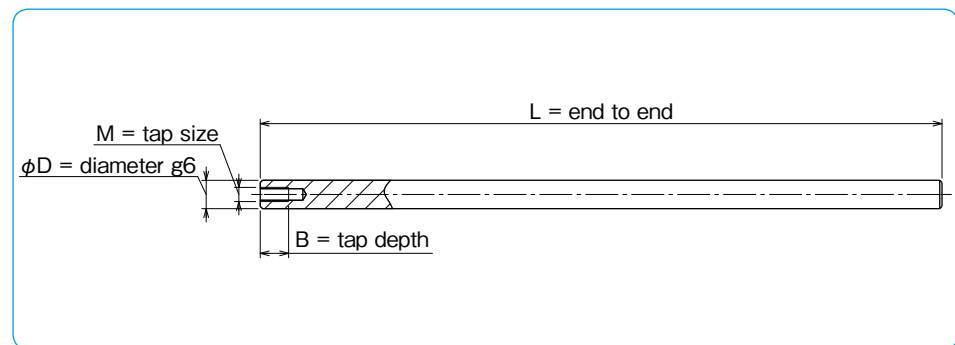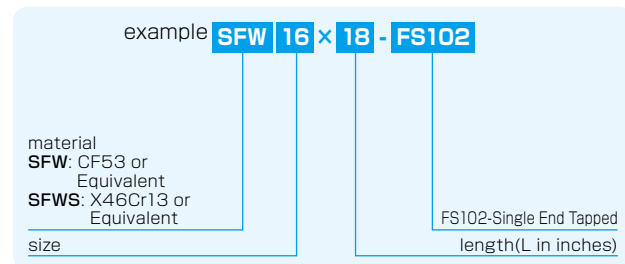

| Part Number SFW | Part Number SFWS | Outer Diameter D | | Tap Size M | Tap Depth B | Length in mm | | | | | | | |
|---------------------|---------------------|---------------------|---------|---------------|----------------|-----------------|-------|-------|-----|-------|-------|-------|-------|
| | | inch/mm | inch/μm | | | 6 | 8 | 9* | 10* | 12 | 18 | 24 | 36 |
| SFW 4-FS102 | | 1/4 | | # 5-40 | 0.250" | 6 | 8 | | | 12 | 18 | 24 | |
| | | 6.350 | | | | 152.4 | 203.2 | | | 304.8 | 457.2 | 609.6 | |
| SFW 6-FS102 | SFWS 6-FS102 | 3/8 | | # 8-32 | 0.330" | 6 | 8* | 9* | 10* | 12 | 18 | 24 | 36 |
| | | 9.525 | | | | 152.4 | 203.2 | 228.6 | 254 | 304.8 | 457.2 | 609.6 | 914.4 |
| SFW 8-FS102 | SFWS 8-FS102 | 1/2 | | 1/4-20 | 0.500" | 6 | 8* | 9* | 10* | 12 | 18 | 24 | 36 |
| | | 12.700 | | | | 152.4 | 203.2 | 228.6 | 254 | 304.8 | 457.2 | 609.6 | 914.4 |
| SFW 10-FS102 | SFWS10-FS102 | 5/8 | −.0005 | 1/4-20 | 0.500" | 6 | 8* | 9* | 10* | 12 | 18 | 24 | 36 |
| | | 15.875 | −.0010 | | | 152.4 | 203.2 | 228.6 | 254 | 304.8 | 457.2 | 609.6 | 914.4 |
| SFW 12-FS102 | SFWS12-FS102 | 3/4 | −13 | 5/16-18 | 0.625" | 6 | 8* | 9* | 10* | 12 | 18 | 24 | 36 |
| | | 19.050 | −25 | | | 152.4 | 203.2 | 228.6 | 254 | 304.8 | 457.2 | 609.6 | 914.4 |
| SFW 16-FS102 | SFWS16-FS102 | 1 | | 3/8-16 | 0.750" | 6 | 8* | 9* | 10* | 12 | 18 | 24 | 36 |
| | | 25.400 | | | | 152.4 | 203.2 | 228.6 | 254 | 304.8 | 457.2 | 609.6 | 914.4 |
| SFW 20-FS102 | SFWS20-FS102 | 1-1/4 | | 1/2-13 | 1.000" | 6 | 8* | 9* | 10* | 12 | 18 | 24 | 36 |
| | | 31.750 | | | | 152.4 | 203.2 | 228.6 | 254 | 304.8 | 457.2 | 609.6 | 914.4 |
| SFW 24-FS102 | SFWS24-FS102 | 1-1/2 | | 5/8-11 | 1.250" | 6 | | | | 12 | 18 | 24 | 36 |
| | | 38.100 | | | | 152.4 | | | | 304.8 | 457.2 | 609.6 | 914.4 |



hardness of SFW: 60 HRC or more
 hardness of SFWS: 52 HRC or more
 Product of NB Corporation of America
 * SFWS is not available

SFW-FS103/SFWS-FS103 TYPE

– Format Both Ends Tapped Inch Shaft –



part number structure

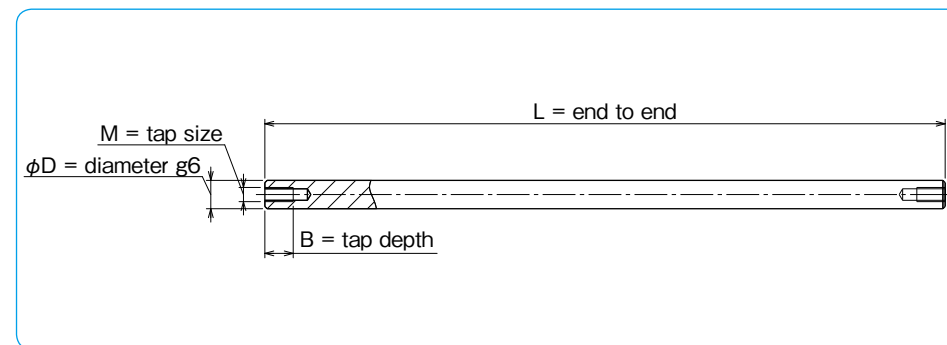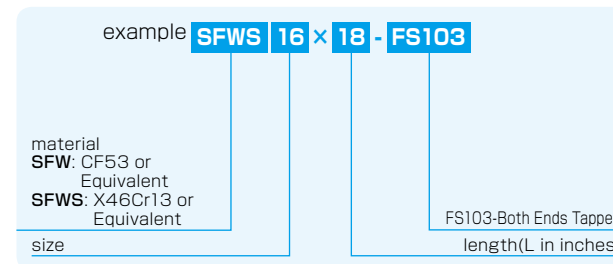


| Part Number SFW | Part Number SFWS | Outer Diameter D | | Tap Size M | Tap Depth B | Length in mm | | | | | | | |
|---------------------|---------------------|---------------------|---------|---------------|----------------|-----------------|-------|-------|-----|-------|-------|-------|-------|
| | | inch/mm | inch/μm | | | 6 | 8 | 9* | 10* | 12 | 18 | 24 | 36 |
| SFW 4-FS103 | | 1/4 | | # 5-40 | 0.250" | 6 | 8 | | | 12 | 18 | 24 | |
| | | 6.350 | | | | 152.4 | 203.2 | | | 304.8 | 457.2 | 609.6 | |
| SFW 6-FS103 | SFWS 6-FS103 | 3/8 | | # 8-32 | 0.330" | 6 | 8* | 9* | 10* | 12 | 18 | 24 | 36 |
| | | 9.525 | | | | 152.4 | 203.2 | 228.6 | 254 | 304.8 | 457.2 | 609.6 | 914.4 |
| SFW 8-FS103 | SFWS 8-FS103 | 1/2 | | 1/4-20 | 0.500" | 6 | 8* | 9* | 10* | 12 | 18 | 24 | 36 |
| | | 12.700 | | | | 152.4 | 203.2 | 228.6 | 254 | 304.8 | 457.2 | 609.6 | 914.4 |
| SFW 10-FS103 | SFWS10-FS103 | 5/8 | −.0005 | 1/4-20 | 0.500" | 6 | 8* | 9* | 10* | 12 | 18 | 24 | 36 |
| | | 15.875 | −.0010 | | | 152.4 | 203.2 | 228.6 | 254 | 304.8 | 457.2 | 609.6 | 914.4 |
| SFW 12-FS103 | SFWS12-FS103 | 3/4 | −13 | 5/16-18 | 0.625" | 6 | 8* | 9* | 10* | 12 | 18 | 24 | 36 |
| | | 19.050 | −25 | | | 152.4 | 203.2 | 228.6 | 254 | 304.8 | 457.2 | 609.6 | 914.4 |
| SFW 16-FS103 | SFWS16-FS103 | 1 | | 3/8-16 | 0.750" | 6 | 8* | 9* | 10* | 12 | 18 | 24 | 36 |
| | | 25.400 | | | | 152.4 | 203.2 | 228.6 | 254 | 304.8 | 457.2 | 609.6 | 914.4 |
| SFW 20-FS103 | SFWS20-FS103 | 1-1/4 | | 1/2-13 | 1.000" | 6 | 8* | 9* | 10* | 12 | 18 | 24 | 36 |
| | | 31.750 | | | | 152.4 | 203.2 | 228.6 | 254 | 304.8 | 457.2 | 609.6 | 914.4 |
| SFW 24-FS103 | SFWS24-FS103 | 1-1/2 | | 5/8-11 | 1.250" | 6 | | | | 12 | 18 | 24 | 36 |
| | | 38.100 | | | | 152.4 | | | | 304.8 | 457.2 | 609.6 | 914.4 |



hardness of SFW: 60 HRC or more
 hardness of SFWS: 52 HRC or more
 Product of NB Corporation of America
 * SFWS is not available

SFW-FS115 TYPE

– Format Single End Threaded Inch Shafts –

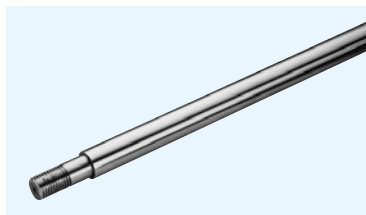

part number structure

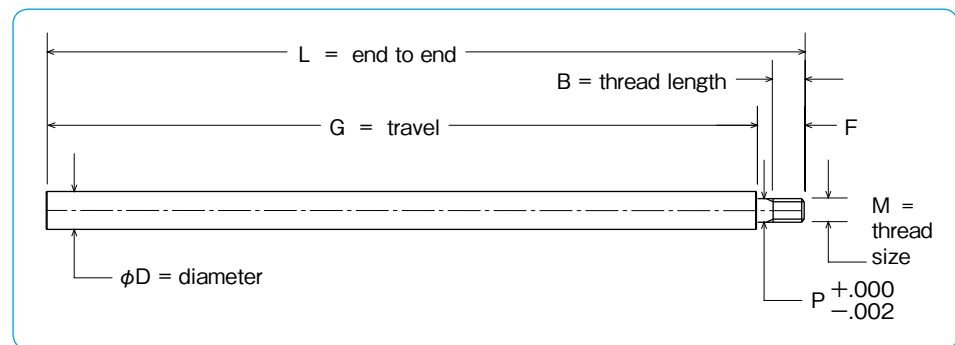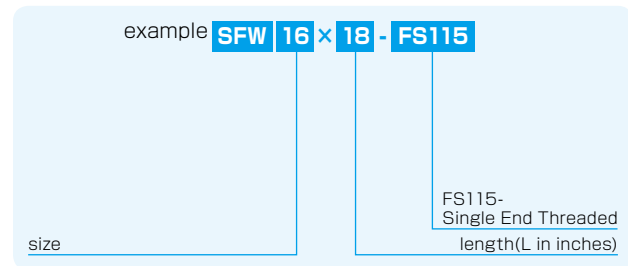


| Part Number | Outer Diameter | | Thread Size M | Thread Length B | Journal Length F | Journal DIA P | 4" Travel G | 6" Travel G | 8" Travel G | 12" Travel G | 24" Travel G | 36" Travel G | 48" Travel G |
|---------------------|----------------|---------------------------|---------------|-----------------|------------------|---------------|-------------|-------------|-------------|--------------|--------------|--------------|--------------|
| | D | inch/μm | | | | | Length L | Length L | Length L | Length L | Length L | Length L | |
| SFW 6-FS115 | 3/8 | -0.005 -0.0010 | 1/4-20 | 0.31 | 0.50 | 0.250 | 4.500 | 6.500 | 8.500 | 12.500 | 24.500 | | |
| | 9.525 | | | 7.87 | 12.70 | 6.35 | 114.3 | 165.1 | 215.9 | 317.5 | 622.3 | | |
| SFW 8-FS115 | 1/2 | -0.005 -0.0010 | 5/16-18 | 0.39 | 0.63 | 0.313 | 4.625 | 6.625 | 8.625 | 12.625 | 24.625 | | |
| | 12.700 | | | 9.91 | 15.88 | 7.95 | 117.5 | 168.3 | 219.1 | 320.7 | 625.5 | | |
| SFW 10-FS115 | 5/8 | -0.005 -0.0010 | 3/8-16 | 0.47 | 0.75 | 0.375 | 4.750 | 6.750 | 8.750 | 12.750 | 24.750 | | |
| | 15.875 | | | 11.94 | 19.05 | 9.53 | 120.7 | 171.5 | 222.3 | 323.9 | 628.7 | | |
| SFW 12-FS115 | 3/4 | -13 -25 | 1/2-13 | 0.63 | 1.00 | 0.500 | 5.000 | 7.000 | 9.000 | 13.000 | 25.000 | | |
| | 19.050 | | | 16.00 | 25.40 | 12.70 | 127.0 | 177.8 | 228.6 | 330.2 | 635.0 | | |
| SFW 16-FS115 | 1 | -0.005 -0.0010 | 5/8-11 | 0.78 | 1.25 | 0.625 | | 7.250 | 9.250 | 13.250 | 25.250 | 37.250 | |
| | 25.400 | | | 19.81 | 31.75 | 15.88 | 184.2 | 235.0 | 336.6 | 641.4 | 946.2 | | |
| SFW 20-FS115 | 1-1/4 | -0.005 -0.0010 | 3/4-10 | 0.94 | 1.50 | 0.750 | | 7.500 | 9.500 | 13.500 | 25.500 | 37.500 | |
| | 31.750 | | | 23.88 | 38.10 | 19.05 | 190.5 | 241.3 | 342.9 | 647.7 | 952.5 | | |
| SFW 24-FS115 | 1-1/2 | -0.006~-0.0011 -15~-27 | 1-8 | 1.25 | 2.00 | 1.000 | | 10.000 | 14.000 | 26.000 | 38.000 | 50.000 | |
| | 38.100 | | | 31.75 | 50.80 | 25.40 | | 254.0 | 355.6 | 660.4 | 965.2 | 1270.0 | |



material: CF53 or Equivalent
 hardness: 60 HRC or more
 stainless steel sizes are available on this series by quote only
 Product of NB Corporation of America

SFW-FS116 TYPE

– Format Both Ends Threaded Inch Shafts –

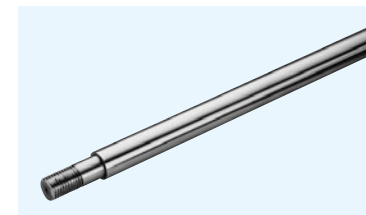

part number structure

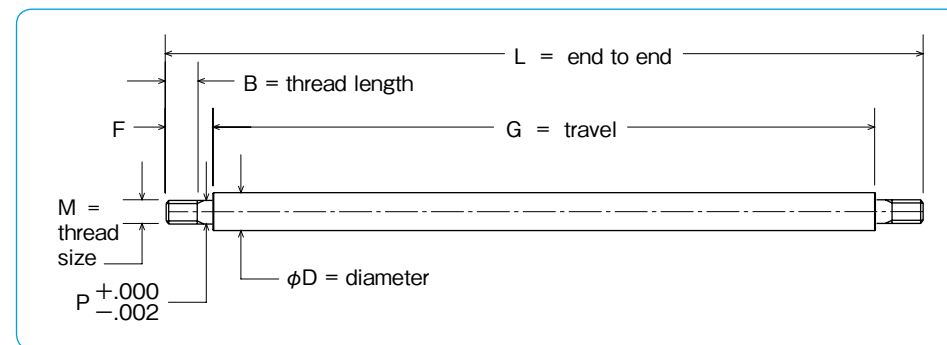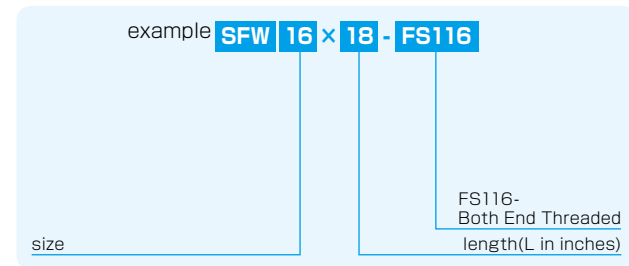


| Part Number | Outer Diameter | | Thread Size M | Thread Length B | Journal Length F | Journal DIA P | 4" Travel G | 6" Travel G | 8" Travel G | 12" Travel G | 24" Travel G | 36" Travel G | 48" Travel G |
|---------------------|----------------|---------------------------|---------------|-----------------|------------------|---------------|-------------|-------------|-------------|--------------|--------------|--------------|--------------|
| | D | inch/μm | | | | | Length L | Length L | Length L | Length L | Length L | Length L | |
| SFW 6-FS116 | 3/8 | -0.005 -0.0010 | 1/4-20 | 0.31 | 0.50 | 0.250 | 5.000 | 7.000 | 9.000 | 13.000 | 25.000 | | |
| | 9.525 | | | 7.87 | 12.70 | 6.35 | 127.0 | 177.8 | 228.6 | 330.2 | 635.0 | | |
| SFW 8-FS116 | 1/2 | -0.005 -0.0010 | 5/16-18 | 0.39 | 0.63 | 0.313 | 5.250 | 7.250 | 9.250 | 13.250 | 25.250 | | |
| | 12.700 | | | 9.91 | 15.88 | 7.95 | 133.4 | 184.2 | 235.0 | 336.6 | 641.4 | | |
| SFW 10-FS116 | 5/8 | -0.005 -0.0010 | 3/8-16 | 0.47 | 0.75 | 0.375 | 5.500 | 7.500 | 9.500 | 13.500 | 25.500 | | |
| | 15.875 | | | 11.94 | 19.05 | 9.53 | 139.7 | 190.5 | 241.3 | 342.9 | 647.7 | | |
| SFW 12-FS116 | 3/4 | -13 -25 | 1/2-13 | 0.63 | 1.00 | 0.500 | 6.000 | 8.000 | 10.000 | 14.000 | 26.000 | | |
| | 19.050 | | | 16.00 | 25.40 | 12.70 | 152.4 | 203.2 | 254.0 | 355.6 | 660.4 | | |
| SFW 16-FS116 | 1 | -0.005 -0.0010 | 5/8-11 | 0.78 | 1.25 | 0.625 | | 8.500 | 10.500 | 14.500 | 26.500 | 38.500 | |
| | 25.400 | | | 19.81 | 31.75 | 15.88 | 215.9 | 266.7 | 368.3 | 673.1 | 977.9 | | |
| SFW 20-FS116 | 1-1/4 | -0.005 -0.0010 | 3/4-10 | 0.94 | 1.50 | 0.750 | | 9.000 | 11.000 | 15.000 | 27.000 | 39.000 | |
| | 31.750 | | | 23.88 | 38.10 | 19.05 | 228.6 | 279.4 | 381.0 | 685.8 | 990.6 | | |
| SFW 24-FS116 | 1-1/2 | -0.006~-0.0011 -15~-27 | 1-8 | 1.25 | 2.00 | 1.000 | | 12.000 | 16.000 | 28.000 | 40.000 | 52.000 | |
| | 38.100 | | | 31.75 | 50.80 | 25.40 | | 304.8 | 406.4 | 711.2 | 1016.0 | 1320.8 | |



material: CF53 or Equivalent
 hardness: 60 HRC or more
 stainless steel sizes are available on this series by quote only
 Product of NB Corporation of America

PC TYPE

– Pre-Cut Slide Shafts –

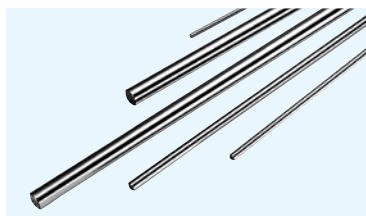

part number structure

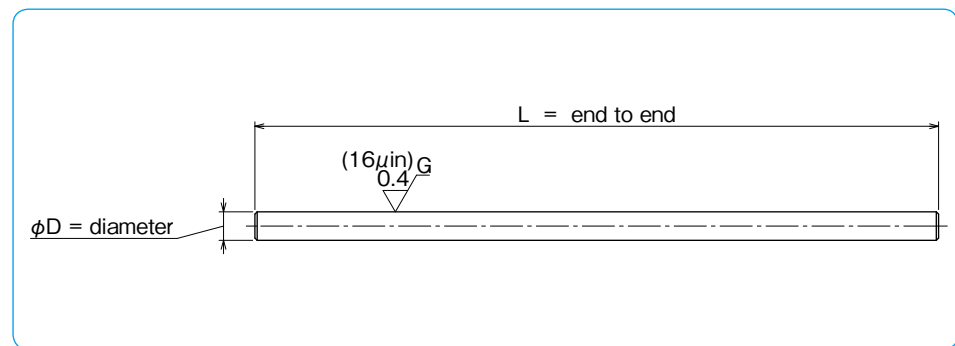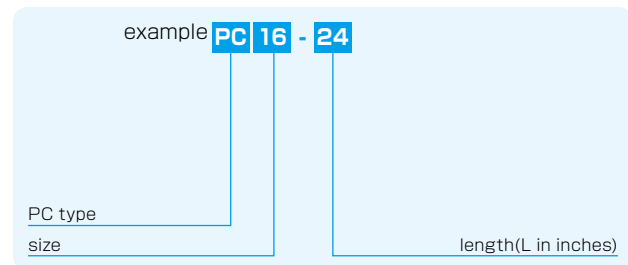


| Part Number | Outer Diameter | | Length L | | | | | | | Mass lbs/inch kg/m |
|-------------|----------------|----------------------------------|------------|-------|-------|--------|--------|--------|-------|--------------------------|
| | D inch/mm | g6 inch/μm | inch mm | | | | | | | |
| PC 4 | 1/4 | -0.0005 -0.0010 -13 -25 | 6 | 12 | 18 | 24 | | | | 0.014 |
| | 6.350 | | 152.4 | 304.8 | 457.2 | 609.6 | | | | 0.25 |
| PC 6 | 3/8 | | 6 | 12 | 18 | 24 | | | | 0.031 |
| | 9.525 | | 152.4 | 304.8 | 457.2 | 609.6 | | | | 0.56 |
| PC 8 | 1/2 | | 12 | 18 | 24 | 30 | 36 | | | 0.056 |
| | 12.700 | | 304.8 | 457.2 | 609.6 | 762 | 914.4 | | | 0.99 |
| PC 10 | 5/8 | | 12 | 18 | 24 | 30 | 36 | | | 0.086 |
| | 15.875 | | 304.8 | 457.2 | 609.6 | 762 | 914.4 | | | 1.55 |
| PC 12 | 3/4 | | 18 | 24 | 30 | 36 | 42 | 48 | | 0.125 |
| | 19.050 | | 457.2 | 609.6 | 762 | 914.4 | 1066.8 | 1219.2 | | 2.24 |
| PC 16 | 1 | 18 | 24 | 30 | 36 | 42 | 48 | | 0.222 | |
| | 25.400 | 457.2 | 609.6 | 762 | 914.4 | 1066.8 | 1219.2 | | 3.98 | |
| PC 20 | 1-1/4 | 18 | 24 | 30 | 36 | 42 | 48 | | 0.348 | |
| | 31.750 | 457.2 | 609.6 | 762 | 914.4 | 1066.8 | 1219.2 | | 6.22 | |
| PC 24 | 1-1/2 | 18 | 24 | 30 | 36 | 48 | | | 0.500 | |
| | 38.100 | 457.2 | 609.6 | 762 | 914.4 | 1219.2 | | | 8.95 | |

material: CF53 or Equivalent
hardness: 60 HRC or more
Product of NB Corporation of America

FIT SERIES

Due to the combined tolerances of the bush's bore and the shaft's diameter, accuracy can be affected by clearance or increased dynamic friction caused by preloading.
NB's FIT Series takes advantages of the lower cost slide bush and the precision ground shaft to achieve a target clearance in order for the linear system to produce a smooth, high-accuracy performance.

part number structure



- Please refer to corresponding catalog pages for details.
- Please specify on the drawing about the shaft machining, radial clearance, match-marking, etc.

Recommended Radial Clearance

Depending on the type of application, the clearance range varies, please use the chart below as a guideline.

| target | clearance (+) | ← 0 → | clearance (-) |
|---------------|--|-------|---------------|
| light motion | [Blue bar indicating positive clearance range] | | |
| high accuracy | [Blue bar indicating zero to negative clearance range] | | |
| no play | [Blue bar indicating negative clearance range] | | |


Slide Bush, Radial Clearance (-) , Negative Limit

Negative clearance is opted to reduce backlash. Please refer to the chart below for the negative clearance limits.

| size | 3~8 | 10~13 | 16~25 | 30~35 | 40 | 50~60 |
|------------------------|------|-------|-------|-------|-------|-------|
| radial clearance limit | -3μm | -4μm | -6μm | -8μm | -10μm | -13μm |

- The off-center of the housing causes uneven loading on the slide bush, please pay special attention to the centering of the housing especially when negative clearance is a requirement.
- Please contact NB for details on the extra preloading requirement or on other part numbers like SRE, SR, etc.

Figure F-3 Radial Clearance between Slide Bush and Shaft

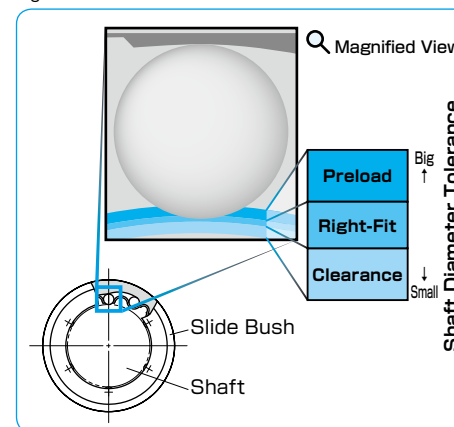

SPINDLE SHAFT & SPINDLE UNIT

NB Spindle Shaft is backed by decades of precision manufacturing experience as well as up to date manufacturing facility to meet demands. NB is capable of handling all your spindle needs such as manufacturing of bearing case and spindle base, design and manufacturing of spindle unit, and overhauling of spindles.

ADVANTAGES

Spindle Unit

NB provides overhauling, engineering services as well as manufacturing of spindle unit.

Ultra Precision Machining

Spindle manufacturing facility is controlled to a constant temperature throughout the year for precision manufacturing of spindles.

Various Machining Solution Available

BT, BBT, HSK inner tapers, gauge and bearing matching, thread grinding, and many other spindle related machining are available.

Surface Treatments

Various surface treatments are available such as hard chrome and ceramic coating. Repairing a damaged spindle with replating and grinding is also available.

NB SPINDLE UNIT M-BT TYPE

Available for various kinds of tool holder


M-BT type is available not only BT but also BBT and HSK.

customization is available

high-speed rotation and high rigidity are possible.



M-BT type dimension table

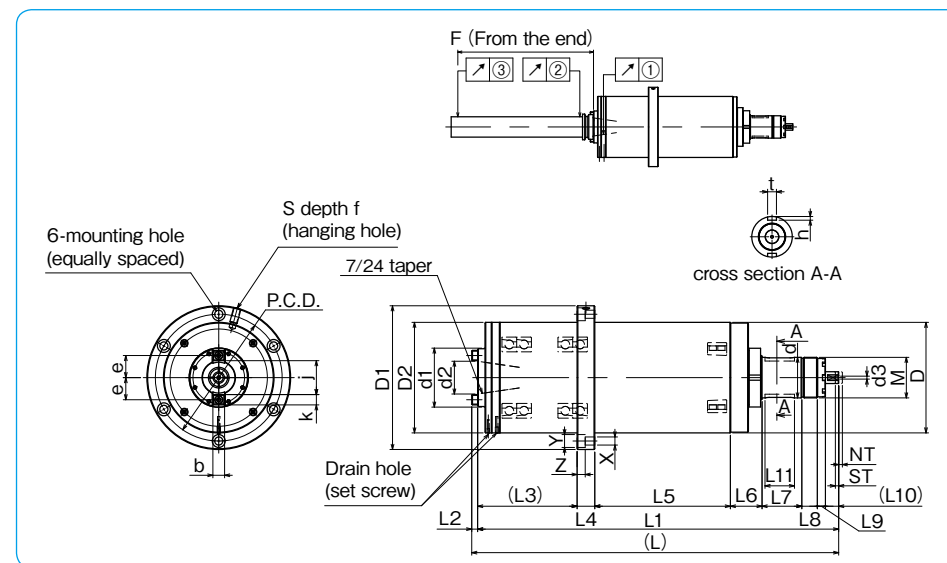

| part number | major dimension | | | | | | | | | | | | | | | |
|-------------|-----------------|-------|-------|----------------|-------|-------|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|
| | D tolerance mm | D1 mm | D2 mm | d tolerance mm | d1 mm | d2 mm | d3 mm | L mm | L1 mm | L2 mm | L3 mm | L4 mm | L5 mm | L6 mm | L7 mm | L8 mm |
| M-BT30 | 130 | 170 | 130 | 45 | 68 | 31.75 | 4 | 413 | 405 | 8 | 115 | 20 | 137 | 43 | 39 | 26 |
| M-BT40 | 150 | 195 | 150 | 55 | 80 | 44.45 | 4 | 498 | 490 | 8 | 135 | 24 | 184 | 43 | 54 | 21 |
| M-BT50 | 230 | 290 | 230 | 85 | 130 | 69.85 | 4 | 717 | 704.5 | 12.5 | 197 | 35 | 270 | 59 | 79 | 30 |

| part number | major dimension | | | | | | | | | | | | | |
|-------------|-----------------|--------|------------------|-----------|----------------|------|------|------|----------------|----------------|------|------|----------------|----|
| | L9 mm | L10 mm | L11 tolerance mm | P.C.D. mm | X × Y × Z mm | S mm | f mm | e mm | b tolerance mm | j mm | k mm | M mm | t tolerance mm | |
| M-BT30 | 8 | 17 | 30 | 152 | 9 × 14 × 8.6 | M10 | 20 | 24 | 15.9 | | 34 | 14 | M45 × 1.5 | 8 |
| M-BT40 | 11 | 18 | 40 | 172 | 11 × 17.5 × 11 | M10 | 20 | 30 | 15.9 | -0.02 -0.04 | 46 | 14 | M55 × 2.0 | 12 |
| M-BT50 | 11 | 23.5 | 60 | 260 | 16 × 23 × 15.2 | M16 | 30 | 49 | 25.4 | | 72 | 26 | M85 × 2.0 | 14 |

| part number | major dimension h tolerance mm | | unclamp stroke tolerance mm | | without tool NT mm | tool clamping force (theoretical value) N | mass kg | maximum revolutions rpm | bearing | | rotational accuracy | | | |
|-------------|--------------------------------|-----------|-----------------------------|-----------|--------------------|---|---------|-------------------------|---------|--------|--------------------------------------|-------------------------------|--------|-----|
| | mm | mm | mm | mm | mm | N | kg | rpm | front | rear | runout of tapered portion (max) ① μm | runout of test bar (max) ② μm | F ③ μm | |
| M-BT30 | 4 | | 4.5 | | 3 ~ 4.5 | 3920 | 29 | 8000 | 7012C | NN3010 | 2 | 3 | 8 | 230 |
| M-BT40 | 5 | +0.2 0 | 4.5 | +0.5 0 | 2.5 ~ 5 | 7840 | 47 | 7000 | 7014C | NN3012 | 2 | 3 | 8 | 300 |
| M-BT50 | 5.5 | | 6.5 | | 3 ~ 8 | 15680 | 161 | 4500 | 7022C | NN3019 | 2 | 3 | 8 | 300 |

In this drawing, position of drawbar is illustrated when it is on tool clamp.



EXAMPLE OF SPINDLE UNIT DESIGN AND MACHINING




| Example of spindle unit specification | |
|---------------------------------------|---|
| Machine used | Machining center |
| Mounting orientation | Vertical |
| Rotational Speed | Max. 10,000 rpm (Max. 700 rpm without tooling attached) |
| Spindle taper size | #30 |
| Lubrication methods | Grease lubrication |
| Lubricant | ISOFLEX NBU15 (NOK Corporation) |
| Tool clamping power | 400 kgf (theoretical) |
| Estimated drive power | 3.5kW |
| Estimated weight | 31kg |

EXAMPLES OF MACHINING


Spindle

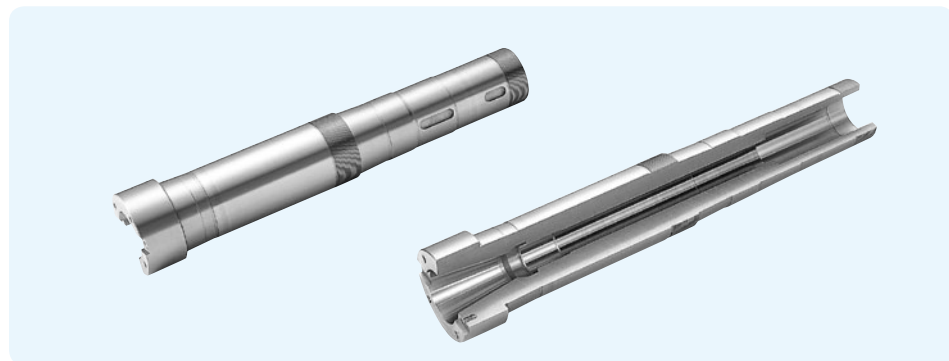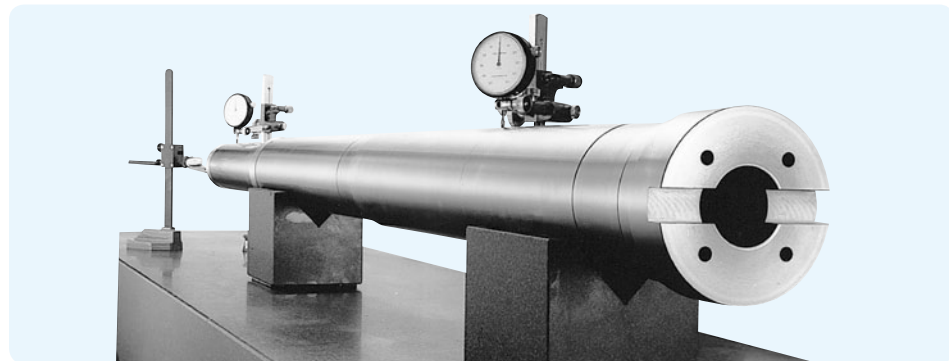

EXAMPLE OF DRAWING ①

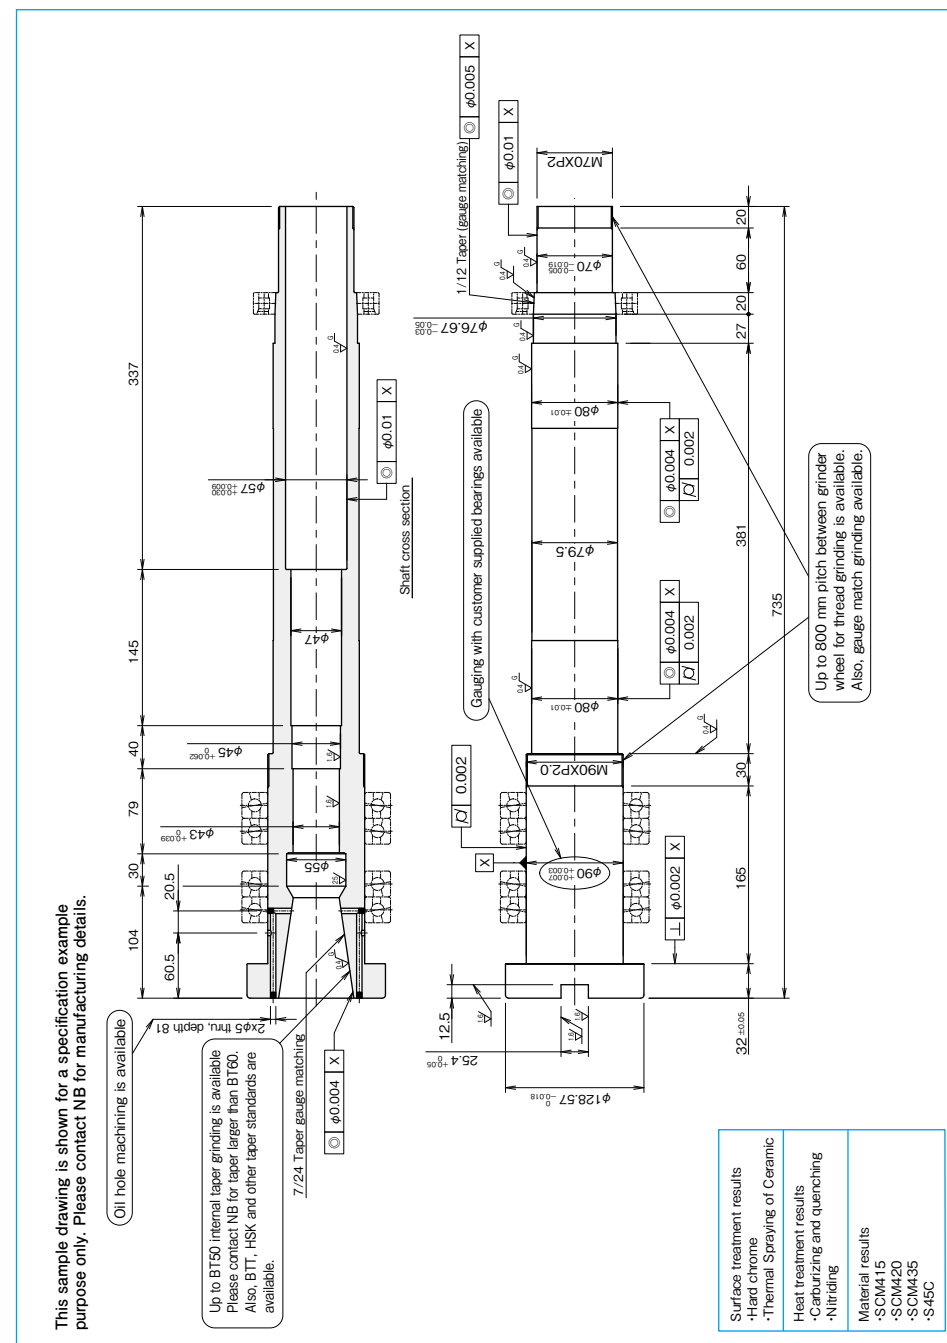


EXAMPLE OF DRAWING ②

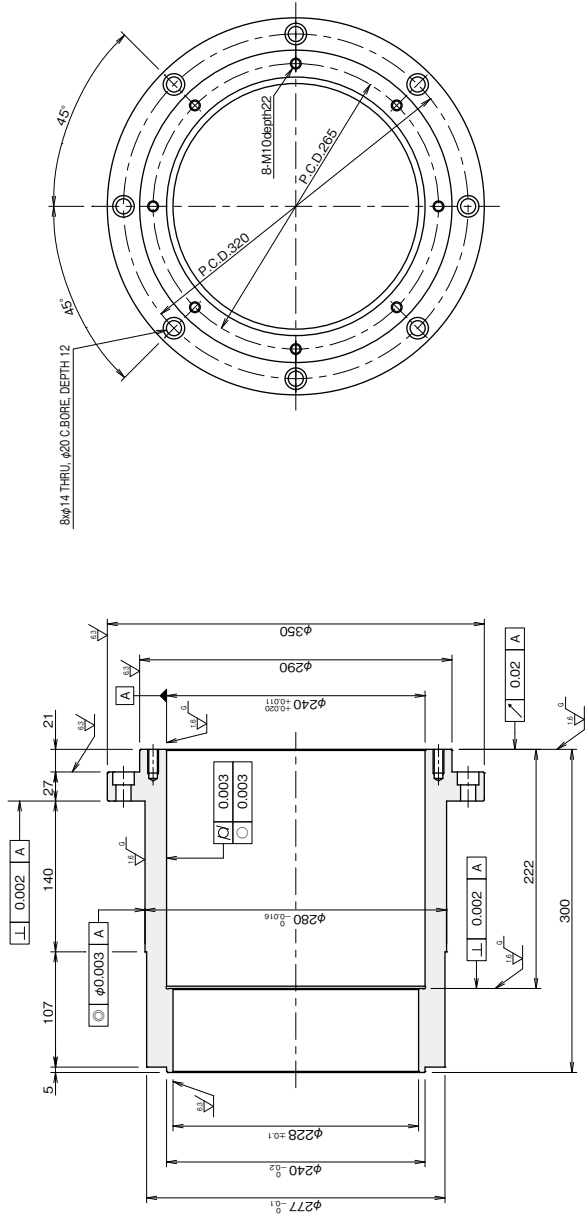

Material results
 -S45C
 -SCM435

This sample drawing is shown for a specification example purpose only. Please contact NB for manufacturing details.

EXAMPLE OF DRAWING ③

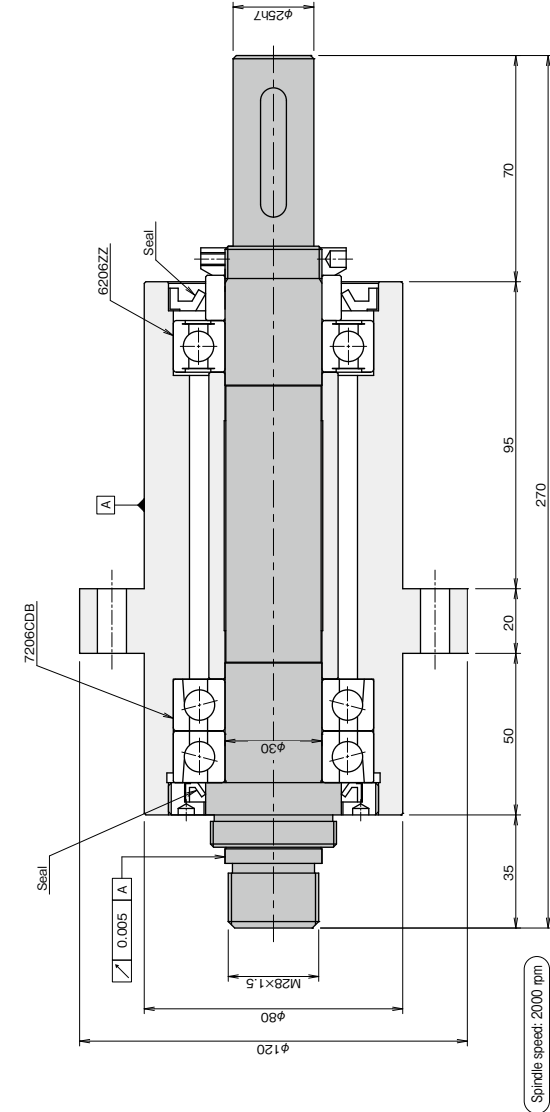

Spindle speed: 2000 rpm

This sample drawing is shown for a specification example purpose only. Please contact NB for manufacturing details.

Custom design and manufacturing service for various spindle units is available. Please contact NB for details.

GENERAL MACHINE SHAFTING

NB general machine shafts are made to customer drawings. Integrated production from material sourcing, machining, heat treatments, surface treatments and final inspection, NB does it all.

ADVANTAGES

Small Lot Production Accepted

One piece custom accepted.

Variety of Machining Capabilities

From small to large, various shaft and spindle machining is available.

Surface Treatment

Various surface treatments are available such as hard chrome, electroless nickel plating, and low temperature black chrome.

Heat Treatment

Various heat treatments are available such as carburizing and induction hardening.

THERMAL-SPRAYING CERAMIC-COATING SPECIFICATIONS


Parts that require wear and corrosion resistance can be thermal-sprayed with a ceramic material per NB's ceramic-coating specifications. Ceramic-coating can be applied to a wide variety of materials. The pores in the coated layer result in good lubrication characteristics and can be sealed to achieve high corrosion resistance.

| | | | | |
|----------------|--|-------------------|-------------------------------|--|
| Materials | High Carbon Chromium Bearing Steel (SUJ2) | Surface Treatment | Hard Chrome | |
| | Chrome Molybdenum Steel (JIS SCM415, 420, 435) | | Low Temperature Black Chrome | |
| | Structural Carbon Steel (JIS S45C) | | Electroless Nickel Plating | |
| | Martensite Stainless Steel (SUS440) | | Thermal Spray Ceramic Coating | |
| | Austenite Stainless Steel (SUS303, 304) | | Others | Gauging with customer supplied nuts and bearings |
| | Tool Steel (JIS SK4) | | | Triangular and trapezoidal thread grinding available |
| | Tool Steel (JIS SKS3) | | | |
| Heat Treatment | Induction Hardening | | | |
| | Induction Hardening (deep) | | | |
| | Carburizing and quenching | | | |




| Machining Ability | Process Details / Manufacturing Contents | Maximum Machinable Diameter | Maximum Machinable Length | Remarks / Notes |
|---------------------------|--|-----------------------------|---|--------------------------------------|
| | Centerless Grinding | φ60 mm outer diameter | 4000mm | |
| | External Grinder | φ640 mm outer diameter | 6000mm | |
| | Internal Grinder | φ200 mm inner diameter | 300mm | Allowable work length: up to 1100 mm |
| | Vertical Grinder | φ350 mm inner diameter | 300mm | |
| | | φ630 mm outer diameter | 300mm | |
| | Lathe | φ400 | 3800mm | |
| | Horizontal Machining Center | φ350 | 2000mm | Up to 3000 kg |
| Vertical Machining Center | φ300 | 3000mm | Up to 3000 kg | |
| BT / Gun Drilling | φ80 | 2000mm | Up to 4000 mm long with both end machining for less than φ120 Up to 2000 mm long for φ120 and over | |

EXAMPLES OF MACHINING ①




Roll Shaft

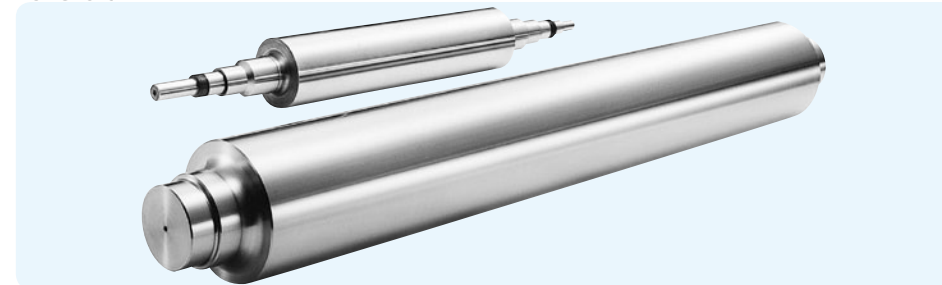

Quill Shaft

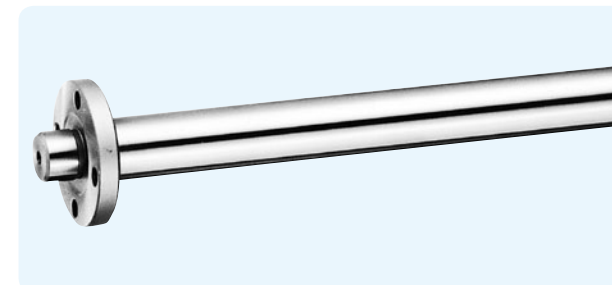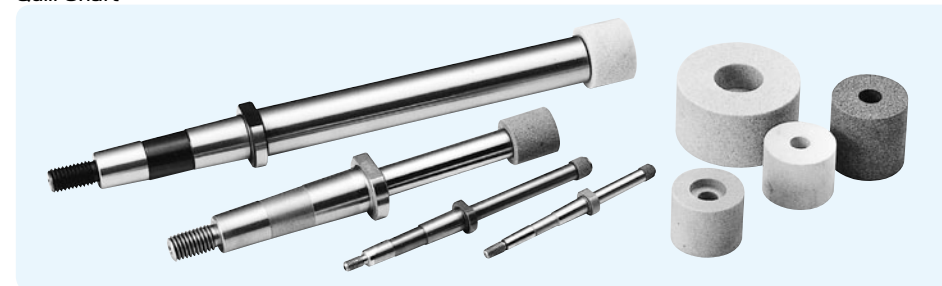

EXAMPLES OF MACHINING ②

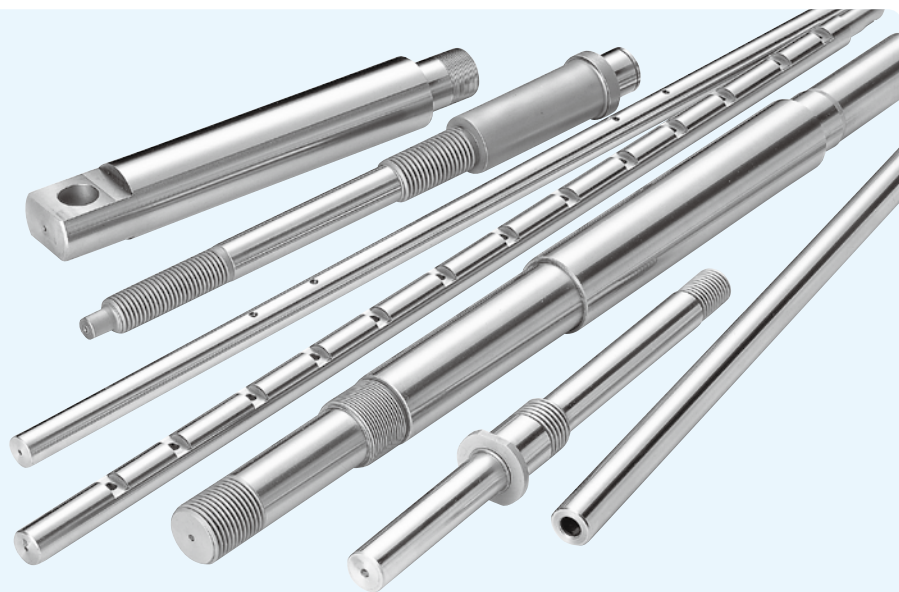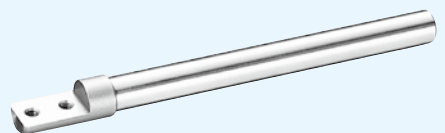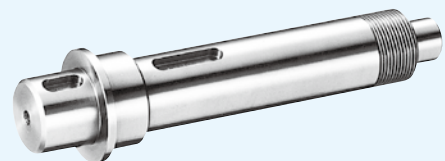

Please visit at NB Website for more examples of machining.

SLIDE WAY SLIDE TABLE MINIATURE SLIDE GONIO WAY

SLIDE WAY

| | |
|-----------------------------------|-------|
| STRUCTURE AND ADVANTAGES | G-2 |
| TYPES | G-3 |
| ACCURACY | G-4 |
| RATED LIFE | G-4 |
| LOAD RATING | G-4 |
| STROKE | G-6 |
| LUBRICATION AND DUST PREVENTION | G-6 |
| MOUNTING | G-6 |
| INSTALLATION PROCEDURE OF NV TYPE | G-7 |
| INSTALLATION PROCEDURE OF SV TYPE | G-8 |
| SPECIAL MOUNTING SCREW BT TYPE | G-9 |
| USE AND HANDLING PRECAUTIONS | G-9 |
| DIMENSION TABLE | G-10~ |

SLIDE TABLE

| | |
|------------------------------|-------|
| STRUCTURE AND ADVANTAGES | G-26 |
| TYPES | G-27 |
| ACCURACY | G-27 |
| RATED LIFE | G-28 |
| LOAD RATING | G-28 |
| USE AND HANDLING PRECAUTIONS | G-28 |
| SPECIAL REQUIREMENTS | G-29 |
| DIMENSION TABLE | G-30~ |

MINIATURE SLIDE

| | |
|------------------------------|-------|
| STRUCTURE AND ADVANTAGES | G-52 |
| ACCURACY | G-53 |
| LOAD RATING | G-53 |
| RATED LIFE | G-53 |
| MOUNTING | G-54 |
| USE AND HANDLING PRECAUTIONS | G-55 |
| DIMENSION TABLE | G-56~ |

GONIO WAY

| | |
|--|-------|
| STRUCTURE AND ADVANTAGES | G-58 |
| ACCURACY OF RVF TYPE | G-59 |
| ACCURACY OF RV TYPE | G-59 |
| RATED LIFE | G-59 |
| MOUNTING OF RVF TYPE | G-60 |
| MOUNTING OF RV TYPE | G-62 |
| RVF TYPE 2 AXES AND SPECIAL REQUIREMENTS | G-64 |
| USE AND HANDLING PRECAUTIONS | G-65 |
| DIMENSION TABLE | G-66~ |

SLIDE WAY

The NB slide way is a non-recirculating linear motion bearing utilizing precision rollers. It is used primarily in optical and measurement equipment where high precision movement is required.

STRUCTURE AND ADVANTAGES

The NB slide way NV type comprises of precisely ground rails and R-retainers with built-in STUDROLLERS and precision rollers. The rails have been optimally designed so that the STUDROLLERS move smoothly, and the STUDROLLERS and precision rollers incorporated in the R-retainers enable slip-free operation between the raceway surface and the rollers resulting in motion with minimal frictional resistance. SV and SVW types consist of precision ground rails and precision caged-rollers. Since caged-rollers do not recirculate, there is only a minimum frictional resistance fluctuation. Also, there is a minimum difference between the static and dynamic frictional resistances.

Non-slip! STUDROLLER System (Rivet Roller Structure)

The STUDROLLER system is based on a new concept to provide complete prevention of roller cage slippage during operation. This system permits usage in all orientations and positions.

Figure G-1 STUDROLLER System



Suitable for Minute Motion

Because the frictional resistance is extremely small and there is only little difference between the static and dynamic frictional resistances, the NB slide way is well suited for minute motion, resulting in highly accurate linear movement.

Low-Speed Stability

Since the frictional resistance fluctuation is small even under low-load conditions, stable motion is obtained at from low to high speeds.

High Rigidity and High Load Capacity

Compared to the ball elements, the rollers provide a larger contact area and less elastic deformation, thus the NB slide way has high rigidity and high load capacity. With new NV rail design, the roller contact area is increased by 30 to 58% (Figure G-2). The number of effective rollers is increased by narrowing the roller pitch. Thus, the NV type has the load rating that is 1.3 to 2.5 times that of the SV type.

Low Noise

The slide way never produces recirculation noise nor roller-contact noise due to a use of roller cage, resulting in quiet motion.

All Stainless Steel Type Available

The anti-corrosion SVS/SVWS/NVS-RNS slide ways have all stainless steel components, making them ideal for use in clean room applications.

Figure G-2 Roller Contact Profile

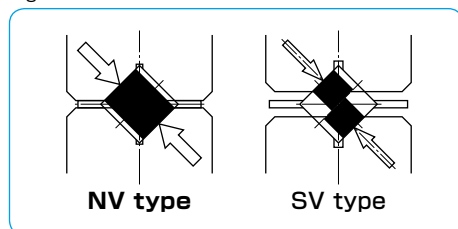


Figure G-3 Structure of NV type


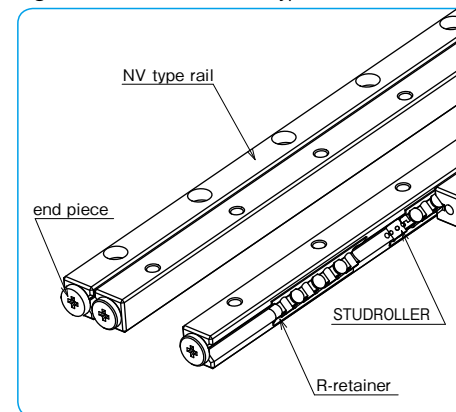


Figure G-4 Structure of SV type




※To the NV type, fastening plates are attached for the purpose of maintaining the center position of the R-retainer before assembly. Please see Installation Procedure on page G-7 and remove the fastening plates before use.

TYPES

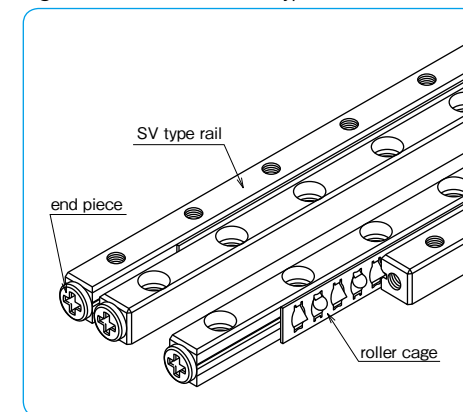


P.G-10

The NV slide way consists of a set of four rails, two R-retainers, and eight end pieces. It permits flexible design of the table which will best suit your application. The NVS-RNS type has all stainless steel components, which is suitable for anti-corrosion, high temperature and vacuum requirements.

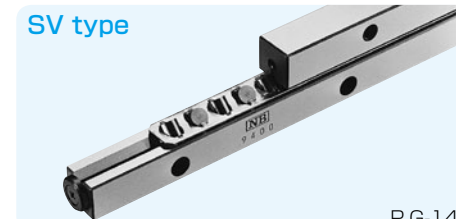

P.G-14

The SV slide way consists of a set of four rails, two R type roller cages, which have precision rollers in a cross arrangement, and eight end pieces. The all stainless steel option makes it suitable for use in corrosive environments.

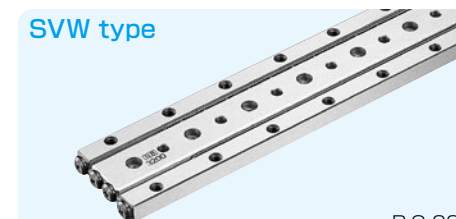

P.G-22

The SVW slide way consists of two SV-type rails, one W type rail, two R type roller cages, and eight end pieces. The use of a W-type rail serves for a compact design. The SVWS type is also available with all stainless steel components.

ACCURACY

The accuracy of the slide way is represented as parallelism measured across the full length with a method shown in Figure G-6. It is classified as high (blank), precision (P), or ultra precision (UP). Special accuracies can also be accommodated. Please contact NB for details.

Figure G-5 Parallelism


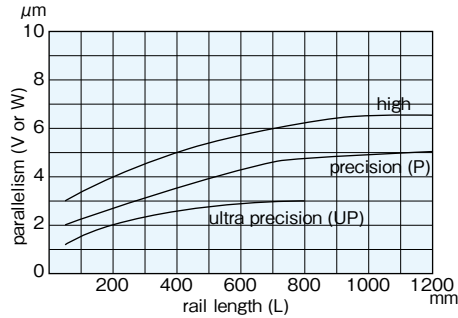


Figure G-6 Accuracy Measurement Method

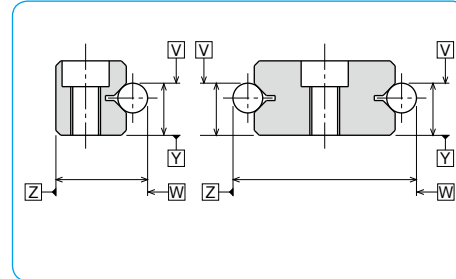

Ultra precision grade is available from size 1 to size 9.

RATED LIFE

The life of the slide way and the slide table is calculated with the following equations:

Rated Life

$$L = \left(\frac{f_t \cdot C}{f_w \cdot P} \right)^{10/3} \cdot 50$$

L: rated life (km) f_t : temperature coefficient f_w : applied load coefficient
 C: basic dynamic load rating (N) P: applied load (N)
 ※ Please refer to page Eng-5 for the coefficients.

Life Time

$$L_h = \frac{L \cdot 10^3}{2 \cdot l_s \cdot n \cdot 60}$$

L_h : life time (hr) l_s : stroke length (m)
 n: number of cycles per minute (cpm)

LOAD RATING

The load rating for the slide way is obtained using the equations listed in Table G-1.

Table G-1 Load Rating

| condition | double-rail parallel usage |
|--------------------------------|--|
| direction of load | |
| basic dynamic load rating C | $C = \left\{ 2P \left(\frac{Z}{2} - 1 \right) \right\}^{1/36} \cdot \left(\frac{Z}{2} \right)^{3/4} \cdot 2^{7/9} \cdot C_1$ |
| basic static load rating C_0 | $C_0 = \frac{Z}{2} \cdot C_{01} \cdot 2$ |
| allowable load F | $F = \frac{Z}{2} \cdot F_1 \cdot 2$ |

C: basic dynamic load rating (N)
 C₀: basic static load rating (N)
 F: allowable load (N)
 C₁: basic dynamic load rating per roller (N)
 C₀₁: basic static load rating per roller (N)
 F₁: allowable load per roller (N)
 Z: number of rollers per cage
 Z/2: number of effective rollers (round down to whole number)
 P: roller pitch (mm)


The load rating of the NV type differs depending on the direction of the load.

Table G-2 Change of Load Rating Corresponding to Load Direction

| | | |
|---------------------------|----------------------------|---------------------|
| basic dynamic load rating | normal vertical direction | 1.0×C |
| | horizontal direction | 0.85×C |
| | reverse vertical direction | 0.7×C |
| basic static load rating | normal vertical direction | 1.0×C ₀ |
| | horizontal direction | 0.85×C ₀ |
| | reverse vertical direction | 0.7×C ₀ |

※ There may be a difference depending on the size. Please contact NB for details.
 Consideration has been given to holes for STUDROLLERS in the raceway surface in calculation of load ratings.

Figure G-7 Direction of Load

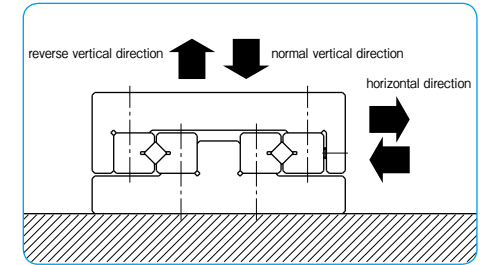


R·RS TYPE

— Standard Roller Cage —
 part number structure

example **RS 6 - 15Z**

specification
 R: standard roller
 RS: stainless steel roller

number of rollers
 size

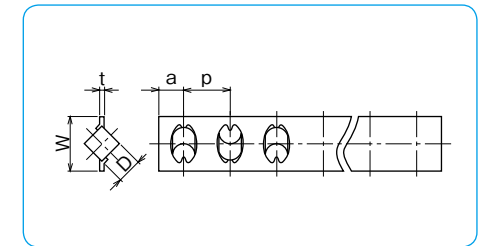

| part number | | D | t | W | p | a | C ₁ | C ₀₁ | F ₁ |
|-------------|----------------|-----|-----|------|-----|-----|----------------|-----------------|----------------|
| standard | anti-corrosion | mm | mm | mm | mm | mm | N | N | N |
| R 1 | RS 1 | 1.5 | 0.2 | 3.8 | 2.5 | 2 | 154 | 119 | 39.6 |
| R 2 | RS 2 | 2 | 0.3 | 5.6 | 4 | 2.5 | 360 | 293 | 97.6 |
| R 3 | RS 3 | 3 | 0.4 | 7.6 | 5 | 3 | 824 | 649 | 216 |
| R 4 | RS 4 | 4 | 0.4 | 10.4 | 7 | 4.5 | 1,660 | 1,320 | 440 |
| R 6 | RS 6 | 6 | 0.7 | 14 | 8.5 | 5.5 | 3,840 | 2,960 | 986 |
| R 9 | RS 9 | 9 | 0.7 | 19 | 14 | 7.5 | 9,330 | 7,070 | 2,350 |
| R12 | RS12 | 12 | 1.0 | 25 | 20 | 10 | 18,900 | 14,500 | 4,830 |

cage material: stainless steel C₁: dynamic load rating per roller C₀₁: static load rating per roller
 F₁: allowable load per roller


RA·RAS TYPE

— Aluminum Roller Cage —
 part number structure

example **RAS 6 - 15Z**

specification
 RA: standard roller
 RAS: stainless steel roller

number of rollers
 size

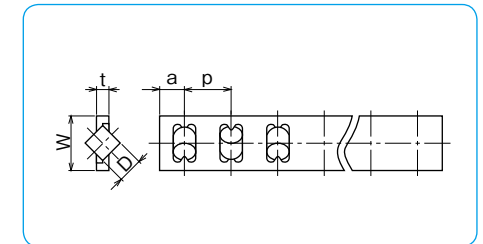

| part number | | D | t | W | p | a | C ₁ | C ₀₁ | F ₁ |
|-------------|----------------|----|-----|------|-----|-----|----------------|-----------------|----------------|
| standard | anti-corrosion | mm | mm | mm | mm | mm | N | N | N |
| RA3 | RAS3 | 3 | 1.2 | 7.6 | 5 | 3 | 824 | 649 | 216 |
| RA4 | RAS4 | 4 | 1.4 | 10.4 | 7 | 4.5 | 1,660 | 1,320 | 440 |
| RA6 | RAS6 | 6 | 2.1 | 14 | 8.5 | 5.5 | 3,840 | 2,960 | 986 |
| RA9 | RAS9 | 9 | 3.0 | 20 | 14 | 7.5 | 9,330 | 7,070 | 2,350 |

cage material: aluminum alloy C₁: dynamic load rating per roller C₀₁: static load rating per roller
 F₁: allowable load per roller


STROKE

Please contact NB for a non-standard stroke length for the NV type. When the stroke of SV type or SVW type is changed, the stroke length must be determined and the load rating should be re-estimated as follows.

Stroke of SV type, SVW type

When the slide way moves along the rail, the cage moves half the distance traveled by the slide way in the same direction. Therefore, although the work may be fixed on the table, the distance between the load center and the cage center will change. To achieve stable accuracy, determine the stroke and the length of the rail as follows.

Figure G-8

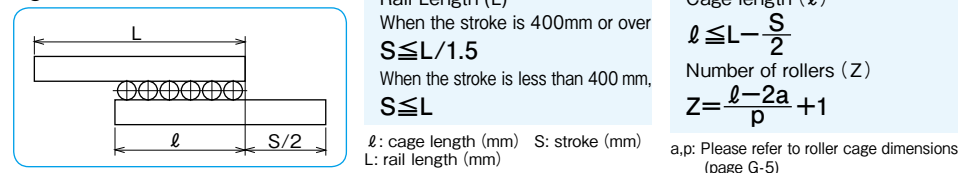

LUBRICATION AND DUST PREVENTION


Lubrication

The slide way is pre-lubricated with lithium soap-based grease No.00 prior to shipment for immediate use. Make sure to relubricate with a similar type of grease periodically according to the operating conditions. NB also provides low dust generation grease. Please refer to page Eng-40 for details.

Dust Prevention

Foreign particles or dust in the slide way affects the motion accuracy and shortens the life time. In a harsh environment please provide side covers for dust prevention. (refer to Figure G-9)

Figure G-9 Example of Dust Prevention Mechanism

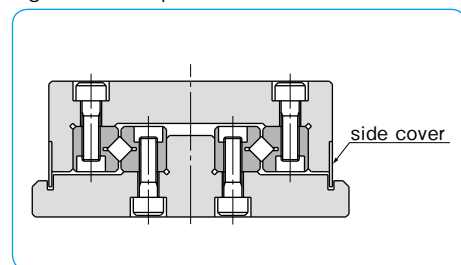

MOUNTING

Example

Figure G-10 NV type, SV type


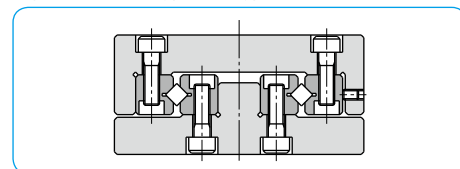


Figure G-11 SVW type

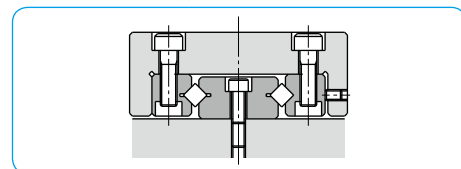


Accuracy of Mounting Surface

To maximize the performance of the NB slide way, it is recommended that the accuracy of the mounting surface to be equal to or greater than the degree of parallelism of the slide way.

- Parallelism of surface 1 against surface A
- Perpendicularity of surface 2 against surface A
- Parallelism of surface 3 against surface B
- Perpendicularity of surface 4 against surface B
- Parallelism of surface 2 against surface C
- Parallelism of surface 4 against surface C

Figure G-12 Accuracy of Mounting Surface

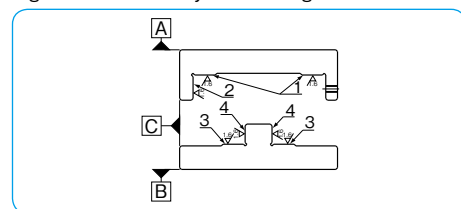


INSTALLATION PROCEDURE OF NV TYPE

Installation Procedure

※Please read "Use and Handling Precautions" before installation.

- (1) Remove burrs, scratches, and dust from the rail-mounting surface of the bed and the table, be careful to prevent contamination during assembly.
- (2) Apply low-viscosity oil to the contact surfaces, and align the bed and the table. (Figure G-13a)
- (3) Set the reference surface onto the mounting surface with the rails fastened. Set the table in the center position, and tighten the adjustment screws lightly so that almost no gap remains. (Figure G-13b)
- (4) Keep the table in the center, tighten the rail mounting bolts lightly, loosen the end pieces of both ends, and remove the fastening plates. Following this, lightly retighten the end pieces.
- (5) While maintaining the conditions of (4), gently move the assembly through its stroke to check if the maximum stroke is secured, and if there is no irregularity.
- (6) Move the table to the center and tighten only the adjustment screws on the R-retainer with the recommended torque shown in Table G-3. (Figure G-13c)
- (7) Gently move the table to one stroke end, and check that the table has surely come into contact with the external mechanical stopper. Following this, tighten the adjustment screws in the same manner as (6). (Figure G-13d)
- (8) Move the table to the opposite stroke end, and tighten in the same manner as (6). (Figure G-13e)
- (9) Fasten the mounting screws on rails 1, 2, and 3 by tightening with the recommended torque shown in Table G-4. (Figure G-13f)
- (10) Set the dial indicators to the center of the table and to the side (reference surface) of the table. (Figure G-13g)
- (11) Perform the final preload adjustment. While moving the table back and forth, repeat steps (6) to (8) until the dial indicators show a minimum deviation.
- (12) Fasten rail 4 securely with the recommended torque. As for the adjustment screws, successively tighten the mounting screws on the R-retainer by moving the table.
- (13) Recheck the motion accuracy while moving the table.
- (14) Tighten the end pieces finally.

Figure G-13 Installation Method

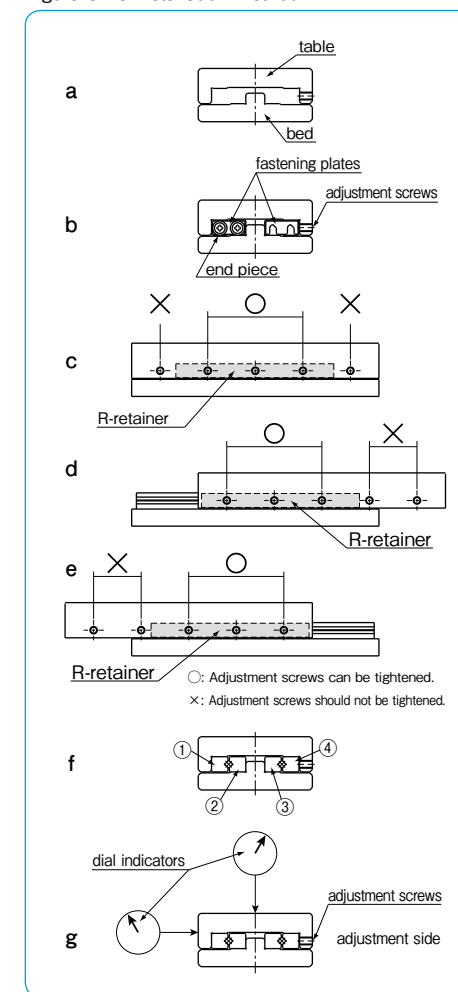

INSTALLATION PROCEDURE OF SV TYPE

Installation Procedure

- (1) Remove burrs, scratches, and dust from the rail-mounting surface of the bed and the table, be careful to prevent contamination during assembly.
- (2) Apply low-viscosity oil to contact surfaces. Attach rails ①-③ by tightening screws with the recommended torque (Table G-4). (Figure G-14a)
- (3) Temporarily attach rail ④ on the adjustment side. (Figure G-14b)
- (4) Remove end pieces on one end. Carefully insert roller cages between rails. (Figure G-14c)
- (5) Re-attach end pieces.
- (6) Move the table slowly to each stroke end to position roller cages at the center of the rails.
- (7) Set the dial indicators to the center of the table and to the side (reference surface) of the table. (Figure G-14d)
- (8) Move the table to one stroke end. Lightly tighten adjustment screws on the roller cage. (Figure G-14e)
- (9) Move the table to the opposite stroke end. Similarly lightly tighten adjustment screws on the roller cage. (Figure G-14f)
- (10) Move table to the center and lightly tighten center adjustment screws. (Figure G-14g)
- (11) Repeat steps (8) ~ (10) until the indicators show a minimum deviation. Please do not apply an excessive preload.
- (12) Make final adjustment of preload. Repeat steps (8) ~ (10) and tighten the adjustment screws with the recommended torque listed in Table G-3.
- (13) Fasten the rail ④ securely with the recommended torque. As with the adjustment screws, successively tighten the mounting screws by moving the table.

Figure G-14 Installation Method

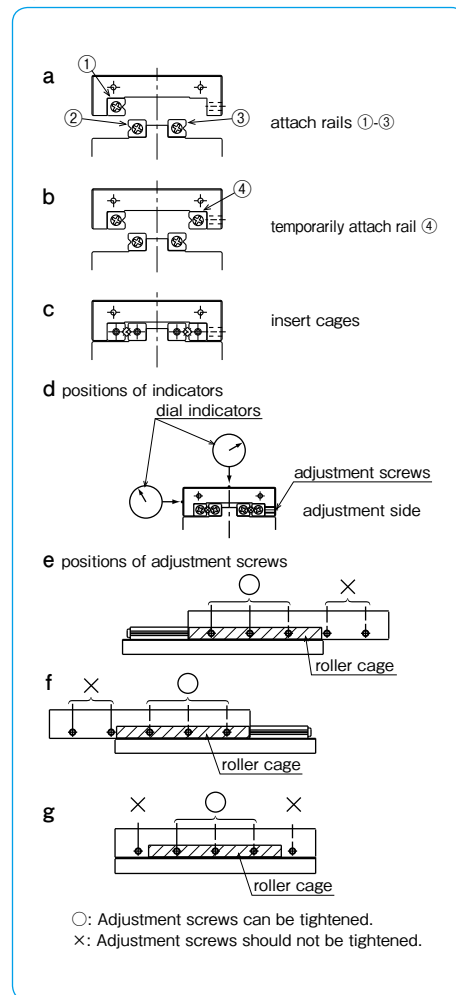


Table G-3 Recommended Torque for Adjustment Screw Unit/N·m

| part number | size | torque |
|-------------|------|--------|
| SV1 | M2 | 0.008 |
| NV2, SV2 | M3 | 0.012 |
| NV3, SV3 | M4 | 0.05 |
| NV4, SV4 | M4 | 0.08 |
| NV6, SV6 | M5 | 0.20 |
| NV9, SV9 | M6 | 0.40 |
| NV12, SV12 | M6 | 0.80 |

Table G-4 Recommended Torque for Mounting screw Unit/N·m

| size | torque |
|------|--------|
| M2 | 0.4 |
| M3 | 1.4 |
| M4 | 3.2 |
| M5 | 6.6 |
| M6 | 11.2 |
| M8 | 27.6 |
| M10 | 55.0 |

(for steel alloy screw)

SPECIAL MOUNTING SCREW BT TYPE

In case of mounting slide way by screws from the counterbore side, threaded holes become the pilot holes. Thus, pilot hole's clearance will be less than a standard clearance hole for a screw. NB offers reduced shoulder screws for mounting SlideWay from bottom when larger screw clearance is required due to preload adjustment or inaccuracy of mating threaded holes. This special mounting screw made of alloy steel is stocked, and custom stainless steel version is available as a special order. Please contact NB for details.

Figure G-15 Special Mounting Screw


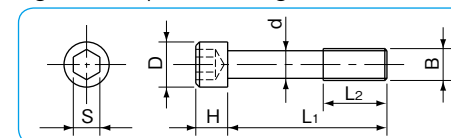


Table G-5 Special Mounting Screw

| part number | B | d | D | H | L1 | L2 | S | applicable size |
|-------------|----|------|------|---|----|----|-----|-----------------|
| BT 3 | M3 | 2.3 | 5 | 3 | 12 | 5 | 2.5 | NV 3, SV 3 |
| BT 4 | M4 | 3.1 | 5.8 | 4 | 15 | 7 | 3 | NV 4, SV 4 |
| BT 6 | M5 | 3.9 | 8 | 5 | 20 | 8 | 4 | NV 6, SV 6 |
| BT 9 | M6 | 4.6 | 8.5 | 6 | 30 | 12 | 5 | NV 9, SV 9 |
| BT12 | M8 | 6.25 | 11.3 | 8 | 40 | 17 | 6 | NV12, SV12 |

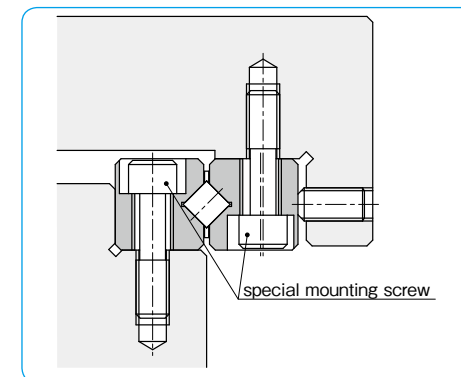

USE AND HANDLING PRECAUTIONS

Careful Handling

Dropping the slide way causes the rolling elements to make dents in the raceway surface. This will prevent smooth motion and will also affect accuracy. Be sure to handle the product with care.

The NV type is packaged as a set of rails and R-retainers. Do not separate or disassemble until assembly/installation is completed. Precision is not guaranteed if disassembled.

Fastening Plates

For the NV type, fastening plates are attached at both end faces of the rails to maintain the R-retainer center position prior to assembly. The fastening plates are not required after the NV type is mounted to a table and bed, however, when removal of the NV type is necessary such as when it will be reassembled, be sure to return the R-retainer to the proper center position, secure the fastening plates with the end pieces, and then remove the NV type.

Specified Allowable Stroke

For the NV type, exceeding the specified stroke (over-stroke) shall cause the raceway surface of the rail to be damaged and the performance of the STUDROLLER to drastically deteriorate. Be sure to provide external mechanical stoppers.

Adjustment

Using the product with insufficient accuracy of the mounting surface or before adjusting the preload will cause the motion accuracy of the product to drop and will have a negative influence upon product life and accuracy. Make sure to assemble, install, and adjust the product with care.

Caution against Excess Preload

It is essential to give preload on the Slide Way products in order to assure rigidity and accuracy. However, excess preload causes damage on the raceways and roller cages/R-retainers.

On installation, please follow the installation procedure and recommended torque on page G-8.

Operating Temperature

The NV type uses resin parts. Please use the product in environments that are lower than 80°C.

Use as a Set

The accuracy of the rails has been matched within each set. Note that the accuracy will be affected when the rails of different sets are combined.

Allowable Load

The allowable load is a load under which the sum of elastic deformations of the rolling element and the raceway in the contact area subject to the maximum contact stress is small enough to guarantee smooth rolling movement. When very smooth and highly accurate linear motion is required, make sure to use the product within the allowable load.

Cage Slippage

For the SV/SVW type, the cage can slip under high-speed motion, vertical application, unbalanced-loading, and vibrating conditions. It is advised that the stroke be set with sufficient margin and an excessive preload should be avoided.

It is also recommended that the rails be cycled to perform the maximum stroke several times, so that the cage returns to its center position.

End Pieces


End pieces are attached to each end of the slide way to prevent removal of the cage. Do not use them as a mechanical stopper.

Knock Pin Hole

When using SVW type knock pin holes to attach a slide way, please do the hole-machining on the mounting surface after attaching the W type rail. After machining, remove the chips completely and wash as required.

NV TYPE

-NV1/NV2/NV3-

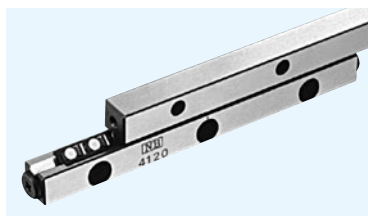

part number structure

example **NVS 2 150-41Z-UP**


specification
 NV: standard
 NVS: anti-corrosion

size

accuracy grade
 blank: high
 P: precision
 UP: ultra precision

rail length

number of rollers

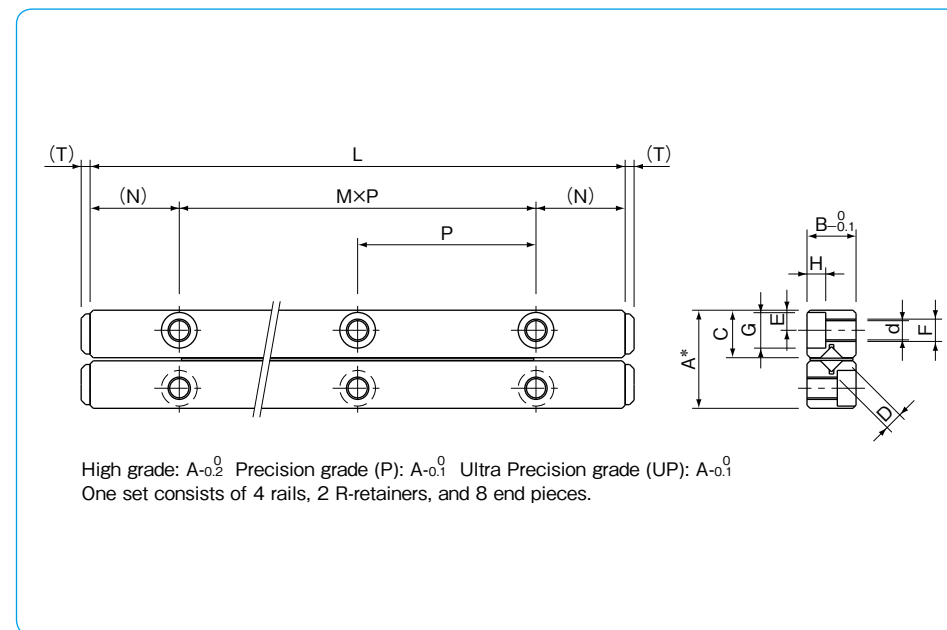


| part number | | stroke | roller diameter | number of rollers | L | A | B | C |
|-------------|----------------|----------|-----------------|-------------------|----|-----|------|------|
| standard | anti-corrosion | ST mm | D mm | Z | mm | mm | mm | mm |
| NV 1020- | NVS 1020- | 12 | 1.5 | 5 | 20 | 8.5 | 4 | 4.03 |
| 1030- | 1030- | 23 | | 7 | 30 | | | |
| 1040- | 1040- | 28 | | 11 | 40 | | | |
| 1050- | 1050- | 34 | | 15 | 50 | | | |
| 1060- | 1060- | 40 | | 19 | 60 | | | |
| 1070- | 1070- | 45 | | 23 | 70 | | | |
| 1080- | 1080- | 51 | | 27 | 80 | | | |
| NV 2030- | NVS 2030- | 18 | | 5 | 30 | | | |
| 2045- | 2045- | 25 | 9 | 45 | | | | |
| 2060- | 2060- | 30 | 15 | 60 | | | | |
| 2075- | 2075- | 40 | 19 | 75 | | | | |
| 2090- | 2090- | 50 | 23 | 90 | | | | |
| 2105- | 2105- | 65 | 27 | 105 | | | | |
| 2120- | 2120- | 70 | 33 | 120 | | | | |
| 2135- | 2135- | 80 | 37 | 135 | | | | |
| 2150- | 2150- | 90 | 41 | 150 | | | | |
| 2165- | 2165- | 95 | 47 | 165 | | | | |
| 2180- | 2180- | 100 | 51 | 180 | | | | |
| NV 3050- | NVS 3050- | 25 | 9 | 50 | 18 | 8 | 8.65 | |
| 3075- | 3075- | 48 | 13 | 75 | | | | |
| 3100- | 3100- | 60 | 19 | 100 | | | | |
| 3125- | 3125- | 83 | 23 | 125 | | | | |
| 3150- | 3150- | 90 | 29 | 150 | | | | |
| 3175- | 3175- | 103 | 35 | 175 | | | | |
| 3200- | 3200- | 113 | 41 | 200 | | | | |
| 3225- | 3225- | 150 | 43 | 225 | | | | |

| major dimensions | | | | | | | | dynamic C N | static Co N | allowable load F N | mass (one set) g | size |
|------------------|---------|---------|-------|---------|---------|---------|---------|-------------------|-------------------|-----------------------------|------------------------|------|
| M x P mm | N mm | E mm | F | d mm | G mm | H mm | T mm | | | | | |
| 1 x 10 | 5 | 1.8 | M2 | 1.65 | 3 | 1.4 | 0.8 | 734 | 849 | 283 | 9 | 1020 |
| 2 x 10 | | | | | | | | 1,250 | 1,690 | 566 | 13 | 1030 |
| 3 x 10 | | | | | | | | 1,720 | 2,540 | 849 | 18 | 1040 |
| 4 x 10 | | | | | | | | 2,160 | 3,390 | 1,130 | 22 | 1050 |
| 5 x 10 | | | | | | | | 2,560 | 4,240 | 1,410 | 26 | 1060 |
| 6 x 10 | | | | | | | | 2,960 | 5,090 | 1,690 | 31 | 1070 |
| 7 x 10 | | | | | | | | 3,330 | 5,940 | 1,980 | 35 | 1080 |
| 1 x 15 | | | | | | | | 7.5 | 2.5 | M3 | 2.55 | 4.4 |
| 2 x 15 | 2,330 | 3,050 | 1,010 | 49 | 2045 | | | | | | | |
| 3 x 15 | 3,990 | 6,110 | 2,030 | 62 | 2060 | | | | | | | |
| 4 x 15 | 4,740 | 7,630 | 2,540 | 74 | 2075 | | | | | | | |
| 5 x 15 | 5,460 | 9,160 | 3,050 | 91 | 2090 | | | | | | | |
| 6 x 15 | 6,160 | 10,600 | 3,560 | 103 | 2105 | | | | | | | |
| 7 x 15 | 6,830 | 12,200 | 4,070 | 120 | 2120 | | | | | | | |
| 8 x 15 | 7,490 | 13,700 | 4,580 | 132 | 2135 | | | | | | | |
| 9 x 15 | 8,130 | 15,200 | 5,090 | 149 | 2150 | | | | | | | |
| 10 x 15 | 9,370 | 18,300 | 6,110 | 161 | 2165 | | | | | | | |
| 11 x 15 | 9,970 | 19,800 | 6,620 | 174 | 2180 | | | | | | | |
| 1 x 25 | 12.5 | 3.5 | M4 | 3.3 | 6 | 3.1 | 2 | 6,150 | 8,060 | 2,680 | 97 | 3050 |
| 2 x 25 | | | | | | | | 8,440 | 12,100 | 4,030 | 140 | 3075 |
| 3 x 25 | | | | | | | | 12,500 | 20,100 | 6,720 | 192 | 3100 |
| 4 x 25 | | | | | | | | 14,400 | 24,200 | 8,060 | 245 | 3125 |
| 5 x 25 | | | | | | | | 16,300 | 28,200 | 9,410 | 290 | 3150 |
| 6 x 25 | | | | | | | | 19,800 | 36,300 | 12,100 | 337 | 3175 |
| 7 x 25 | | | | | | | | 21,500 | 40,300 | 13,400 | 385 | 3200 |
| 8 x 25 | | | | | | | | 23,200 | 44,300 | 14,700 | 434 | 3225 |



The basic static load rating is the value at the center of the stroke.

NV TYPE

-NV4/NV6/NV9/NV12-

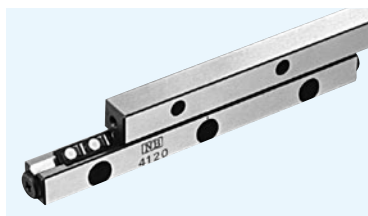

part number structure

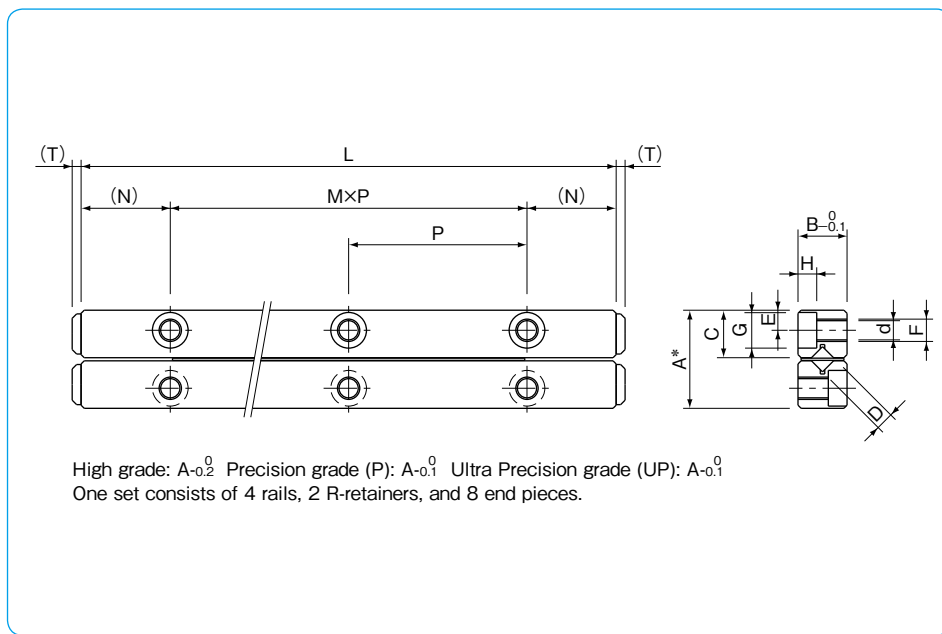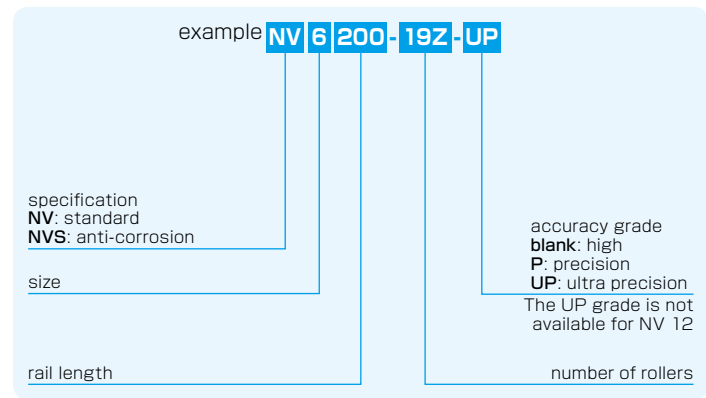

| part number | | stroke | roller diameter | number of rollers | L | A | B | C |
|--------------------|--------------------|--------|-----------------|-------------------|-----|----|----|-------|
| standard | anti-corrosion | ST mm | D mm | Z | mm | mm | mm | mm |
| NV4080- 9Z | NVS4080- 9Z | 60 | 4 | 9 | 80 | 22 | 11 | 10.65 |
| 4120-17Z | 4120-17Z | 75 | | 17 | 120 | | | |
| 4160-23Z | 4160-23Z | 105 | | 23 | 160 | | | |
| 4200-29Z | 4200-29Z | 130 | | 29 | 200 | | | |
| 4240-37Z | 4240-37Z | 143 | | 37 | 240 | | | |
| 4280-43Z | 4280-43Z | 170 | | 43 | 280 | | | |
| NV6100- 9Z | NVS6100- 9Z | 63 | 6 | 9 | 100 | 31 | 15 | 15.15 |
| 6150-15Z | 6150-15Z | 85 | | 15 | 150 | | | |
| 6200-19Z | 6200-19Z | 135 | | 19 | 200 | | | |
| 6250-25Z | 6250-25Z | 158 | | 25 | 250 | | | |
| 6300-31Z | 6300-31Z | 180 | | 31 | 300 | | | |
| 6350-35Z | 6350-35Z | 230 | | 35 | 350 | | | |
| 6400-39Z | 6400-39Z | 275 | 39 | 400 | | | | |
| NV9200-13Z | — | 120 | 9 | 13 | 200 | 44 | 22 | 21.5 |
| 9300-21Z | — | 170 | | 21 | 300 | | | |
| 9400-29Z | — | 220 | | 29 | 400 | | | |
| 9500-35Z | — | 300 | | 35 | 500 | | | |
| NV12300-15Z | — | 180 | 12 | 15 | 300 | 58 | 28 | 28.5 |
| 12400-21Z | — | 230 | | 21 | 400 | | | |
| 12500-27Z | — | 280 | | 27 | 500 | | | |
| 12600-31Z | — | 380 | | 31 | 600 | | | |


The basic static load rating is the value at the center of the stroke.

| major dimensions | | | | | | | | basic load rating | | allowable | mass | size |
|------------------|----|-----|-----|-----|------|-----|----|-------------------|-----------|-----------|-------------|--------------|
| M x P | N | E | F | d | G | H | T | dynamic C | static Co | load F | (one set) g | |
| mm | mm | mm | mm | mm | mm | mm | mm | N | N | N | | |
| 1 x 40 | 20 | 4.5 | M5 | 4.3 | 8 | 4.2 | 2 | 12,100 | 15,700 | 5,250 | 265 | 4080 |
| 2 x 40 | | | | | | | | 20,700 | 31,500 | 10,500 | 400 | 4120 |
| 3 x 40 | | | | | | | | 28,500 | 47,200 | 15,700 | 530 | 4160 |
| 4 x 40 | | | | | | | | 32,100 | 55,100 | 18,300 | 660 | 4200 |
| 5 x 40 | | | | | | | | 39,000 | 70,900 | 23,600 | 800 | 4240 |
| 6 x 40 | | | | | | | | 45,600 | 86,600 | 28,800 | 930 | 4280 |
| 1 x 50 | 25 | 6 | M6 | 5.2 | 9.5 | 5.2 | 3 | 29,600 | 37,500 | 12,500 | 650 | 6100 |
| 2 x 50 | | | | | | | | 50,900 | 75,100 | 25,000 | 970 | 6150 |
| 3 x 50 | | | | | | | | 60,600 | 93,900 | 31,300 | 1,300 | 6200 |
| 4 x 50 | | | | | | | | 69,800 | 112,000 | 37,500 | 1,620 | 6250 |
| 5 x 50 | | | | | | | | 87,400 | 150,000 | 50,100 | 1,940 | 6300 |
| 6 x 50 | | | | | | | | 95,800 | 169,000 | 56,300 | 2,360 | 6350 |
| 7 x 50 | | | | | | | | 104,000 | 187,000 | 62,600 | 2,780 | 6400 |
| 1 x 100 | 50 | 9 | M8 | 6.8 | 10.5 | 6.2 | 4 | 96,100 | 128,000 | 42,600 | 2,720 | 9200 |
| 2 x 100 | | | | | | | | 143,000 | 213,000 | 71,100 | 4,080 | 9300 |
| 3 x 100 | | | | | | | | 186,000 | 298,000 | 99,500 | 5,440 | 9400 |
| 4 x 100 | | | | | | | | 226,000 | 384,000 | 128,000 | 6,790 | 9500 |
| 2 x 100 | 50 | 12 | M10 | 8.5 | 13.5 | 8.2 | 4 | 228,000 | 317,000 | 105,000 | 6,770 | 12300 |
| 3 x 100 | | | | | | | | 271,000 | 397,000 | 132,000 | 9,040 | 12400 |
| 4 x 100 | | | | | | | | 352,000 | 555,000 | 185,000 | 11,300 | 12500 |
| 5 x 100 | | | | | | | | 391,000 | 635,000 | 211,000 | 13,560 | 12600 |

1N=0.102kgf



NVS-RNS TYPE

—Special Environments Type—

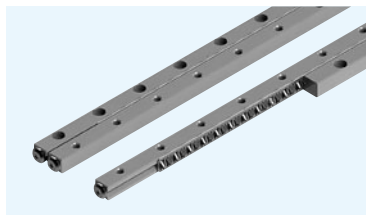

part number structure

example **NVS 4 200-RNS 27Z-P**

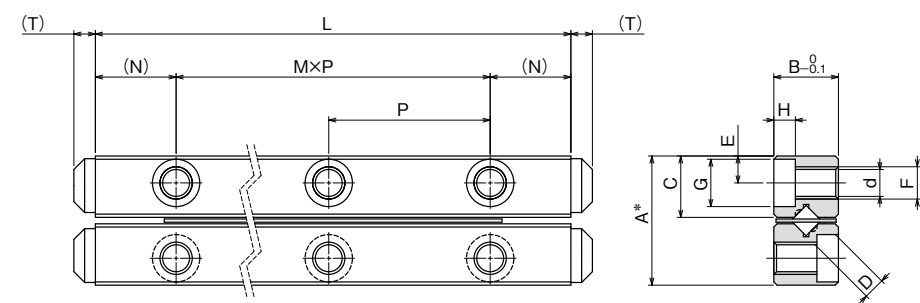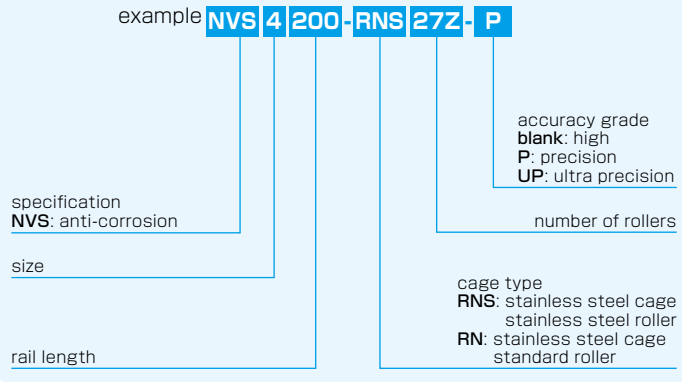

High: A-0.2 Precision (P): A-0.1 Ultra Precision (UP): A-0.1
One set consists of 4 rails, 2 cages, and 8 end pieces.

| part number | stroke ST mm | roller diameter D mm | number of rollers Z | major dimensions | | | | | | | | | | | | |
|-----------------|--------------------|-------------------------------|---------------------------|------------------|---------|---------|---------|-----------|---------|---------|----|----|-------|------|----|-----|
| | | | | L mm | A mm | B mm | C mm | M×P mm | N mm | E mm | | | | | | |
| NVS 2030-RNS 7Z | 15 | 2 | 7 | 30 | 12 | 6 | 5.7 | 1×15 | 7.5 | 2.5 | | | | | | |
| 2045-RNS11Z | 20 | | 11 | 45 | | | | 2×15 | | | | | | | | |
| 2060-RNS13Z | 30 | | 13 | 60 | | | | 3×15 | | | | | | | | |
| 2075-RNS17Z | 40 | | 17 | 75 | | | | 4×15 | | | | | | | | |
| 2090-RNS21Z | 50 | | 21 | 90 | | | | 5×15 | | | | | | | | |
| 2105-RNS23Z | 65 | | 23 | 105 | | | | 6×15 | | | | | | | | |
| 2120-RNS27Z | 70 | | 27 | 120 | | | | 7×15 | | | | | | | | |
| 2135-RNS31Z | 80 | | 31 | 135 | | | | 8×15 | | | | | | | | |
| 2150-RNS33Z | 90 | | 33 | 150 | | | | 9×15 | | | | | | | | |
| 2165-RNS37Z | 95 | | 37 | 165 | | | | 10×15 | | | | | | | | |
| 2180-RNS43Z | 100 | | 43 | 180 | | | | 11×15 | | | | | | | | |
| NVS 3050-RNS 9Z | 20 | 3 | 9 | 50 | 18 | 8 | 8.65 | 1×25 | 12.5 | 3.5 | | | | | | |
| 3075-RNS13Z | 38 | | 13 | 75 | | | | 2×25 | | | | | | | | |
| 3100-RNS17Z | 55 | | 17 | 100 | | | | 3×25 | | | | | | | | |
| 3125-RNS21Z | 70 | | 21 | 125 | | | | 4×25 | | | | | | | | |
| 3150-RNS25Z | 85 | | 25 | 150 | | | | 5×25 | | | | | | | | |
| 3175-RNS29Z | 103 | | 29 | 175 | | | | 6×25 | | | | | | | | |
| 3200-RNS33Z | 113 | | 33 | 200 | | | | 7×25 | | | | | | | | |
| 3225-RNS35Z | 150 | | 35 | 225 | | | | 8×25 | | | | | | | | |
| NVS 4080-RNS 9Z | 58 | | 4 | 9 | | | | 80 | | | 22 | 11 | 10.65 | 1×40 | 20 | 4.5 |
| 4120-RNS17Z | 60 | | | 17 | | | | 120 | | | | | | 2×40 | | |
| 4160-RNS21Z | 98 | 21 | | 160 | 3×40 | | | | | | | | | | | |
| 4200-RNS27Z | 115 | 27 | | 200 | 4×40 | | | | | | | | | | | |
| 4240-RNS31Z | 143 | 31 | | 240 | 5×40 | | | | | | | | | | | |
| 4280-RNS37Z | 170 | 37 | | 280 | 6×40 | | | | | | | | | | | |

*Some specification values are different from those of NV standard type. Please contact NB for details.

| F | d | G | H | T | basic load rating | | allowable load F N | mass (one set) g | size |
|--------|--------|--------|-----|------|-------------------|-------------------|-----------------------------|------------------------|------|
| | | | | | dynamic C N | static Co N | | | |
| M3 | 2.55 | 4.4 | 2 | 1.2 | 2,320 | 3,050 | 1,010 | 30 | 2030 |
| | | | | | 3,190 | 4,580 | 1,520 | 44 | 2045 |
| | | | | | 3,190 | 4,580 | 1,520 | 58 | 2060 |
| | | | | | 4,000 | 6,110 | 2,030 | 73 | 2075 |
| | | | | | 4,760 | 7,630 | 2,540 | 87 | 2090 |
| | | | | | 5,490 | 9,160 | 3,050 | 101 | 2105 |
| | | | | | 6,190 | 10,600 | 3,560 | 115 | 2120 |
| | | | | | 6,870 | 12,200 | 4,070 | 130 | 2135 |
| | | | | | 6,870 | 12,200 | 4,070 | 144 | 2150 |
| | | | | | 7,530 | 13,700 | 4,580 | 158 | 2165 |
| 8,800 | 16,800 | 5,600 | 173 | 2180 | | | | | |
| M4 | 3.3 | 6 | 3.1 | 2 | 6,150 | 8,060 | 2,680 | 102 | 3050 |
| | | | | | 8,460 | 12,100 | 4,030 | 151 | 3075 |
| | | | | | 10,600 | 16,100 | 5,370 | 200 | 3100 |
| | | | | | 12,600 | 20,100 | 6,720 | 249 | 3125 |
| | | | | | 14,500 | 24,200 | 8,060 | 297 | 3150 |
| | | | | | 16,400 | 28,200 | 9,410 | 346 | 3175 |
| | | | | | 18,200 | 32,200 | 10,700 | 395 | 3200 |
| | | | | | 19,900 | 36,300 | 12,100 | 443 | 3225 |
| | | | | | 12,100 | 15,700 | 5,250 | 269 | 4080 |
| | | | | | 20,800 | 31,500 | 10,500 | 405 | 4120 |
| 24,800 | 39,300 | 13,100 | 536 | 4160 | | | | | |
| 32,200 | 55,100 | 18,300 | 670 | 4200 | | | | | |
| 35,800 | 63,000 | 21,000 | 801 | 4240 | | | | | |
| 39,200 | 70,900 | 23,600 | 935 | 4280 | | | | | |


1N≒0.102kgf

SV TYPE

-SV1/SV2-



part number structure

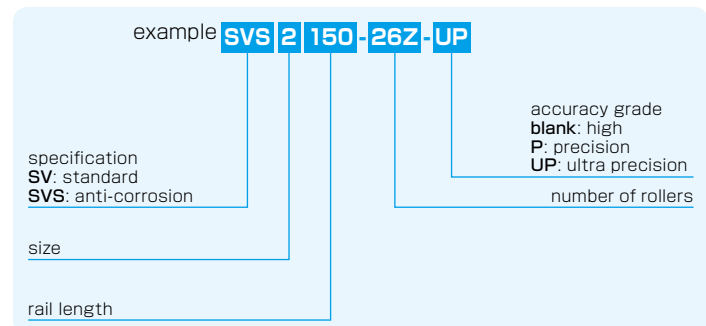


※Stainless steel rollers are used for anti-corrosion type. (refer to page G-5)

| part number | | stroke ST mm | roller diameter D mm | number of rollers Z | L mm | A mm | B mm | C mm |
|-------------|----------------|--------------------|-------------------------------|---------------------------|---------|---------|---------|---------|
| standard | anti-corrosion | | | | | | | |
| SV 1020-5Z | SVS 1020-5Z | 12 | 1.5 | 5 | 20 | 8.5 | 4 | 3.8 |
| 1030-7Z | 1030-7Z | 20 | | 7 | 30 | | | |
| 1040-10Z | 1040-10Z | 27 | | 10 | 40 | | | |
| 1050-13Z | 1050-13Z | 32 | | 13 | 50 | | | |
| 1060-16Z | 1060-16Z | 37 | | 16 | 60 | | | |
| 1070-19Z | 1070-19Z | 42 | | 19 | 70 | | | |
| 1080-21Z | 1080-21Z | 50 | | 21 | 80 | | | |
| SV 2030-5Z | SVS 2030-5Z | 18 | | 5 | 30 | | | |
| 2045-8Z | 2045-8Z | 24 | 8 | 45 | | | | |
| 2060-11Z | 2060-11Z | 30 | 11 | 60 | | | | |
| 2075-13Z | 2075-13Z | 44 | 13 | 75 | | | | |
| 2090-16Z | 2090-16Z | 50 | 16 | 90 | | | | |
| 2105-18Z | 2105-18Z | 64 | 18 | 105 | | | | |
| 2120-21Z | 2120-21Z | 70 | 21 | 120 | | | | |
| 2135-23Z | 2135-23Z | 84 | 23 | 135 | | | | |
| 2150-26Z | 2150-26Z | 90 | 26 | 150 | | | | |
| 2165-29Z | 2165-29Z | 95 | 29 | 165 | | | | |
| 2180-32Z | 2180-32Z | 100 | 32 | 180 | | | | |

※Maximum Rail Length (standard type only)

| part number | Max. length |
|-------------|-------------|
| SV1 | 200mm |
| SV2 | 450mm |

※Please contact NB for details.

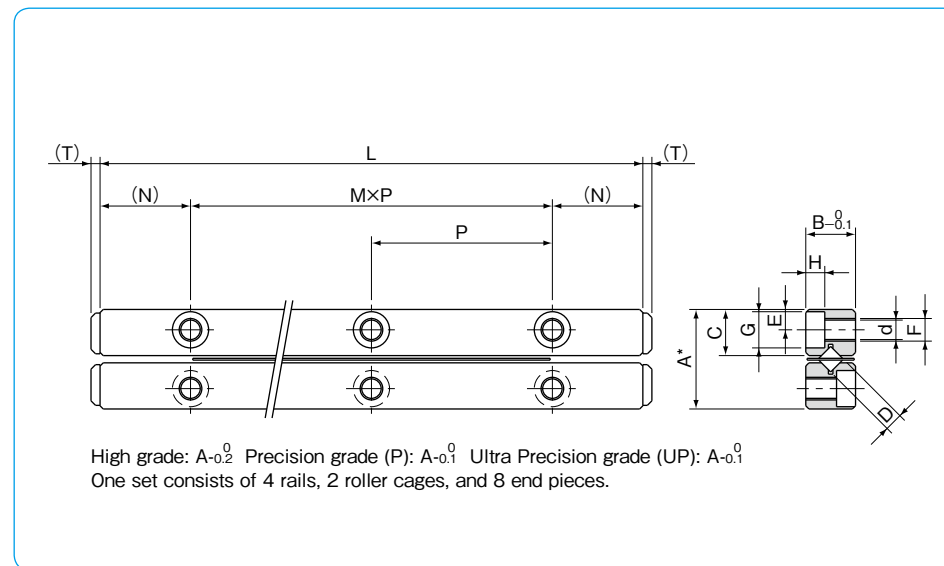

| major dimensions | | | | | | | | dynamic C N | static Co N | allowable load F N | mass (one set) g | size |
|------------------|---------|---------|---------|---------|---------|---------|---------|-------------------|-------------------|-----------------------------|------------------------|------|
| M × P mm | N mm | E mm | F mm | d mm | G mm | H mm | T mm | | | | | |
| 1 × 10 | 5 | 1.8 | M2 | 1.65 | 3 | 1.4 | 0.8 | 464 | 476 | 158 | 11 | 1020 |
| 2 × 10 | | | | | | | | 641 | 714 | 237 | 14 | 1030 |
| 3 × 10 | | | | | | | | 959 | 1,190 | 396 | 18 | 1040 |
| 4 × 10 | | | | | | | | 1,100 | 1,420 | 475 | 22 | 1050 |
| 5 × 10 | | | | | | | | 1,380 | 1,900 | 633 | 26 | 1060 |
| 6 × 10 | | | | | | | | 1,510 | 2,140 | 712 | 30 | 1070 |
| 7 × 10 | | | | | | | | 1,650 | 2,380 | 792 | 34 | 1080 |
| 1 × 15 | | | | | | | | 7.5 | 2.5 | M3 | 2.55 | 4.4 |
| 2 × 15 | 1,900 | 2,340 | 780 | 42 | 2045 | | | | | | | |
| 3 × 15 | 2,270 | 2,930 | 976 | 55 | 2060 | | | | | | | |
| 4 × 15 | 2,620 | 3,510 | 1,170 | 69 | 2075 | | | | | | | |
| 5 × 15 | 3,280 | 4,680 | 1,560 | 83 | 2090 | | | | | | | |
| 6 × 15 | 3,590 | 5,270 | 1,750 | 96 | 2105 | | | | | | | |
| 7 × 15 | 3,900 | 5,860 | 1,950 | 110 | 2120 | | | | | | | |
| 8 × 15 | 4,210 | 6,440 | 2,140 | 123 | 2135 | | | | | | | |
| 9 × 15 | 4,790 | 7,610 | 2,530 | 137 | 2150 | | | | | | | |
| 10 × 15 | 5,080 | 8,200 | 2,730 | 151 | 2165 | | | | | | | |
| 11 × 15 | 5,640 | 9,370 | 3,120 | 165 | 2180 | | | | | | | |


1N≒0.102kgf

SV TYPE

-SV3/SV4-



part number structure

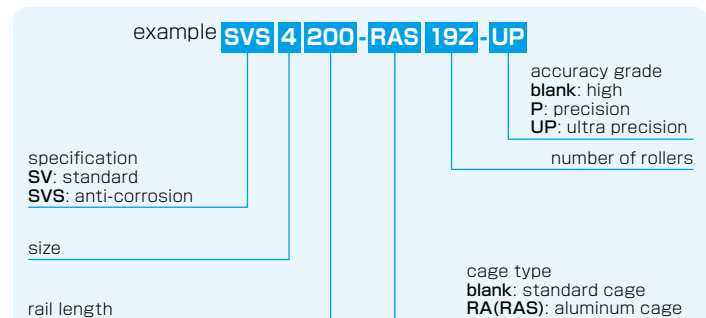


※Stainless steel rollers are used for anti-corrosion type. (refer to page G-5)

| part number | | stroke | roller diameter | number of rollers | L | A | B | C |
|-------------|----------------|--------|-----------------|-------------------|-----|----|----|-----|
| standard | anti-corrosion | ST mm | D mm | Z | mm | mm | mm | mm |
| SV 3050-7Z | SVS 3050-7Z | 28 | 3 | 7 | 50 | 18 | 8 | 8.3 |
| 3075-10Z | 3075-10Z | 48 | | 10 | 75 | | | |
| 3100-14Z | 3100-14Z | 58 | | 14 | 100 | | | |
| 3125-17Z | 3125-17Z | 78 | | 17 | 125 | | | |
| 3150-21Z | 3150-21Z | 88 | | 21 | 150 | | | |
| 3175-24Z | 3175-24Z | 105 | | 24 | 175 | | | |
| 3200-28Z | 3200-28Z | 115 | | 28 | 200 | | | |
| 3225-31Z | 3225-31Z | 135 | | 31 | 225 | | | |
| 3250-35Z | 3250-35Z | 145 | | 35 | 250 | | | |
| 3275-38Z | 3275-38Z | 165 | | 38 | 275 | | | |
| 3300-42Z | 3300-42Z | 175 | | 42 | 300 | | | |
| 3325-45Z | 3325-45Z | 195 | | 45 | 325 | | | |
| 3350-49Z | 3350-49Z | 205 | | 49 | 350 | | | |
| SV 4080-7Z | SVS 4080-7Z | 58 | | 4 | 7 | | | |
| 4120-11Z | 4120-11Z | 82 | 11 | | 120 | | | |
| 4160-15Z | 4160-15Z | 105 | 15 | | 160 | | | |
| 4200-19Z | 4200-19Z | 130 | 19 | | 200 | | | |
| 4240-23Z | 4240-23Z | 150 | 23 | | 240 | | | |
| 4280-27Z | 4280-27Z | 175 | 27 | | 280 | | | |
| 4320-31Z | 4320-31Z | 200 | 31 | | 320 | | | |
| 4360-35Z | 4360-35Z | 225 | 35 | | 360 | | | |
| 4400-39Z | 4400-39Z | 250 | 39 | | 400 | | | |
| 4440-43Z | 4440-43Z | 270 | 43 | | 440 | | | |
| 4480-47Z | 4480-47Z | 295 | 47 | | 480 | | | |

※Maximum Rail Length (standard type only)

| part number | Max. length |
|-------------|-------------|
| SV3 | 700mm |
| SV4 | 700mm |

※Please contact NB for details.

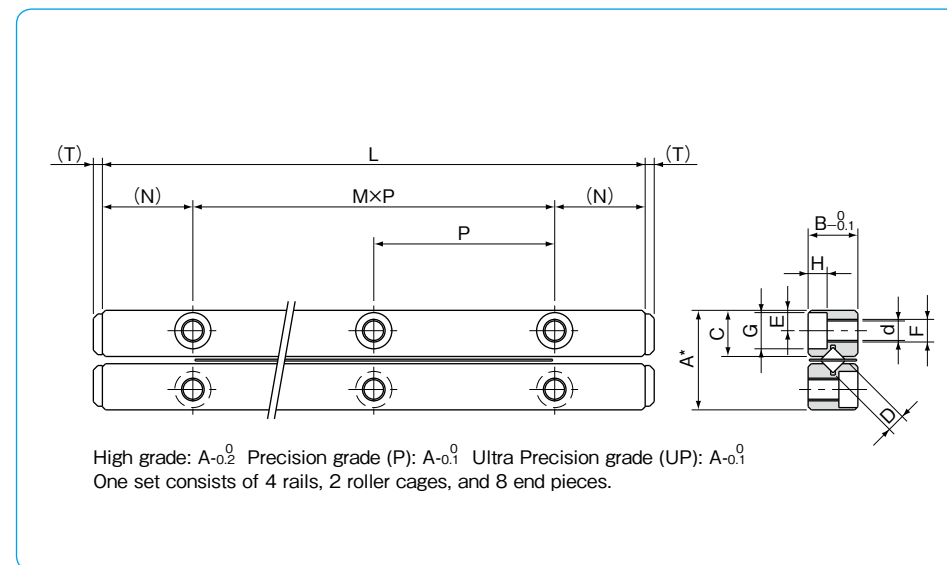

| major dimensions | | | | | | | | basic load rating | | allowable | mass | size |
|------------------|--------|--------|--------|-------|-------------|-----|----|-------------------|-----------|-----------|-------------|-------------|
| M × P | N | E | F | d | G | H | T | dynamic C | static Co | load F | (one set) g | |
| mm | mm | mm | | mm | mm | mm | mm | N | N | N | | |
| 1 × 25 | 12.5 | 3.5 | M4 | 3.3 | 6 | 3.1 | 2 | 3,490 | 3,890 | 1,290 | 94 | 3050 |
| 2 × 25 | | | | | | | | 5,230 | 6,490 | 2,160 | 135 | 3075 |
| 3 × 25 | | | | | | | | 6,810 | 9,080 | 3,020 | 187 | 3100 |
| 4 × 25 | | | | | | | | 7,560 | 10,300 | 3,450 | 234 | 3125 |
| 5 × 25 | | | | | | | | 9,000 | 12,900 | 4,320 | 281 | 3150 |
| 6 × 25 | | | | | | | | 10,300 | 15,500 | 5,180 | 327 | 3175 |
| 7 × 25 | | | | | | | | 11,700 | 18,100 | 6,040 | 374 | 3200 |
| 8 × 25 | | | | | | | | 12,300 | 19,400 | 6,480 | 421 | 3225 |
| 9 × 25 | | | | | | | | 13,600 | 22,000 | 7,340 | 468 | 3250 |
| 10 × 25 | | | | | | | | 14,800 | 24,600 | 8,200 | 514 | 3275 |
| 11 × 25 | | | | | | | | 16,000 | 27,200 | 9,070 | 561 | 3300 |
| 12 × 25 | | | | | | | | 16,600 | 28,500 | 9,500 | 608 | 3325 |
| 13 × 25 | | | | | | | | 17,800 | 31,100 | 10,300 | 655 | 3350 |
| 1 × 40 | | | | | | | | 20 | 4.5 | M5 | 4.3 | 8 |
| 2 × 40 | 10,600 | 13,200 | 4,400 | 385 | 4120 | | | | | | | |
| 3 × 40 | 13,800 | 18,400 | 6,160 | 510 | 4160 | | | | | | | |
| 4 × 40 | 16,800 | 23,700 | 7,920 | 635 | 4200 | | | | | | | |
| 5 × 40 | 19,700 | 29,000 | 9,680 | 770 | 4240 | | | | | | | |
| 6 × 40 | 22,400 | 34,300 | 11,400 | 905 | 4280 | | | | | | | |
| 7 × 40 | 25,100 | 39,600 | 13,200 | 1,020 | 4320 | | | | | | | |
| 8 × 40 | 27,600 | 44,800 | 14,900 | 1,160 | 4360 | | | | | | | |
| 9 × 40 | 30,200 | 50,100 | 16,700 | 1,280 | 4400 | | | | | | | |
| 10 × 40 | 32,600 | 55,400 | 18,400 | 1,410 | 4440 | | | | | | | |
| 11 × 40 | 35,000 | 60,700 | 20,200 | 1,540 | 4480 | | | | | | | |


1N≐0.102kgf

SV TYPE

-SV6/SV9-




part number structure

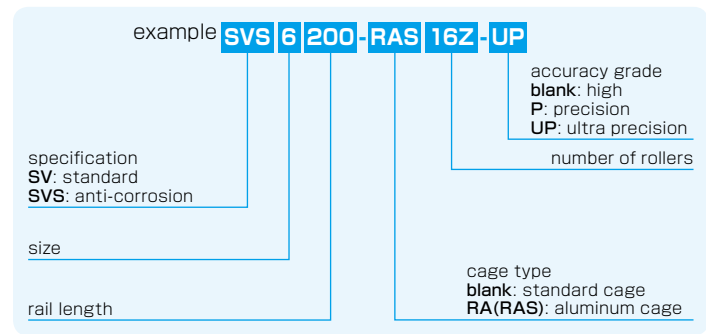

※Stainless steel rollers are used for anti-corrosion type. (refer to page G-5)

| part number | | stroke | roller diameter | number of rollers | L | A | B | C |
|-------------|----------------|--------|-----------------|-------------------|-------|----|----|------|
| standard | anti-corrosion | ST mm | D mm | Z | mm | mm | mm | mm |
| SV 6100-8Z | SVS 6100-8Z | 55 | 6 | 8 | 100 | 31 | 15 | 14.2 |
| 6150-12Z | 6150-12Z | 85 | | 12 | 150 | | | |
| 6200-16Z | 6200-16Z | 120 | | 16 | 200 | | | |
| 6250-20Z | 6250-20Z | 150 | | 20 | 250 | | | |
| 6300-24Z | 6300-24Z | 185 | | 24 | 300 | | | |
| 6350-28Z | 6350-28Z | 215 | | 28 | 350 | | | |
| 6400-32Z | 6400-32Z | 245 | | 32 | 400 | | | |
| 6450-36Z | 6450-36Z | 280 | | 36 | 450 | | | |
| 6500-40Z | 6500-40Z | 310 | | 40 | 500 | | | |
| 6600-49Z | 6600-49Z | 360 | | 49 | 600 | | | |
| SV 9200-10Z | SVS 9200-10Z | 115 | 9 | 10 | 200 | 44 | 22 | 20.2 |
| 9300-15Z | 9300-15Z | 175 | | 15 | 300 | | | |
| 9400-20Z | 9400-20Z | 235 | | 20 | 400 | | | |
| 9500-25Z | 9500-25Z | 295 | | 25 | 500 | | | |
| 9600-30Z | 9600-30Z | 355 | | 30 | 600 | | | |
| 9700-35Z | 9700-35Z | 415 | | 35 | 700 | | | |
| 9800-40Z | 9800-40Z | 475 | | 40 | 800 | | | |
| 9900-45Z | 9900-45Z | 535 | | 45 | 900 | | | |
| 91000-50Z | 91000-50Z | 595 | | 50 | 1,000 | | | |

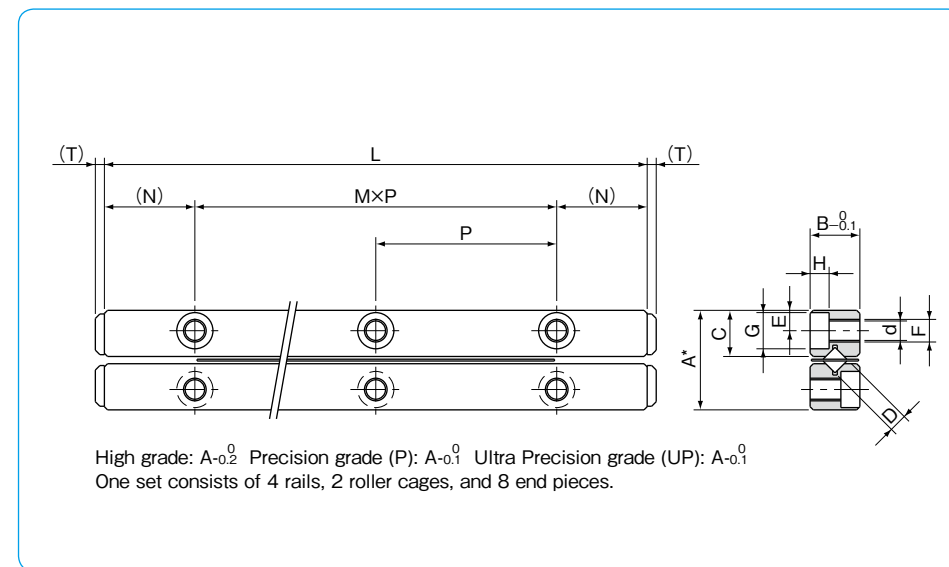

| major dimensions | | | | | | | | basic load rating | | allowable | mass | size |
|------------------|----|----|----|-----|------|-----|----|-------------------|-----------|-----------|-------------|-------|
| M × P | N | E | F | d | G | H | T | dynamic C | static Co | load F | (one set) g | |
| mm | mm | mm | mm | mm | mm | mm | mm | N | N | N | | |
| 1 × 50 | 25 | 6 | M6 | 5.2 | 9.5 | 5.2 | 3 | 20,700 | 23,600 | 7,880 | 628 | 6100 |
| 2 × 50 | | | | | | | | 28,500 | 35,500 | 11,800 | 942 | 6150 |
| 3 × 50 | | | | | | | | 35,700 | 47,300 | 15,700 | 1,260 | 6200 |
| 4 × 50 | | | | | | | | 42,500 | 59,200 | 19,700 | 1,570 | 6250 |
| 5 × 50 | | | | | | | | 49,000 | 71,000 | 23,600 | 1,880 | 6300 |
| 6 × 50 | | | | | | | | 55,300 | 82,800 | 27,600 | 2,200 | 6350 |
| 7 × 50 | | | | | | | | 61,400 | 94,700 | 31,500 | 2,510 | 6400 |
| 8 × 50 | | | | | | | | 67,300 | 106,000 | 35,400 | 2,830 | 6450 |
| 9 × 50 | | | | | | | | 73,100 | 118,000 | 39,400 | 3,140 | 6500 |
| 11 × 50 | | | | | | | | 84,200 | 142,000 | 47,300 | 3,770 | 6600 |
| 1 × 100 | 50 | 9 | M8 | 6.8 | 10.5 | 6.2 | 4 | 60,900 | 70,700 | 23,500 | 2,720 | 9200 |
| 2 × 100 | | | | | | | | 79,300 | 98,900 | 32,900 | 4,030 | 9300 |
| 3 × 100 | | | | | | | | 104,000 | 141,000 | 47,000 | 5,380 | 9400 |
| 4 × 100 | | | | | | | | 120,000 | 169,000 | 56,400 | 6,700 | 9500 |
| 5 × 100 | | | | | | | | 143,000 | 212,000 | 70,500 | 8,050 | 9600 |
| 6 × 100 | | | | | | | | 158,000 | 240,000 | 79,900 | 9,230 | 9700 |
| 7 × 100 | | | | | | | | 180,000 | 282,000 | 94,000 | 10,500 | 9800 |
| 8 × 100 | | | | | | | | 193,000 | 311,000 | 103,000 | 11,900 | 9900 |
| 9 × 100 | | | | | | | | 214,000 | 353,000 | 117,000 | 13,000 | 91000 |

1N≒0.102kgf


※Maximum Rail Length (standard type only)

| part number | Max. length |
|-------------|-------------|
| SV6 | 700mm |


※Please contact NB for details.

SV TYPE

-SV12-

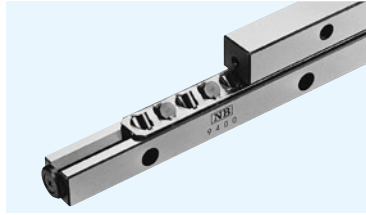


part number structure

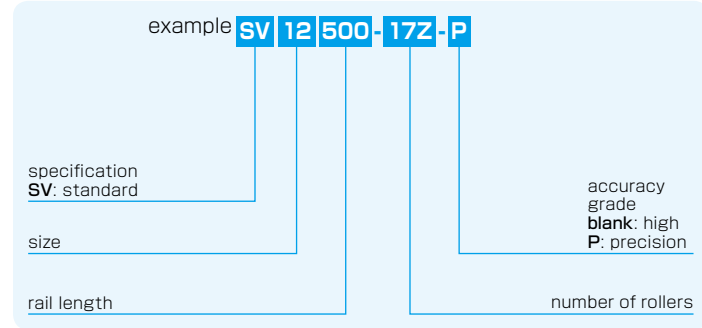

※Stainless steel rollers are used for anti-corrosion type. (refer to page G-5)


| part number | | stroke ST mm | roller diameter D mm | number of rollers Z | L mm | A mm | B mm | C mm |
|---------------------|----------------------|--------------------|-------------------------------|---------------------------|---------|---------|---------|---------|
| standard | anti-corrosion | | | | | | | |
| SV 12300-10Z | SVS 12300-10Z | 200 | 12 | 10 | 300 | 58 | 28 | 27 |
| 12400-14Z | 12400-14Z | 240 | | 14 | 400 | | | |
| 12500-17Z | 12500-17Z | 320 | | 17 | 500 | | | |
| 12600-21Z | 12600-21Z | 360 | | 21 | 600 | | | |
| 12700-24Z | 12700-24Z | 440 | | 24 | 700 | | | |
| 12800-28Z | 12800-28Z | 480 | | 28 | 800 | | | |
| 12900-31Z | 12900-31Z | 560 | | 31 | 900 | | | |
| 121000-34Z | 121000-34Z | 640 | | 34 | 1,000 | | | |
| 121100-38Z | — | 680 | | 38 | 1,100 | | | |
| 121200-42Z | — | 720 | | 42 | 1,200 | | | |

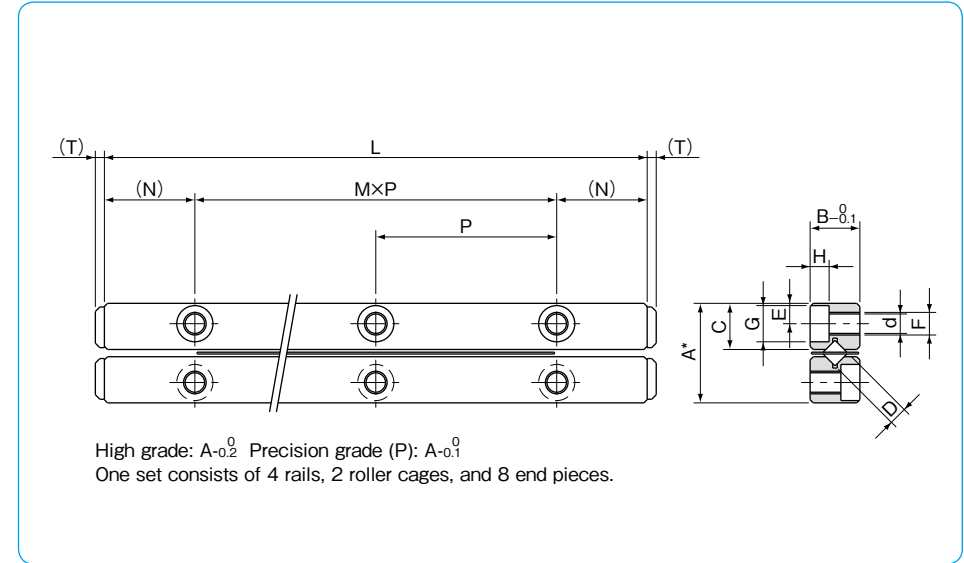

| major dimensions | | | | | | | | dynamic load C N | static load Co N | allowable load F N | mass (one set) g | size |
|------------------|---------|---------|-----|---------|---------|---------|---------|---------------------------|---------------------------|-----------------------------|------------------------|---------------|
| M×P mm | N mm | E mm | F | d mm | G mm | H mm | T mm | | | | | |
| 2×100 | 50 | 12 | M10 | 8.5 | 13.5 | 8.2 | 4 | 124,000 | 145,000 | 48,300 | 6,880 | 12300 |
| 3×100 | | | | | | | | 162,000 | 203,000 | 67,600 | 9,090 | 12400 |
| 4×100 | | | | | | | | 180,000 | 232,000 | 77,200 | 11,400 | 12500 |
| 5×100 | | | | | | | | 214,000 | 290,000 | 96,600 | 13,700 | 12600 |
| 6×100 | | | | | | | | 247,000 | 348,000 | 115,000 | 15,800 | 12700 |
| 7×100 | | | | | | | | 279,000 | 406,000 | 135,000 | 18,200 | 12800 |
| 8×100 | | | | | | | | 294,000 | 435,000 | 144,000 | 20,500 | 12900 |
| 9×100 | | | | | | | | 324,000 | 493,000 | 164,000 | 22,800 | 121000 |
| 10×100 | | | | | | | | 354,000 | 551,000 | 183,000 | 25,000 | 121100 |
| 11×100 | | | | | | | | 382,000 | 609,000 | 202,000 | 27,300 | 121200 |

1N≒0.102kgf

SVW TYPE

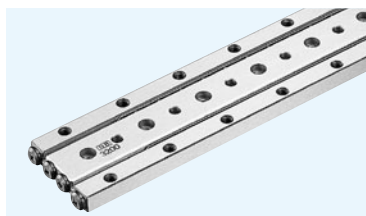

part number structure

example **SVWS 4 200-RAS 19Z-UP**

specification
SVW: standard
SVWS: anti-corrosion

size


rail length

accuracy grade
blank: high
P: precision
UP: ultra precision

number of rollers

cage type
blank: standard cage
RA: aluminum cage
standard: standard roller
RAS: aluminum cage
stainless steel: stainless steel roller

* Refer to page G-5 for information on cage types.
 ** Aluminum cage is not available for size 1 and 2.

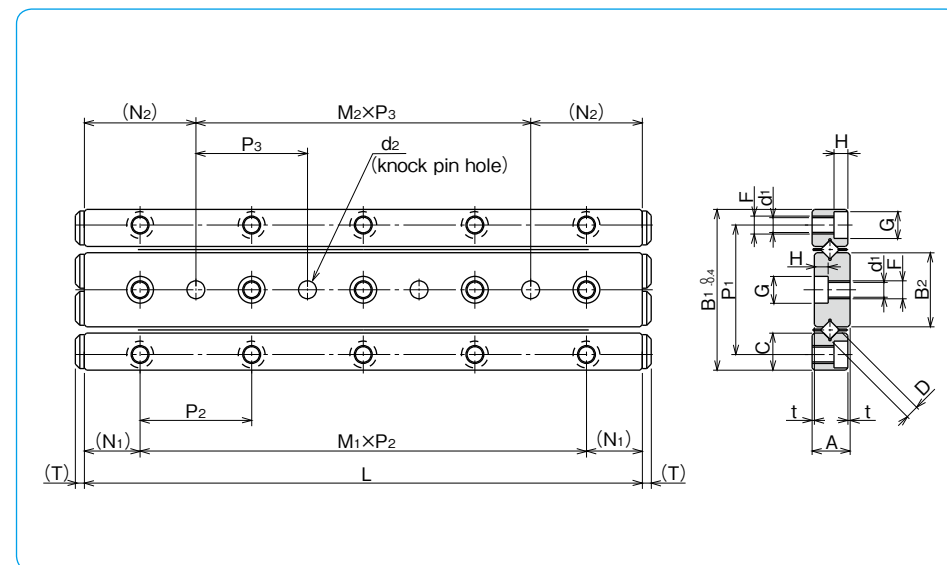

| part number | | stroke | roller diameter | number of rollers | L | A | t | B ₁ | B ₂ | C | P ₁ | M ₁ × P ₂ |
|--------------|----------------|--------|-----------------|-------------------|-----|------|-----|----------------|----------------|------|----------------|---------------------------------|
| standard | anti-corrosion | ST mm | D mm | Z | mm | mm | mm | mm | mm | mm | mm | mm |
| SVW 1020- 5Z | SVWS 1020- 5Z | 12 | 1.5 | 5 | 20 | 4.5 | 0.5 | 17 | 7.6 | 3.8 | 13.4 | 1 × 10 |
| 1030- 7Z | 1030- 7Z | 20 | | 7 | 30 | | | | | | | 2 × 10 |
| 1040-10Z | 1040-10Z | 27 | | 10 | 40 | | | | | | | 3 × 10 |
| 1050-13Z | 1050-13Z | 32 | | 13 | 50 | | | | | | | 4 × 10 |
| 1060-16Z | 1060-16Z | 37 | | 16 | 60 | | | | | | | 5 × 10 |
| 1070-19Z | 1070-19Z | 42 | | 19 | 70 | | | | | | | 6 × 10 |
| 1080-21Z | 1080-21Z | 50 | | 21 | 80 | | | | | | | 7 × 10 |
| SVW 2030- 5Z | SVWS 2030- 5Z | 18 | 2 | 5 | 30 | 6.5 | 0.5 | 24 | 11 | 5.5 | 19 | 1 × 15 |
| 2045- 8Z | 2045- 8Z | 24 | | 8 | 45 | | | | | | | 2 × 15 |
| 2060-11Z | 2060-11Z | 30 | | 11 | 60 | | | | | | | 3 × 15 |
| 2075-13Z | 2075-13Z | 44 | | 13 | 75 | | | | | | | 4 × 15 |
| 2090-16Z | 2090-16Z | 50 | | 16 | 90 | | | | | | | 5 × 15 |
| 2105-18Z | 2105-18Z | 64 | | 18 | 105 | | | | | | | 6 × 15 |
| 2120-21Z | 2120-21Z | 70 | | 21 | 120 | | | | | | | 7 × 15 |
| SVW 3050- 7Z | SVWS 3050- 7Z | 28 | 3 | 7 | 50 | 8.5 | 0.5 | 36 | 16.6 | 8.3 | 29 | 1 × 25 |
| 3075-10Z | 3075-10Z | 48 | | 10 | 75 | | | | | | | 2 × 25 |
| 3100-14Z | 3100-14Z | 58 | | 14 | 100 | | | | | | | 3 × 25 |
| 3125-17Z | 3125-17Z | 78 | | 17 | 125 | | | | | | | 4 × 25 |
| 3150-21Z | 3150-21Z | 88 | | 21 | 150 | | | | | | | 5 × 25 |
| 3175-24Z | 3175-24Z | 105 | | 24 | 175 | | | | | | | 6 × 25 |
| 3200-28Z | 3200-28Z | 115 | | 28 | 200 | | | | | | | 7 × 25 |
| SVW 4080- 7Z | SVWS 4080- 7Z | 58 | 4 | 7 | 80 | 11.5 | 0.5 | 44 | 20.4 | 10.2 | 35 | 1 × 40 |
| 4120-11Z | 4120-11Z | 82 | | 11 | 120 | | | | | | | 2 × 40 |
| 4160-15Z | 4160-15Z | 105 | | 15 | 160 | | | | | | | 3 × 40 |
| 4200-19Z | 4200-19Z | 130 | | 19 | 200 | | | | | | | 4 × 40 |
| 4240-23Z | 4240-23Z | 150 | | 23 | 240 | | | | | | | 5 × 40 |
| 4280-27Z | 4280-27Z | 175 | | 27 | 280 | | | | | | | 6 × 40 |

| major dimensions | | | | | | | | | basic load rating | | | | allowable | | mass | | size |
|------------------|----|----------------|-----|-----|---------------------------------|----------------|----------------------------------|-----|-------------------|-----------|--------|--------|------------------|------|------|--|------|
| N ₁ | F | d ₁ | G | H | M ₂ × P ₃ | N ₂ | d ₂ | T | dynamic C | static Co | load F | load N | mass (one set) g | size | | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | N | N | N | N | g | | | | |
| 5 | M2 | 1.65 | 3 | 1.4 | — | 10 | 2 ^{+0.010} ₀ | 0.8 | 464 | 476 | 158 | 11 | 1020 | | | | |
| | | | | | 1 × 10 | | | | 641 | 714 | 237 | 14 | 1030 | | | | |
| | | | | | 2 × 10 | | | | 959 | 1,190 | 396 | 18 | 1040 | | | | |
| | | | | | 3 × 10 | | | | 1,100 | 1,420 | 475 | 22 | 1050 | | | | |
| | | | | | 4 × 10 | | | | 1,380 | 1,900 | 633 | 26 | 1060 | | | | |
| | | | | | 5 × 10 | | | | 1,510 | 2,140 | 712 | 30 | 1070 | | | | |
| | | | | | 6 × 10 | | | | 1,650 | 2,380 | 792 | 34 | 1080 | | | | |
| 7.5 | M3 | 2.55 | 4.4 | 2 | — | 15 | 3 ^{+0.010} ₀ | 1.2 | 1,090 | 1,170 | 390 | 28 | 2030 | | | | |
| | | | | | 1 × 15 | | | | 1,900 | 2,340 | 780 | 42 | 2045 | | | | |
| | | | | | 2 × 15 | | | | 2,270 | 2,930 | 976 | 55 | 2060 | | | | |
| | | | | | 3 × 15 | | | | 2,620 | 3,510 | 1,170 | 69 | 2075 | | | | |
| | | | | | 4 × 15 | | | | 3,280 | 4,680 | 1,560 | 83 | 2090 | | | | |
| | | | | | 5 × 15 | | | | 3,590 | 5,270 | 1,750 | 96 | 2105 | | | | |
| | | | | | 6 × 15 | | | | 3,900 | 5,860 | 1,950 | 110 | 2120 | | | | |
| 12.5 | M4 | 3.3 | 6 | 3.1 | — | 25 | 4 ^{+0.012} ₀ | 2 | 3,490 | 3,890 | 1,290 | 94 | 3050 | | | | |
| | | | | | 1 × 25 | | | | 5,230 | 6,490 | 2,160 | 135 | 3075 | | | | |
| | | | | | 2 × 25 | | | | 6,810 | 9,080 | 3,020 | 187 | 3100 | | | | |
| | | | | | 3 × 25 | | | | 7,560 | 10,300 | 3,450 | 234 | 3125 | | | | |
| | | | | | 4 × 25 | | | | 9,000 | 12,900 | 4,320 | 281 | 3150 | | | | |
| | | | | | 5 × 25 | | | | 10,300 | 15,500 | 5,180 | 327 | 3175 | | | | |
| | | | | | 6 × 25 | | | | 11,700 | 18,100 | 6,040 | 374 | 3200 | | | | |
| 20 | M5 | 4.3 | 8 | 4.2 | — | 40 | 5 ^{+0.012} ₀ | 2 | 7,110 | 7,920 | 2,640 | 255 | 4080 | | | | |
| | | | | | 1 × 40 | | | | 10,600 | 13,200 | 4,400 | 385 | 4120 | | | | |
| | | | | | 2 × 40 | | | | 13,800 | 18,400 | 6,160 | 510 | 4160 | | | | |
| | | | | | 3 × 40 | | | | 16,800 | 23,700 | 7,920 | 635 | 4200 | | | | |
| | | | | | 4 × 40 | | | | 19,700 | 29,000 | 9,680 | 770 | 4240 | | | | |
| | | | | | 5 × 40 | | | | 22,400 | 34,300 | 11,400 | 905 | 4280 | | | | |

1N≒0.102kgf

SLIDE TABLE

The NB slide table is a precision table equipped with a slide way. Its high-precision and low-friction characteristics make it well suited for use in electronics automatic-assembly machines, optical measurement devices, etc.

STRUCTURE AND ADVANTAGES

The NB slide table consists of a slide way sandwiched between an accurately machined table and a bed. Stoppers are provided inside the table.

High Accuracy

The mounting surfaces of the table and bed are precision finished to ensure high precision linear motion, resulting in a high performance slide way.

Low Friction

Its non-recirculating mechanism provides stable motion at from low to high speeds.

Compact and High Rigidity

Being designed compactly, the NB slide table holds the high load capacity and high rigidity characteristics.

Figure G-16 Structure of NVT type


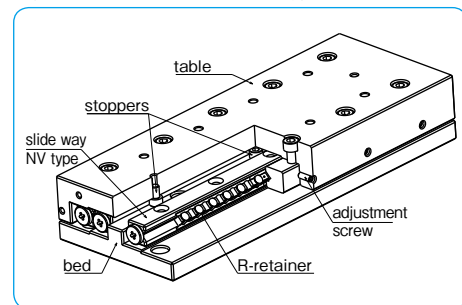


Figure G-18 Structure of SVT type

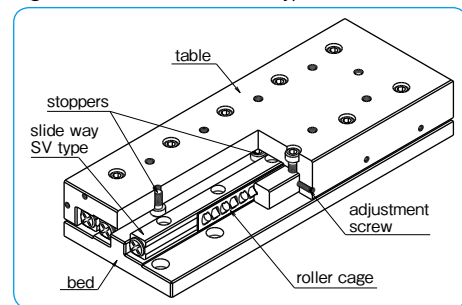

No Need for Adjustment

The table is carefully assembled so that the accuracy and preload are optimized, it can be used immediately without any further adjustment.

Ease of Mounting

Standardized mounting holes are provided in the table and bed. High precision linear motion can be achieved simply by mounting.

Figure G-17 Structure of NYT type


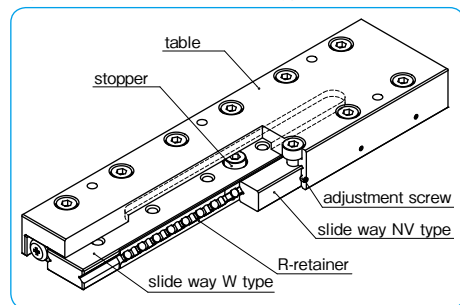


Figure G-19 Structure of SYT type



TYPES


NVT·NVTS type

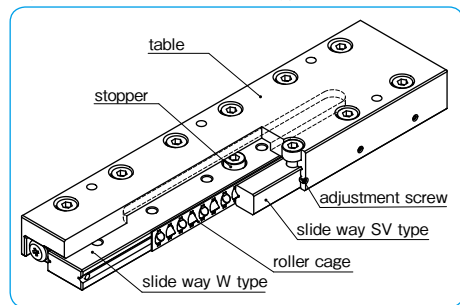

P.G-30

The NVT type slide table incorporates the NV type slide way. The table and bed have been precision machined to provide a high degree of accuracy and the product can be used, without any need for troublesome accuracy or preload adjustments. In the NVTS type, the anti-corrosion NVS type slide way is sandwiched between an accurately machined aluminum table and bed.

NYT·NYTS type

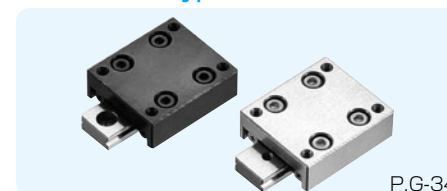

P.G-34

The NYT/NYTS type is a thin, compact slide table, utilizing the studroller system. Either tapped or counterbore mounting type (D type) is available. The anti-corrosion type NYTS slide table is made of all stainless steel components except for R-retainer.

SVT·SVTS type



P.G-38

In the SVT type slide table, the SV type slide way is sandwiched between an accurately machined steel table and bed. In the SVTS type, the anti-corrosion SVS type slide way is sandwiched between an accurately machined aluminum table and bed.

SYT·SYTS type




P.G-44

The SYT/SYTS type is a thin, compact slide table. Either tapped or counterbore type (D type) is available for the mounting hole. The anti-corrosion SYTS type slide table is made of all stainless steel components, making it suitable for use in clean rooms.

ACCURACY

The motion accuracy of a slide table is measured by placing indicators at the center of the top and side surface of the table, as illustrated in Figure G-20. It is expressed in terms of the indicator deviation when the table is moved the full stroke without any load. For accuracy, please see the dimension tables.

Figure G-20 Accuracy Measurement Method

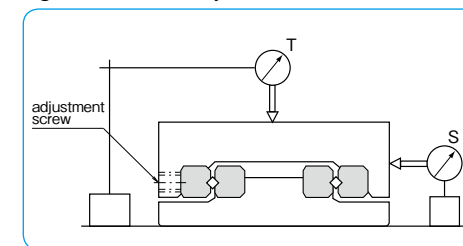

RATED LIFE

The life of an NB slide table is calculated using the following equations.

Rated Life

$$L = \left(\frac{f_T \cdot C}{f_w \cdot P} \right)^{10/3} \cdot 50$$

L: rated life(km) f_T: temperature coefficient f_w: applied load coefficient
 C: basic dynamic load rating(N) P: applied load(N)
 ※Please refer to page Eng-5 for the coefficients.

Life Time

$$L_h = \frac{L \cdot 10^3}{2 \cdot l_s \cdot n \cdot 60}$$

L_h: life time (hr) l_s: stroke length (m)
 n: number of cycles per minute (cpm)

LOAD RATING


The load rating of the slide table NVT type and NYT type differs depending on the direction of the load.

Table G-6 Change of Load Rating Corresponding to Load Direction

| | | |
|---------------------------|----------------------------|---------------------|
| basic dynamic load rating | normal vertical direction | 1.0×C |
| | horizontal direction | 0.85×C |
| | reverse vertical direction | 0.7×C |
| basic static load rating | normal vertical direction | 1.0×C ₀ |
| | horizontal direction | 0.85×C ₀ |
| | reverse vertical direction | 0.7×C ₀ |

※There may be a difference depending on the size. Please contact NB for details.
 Consideration has been given to holes for STUDROLLERS in the raceway surface in calculation of load ratings.

Figure G-21 Direction of Load

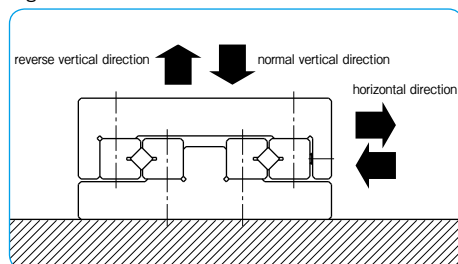

USE AND HANDLING PRECAUTIONS

Careful Handling

Dropping the slide table causes the rolling elements to make dents in the raceway surface. This will prevent smooth motion and will also affect accuracy. Be sure to handle the product with care.

Dust Prevention

Dust and foreign particles affect the accuracy and lifetime of a slide table. A slide table used in a harsh environment should be protected with a cover.

Lubrication

The slide table is prelubricated with lithium soap based grease No.00 prior to shipment for immediate use. Make sure to relubricate with a similar type of grease periodically depending on the operating conditions.

Cage Slippage

For the SVT/SYT type, the cage can slip under high-speed motion, vertical application, unbalanced-loading, and vibrating conditions. It is advised

that the motion speed be kept under 0.5m/s under general operating conditions. It is also recommended that the rails be cycled to perform the maximum stroke several times, so that the cage returns to its central position.

Adjustment/Installation Screw


The NB slide table is adjusted to achieve optimum accuracy and preload. The adjustment screw and rail installation screws should be kept untouched.

Allowable Load

The allowable load is a load under which the sum of elastic deformations of the rolling element and the raceway in the contact area subject to the maximum contact stress is small enough to guarantee smooth rolling movement. When very smooth and highly accurate linear motion is required, make sure to use the product within the allowable load.

SPECIAL REQUIREMENTS

NB can machine tables to meet special requirements, including tables with a micrometer head and tables for projectors. Please contact NB for details.


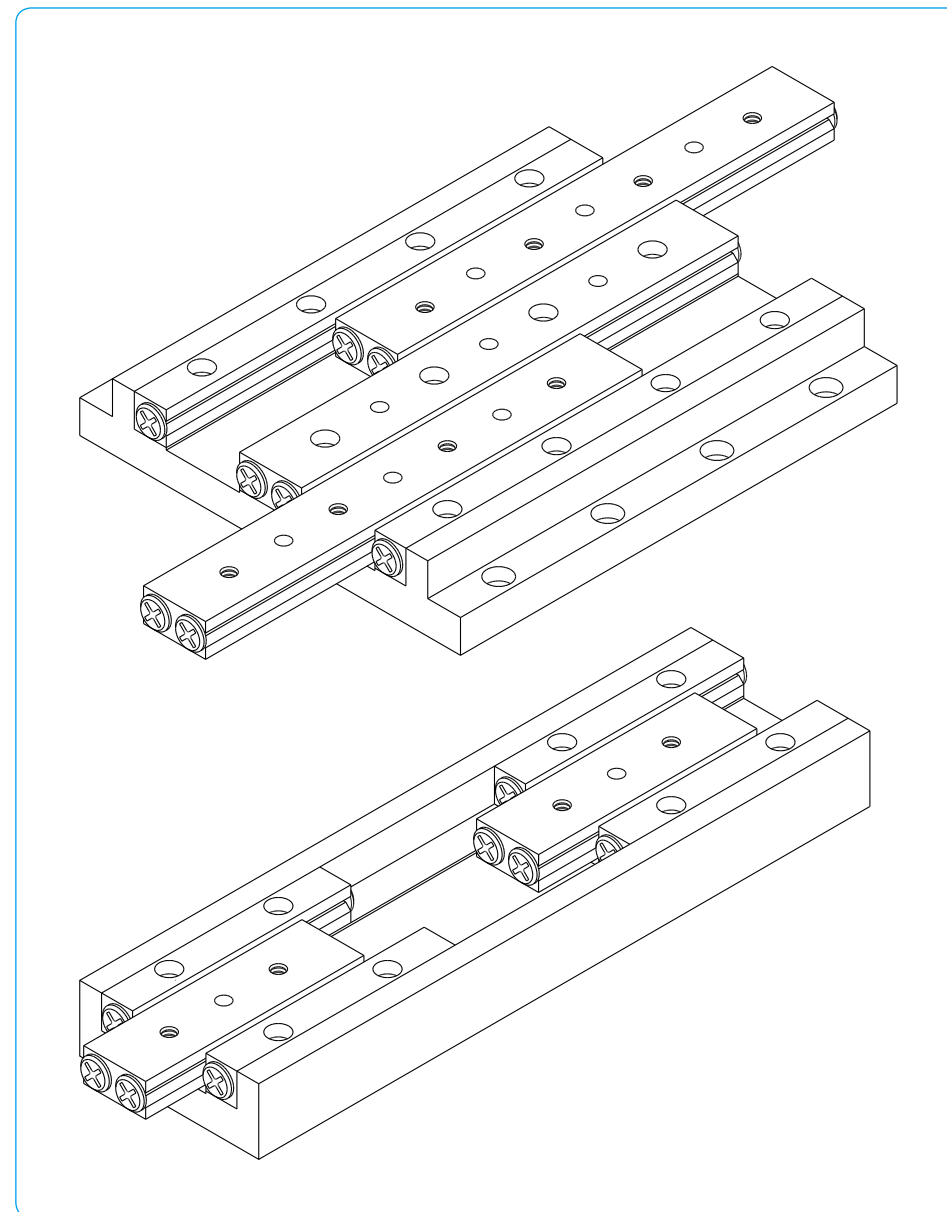


NVT TYPE

-NVT1/NVT2/NVT3-



part number structure

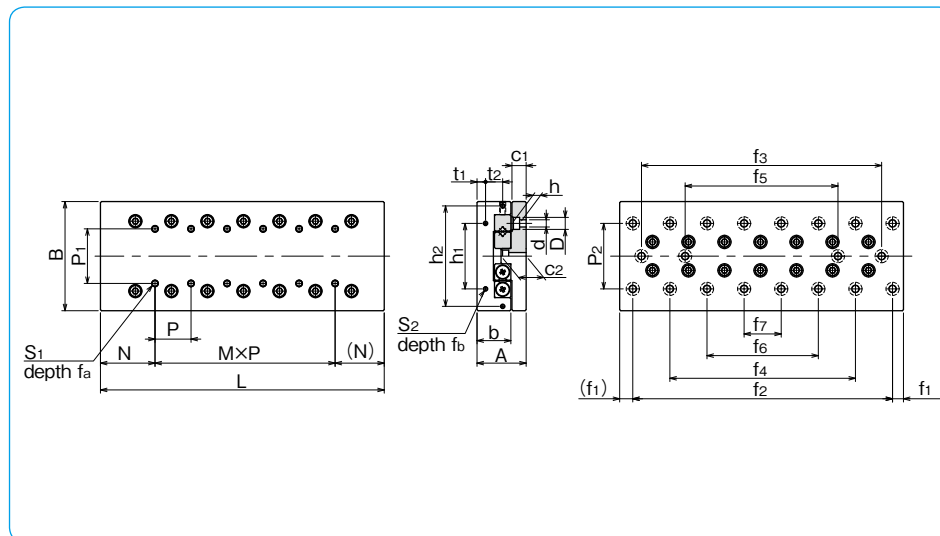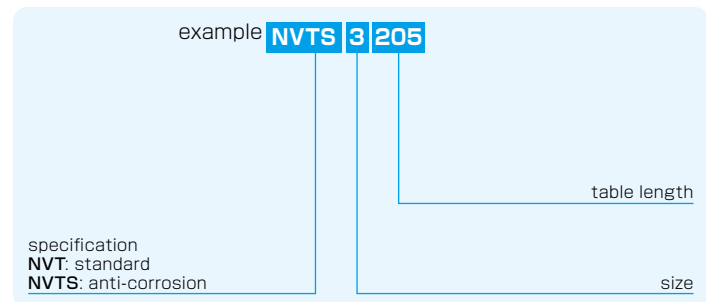


| part number | | stroke ST mm | major dimensions | | | | table-top mounting hole dimensions | | | | | table-end mounting hole dimensions | | | | | |
|----------------|-----------------|--------------------|--------------------|--------------------|---------|---------|------------------------------------|----------------------|----------------------|---------|-----------|------------------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| standard | anti-corrosion | | A mm | B mm | L mm | b mm | P ₁ mm | S ₁ mm | f _a mm | N mm | M×P mm | h ₁ mm | h ₂ mm | t ₁ mm | t ₂ mm | S ₂ mm | f _b mm |
| NVT1025 | NVTS1025 | 12 | | | 25 | | | | | — | | | | | | | |
| 1035 | 1035 | 18 | | | 35 | | | | | 1×10 | | | | | | | |
| 1045 | 1045 | 25 | | | 45 | | | | | 2×10 | | | | | | | |
| 1055 | 1055 | 32 | 17 ^{±0.1} | 30 ^{-0.4} | 55 | 11 | 10 | M2 | 4 | 12.5 | 3×10 | 12 | — | 2.5 | — | M2 | 6 |
| 1065 | 1065 | 40 | | | 65 | | | | | | 4×10 | | | | | | |
| 1075 | 1075 | 45 | | | 75 | | | | | | 5×10 | | | | | | |
| 1085 | 1085 | 50 | | | 85 | | | | | | 6×10 | | | | | | |
| NVT2035 | NVTS2035 | 18 | | | 35 | | | | | — | | | | | | | |
| 2050 | 2050 | 30 | | | 50 | | | | | 1×15 | | | | | | | |
| 2065 | 2065 | 40 | | | 65 | | | | | 2×15 | | | | | | | |
| 2080 | 2080 | 50 | | | 80 | | | | | 3×15 | | | | | | | |
| 2095 | 2095 | 60 | | | 95 | | | | | 4×15 | | | | | | | |
| 2110 | 2110 | 70 | 21 ^{±0.1} | 40 ^{-0.4} | 110 | 14 | 15 | M3 | 6 | 17.5 | 5×15 | 16 | — | 3.4 | — | M2 | 6 |
| 2125 | 2125 | 80 | | | 125 | | | | | | 6×15 | | | | | | |
| 2140 | 2140 | 90 | | | 140 | | | | | | 7×15 | | | | | | |
| 2155 | 2155 | 100 | | | 155 | | | | | | 8×15 | | | | | | |
| 2170 | 2170 | 110 | | | 170 | | | | | | 9×15 | | | | | | |
| 2185 | 2185 | 120 | | | 185 | | | | | | 10×15 | | | | | | |
| NVT3055 | NVTS3055 | 30 | | | 55 | | | | | — | | | | | | | |
| 3080 | 3080 | 45 | | | 80 | | | | | 1×25 | | | | | | | |
| 3105 | 3105 | 60 | | | 105 | | | | | 2×25 | | | | | | | |
| 3130 | 3130 | 75 | 28 ^{±0.1} | 60 ^{±0.1} | 130 | 18.5 | 25 | M4 | 8 | 27.5 | 3×25 | 40 | — | 5.5 | — | M3 | 6 |
| 3155 | 3155 | 90 | | | 155 | | | | | | 4×25 | | | | | | |
| 3180 | 3180 | 105 | | | 180 | | | | | | 5×25 | | | | | | |
| 3205 | 3205 | 130 | | | 205 | | | | | | 6×25 | | | | | | |
| 3230 | 3230 | 155 | | | 230 | | | | | | 7×25 | | | | | | |

The basic static load rating is the value at the center of the stroke.

| bed-surface mounting hole dimensions | | | | | | | | | | | | | accuracy ※(deviation) | | basic load rating | | allowable load | | allowable static moment | | | mass | | |
|--------------------------------------|-------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|---------|---------|--------------------------|---------|-------------------|-----------------------|-----------------------|-----------------------|-------------------------|-----------|-------------|-------|-------------|-------------|
| P ₂ mm | d×D×h mm | c ₁ mm | c ₂ mm | f ₁ mm | f ₂ mm | f ₃ mm | f ₄ mm | f ₅ mm | f ₆ mm | f ₇ mm | T μm | S μm | C N | Co N | F N | M _P N·m | M _Y N·m | M _R N·m | NVT g | NVTS g | size | | | |
| 22 | 2.5×4.5×2.5 | 5.5 | 9 | 3.5 | 18 | — | — | — | — | — | 2 | 4 | 734 | 849 | 283 | 3.73 | 3.18 | 5.73 | 87 | 39 | 1025 | | | |
| | | | | | 28 | — | — | — | — | — | — | — | 2 | 4 | 1,250 | 1,690 | 566 | 1.77 | 4.24 | 1.93 | 124 | 55 | 1035 | |
| | | | | | 38 | — | — | — | — | — | — | — | — | 2 | 4 | 1,720 | 2,540 | 849 | 9.09 | 10.3 | 7.67 | 160 | 71 | 1045 |
| | | | | | 48 | — | 28 | — | — | — | — | — | — | 2 | 5 | 2,160 | 3,390 | 1,130 | 14.1 | 16.7 | 9.61 | 195 | 87 | 1055 |
| | | | | | 58 | — | 38 | — | — | — | — | — | — | 2 | 5 | 2,560 | 4,240 | 1,410 | 24.9 | 26.7 | 15.3 | 231 | 103 | 1065 |
| | | | | | 68 | — | 48 | — | — | — | — | — | — | 2 | 5 | 2,960 | 5,090 | 1,690 | 33.1 | 36.7 | 17.2 | 267 | 119 | 1075 |
| | | | | | 78 | — | 58 | — | — | — | — | — | — | 2 | 5 | 3,330 | 5,940 | 1,980 | 47.8 | 50.7 | 23.0 | 303 | 136 | 1085 |
| 30 | 3.5×6.5×3.5 | 6.5 | 10.9 | 5 | 25 | — | — | — | — | — | 2 | 4 | 1,360 | 1,520 | 509 | 10.1 | 8.8 | 13.7 | 200 | 95 | 2035 | | | |
| | | | | | 40 | — | — | — | — | — | — | — | 2 | 4 | 2,330 | 3,050 | 1,010 | 18.9 | 18.7 | 18.6 | 287 | 140 | 2050 | |
| | | | | | 55 | — | — | — | — | — | — | — | — | 2 | 5 | 3,190 | 4,580 | 1,520 | 36.9 | 35.7 | 32.4 | 377 | 182 | 2065 |
| | | | | | 70 | — | 40 | — | — | — | — | — | — | 2 | 5 | 3,990 | 6,110 | 2,030 | 53.2 | 53.8 | 37.3 | 455 | 225 | 2080 |
| | | | | | 85 | — | 55 | — | — | — | — | — | — | 2 | 5 | 4,740 | 7,630 | 2,540 | 80.3 | 79.9 | 51.1 | 550 | 260 | 2095 |
| | | | | | 100 | — | 70 | — | — | — | — | — | — | 3 | 6 | 5,460 | 9,160 | 3,050 | 104 | 106 | 56.0 | 640 | 295 | 2110 |
| | | | | | 115 | — | 85 | — | — | — | — | — | — | 3 | 6 | 6,160 | 10,600 | 3,560 | 130 | 135 | 60.9 | 730 | 340 | 2125 |
| | | | | | 130 | — | 100 | — | 70 | — | — | — | — | 3 | 6 | 6,830 | 12,200 | 4,070 | 171 | 176 | 74.7 | 810 | 370 | 2140 |
| | | | | | 145 | — | 115 | — | 85 | — | — | — | — | 3 | 6 | 8,130 | 15,200 | 5,090 | 235 | 244 | 88.4 | 890 | 410 | 2155 |
| | | | | | 160 | — | 130 | — | 100 | — | — | — | — | 3 | 7 | 8,750 | 16,800 | 5,600 | 275 | 289 | 93.3 | 980 | 450 | 2170 |
| 175 | — | 145 | — | 115 | 85 | — | — | — | 3 | 7 | 9,370 | 18,300 | 6,110 | 317 | 338 | 98.3 | 1,070 | 490 | 2185 | | | | | |
| 40 | 4.5×8×4.5 | 9 | 15 | 10 | 35 | — | — | — | — | — | 2 | 5 | 6,150 | 8,060 | 2,680 | 20.8 | 37.2 | 27.3 | 643 | 303 | 3055 | | | |
| | | | | | 60 | — | — | — | — | — | — | — | 2 | 5 | 8,440 | 12,100 | 4,030 | 125 | 119 | 140 | 960 | 445 | 3080 | |
| | | | | | 85 | — | — | — | — | — | — | — | — | 3 | 6 | 10,500 | 16,100 | 5,370 | 188 | 186 | 167 | 1,260 | 590 | 3105 |
| | | | | | 110 | — | — | — | — | — | — | — | — | 3 | 6 | 14,400 | 24,200 | 8,060 | 300 | 319 | 195 | 1,580 | 725 | 3130 |
| | | | | | 135 | 85 | — | — | — | — | — | — | — | 3 | 6 | 16,300 | 28,200 | 9,410 | 508 | 505 | 308 | 1,860 | 860 | 3155 |
| | | | | | 160 | 110 | — | — | — | — | — | — | — | 3 | 7 | 18,100 | 32,200 | 10,700 | 630 | 635 | 335 | 2,160 | 1,000 | 3180 |
| | | | | | 185 | 135 | 85 | — | — | — | — | — | — | 3 | 7 | 19,800 | 36,300 | 12,100 | 763 | 779 | 362 | 2,460 | 1,140 | 3205 |
| | | | | | 210 | 160 | 110 | — | — | — | — | — | — | 3 | 7 | 21,500 | 40,300 | 13,400 | 906 | 936 | 390 | 2,780 | 1,310 | 3230 |


※For accuracy (T, S), refer to Figure G-20 (page G-27).

1N≒0.102kgf 1N·m≒0.102kgf·m





NVT TYPE

-NVT4/NVT6/NVT9-

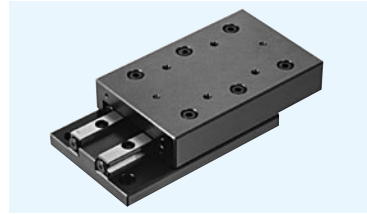

part number structure

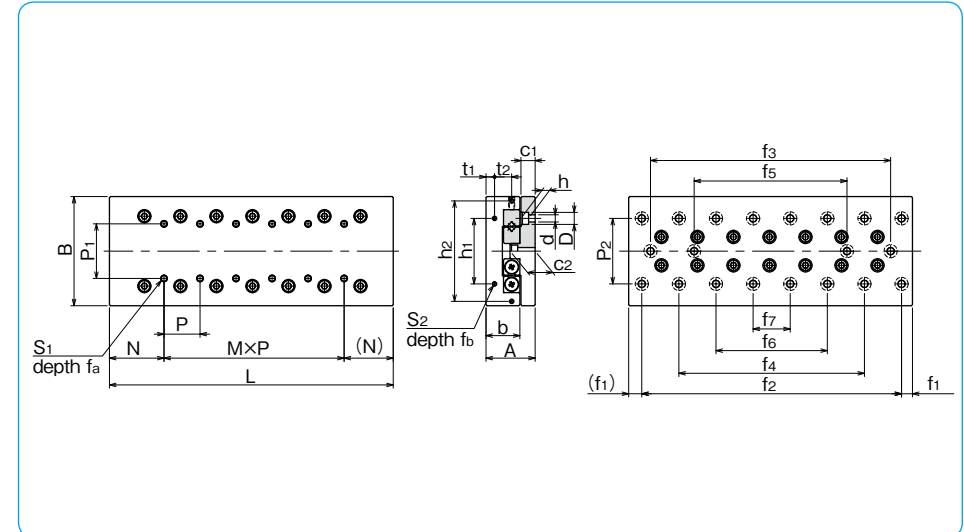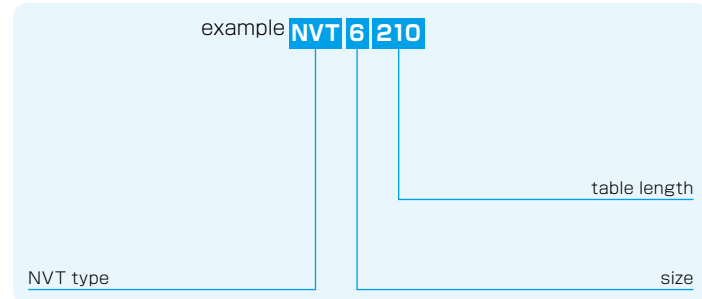


| part number | | stroke ST mm | major dimensions | | | | table-top mounting hole dimensions | | | | | table-end mounting hole dimensions | | | | | |
|----------------|-----------------|--------------------|------------------|---------|---------|---------|------------------------------------|----------------------|----------------------|---------|-----------|------------------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| standard | anti-corrosion | | A mm | B mm | L mm | b mm | P ₁ mm | S ₁ mm | f _a mm | N mm | M×P mm | h ₁ mm | h ₂ mm | t ₁ mm | t ₂ mm | S ₂ mm | f _b mm |
| NVT4085 | NVTS4085 | 50 | 35±0.1 | 80±0.1 | 85 | 24 | 40 | M5 | 10 | 42.5 | — | 55 | — | 6.5 | — | M3 | 6 |
| 4125 | 4125 | 75 | | | 125 | | | | | | 1×40 | | | | | | |
| 4165 | 4165 | 105 | | | 165 | | | | | | 2×40 | | | | | | |
| 4205 | 4205 | 130 | | | 205 | | | | | | 3×40 | | | | | | |
| 4245 | 4245 | 155 | | | 245 | | | | | | 4×40 | | | | | | |
| 4285 | 4285 | 185 | 285 | 5×40 | | | | | | | | | | | | | |
| NVT6110 | — | 60 | 45±0.1 | 100±0.1 | 110 | 31 | 50 | M6 | 12 | 55 | — | 60 | 92 | 8 | 15 | M4 | 8 |
| 6160 | — | 95 | | | 160 | | | | | | 1×50 | | | | | | |
| 6210 | — | 130 | | | 210 | | | | | | 2×50 | | | | | | |
| 6260 | — | 165 | | | 260 | | | | | | 3×50 | | | | | | |
| 6310 | — | 200 | | | 310 | | | | | | 4×50 | | | | | | |
| 6360 | — | 235 | | | 360 | | | | | | 5×50 | | | | | | |
| 6410 | — | 265 | | | 410 | | | | | | 6×50 | | | | | | |
| NVT9210 | — | 130 | 60±0.1 | 145±0.1 | 210 | 43 | 85 | M8 | 16 | 105.5 | — | 90 | 135 | 11 | 20 | M4 | 8 |
| 9310 | — | 180 | | | 310 | | | | | | 1×100 | | | | | | |
| 9410 | — | 220 | | | 410 | | | | | | 2×100 | | | | | | |
| 9510 | — | 300 | | | 510 | | | | | | 3×100 | | | | | | |

The basic static load rating is the value at the center of the stroke.


| bed-surface mounting hole dimensions | | | | | | | | | | | | | accuracy ※(deviation) | | basic load rating | | allowable load | | allowable static moment | | | mass | | size |
|--------------------------------------|-------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|---------|---------|--------------------------|---------|-------------------|-----------------------|-----------------------|-----------------------|-------------------------|-----------|-------------|------|--|------|
| P ₂ mm | d×D×h mm | c ₁ mm | c ₂ mm | f ₁ mm | f ₂ mm | f ₃ mm | f ₄ mm | f ₅ mm | f ₆ mm | f ₇ mm | T μm | S μm | C N | Co N | F N | M _P N·m | M _Y N·m | M _R N·m | NVT g | NVTS g | | | | |
| 55 | 5.5×10×5.4 | 10.5 | 18 | 10 | 65 | — | — | — | — | — | 2 | 5 | 12,100 | 15,700 | 5,250 | 156 | 147 | 239 | 1,710 | 790 | 4085 | | | |
| | | | | | 105 | — | — | — | — | — | 3 | 6 | 20,700 | 31,500 | 10,500 | 327 | 357 | 320 | 2,520 | 1,160 | 4125 | | | |
| | | | | | 145 | — | — | — | — | — | 3 | 7 | 24,700 | 39,300 | 13,100 | 656 | 660 | 559 | 3,320 | 1,530 | 4165 | | | |
| | | | | | 185 | 105 | — | — | — | — | 3 | 7 | 32,100 | 55,100 | 18,300 | 1,270 | 1,250 | 874 | 4,130 | 1,900 | 4205 | | | |
| | | | | | 225 | 145 | — | — | — | — | 3 | 7 | 39,000 | 70,900 | 23,600 | 1,740 | 1,780 | 956 | 4,930 | 2,270 | 4245 | | | |
| | | | | | 265 | 185 | — | — | — | — | 3 | 7 | 42,400 | 78,700 | 26,200 | 2,380 | 2,400 | 1,190 | 5,730 | 2,630 | 4285 | | | |
| 60 | 7×11.5×7 | 13 | 23 | 10 | 90 | — | — | — | — | — | 3 | 6 | 29,600 | 37,500 | 12,500 | 216 | 303 | 343 | 3,300 | — | 6110 | | | |
| | | | | | 140 | — | — | — | — | — | 3 | 6 | 40,700 | 56,300 | 18,700 | 937 | 927 | 995 | 4,850 | — | 6160 | | | |
| | | | | | 190 | 90 | — | — | — | — | 3 | 7 | 60,600 | 93,900 | 31,300 | 1,950 | 1,980 | 1,410 | 6,310 | — | 6210 | | | |
| | | | | | 240 | 140 | — | — | — | — | 3 | 7 | 69,800 | 112,000 | 37,500 | 2,680 | 2,770 | 1,640 | 7,790 | — | 6260 | | | |
| | | | | | 290 | 190 | — | — | — | — | 3 | 7 | 78,800 | 131,000 | 43,800 | 4,460 | 4,410 | 2,490 | 9,260 | — | 6310 | | | |
| | | | | | 340 | 240 | 140 | — | — | — | 4 | 8 | 87,400 | 150,000 | 50,100 | 5,570 | 5,580 | 2,720 | 10,900 | — | 6360 | | | |
| | | | | | 390 | 290 | 190 | — | — | — | 4 | 8 | 104,000 | 187,000 | 62,600 | 7,440 | 7,660 | 2,950 | 12,460 | — | 6410 | | | |
| 90 | 9×14×9 | 16 | 29 | 55 | 100 | — | — | — | — | — | 3 | 6 | 96,100 | 128,000 | 42,600 | 1,700 | 2,110 | 2,260 | 12,550 | — | 9210 | | | |
| | | | | | 200 | — | — | — | — | — | 3 | 6 | 143,000 | 213,000 | 71,100 | 6,550 | 6,580 | 5,330 | 18,000 | — | 9310 | | | |
| | | | | | 300 | — | — | — | — | — | 3 | 7 | 186,000 | 298,000 | 99,500 | 12,600 | 12,700 | 7,770 | 24,010 | — | 9410 | | | |
| | | | | | 400 | — | — | — | — | — | 3 | 7 | 206,000 | 341,000 | 113,000 | 18,700 | 18,600 | 10,200 | 30,100 | — | 9510 | | | |

※For accuracy (T, S), refer to Figure G-20 (page G-27).

1N≒0.102kgf 1N·m≒0.102kgf·m

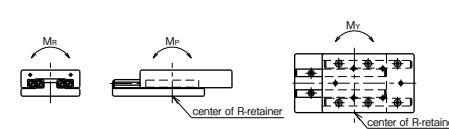

NYT TYPE

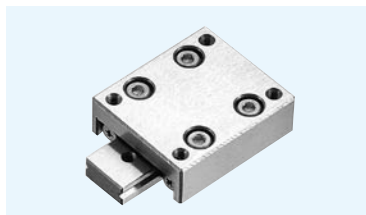


part number structure

example **NYT 2 065**

specification
 NYT: standard
 NYTS: anti-corrosion

table length

size

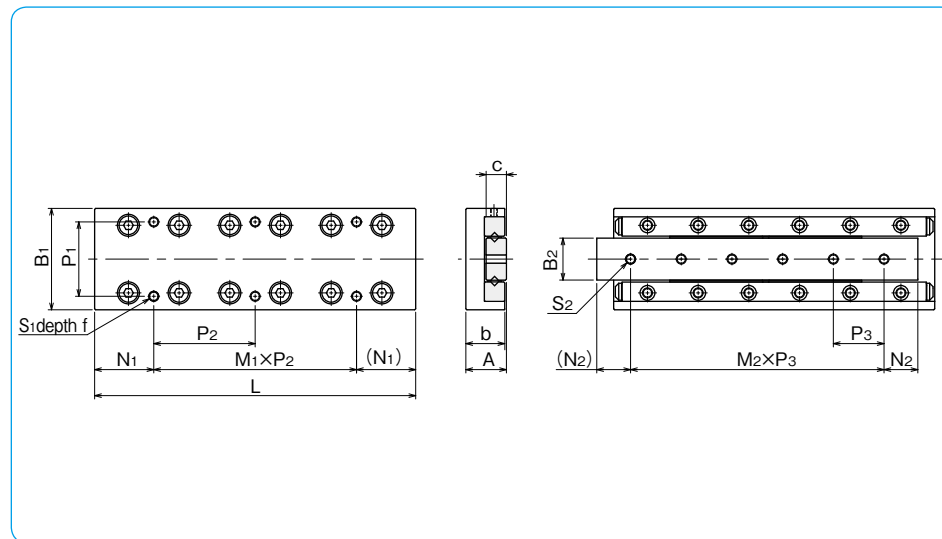


| part number | | stroke ST mm | major dimensions | | | | | | table-top mounting hole dimensions | | | | |
|-------------|----------------|--------------------|------------------|----------------------|---------|---------|----------------------|---------|------------------------------------|----------------------|---------|----------------------|---------------------------------------|
| standard | anti-corrosion | | A mm | B ₁ mm | L mm | b mm | B ₂ mm | c mm | P ₁ mm | S ₁ mm | f mm | N ₁ mm | M ₁ × P ₂ mm |
| NYT 1025 | NYTS 1025 | 12 | 8±0.1 | 20±0.1 | 25 | 7.5 | 6.6 | 4 | 14 | M2.6 | 3 | 3.5 | 1×18 |
| 1035 | 1035 | 18 | | | 35 | | | | | | | 3.5 | 1×28 |
| 1045 | 1045 | 25 | | | 45 | | | | | | | 12.5 | 1×20 |
| 1055 | 1055 | 32 | | | 55 | | | | | | | 12.5 | 1×30 |
| 1065 | 1065 | 40 | | | 65 | | | | | | | 12.5 | 2×20 |
| 1075 | 1075 | 45 | | | 75 | | | | | | | 22.5 | 1×30 |
| 1085 | 1085 | 50 | | | 85 | | | | | | | 12.5 | 2×30 |
| NYT 2035 | NYTS 2035 | 18 | 12±0.1 | 30±0.1 | 35 | 11.5 | 12.4 | 6 | 22 | M3 | 5 | 3.5 | 1×28 |
| 2050 | 2050 | 30 | | | 50 | | | | | | | 3.5 | 1×43 |
| 2065 | 2065 | 40 | | | 65 | | | | | | | 17.5 | 1×30 |
| 2080 | 2080 | 50 | | | 80 | | | | | | | 17.5 | 1×45 |
| 2095 | 2095 | 60 | | | 95 | | | | | | | 17.5 | 2×30 |
| 2110 | 2110 | 70 | | | 110 | | | | | | | 32.5 | 1×45 |
| 2125 | 2125 | 80 | | | 125 | | | | | | | 17.5 | 2×45 |
| NYT 3055 | NYTS 3055 | 30 | 16±0.1 | 40±0.1 | 55 | 15.5 | 16.7 | 8 | 30 | M4 | 7 | 7.5 | 1×40 |
| 3080 | 3080 | 45 | | | 80 | | | | | | | 7.5 | 1×65 |
| 3105 | 3105 | 60 | | | 105 | | | | | | | 27.5 | 1×50 |
| 3130 | 3130 | 75 | | | 130 | | | | | | | 27.5 | 1×75 |
| 3155 | 3155 | 90 | | | 155 | | | | | | | 27.5 | 2×50 |
| 3180 | 3180 | 105 | | | 180 | | | | | | | 52.5 | 1×75 |
| 3205 | 3205 | 130 | | | 205 | | | | | | | 27.5 | 2×75 |

The basic static load rating is the value at the center of the stroke.

| bed-surface S ₂ | mounting hole dimensions | | accuracy ※(deviation) | | basic load rating | | allowable load F N | allowable static moment | | | mass g | size |
|-------------------------------|--------------------------|---------------------------------------|--------------------------|---------|-------------------|-------------------|-----------------------------|-------------------------|-----------------------|-----------------------|-----------|------|
| | N ₂ mm | M ₂ × P ₃ mm | T μm | S μm | dynamic C N | static Co N | | M _P N·m | M _Y N·m | M _R N·m | | |
| M2.6 | 5 | 2×7.5 | 2 | 4 | 734 | 849 | 283 | 3.73 | 3.18 | 3.18 | 25 | 1025 |
| | 7.5 | 2×10 | 2 | 4 | 1,250 | 1,690 | 566 | 1.77 | 4.24 | 1.07 | 35 | 1035 |
| | 7.5 | 3×10 | 2 | 5 | 1,720 | 2,540 | 849 | 9.09 | 10.3 | 4.26 | 45 | 1045 |
| | 7.5 | 4×10 | 2 | 5 | 2,160 | 3,390 | 1,130 | 14.1 | 16.7 | 5.33 | 55 | 1055 |
| | 7.5 | 5×10 | 2 | 5 | 2,560 | 4,240 | 1,410 | 24.9 | 26.7 | 8.52 | 65 | 1065 |
| | 7.5 | 6×10 | 2 | 5 | 2,960 | 5,090 | 1,690 | 33.1 | 36.7 | 9.59 | 76 | 1075 |
| | 7.5 | 7×10 | 2 | 5 | 3,330 | 5,940 | 1,980 | 47.8 | 50.7 | 12.7 | 86 | 1085 |
| M3 | 7.5 | 1×20 | 2 | 4 | 1,360 | 1,520 | 509 | 10.1 | 8.80 | 9.93 | 84 | 2035 |
| | 10 | 2×15 | 2 | 4 | 2,330 | 3,050 | 1,010 | 18.9 | 18.7 | 13.4 | 120 | 2050 |
| | 10 | 3×15 | 2 | 5 | 3,190 | 4,580 | 1,520 | 36.9 | 35.7 | 23.4 | 157 | 2065 |
| | 10 | 4×15 | 2 | 5 | 3,990 | 6,110 | 2,030 | 53.2 | 53.8 | 26.9 | 190 | 2080 |
| | 10 | 5×15 | 2 | 5 | 4,740 | 7,630 | 2,540 | 80.3 | 79.9 | 36.9 | 225 | 2095 |
| | 10 | 6×15 | 2 | 5 | 5,460 | 9,160 | 3,050 | 104 | 106 | 40.4 | 265 | 2110 |
| | 10 | 7×15 | 2 | 5 | 6,160 | 10,600 | 3,560 | 130 | 135 | 44.0 | 305 | 2125 |
| M4 | 10 | 1×35 | 2 | 5 | 6,150 | 8,060 | 2,680 | 20.8 | 37.2 | 17.0 | 228 | 3055 |
| | 15 | 2×25 | 2 | 5 | 8,440 | 12,100 | 4,030 | 125 | 119 | 87.2 | 345 | 3080 |
| | 15 | 3×25 | 3 | 5 | 10,500 | 16,100 | 5,370 | 188 | 186 | 104 | 450 | 3105 |
| | 15 | 4×25 | 3 | 5 | 14,400 | 24,200 | 8,060 | 300 | 319 | 121 | 570 | 3130 |
| | 15 | 5×25 | 3 | 5 | 16,300 | 28,200 | 9,410 | 508 | 505 | 191 | 665 | 3155 |
| | 15 | 6×25 | 3 | 5 | 18,100 | 32,200 | 10,700 | 630 | 635 | 208 | 780 | 3180 |
| | 15 | 7×25 | 3 | 5 | 19,800 | 36,300 | 12,100 | 763 | 779 | 225 | 890 | 3205 |

※For accuracy (T, S), refer to Figure G-20 (page G-27).

1N=0.102kgf 1N·m=0.102kgf·m





NYT-D TYPE



part number structure

example **NYTS 3 125 -D**

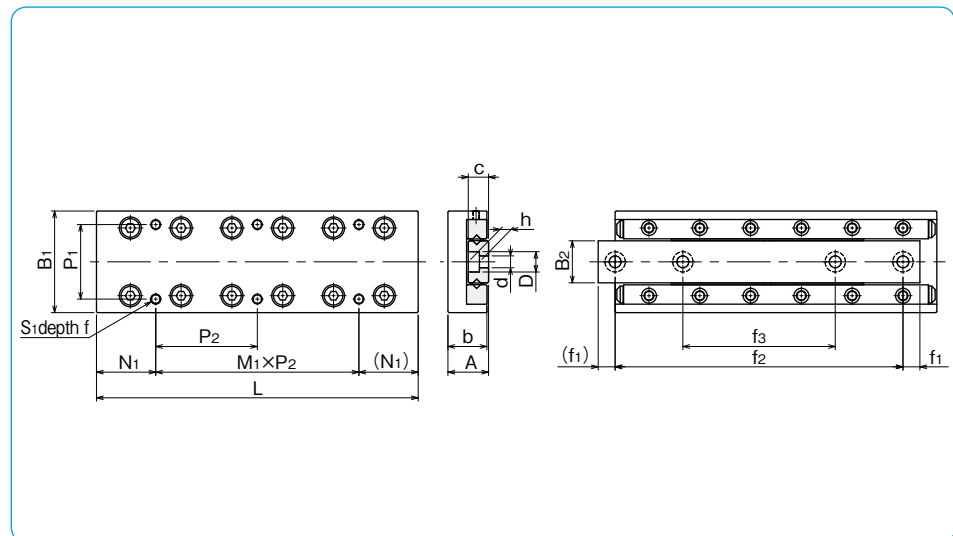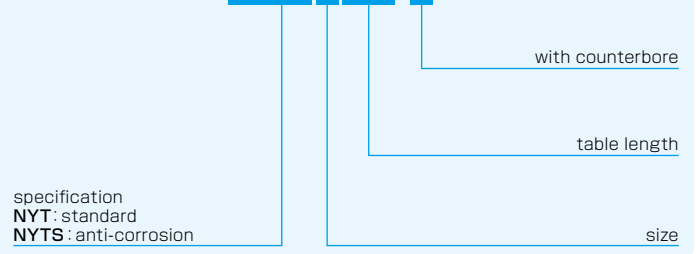


| part number | | stroke ST mm | major dimensions | | | | | | table-top mounting hole dimensions | | | | | size |
|-------------|----------------|--------------------|------------------|----------------|------|------|----------------|---|------------------------------------|----------------|---|----------------|--------------------------------|------|
| standard | anti-corrosion | | A | B ₁ | L | b | B ₂ | c | P ₁ | S ₁ | f | N ₁ | M ₁ ×P ₂ | |
| NYT 1025-D | NYTS 1025-D | 12 | 8±0.1 | 20±0.1 | 25 | 7.5 | 6.6 | 4 | 14 | M2.6 | 3 | 3.5 | 1×18 | |
| 1035-D | 1035-D | 18 | | | 35 | | | | | | | 3.5 | 1×28 | |
| 1045-D | 1045-D | 25 | | | 45 | | | | | | | 12.5 | 1×20 | |
| 1055-D | 1055-D | 32 | | | 55 | | | | | | | 12.5 | 1×30 | |
| 1065-D | 1065-D | 40 | | | 65 | | | | | | | 12.5 | 2×20 | |
| 1075-D | 1075-D | 45 | | | 75 | | | | | | | 22.5 | 1×30 | |
| 1085-D | 1085-D | 50 | 85 | 12.5 | 2×30 | | | | | | | | | |
| NYT 2035-D | NYTS 2035-D | 18 | 12±0.1 | 30±0.1 | 35 | 11.5 | 12.4 | 6 | 22 | M3 | 5 | 3.5 | 1×28 | |
| 2050-D | 2050-D | 30 | | | 50 | | | | | | | 3.5 | 1×43 | |
| 2065-D | 2065-D | 40 | | | 65 | | | | | | | 17.5 | 1×30 | |
| 2080-D | 2080-D | 50 | | | 80 | | | | | | | 17.5 | 1×45 | |
| 2095-D | 2095-D | 60 | | | 95 | | | | | | | 17.5 | 2×30 | |
| 2110-D | 2110-D | 70 | | | 110 | | | | | | | 32.5 | 1×45 | |
| 2125-D | 2125-D | 80 | 125 | 17.5 | 2×45 | | | | | | | | | |
| NYT 3055-D | NYTS 3055-D | 30 | 16±0.1 | 40±0.1 | 55 | 15.5 | 16.7 | 8 | 30 | M4 | 7 | 7.5 | 1×40 | |
| 3080-D | 3080-D | 45 | | | 80 | | | | | | | 7.5 | 1×65 | |
| 3105-D | 3105-D | 60 | | | 105 | | | | | | | 27.5 | 1×50 | |
| 3130-D | 3130-D | 75 | | | 130 | | | | | | | 27.5 | 1×75 | |
| 3155-D | 3155-D | 90 | | | 155 | | | | | | | 27.5 | 2×50 | |
| 3180-D | 3180-D | 105 | | | 180 | | | | | | | 52.5 | 1×75 | |
| 3205-D | 3205-D | 130 | 205 | 27.5 | 2×75 | | | | | | | | | |

The basic static load rating is the value at the center of the stroke.

| bed-surface mounting hole dimensions d×D×h | bed-surface mounting hole dimensions | | | accuracy ※(deviation) | | basic load rating | | allowable load F | allowable static moment | | | mass | size |
|---|--------------------------------------|----------------|----------------|--------------------------|---------|-------------------|-------------------------------|---------------------|-------------------------|-----------------------|-----------------------|------|-------------|
| | f ₁ | f ₂ | f ₃ | T μm | S μm | C N | static C ₀ N | | M _P N·m | M _Y N·m | M _R N·m | | |
| 2.5×4.1×2.2 | 3.5 | 18 | — | 2 | 4 | 734 | 849 | 283 | 3.73 | 3.18 | 3.18 | 25 | 1025 |
| | 5 | 25 | — | 2 | 4 | 1,250 | 1,690 | 566 | 1.77 | 4.24 | 1.07 | 35 | 1035 |
| | 3.5 | 38 | 25 | 2 | 5 | 1,720 | 2,540 | 849 | 9.09 | 10.3 | 4.26 | 45 | 1045 |
| | 3.5 | 48 | 29 | 2 | 5 | 2,160 | 3,390 | 1,130 | 14.1 | 16.7 | 5.33 | 55 | 1055 |
| | 5 | 55 | 31 | 2 | 5 | 2,560 | 4,240 | 1,410 | 24.9 | 26.7 | 8.52 | 65 | 1065 |
| | 5 | 65 | 35 | 2 | 5 | 2,960 | 5,090 | 1,690 | 33.1 | 36.7 | 9.59 | 76 | 1075 |
| 3.5×6×3.3 | 5 | 75 | 40 | 2 | 5 | 3,330 | 5,940 | 1,980 | 47.8 | 50.7 | 12.7 | 86 | 1085 |
| | 5 | 25 | — | 2 | 4 | 1,360 | 1,520 | 509 | 10.1 | 8.80 | 9.93 | 84 | 2035 |
| | 7.5 | 35 | — | 2 | 4 | 2,330 | 3,050 | 1,010 | 18.9 | 18.7 | 13.4 | 120 | 2050 |
| | 5 | 55 | 33 | 2 | 5 | 3,190 | 4,580 | 1,520 | 36.9 | 35.7 | 23.4 | 157 | 2065 |
| | 5 | 70 | 40 | 2 | 5 | 3,990 | 6,110 | 2,030 | 53.2 | 53.8 | 26.9 | 190 | 2080 |
| | 5 | 85 | 45 | 2 | 5 | 4,740 | 7,630 | 2,540 | 80.3 | 79.9 | 36.9 | 225 | 2095 |
| 4.5×7.5×4.3 | 7.5 | 95 | 50 | 2 | 5 | 5,460 | 9,160 | 3,050 | 104 | 106 | 40.4 | 265 | 2110 |
| | 7.5 | 110 | 55 | 2 | 5 | 6,160 | 10,600 | 3,560 | 130 | 135 | 44.0 | 305 | 2125 |
| | 7.5 | 40 | — | 2 | 5 | 6,150 | 8,060 | 2,680 | 20.8 | 37.2 | 17.0 | 228 | 3055 |
| | 6 | 68 | 43 | 2 | 5 | 8,440 | 12,100 | 4,030 | 125 | 119 | 87.2 | 345 | 3080 |
| | 7.5 | 90 | 55 | 3 | 5 | 10,500 | 16,100 | 5,370 | 188 | 186 | 104 | 450 | 3105 |
| | 7.5 | 115 | 65 | 3 | 5 | 14,400 | 24,200 | 8,060 | 300 | 319 | 121 | 570 | 3130 |
| 4.5×7.5×4.3 | 7.5 | 140 | 95 | 3 | 5 | 16,300 | 28,200 | 9,410 | 508 | 505 | 191 | 665 | 3155 |
| | 7.5 | 165 | 85 | 3 | 5 | 18,100 | 32,200 | 10,700 | 630 | 635 | 208 | 780 | 3180 |
| | 7.5 | 190 | 90 | 3 | 5 | 19,800 | 36,300 | 12,100 | 763 | 779 | 225 | 890 | 3205 |

※For accuracy (T, S), refer to Figure G-20 (page G-27).


1N=0.102kgf 1N·m=0.102kgf·m





SLIDE TABLE

SVT TYPE

-SVT1/SVT2-

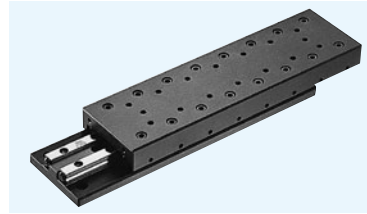

part number structure

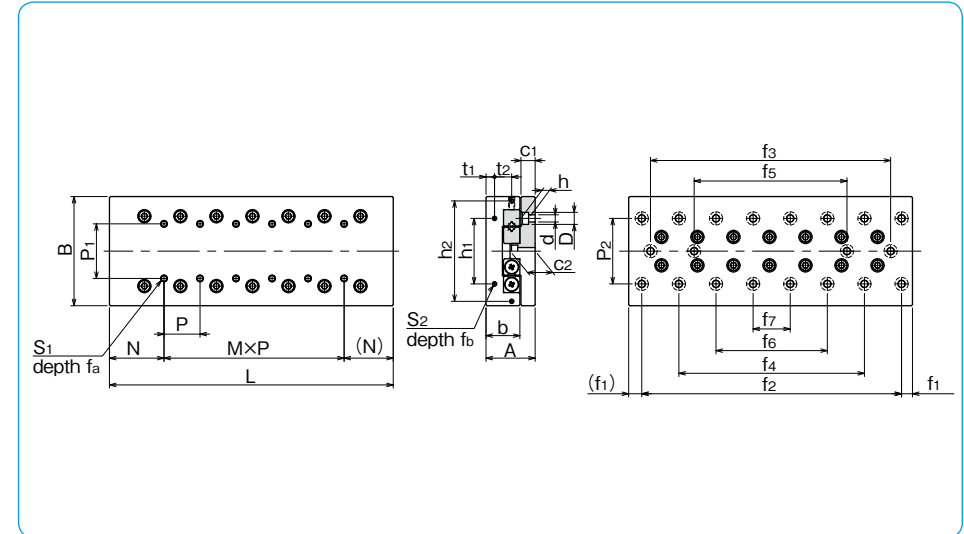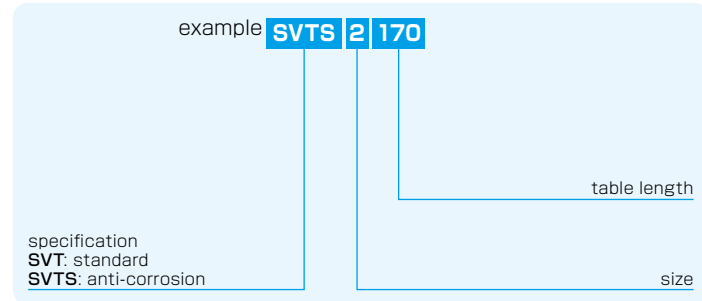


| part number | | stroke ST mm | major dimensions | | | table-top mounting hole dimensions | | | | table-end mounting hole dimensions | | | | | | | |
|-----------------|------------------|--------------------|--------------------|--------------------|---------|------------------------------------|----------------------|----------------------|----------------------|------------------------------------|-----------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| standard | anti-corrosion | | A mm | B mm | L mm | b mm | P ₁ mm | S ₁ mm | f _a mm | N mm | M×P mm | h ₁ mm | h ₂ mm | t ₁ mm | t ₂ mm | S ₂ mm | f _b mm |
| SVT 1025 | SVTS 1025 | 12 | | 25 | | | | | | — | | | | | | | |
| 1035 | 1035 | 18 | | 35 | | | | | | 1×10 | | | | | | | |
| 1045 | 1045 | 25 | | 45 | | | | | | 2×10 | | | | | | | |
| 1055 | 1055 | 32 | 17 ^{±0.1} | 30 ^{-0.4} | 55 | 11 | 10 | M2 | 4 | 12.5 | 3×10 | 12 | — | 2.5 | — | M2 | 6 |
| 1065 | 1065 | 40 | | 65 | | | | | | | 4×10 | | | | | | |
| 1075 | 1075 | 45 | | 75 | | | | | | | 5×10 | | | | | | |
| 1085 | 1085 | 50 | | 85 | | | | | | | 6×10 | | | | | | |
| SVT 2035 | SVTS 2035 | 18 | | 35 | | | | | | — | | | | | | | |
| 2050 | 2050 | 30 | | 50 | | | | | | 1×15 | | | | | | | |
| 2065 | 2065 | 40 | | 65 | | | | | | 2×15 | | | | | | | |
| 2080 | 2080 | 50 | | 80 | | | | | | 3×15 | | | | | | | |
| 2095 | 2095 | 60 | | 95 | | | | | | 4×15 | | | | | | | |
| 2110 | 2110 | 70 | 21 ^{±0.1} | 40 ^{-0.4} | 110 | 14 | 15 | M3 | 6 | 17.5 | 5×15 | 16 | — | 3.4 | — | M2 | 6 |
| 2125 | 2125 | 80 | | 125 | | | | | | | 6×15 | | | | | | |
| 2140 | 2140 | 90 | | 140 | | | | | | | 7×15 | | | | | | |
| 2155 | 2155 | 100 | | 155 | | | | | | | 8×15 | | | | | | |
| 2170 | 2170 | 110 | | 170 | | | | | | | 9×15 | | | | | | |
| 2185 | 2185 | 120 | | 185 | | | | | | | 10×15 | | | | | | |

| bed-surface mounting hole dimensions | | | | | | | | | | | accuracy ※(deviation) | | basic load rating | | allowable | | allowable | | | mass | | size | | |
|--------------------------------------|-------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|--------------------------|---------|-------------------|---------|-----------|-----------------------|-----------------------|-----------------------|----------|-----------|-------------|-------|-------------|-------------|
| P ₂ mm | d×D×h mm | c ₁ mm | c ₂ mm | f ₁ mm | f ₂ mm | f ₃ mm | f ₄ mm | f ₅ mm | f ₆ mm | f ₇ mm | T μm | S μm | C N | Co N | F N | M _P N·m | M _Y N·m | M _R N·m | SVT g | SVTS g | | | | |
| 22 | 2.5×4.5×2.5 | 5.5 | 9 | 3.5 | 18 | — | — | — | — | — | 2 | 4 | 464 | 476 | 158 | 1.79 | 1.47 | 3.22 | 82 | 36 | 1025 | | | |
| | | | | | 28 | — | — | — | — | — | — | — | 2 | 4 | 805 | 952 | 316 | 3.08 | 3.5 | 6.45 | 120 | 50 | 1035 | |
| | | | | | 38 | — | — | — | — | — | — | — | — | 2 | 4 | 959 | 1,190 | 396 | 6.98 | 6.4 | 8.06 | 158 | 69 | 1045 |
| | | | | | 48 | — | 28 | — | — | — | — | — | — | 2 | 5 | 1,100 | 1,420 | 475 | 9.53 | 8.81 | 9.68 | 190 | 83 | 1055 |
| | | | | | 58 | — | 38 | — | — | — | — | — | — | 2 | 5 | 1,240 | 1,660 | 554 | 12.4 | 11.6 | 11.2 | 225 | 98 | 1065 |
| | | | | | 68 | — | 48 | — | — | — | — | — | — | 2 | 5 | 1,510 | 2,140 | 712 | 19.3 | 18.3 | 14.5 | 260 | 113 | 1075 |
| | | | | | 78 | — | 58 | — | — | — | — | — | — | 2 | 5 | 1,650 | 2,380 | 792 | 23.4 | 22.3 | 16.1 | 295 | 128 | 1085 |
| | | | | | 25 | — | — | — | — | — | — | — | — | — | 2 | 4 | 1,090 | 1,170 | 390 | 7.04 | 5.78 | 10.5 | 195 | 90 |
| 30 | 3.5×6.5×3.5 | 6.5 | 10.9 | 5 | 40 | — | — | — | — | — | 2 | 4 | 1,510 | 1,750 | 585 | 12.1 | 10.7 | 15.8 | 280 | 133 | 2050 | | | |
| | | | | | 55 | — | — | — | — | — | — | — | 2 | 5 | 1,900 | 2,340 | 780 | 19.1 | 17.1 | 21.1 | 370 | 175 | 2065 | |
| | | | | | 70 | — | 40 | — | — | — | — | — | — | 2 | 5 | 2,620 | 3,510 | 1,170 | 27.4 | 29.6 | 31.6 | 450 | 220 | 2080 |
| | | | | | 85 | — | 55 | — | — | — | — | — | — | 2 | 5 | 2,950 | 4,100 | 1,360 | 37.4 | 39.9 | 36.9 | 540 | 250 | 2095 |
| | | | | | 100 | — | 70 | — | — | — | — | — | — | 3 | 6 | 3,280 | 4,680 | 1,560 | 61.7 | 58.1 | 42.2 | 630 | 285 | 2110 |
| | | | | | 115 | — | 85 | — | — | — | — | — | — | 3 | 6 | 3,590 | 5,270 | 1,750 | 76.1 | 72.1 | 47.5 | 720 | 330 | 2125 |
| | | | | | 130 | — | 100 | — | 70 | — | — | — | — | 3 | 6 | 4,210 | 6,440 | 2,140 | 92 | 95.9 | 58.1 | 800 | 360 | 2140 |
| | | | | | 145 | — | 115 | — | 85 | — | — | — | — | 3 | 6 | 4,500 | 7,030 | 2,340 | 109 | 113 | 63.3 | 880 | 400 | 2155 |
| | | | | | 160 | — | 130 | — | 100 | — | — | — | — | 3 | 7 | 4,790 | 7,610 | 2,530 | 148 | 143 | 68.6 | 970 | 440 | 2170 |
| | | | | | 175 | — | 145 | — | 115 | 85 | — | — | — | 3 | 7 | 5,080 | 8,200 | 2,730 | 170 | 164 | 73.9 | 1,060 | 480 | 2185 |


※For accuracy (T, S), refer to Figure G-20 (page G-27).

1N ≒ 0.102kgf 1N·m ≒ 0.102kgf·m


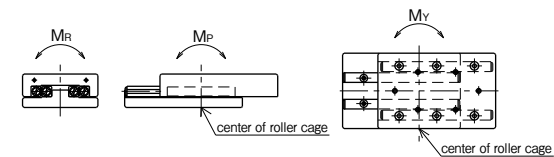


SVT TYPE

-SVT3/SVT4-

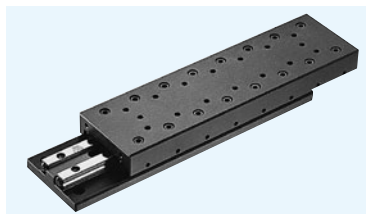

part number structure

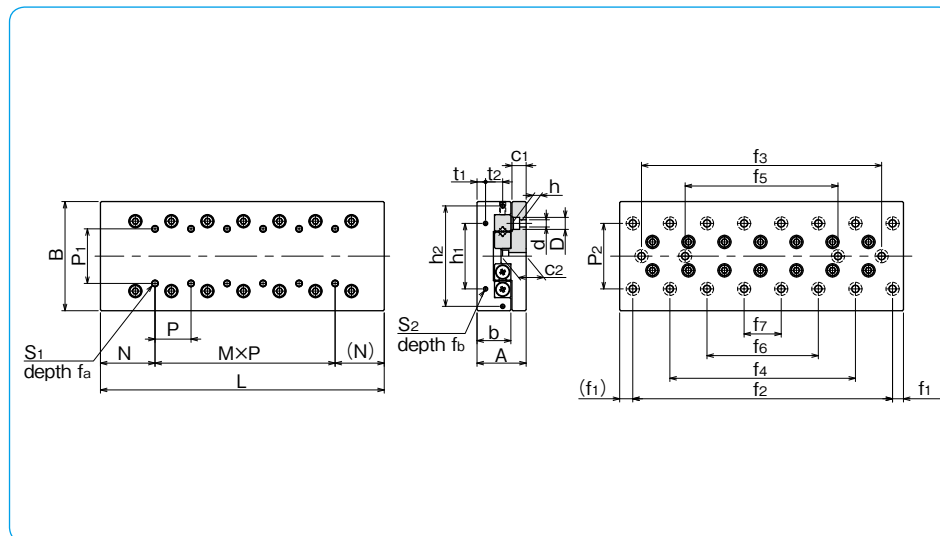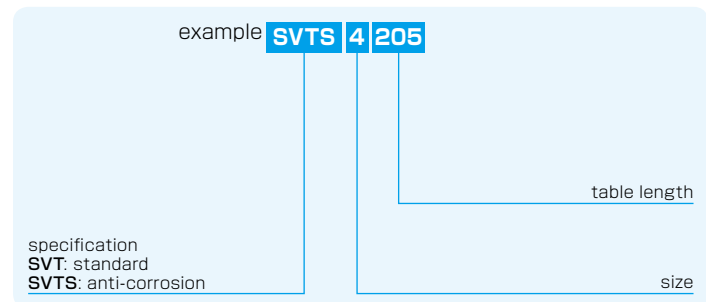


| part number | | stroke | major dimensions | | | | table-top mounting hole dimensions | | | | | table-end mounting hole dimensions | | | | | |
|-----------------|------------------|--------|--------------------|--------------------|------|------|------------------------------------|----|-------|------|--------|------------------------------------|-------|-------|-------|----|-------|
| standard | anti-corrosion | ST mm | A mm | B mm | L mm | b mm | P1 mm | S1 | fa mm | N mm | MxP mm | h1 mm | h2 mm | t1 mm | t2 mm | S2 | fb mm |
| SVT 3055 | SVTS 3055 | 30 | | | 55 | | | | | | — | | | | | | |
| 3080 | 3080 | 45 | | | 80 | | | | | | 1x25 | | | | | | |
| 3105 | 3105 | 60 | | | 105 | | | | | | 2x25 | | | | | | |
| 3130 | 3130 | 75 | | | 130 | | | | | | 3x25 | | | | | | |
| 3155 | 3155 | 90 | 28 ^{±0.1} | 60 ^{±0.1} | 155 | 18.5 | 25 | M4 | 8 | 27.5 | 4x25 | 40 | — | 5.5 | — | M3 | 6 |
| 3180 | 3180 | 105 | | | 180 | | | | | | 5x25 | | | | | | |
| 3205 | 3205 | 130 | | | 205 | | | | | | 6x25 | | | | | | |
| 3230 | 3230 | 155 | | | 230 | | | | | | 7x25 | | | | | | |
| 3255 | 3255 | 180 | | | 255 | | | | | | 8x25 | | | | | | |
| 3280 | 3280 | 205 | | | 280 | | | | | | 9x25 | | | | | | |
| 3305 | 3305 | 230 | | | 305 | | | | | | 10x25 | | | | | | |
| SVT 4085 | SVTS 4085 | 50 | | | 85 | | | | | | — | | | | | | |
| 4125 | 4125 | 75 | | | 125 | | | | | | 1x40 | | | | | | |
| 4165 | 4165 | 105 | | | 165 | | | | | | 2x40 | | | | | | |
| 4205 | 4205 | 130 | | | 205 | | | | | | 3x40 | | | | | | |
| 4245 | 4245 | 155 | 35 ^{±0.1} | 80 ^{±0.1} | 245 | 24 | 40 | M5 | 10 | 42.5 | 4x40 | 55 | — | 6.5 | — | M3 | 6 |
| 4285 | 4285 | 185 | | | 285 | | | | | | 5x40 | | | | | | |
| 4325 | 4325 | 210 | | | 325 | | | | | | 6x40 | | | | | | |
| 4365 | 4365 | 235 | | | 365 | | | | | | 7x40 | | | | | | |
| 4405 | 4405 | 265 | | | 405 | | | | | | 8x40 | | | | | | |

| bed-surface mounting hole dimensions | | | | | | | | | | | accuracy ※(deviation) | | basic load rating | | allowable load | | allowable static moment | | | mass | | size |
|--------------------------------------|------------|-------|-------|-------|-------|-------|-------|--------|--------|-------|--------------------------|------|-------------------|--------|----------------|-------------|-------------------------|--------|-------|--------|-------------|------|
| P2 mm | dxDxh mm | c1 mm | c2 mm | f1 mm | f2 mm | f3 mm | f4 mm | f5 mm | f6 mm | f7 mm | T μm | S μm | C N | Co N | F N | MP N·m | MY N·m | MR N·m | SVT g | SVTS g | size | |
| 40 | 4.5x8x4.5 | 9 | 15 | 10 | 35 | — | — | — | — | — | 2 | 5 | 3,490 | 3,890 | 1,290 | 19.4 | 22.2 | 54.5 | 640 | 300 | 3055 | |
| | | | | | 60 | — | — | — | — | — | 2 | 5 | 5,230 | 6,490 | 2,160 | 53.0 | 58.0 | 90.9 | 955 | 440 | 3080 | |
| | | | | | 85 | — | — | — | — | — | 3 | 6 | 6,030 | 7,780 | 2,590 | 103 | 95.7 | 109 | 1,250 | 580 | 3105 | |
| | | | | | 110 | — | — | — | — | — | 3 | 6 | 7,560 | 10,300 | 3,450 | 170 | 160 | 145 | 1,570 | 715 | 3130 | |
| | | | | | 135 | 85 | — | — | — | — | 3 | 6 | 9,000 | 12,900 | 4,320 | 210 | 220 | 181 | 1,850 | 850 | 3155 | |
| | | | | | 160 | 110 | — | — | — | — | 3 | 7 | 10,300 | 15,500 | 5,180 | 302 | 314 | 218 | 2,150 | 990 | 3180 | |
| | | | | | 185 | 135 | 85 | — | — | — | 3 | 7 | 11,000 | 16,800 | 5,610 | 355 | 367 | 236 | 2,450 | 1,130 | 3205 | |
| | | | | | 210 | 160 | 110 | — | — | — | 3 | 7 | 11,700 | 18,100 | 6,040 | 472 | 455 | 254 | 2,740 | 1,270 | 3230 | |
| | | | | | 235 | 185 | 135 | — | — | — | 3 | 7 | 12,900 | 20,700 | 6,910 | 537 | 552 | 290 | 3,040 | 1,410 | 3255 | |
| | | | | | 260 | 210 | 160 | 110 | — | — | 3 | 7 | 13,600 | 22,000 | 7,340 | 606 | 622 | 309 | 3,360 | 1,540 | 3280 | |
| 285 | 235 | 185 | 135 | — | — | 3 | 7 | 14,200 | 23,300 | 7,770 | 757 | 735 | 372 | 3,660 | 1,680 | 3305 | | | | | | |
| 55 | 5.5x10x5.4 | 10.5 | 18 | 10 | 65 | — | — | — | — | — | 2 | 5 | 7,110 | 7,920 | 2,640 | 96.0 | 84.9 | 159 | 1,700 | 780 | 4085 | |
| | | | | | 105 | — | — | — | — | — | 3 | 6 | 10,600 | 13,200 | 4,400 | 217 | 199 | 265 | 2,500 | 1,140 | 4125 | |
| | | | | | 145 | — | — | — | — | — | 3 | 7 | 13,800 | 18,400 | 6,160 | 296 | 316 | 371 | 3,300 | 1,510 | 4165 | |
| | | | | | 185 | 105 | — | — | — | — | 3 | 7 | 16,800 | 23,700 | 7,920 | 488 | 513 | 477 | 4,100 | 1,870 | 4205 | |
| | | | | | 225 | 145 | — | — | — | — | 3 | 7 | 19,700 | 29,000 | 9,680 | 729 | 759 | 584 | 4,900 | 2,240 | 4245 | |
| | | | | | 265 | 185 | — | — | — | — | 3 | 7 | 22,400 | 34,300 | 11,400 | 1,010 | 1,050 | 690 | 5,700 | 2,600 | 4285 | |
| | | | | | 305 | 225 | 145 | — | — | — | 4 | 8 | 25,100 | 39,600 | 13,200 | 1,350 | 1,390 | 796 | 6,500 | 3,000 | 4325 | |
| | | | | | 345 | 265 | 185 | — | — | — | 4 | 8 | 27,600 | 44,800 | 14,900 | 1,730 | 1,780 | 902 | 7,300 | 3,300 | 4365 | |
| | | | | | 385 | 305 | 225 | — | — | — | 4 | 8 | 28,900 | 47,500 | 15,800 | 2,160 | 2,100 | 955 | 8,100 | 3,700 | 4405 | |


※For accuracy (T, S), refer to Figure G-20 (page G-27).

1N ≒ 0.102kgf 1N · m ≒ 0.102kgf · m


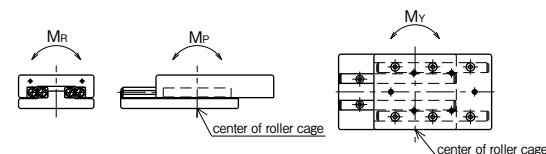


SVT TYPE

-SVT6/SVT9-

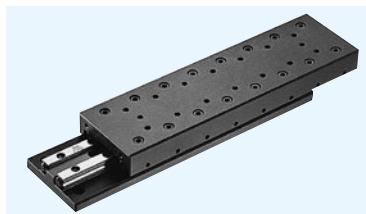

part number structure

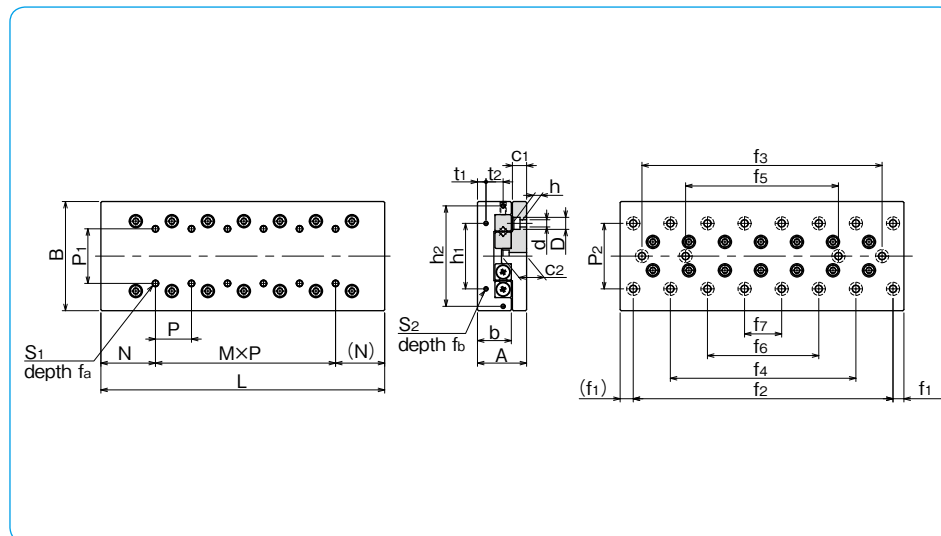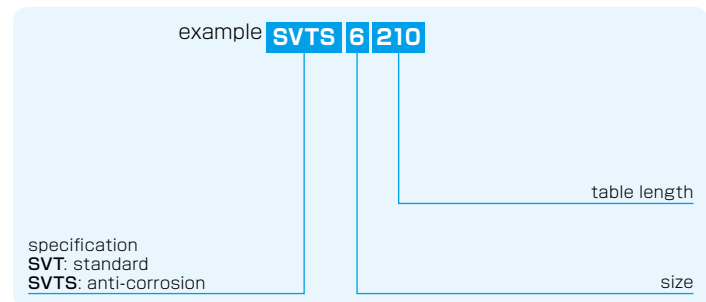


| part number | | stroke ST mm | major dimensions | | | | table-top mounting hole dimensions | | | | | table-end mounting hole dimensions | | | | | |
|-----------------|------------------|--------------------|--------------------|---------------------|---------|---------|------------------------------------|----------------------|----------------------|---------|-----------|------------------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| standard | anti-corrosion | | A mm | B mm | L mm | b mm | P ₁ mm | S ₁ mm | f _a mm | N mm | M×P mm | h ₁ mm | h ₂ mm | t ₁ mm | t ₂ mm | S ₂ mm | f _b mm |
| SVT 6110 | SVTS 6110 | 60 | | | 110 | | | | | — | | | | | | | |
| 6160 | 6160 | 95 | | | 160 | | | | | 1×50 | | | | | | | |
| 6210 | 6210 | 130 | | | 210 | | | | | 2×50 | | | | | | | |
| 6260 | 6260 | 165 | | | 260 | | | | | 3×50 | | | | | | | |
| 6310 | 6310 | 200 | 45 ^{±0.1} | 100 ^{±0.1} | 310 | 31 | 50 | M6 | 12 | 55 | 4×50 | 60 | 92 | 8 | 15 | M4 | 8 |
| 6360 | 6360 | 235 | | | 360 | | | | | 5×50 | | | | | | | |
| 6410 | 6410 | 265 | | | 410 | | | | | 6×50 | | | | | | | |
| 6460 | 6460 | 300 | | | 460 | | | | | 7×50 | | | | | | | |
| 6510 | 6510 | 335 | | | 510 | | | | | 8×50 | | | | | | | |
| SVT 9210 | — | 130 | | | 210 | | | | | — | | | | | | | |
| 9310 | — | 180 | | | 310 | | | | | 1×100 | | | | | | | |
| 9410 | — | 350 | | | 410 | | | | | 2×100 | | | | | | | |
| 9510 | — | 450 | | | 510 | | | | | 3×100 | | | | | | | |
| 9610 | — | 550 | 60 ^{±0.1} | 145 ^{±0.1} | 610 | 43 | 85 | M8 | 16 | 105 | 4×100 | 90 | 135 | 11 | 20 | M4 | 8 |
| 9710 | — | 650 | | | 710 | | | | | 5×100 | | | | | | | |
| 9810 | — | 750 | | | 810 | | | | | 6×100 | | | | | | | |
| 9910 | — | 850 | | | 910 | | | | | 7×100 | | | | | | | |
| 91010 | — | 950 | | | 1,010 | | | | | 8×100 | | | | | | | |

| bed-surface mounting hole dimensions | | | | | | | | | | | accuracy ※(deviation) | | basic load rating | | allowable load | | allowable static moment | | | mass | | size | | |
|--------------------------------------|-------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|--------------------------|---------|-------------------|---------|----------------|-----------------------|-------------------------|-----------------------|----------|-----------|-------------|--------|-------------|--------------|
| P ₂ mm | d×D×h mm | c ₁ mm | c ₂ mm | f ₁ mm | f ₂ mm | f ₃ mm | f ₄ mm | f ₅ mm | f ₆ mm | f ₇ mm | T μm | S μm | C N | Co N | F N | M _P N·m | M _Y N·m | M _R N·m | SVT g | SVTS g | | | | |
| 60 | 7×11.5×7 | 13 | 23 | 10 | 90 | — | — | — | — | — | 3 | 6 | 16,500 | 17,700 | 5,910 | 260 | 230 | 400 | 3,280 | 1,705 | 6110 | | | |
| | | | | | 140 | — | — | — | — | — | — | — | — | 3 | 6 | 24,700 | 29,600 | 9,860 | 588 | 539 | 666 | 4,820 | 2,480 | 6160 |
| | | | | | 190 | 90 | — | — | — | — | — | — | — | 3 | 7 | 32,200 | 41,400 | 13,800 | 1,040 | 978 | 933 | 6,270 | 3,255 | 6210 |
| | | | | | 240 | 140 | — | — | — | — | — | — | — | 3 | 7 | 39,200 | 53,200 | 17,700 | 1,630 | 1,540 | 1,200 | 7,740 | 4,030 | 6260 |
| | | | | | 290 | 190 | — | — | — | — | — | — | — | 3 | 7 | 45,800 | 65,100 | 21,600 | 2,340 | 2,240 | 1,460 | 9,200 | 4,805 | 6310 |
| | | | | | 340 | 240 | 140 | — | — | — | — | — | — | 4 | 8 | 52,200 | 76,900 | 25,600 | 2,750 | 2,850 | 1,730 | 10,740 | 5,580 | 6360 |
| | | | | | 390 | 290 | 190 | — | — | — | — | — | — | 4 | 8 | 58,400 | 88,800 | 29,500 | 3,660 | 3,770 | 2,000 | 12,190 | 6,355 | 6410 |
| | | | | | 440 | 340 | 240 | — | — | — | — | — | — | 4 | 8 | 64,400 | 100,000 | 33,500 | 4,700 | 4,830 | 2,260 | 13,800 | 7,130 | 6460 |
| | | | | | 490 | 390 | 290 | 190 | — | — | — | — | — | 4 | 8 | 70,200 | 112,000 | 37,400 | 5,870 | 6,010 | 2,530 | 15,300 | 7,905 | 6510 |
| | | | | | 90 | 9×14×9 | 16 | 29 | 55 | 100 | — | — | — | — | — | 3 | 7 | 51,100 | 56,500 | 18,800 | 1,610 | 1,440 | 2,030 | 12,520 |
| 200 | — | — | — | — | | | | | | — | — | — | 3 | 7 | 79,300 | 98,900 | 32,900 | 3,150 | 3,360 | 3,560 | 17,950 | — | 9310 | |
| 300 | 100 | — | — | — | | | | | | — | — | — | — | 4 | 8 | 79,300 | 98,900 | 32,900 | 4,110 | 3,840 | 3,560 | 23,950 | — | 9410 |
| 400 | 200 | — | — | — | | | | | | — | — | — | — | 4 | 8 | 96,600 | 127,000 | 42,300 | 6,420 | 6,080 | 4,580 | 30,090 | — | 9510 |
| 500 | 300 | 100 | — | — | | | | | | — | — | — | — | 4 | 9 | 112,000 | 155,000 | 51,700 | 7,760 | 8,090 | 5,600 | 35,990 | — | 9610 |
| 600 | 400 | 200 | — | — | | | | | | — | — | — | — | 4 | 9 | 128,000 | 183,000 | 61,100 | 10,800 | 11,200 | 6,620 | 41,890 | — | 9710 |
| 700 | 500 | 300 | 100 | — | | | | | | — | — | — | — | 5 | 10 | 136,000 | 197,000 | 65,800 | 14,400 | 13,900 | 7,130 | 47,790 | — | 9810 |
| 800 | 600 | 400 | 200 | — | | | | | | — | — | — | — | 5 | 10 | 151,000 | 226,000 | 75,200 | 18,500 | 17,900 | 8,140 | 53,690 | — | 9910 |
| 900 | 700 | 500 | 300 | 100 | | | | | | — | — | — | — | 5 | 10 | 165,000 | 254,000 | 84,600 | 23,100 | 22,400 | 9,160 | 59,590 | — | 91010 |


※For accuracy (T, S), refer to Figure G-20 (page G-27).

1N ≅ 0.102kgf 1N · m ≅ 0.102kgf · m


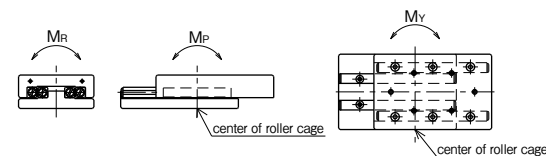


SYT TYPE

-SYT1/SYT2-

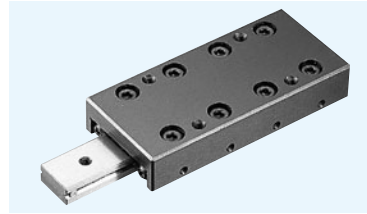

part number structure

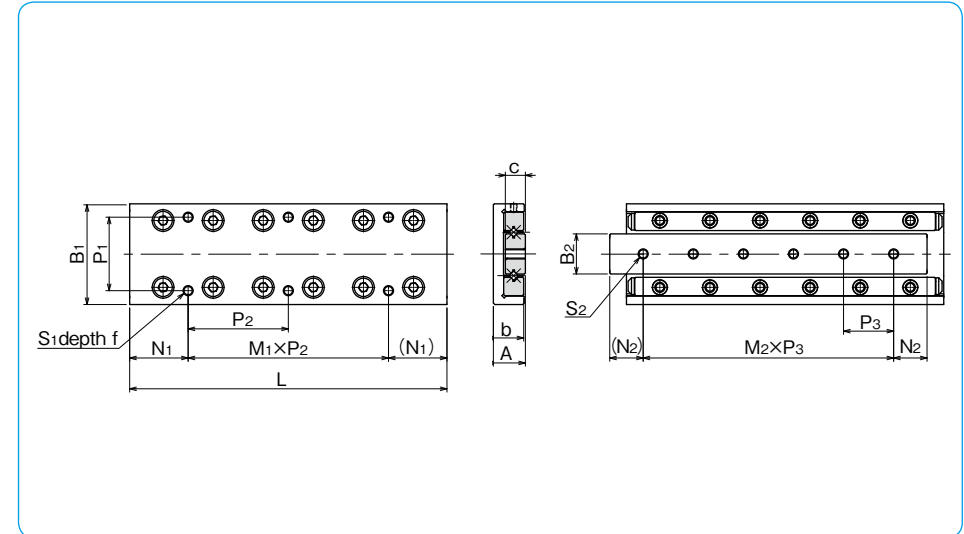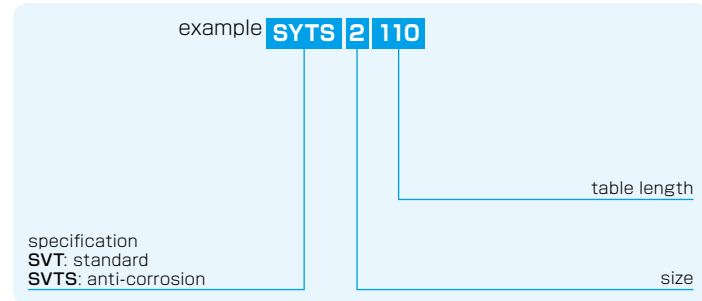


| part number | | stroke ST mm | major dimensions | | | | | | table-top mounting hole dimensions | | |
|-----------------|------------------|--------------------|------------------|----------------------|---------|---------|----------------------|---------|------------------------------------|----------------|---------|
| standard | anti-corrosion | | A mm | B ₁ mm | L mm | b mm | B ₂ mm | c mm | P ₁ mm | S ₁ | f mm |
| SYT 1025 | SYTS 1025 | 12 | 8±0.1 | 20±0.1 | 25 | 7.5 | 6.6 | 4 | 14 | M2.6 | 3 |
| 1035 | 1035 | 18 | | | 35 | | | | | | |
| 1045 | 1045 | 25 | | | 45 | | | | | | |
| 1055 | 1055 | 32 | | | 55 | | | | | | |
| 1065 | 1065 | 40 | | | 65 | | | | | | |
| 1075 | 1075 | 45 | | | 75 | | | | | | |
| 1085 | 1085 | 50 | | | 85 | | | | | | |
| SYT 2035 | SYTS 2035 | 18 | 12±0.1 | 30±0.1 | 35 | 11.5 | 12 | 6 | 22 | M3 | 5 |
| 2050 | 2050 | 30 | | | 50 | | | | | | |
| 2065 | 2065 | 40 | | | 65 | | | | | | |
| 2080 | 2080 | 50 | | | 80 | | | | | | |
| 2095 | 2095 | 60 | | | 95 | | | | | | |
| 2110 | 2110 | 70 | | | 110 | | | | | | |
| 2125 | 2125 | 80 | | | 125 | | | | | | |

| N ₁ mm | M ₁ ×P ₂ mm | bed-surface mounting hole dimensions | | accuracy ※(deviation) | | basic load rating | | allowable load F N | allowable static moment | | | mass g | size | |
|----------------------|--------------------------------------|--------------------------------------|----------------------|--------------------------------------|---------|-------------------|-------------------|--------------------------|-------------------------|-----------------------|-----------------------|-----------|------|-----------------------|
| | | S ₂ | N ₂ mm | M ₂ ×P ₃ mm | T μm | S μm | dynamic C N | | static Co N | M _P N·m | M _Y N·m | | | M _R N·m |
| 3.5 | 1×18 | M2.6 | 5 | 2×7.5 | 2 | 4 | 464 | 476 | 158 | 1.79 | 1.47 | 1.79 | 22 | 1025 |
| 3.5 | 1×28 | | 7.5 | 2×10 | 2 | 4 | 805 | 952 | 316 | 3.08 | 3.50 | 3.58 | 33 | 1035 |
| 12.5 | 1×20 | | 7.5 | 3×10 | 2 | 5 | 959 | 1,190 | 396 | 6.98 | 6.40 | 4.48 | 42 | 1045 |
| 12.5 | 1×30 | | 7.5 | 4×10 | 2 | 5 | 1,100 | 1,420 | 475 | 9.53 | 8.81 | 5.37 | 52 | 1055 |
| 12.5 | 2×20 | | 7.5 | 5×10 | 2 | 5 | 1,240 | 1,660 | 554 | 12.4 | 11.6 | 6.27 | 63 | 1065 |
| 22.5 | 1×30 | | 7.5 | 6×10 | 2 | 5 | 1,510 | 2,140 | 712 | 19.3 | 18.3 | 8.06 | 72 | 1075 |
| 12.5 | 2×30 | | 7.5 | 7×10 | 2 | 5 | 1,650 | 2,380 | 792 | 23.4 | 22.3 | 8.96 | 83 | 1085 |
| 3.5 | 1×28 | M3 | 7.5 | 1×20 | 2 | 4 | 1,090 | 1,170 | 390 | 7.04 | 5.78 | 7.63 | 79 | 2035 |
| 3.5 | 1×43 | | 10 | 2×15 | 2 | 4 | 1,510 | 1,750 | 585 | 12.1 | 10.7 | 11.4 | 113 | 2050 |
| 17.5 | 1×30 | | 10 | 3×15 | 2 | 5 | 1,900 | 2,340 | 780 | 19.1 | 17.1 | 15.2 | 150 | 2065 |
| 17.5 | 1×45 | | 10 | 4×15 | 2 | 5 | 2,620 | 3,510 | 1,170 | 27.4 | 29.6 | 22.8 | 185 | 2080 |
| 17.5 | 2×30 | | 10 | 5×15 | 2 | 5 | 2,950 | 4,100 | 1,360 | 37.4 | 39.9 | 26.7 | 215 | 2095 |
| 32.5 | 1×45 | | 10 | 6×15 | 2 | 5 | 3,280 | 4,680 | 1,560 | 61.7 | 58.1 | 30.5 | 255 | 2110 |
| 17.5 | 2×45 | | 10 | 7×15 | 2 | 5 | 3,590 | 5,270 | 1,750 | 76.1 | 72.1 | 34.3 | 295 | 2125 |

※For accuracy (T, S), refer to Figure G-20 (page G-27).

1N≒0.102kgf 1N·m≒0.102kgf·m

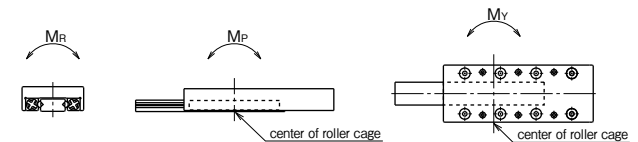


SYT TYPE


-SYT3-



part number structure

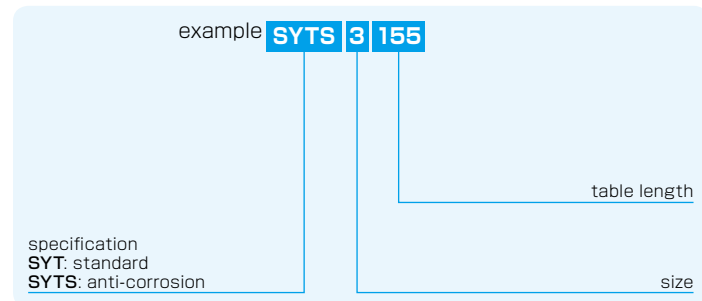


| part number | | stroke ST mm | major dimensions | | | | | | table-top mounting hole dimensions | | |
|-----------------|------------------|--------------------|------------------|----------------------|---------|---------|----------------------|---------|------------------------------------|----------------|---------|
| standard | anti-corrosion | | A mm | B ₁ mm | L mm | b mm | B ₂ mm | c mm | P ₁ mm | S ₁ | f mm |
| SYT 3055 | SYTS 3055 | 30 | 16±0.1 | 40±0.1 | 55 | 15.5 | 16 | 8 | 30 | M4 | 7 |
| 3080 | 3080 | 45 | | | 80 | | | | | | |
| 3105 | 3105 | 60 | | | 105 | | | | | | |
| 3130 | 3130 | 75 | | | 130 | | | | | | |
| 3155 | 3155 | 90 | | | 155 | | | | | | |
| 3180 | 3180 | 105 | | | 180 | | | | | | |
| 3205 | 3205 | 130 | | | 205 | | | | | | |

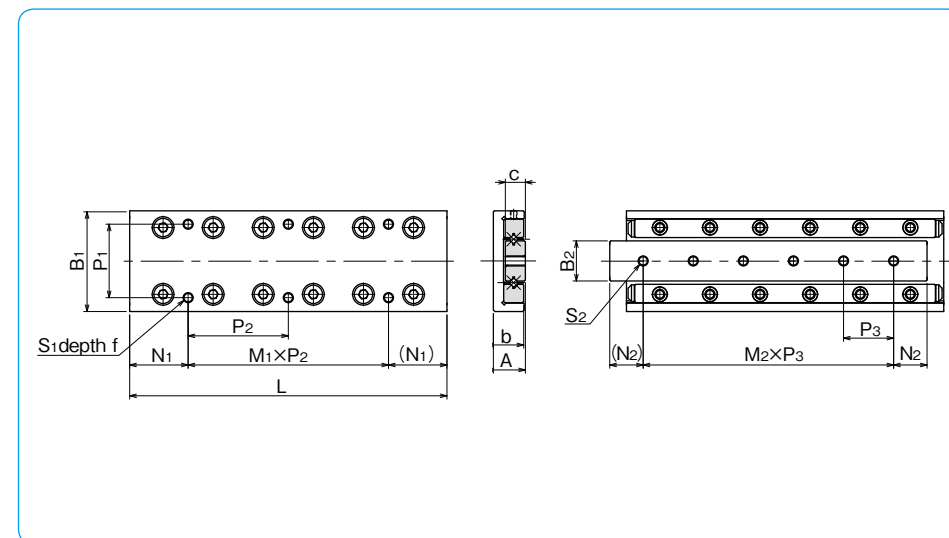

| N ₁ mm | | M ₁ ×P ₂ mm | | bed-surface mounting hole dimensions | | accuracy ※(deviation) | | basic load rating | | allowable load | allowable static moment | | | mass | size |
|----------------------|--------------------------------|--------------------------------------|----------------|--------------------------------------|---------|--------------------------|-------------------|-------------------|--------|-----------------------|-------------------------|-----------------------|-----|-------------|------|
| N ₁ | M ₁ ×P ₂ | S ₂ | N ₂ | M ₂ ×P ₃ | T μm | S μm | dynamic C N | static Co N | F N | M _P N·m | M _Y N·m | M _R N·m | g | | |
| 7.5 | 1×40 | M4 | 10 | 1×35 | 2 | 5 | 3,490 | 3,890 | 1,290 | 19.4 | 22.2 | 33.8 | 225 | 3055 | |
| 7.5 | 1×65 | | 15 | 2×25 | 2 | 5 | 5,230 | 6,490 | 2,160 | 53.0 | 58.0 | 56.4 | 340 | 3080 | |
| 27.5 | 1×50 | | 15 | 3×25 | 3 | 5 | 6,030 | 7,790 | 2,590 | 103 | 95.7 | 67.7 | 440 | 3105 | |
| 27.5 | 1×75 | | 15 | 4×25 | 3 | 5 | 7,560 | 10,300 | 3,450 | 170 | 160 | 90.3 | 560 | 3130 | |
| 27.5 | 2×50 | | 15 | 5×25 | 3 | 5 | 9,000 | 12,900 | 4,320 | 210 | 220 | 112 | 655 | 3155 | |
| 52.5 | 1×75 | | 15 | 6×25 | 3 | 5 | 10,300 | 15,500 | 5,180 | 302 | 314 | 135 | 770 | 3180 | |
| 27.5 | 2×75 | | 15 | 7×25 | 3 | 5 | 11,000 | 16,800 | 5,610 | 355 | 367 | 146 | 880 | 3205 | |

※For accuracy (T, S), refer to Figure G-20 (page G-27).

1N≐0.102kgf 1N·m≐0.102kgf·m


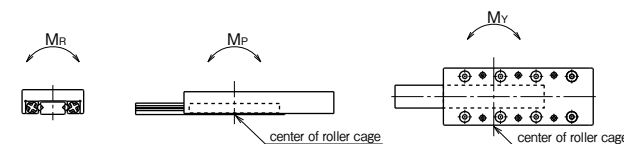


SYT-D TYPE

-SYT1/SYT2-



part number structure

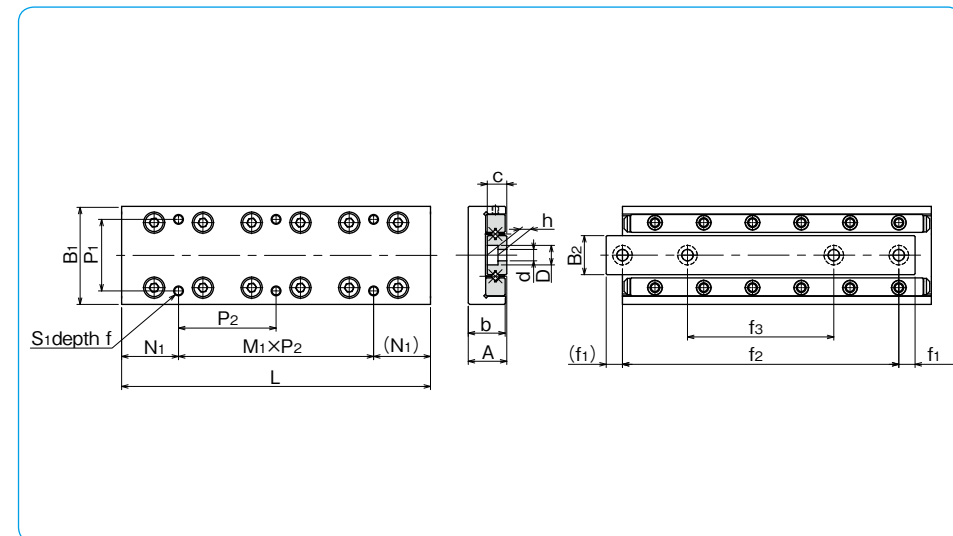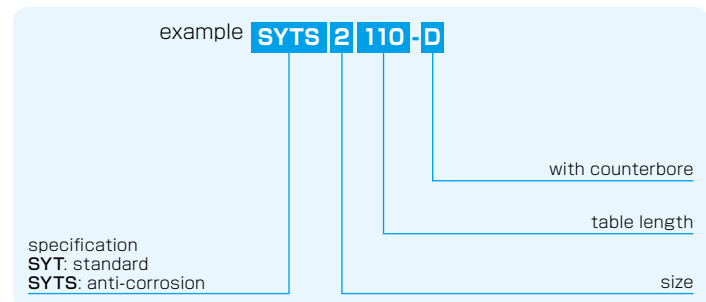


| part number | | stroke ST mm | major dimensions | | | | | | table-top mounting hole dimensions | | | |
|------------------|-------------------|--------------------|------------------|----------------------|---------|---------|----------------------|---------|---------------------------------------|----------------------|---------|----------------------|
| standard | anti-corrosion | | A mm | B ₁ mm | L mm | b mm | B ₂ mm | c mm | P ₁ mm | S ₁ mm | f mm | N ₁ mm |
| SYT1025-D | SYTS1025-D | 12 | 8±0.1 | 20±0.1 | 25 | 7.5 | 6.6 | 4 | 14 | M2.6 | 3 | 3.5 |
| 1035-D | 1035-D | 18 | | | 35 | | | | | | | 3.5 |
| 1045-D | 1045-D | 25 | | | 45 | | | | | | | 12.5 |
| 1055-D | 1055-D | 32 | | | 55 | | | | | | | 12.5 |
| 1065-D | 1065-D | 40 | | | 65 | | | | | | | 12.5 |
| 1075-D | 1075-D | 45 | | | 75 | | | | | | | 22.5 |
| 1085-D | 1085-D | 50 | | | 85 | | | | | | | 12.5 |
| SYT2035-D | SYTS2035-D | 18 | | | 12±0.1 | | | | | | | 30±0.1 |
| 2050-D | 2050-D | 30 | 50 | 3.5 | | | | | | | | |
| 2065-D | 2065-D | 40 | 65 | 17.5 | | | | | | | | |
| 2080-D | 2080-D | 60 | 80 | 17.5 | | | | | | | | |
| 2095-D | 2095-D | 60 | 95 | 17.5 | | | | | | | | |
| 2110-D | 2110-D | 70 | 110 | 32.5 | | | | | | | | |
| 2125-D | 2125-D | 80 | 125 | 17.5 | | | | | | | | |

| M ₁ ×P ₂ mm | bed-surface mounting hole dimensions | | | accuracy ※(deviation) | | basic load rating | | allowable | allowable static moment | | | mass g | size | |
|--------------------------------------|---|----------------------|----------------------|--------------------------|---------|-------------------|-------------------|-------------------|----------------------------|-----------------------|-----------------------|-----------|------|-----------------------|
| | d×D×h mm | f ₁ mm | f ₂ mm | f ₃ mm | T μm | S μm | dynamic C N | static Co N | load F N | M _P N·m | M _Y N·m | | | M _R N·m |
| 1×18 | 2.5×4.1×2.2 | 3.5 | 18 | — | 2 | 4 | 464 | 476 | 158 | 1.79 | 1.47 | 1.79 | 22 | 1025 |
| 1×28 | | 5 | 25 | — | 2 | 4 | 805 | 952 | 316 | 3.08 | 3.50 | 3.58 | 33 | 1035 |
| 1×20 | | 3.5 | 38 | 25 | 2 | 5 | 959 | 1,190 | 396 | 6.98 | 6.40 | 4.48 | 42 | 1045 |
| 1×30 | | 3.5 | 48 | 29 | 2 | 5 | 1,100 | 1,420 | 475 | 9.53 | 8.81 | 5.37 | 52 | 1055 |
| 2×20 | | 5 | 55 | 31 | 2 | 5 | 1,240 | 1,660 | 554 | 12.4 | 11.6 | 6.27 | 63 | 1065 |
| 1×30 | | 5 | 65 | 35 | 2 | 5 | 1,510 | 2,140 | 712 | 19.3 | 18.3 | 8.06 | 72 | 1075 |
| 2×30 | | 5 | 75 | 40 | 2 | 5 | 1,650 | 2,380 | 792 | 23.4 | 22.3 | 8.96 | 83 | 1085 |
| 1×28 | | 3.5×6×3.3 | 5 | 25 | — | 2 | 4 | 1,090 | 1,170 | 390 | 7.04 | 5.78 | 7.63 | 79 |
| 1×43 | 7.5 | | 35 | — | 2 | 4 | 1,510 | 1,750 | 585 | 12.1 | 10.7 | 11.4 | 113 | 2050 |
| 1×30 | 5 | | 55 | 33 | 2 | 5 | 1,900 | 2,340 | 780 | 19.1 | 17.1 | 15.2 | 150 | 2065 |
| 1×45 | 5 | | 70 | 40 | 2 | 5 | 2,620 | 3,510 | 1,170 | 27.4 | 29.6 | 22.8 | 185 | 2080 |
| 2×30 | 5 | | 85 | 45 | 2 | 5 | 2,950 | 4,100 | 1,360 | 37.4 | 39.9 | 26.7 | 215 | 2095 |
| 1×45 | 7.5 | | 95 | 50 | 2 | 5 | 3,280 | 4,680 | 1,560 | 61.7 | 58.1 | 30.5 | 255 | 2110 |
| 2×45 | 7.5 | | 110 | 55 | 2 | 5 | 3,590 | 5,270 | 1,750 | 76.1 | 72.1 | 34.3 | 295 | 2125 |

※For accuracy (T, S), refer to Figure G-20 (page G-27).

1N ≒ 0.102kgf 1N · m ≒ 0.102kgf · m

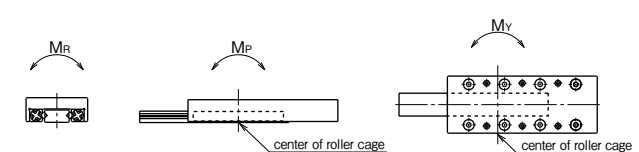


SYT-D TYPE


-SYT3-



part number structure

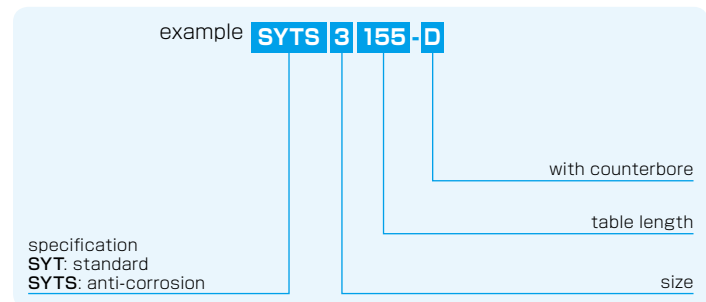


| part number | | stroke ST mm | major dimensions | | | | | | table-top mounting hole dimensions | | | |
|-------------|----------------|--------------------|------------------|----------------------|---------|---------|----------------------|---------|---------------------------------------|----------------|---------|----------------------|
| standard | anti-corrosion | | A mm | B ₁ mm | L mm | b mm | B ₂ mm | c mm | P ₁ mm | S ₁ | f mm | N ₁ mm |
| SYT3055-D | SYTS3055-D | 30 | 16±0.1 | 40±0.1 | 55 | 15.5 | 16 | 8 | 30 | M4 | 7 | 7.5 |
| 3080-D | 3080-D | 45 | | | 80 | | | | | | | 7.5 |
| 3105-D | 3105-D | 60 | | | 105 | | | | | | | 27.5 |
| 3130-D | 3130-D | 75 | | | 130 | | | | | | | 27.5 |
| 3155-D | 3155-D | 90 | | | 155 | | | | | | | 27.5 |
| 3180-D | 3180-D | 105 | | | 180 | | | | | | | 52.5 |
| 3205-D | 3205-D | 130 | | | 205 | | | | | | | 27.5 |

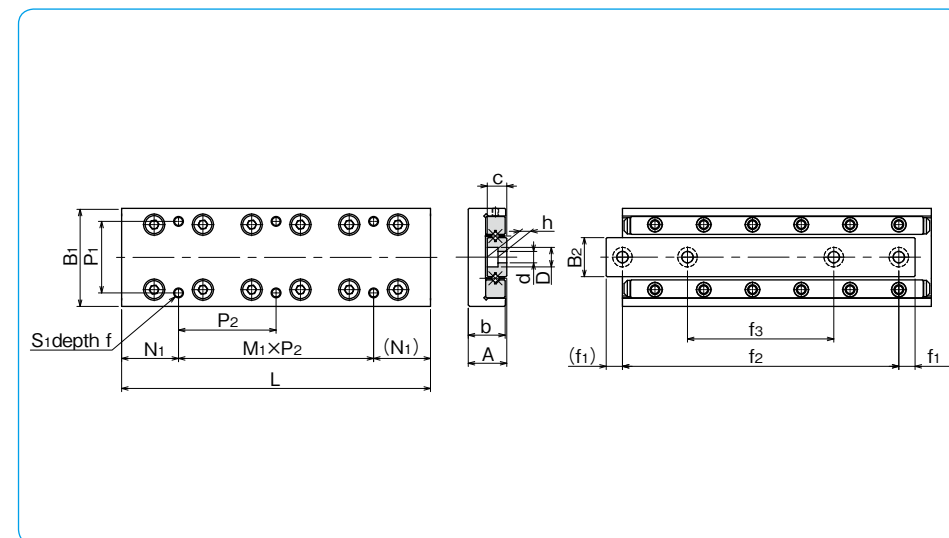

| M ₁ ×P ₂ mm | bed-surface mounting hole dimensions | | | accuracy ※(deviation) | | basic load rating | | allowable | allowable static moment | | | mass | size | |
|--------------------------------------|---|----------------------|----------------------|--------------------------|---------|-------------------|-------------------|-------------------|----------------------------|-----------------------|-----------------------|-----------------------|------|-------------|
| | d×D×h mm | f ₁ mm | f ₂ mm | f ₃ mm | T μm | S μm | dynamic C N | static Co N | load F N | M _P N·m | M _Y N·m | M _R N·m | g | |
| 1×40 | 4.5×7.5×4.3 | 7.5 | 40 | — | 2 | 5 | 3,490 | 3,890 | 1,290 | 19.4 | 22.2 | 33.8 | 225 | 3055 |
| 1×65 | | 6 | 68 | 43 | 2 | 5 | 5,230 | 6,490 | 2,160 | 53.0 | 58.0 | 56.4 | 340 | 3080 |
| 1×50 | | 7.5 | 90 | 55 | 3 | 5 | 6,030 | 7,780 | 2,590 | 103 | 95.7 | 67.7 | 440 | 3105 |
| 1×75 | | 7.5 | 115 | 65 | 3 | 5 | 7,560 | 10,300 | 3,450 | 170 | 160 | 90.3 | 560 | 3130 |
| 2×50 | | 7.5 | 140 | 95 | 3 | 5 | 9,000 | 12,900 | 4,320 | 210 | 220 | 112 | 655 | 3155 |
| 1×75 | | 7.5 | 165 | 85 | 3 | 5 | 10,300 | 15,500 | 5,180 | 302 | 314 | 135 | 770 | 3180 |
| 2×75 | | 7.5 | 190 | 90 | 3 | 5 | 11,000 | 16,800 | 5,610 | 355 | 367 | 146 | 880 | 3205 |

※For accuracy (T, S), refer to Figure G-20 (page G-27).

1N≐0.102kgf 1N·m≐0.102kgf·m

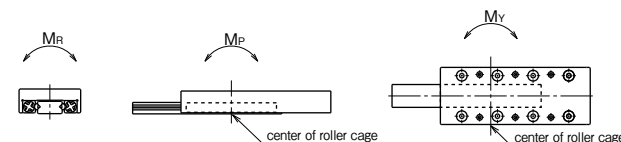

MINIATURE SLIDE

The NB miniature slide SYBS type is a limited stroke table with the most compact envelope dimensions, featuring two ball raceway grooves. The SYBS type utilizes balls as the rolling elements. The ultra compact design contributes greatly to the creation of smaller and lighter industrial machinery and equipment of all types.

STRUCTURE AND ADVANTAGES

The NB miniature slide incorporates a unique integrated ball cage between the table and bed. All components have been produced with high precision machining.

Ultra Compact Design

The table height of the SYBS type is 3.2~8mm and the width is 6~17mm. This compact size when compared with conventional slide tables helps to realize the miniaturization of machinery and equipment.

Low Friction · Low Noise

Since the rolling ball elements do not recirculate, the frictional resistance will not vary significantly resulting in smooth, high precision operation. Additionally, the

ball cage greatly reduces the contact noise of the rolling elements bringing about a low-noise operation.


High Accuracy

The ball raceway grooves of each of the bed and table are processed through simultaneous precision machining resulting in minimal processing errors, and bringing about extremely smooth, precision linear movement.

Stainless Steel Structure

The SYBS type is made of all stainless steel components. This allows for use in corrosive or high temperature applications. The SYBS is a perfect component for vacuum or clean room environments.

Figure G-22 Structure of SYBS type

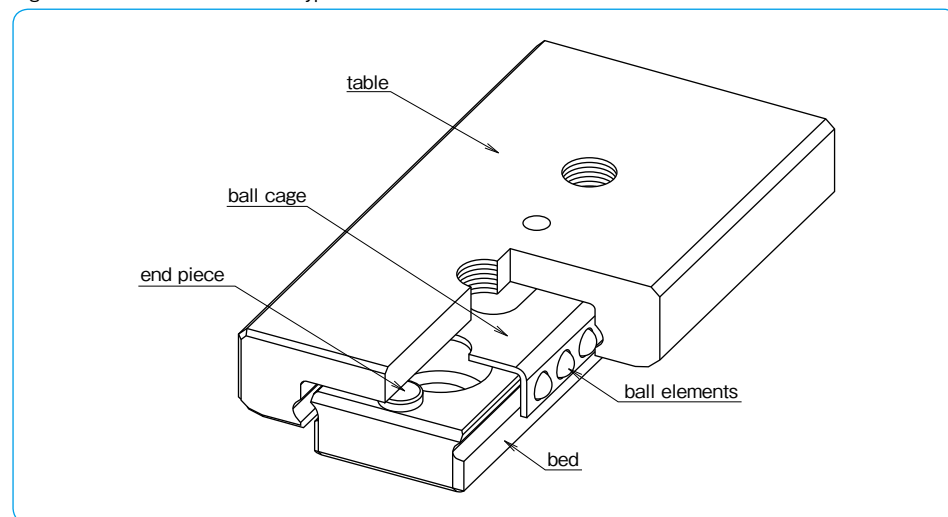

ACCURACY


Table G-7 shows the accuracy of the SYBS miniature slide.

The deviation is measured as Figure G-23 illustrates. Dial indicators are placed to the center of the table's top and the reference surface side (opposite from the NB mark) and then the table is moved the full stroke without any load.

Table G-7 Accuracy unit: mm

| item | tolerance |
|------------------------------------|-----------|
| height H | ±0.020 |
| width W | ±0.025 |
| deviation from center of surface C | 0.004 |
| deviation from center of surface D | 0.006 |

Figure G-23 Accuracy Measurement Method

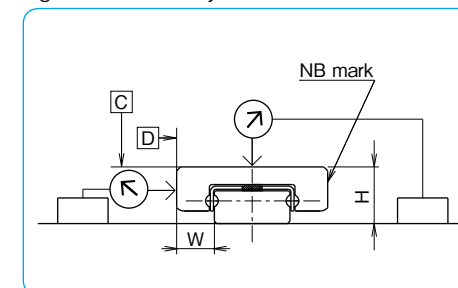


LOAD RATING

The load rating of the miniature slide varies depending on the direction of the applied load.

Table G-8 Change of Load Rating Corresponding to Load Direction

| | | |
|---------------------------|----------------------|---------|
| basic dynamic load rating | vertical direction | 1.00×C |
| | horizontal direction | 1.13×C |
| basic static load rating | vertical direction | 1.00×Co |
| | horizontal direction | 1.19×Co |

Figure G-24 Direction of Load

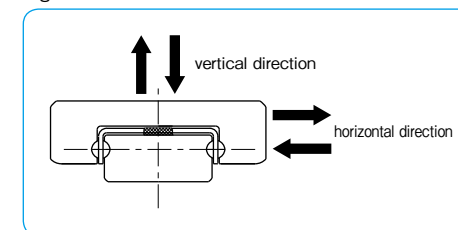

RATED LIFE

The life of an NB miniature slide is calculated using the following equations:

Rated Life

$$L = \left(\frac{f_T}{f_w} \cdot \frac{C}{P} \right)^3 \cdot 50$$

L: rated life (km) f_T: temperature coefficient
 f_w: applied load coefficient C: basic dynamic load rating (N)
 P: applied load (N)
 * Refer to page Eng-5 for the coefficient.

Life Time

$$L_h = \frac{L \cdot 10^3}{2 \cdot l_s \cdot n_1 \cdot 60}$$

L_h: life time (hr) l_s: stroke length (m)
 n₁: number of cycles per minute (cpm)

MOUNTING

Mounting Surface Profile

In most general installations, the miniature slide is mounted by pushing the reference surface of the bed and table against a shoulder that is set up on the mounting surface. Machined undercuts should be used in the corners of the shoulder (as illustrated in Figure G-25) so that the corners will not interfere with the reference surfaces of the bed and table. Table G-9 lists the recommended shoulder heights of the mounting reference surfaces.

When installing the miniature slide table without providing machined undercuts, the corner radius should be realigned as illustrated in Figure G-26. Table G-10 lists the values of the corner radius of the mounting surface.

Figure G-25 Mounting Surface Profile-1


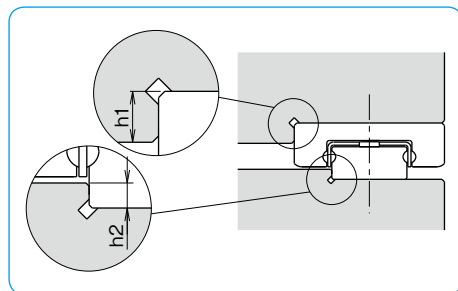


Figure G-26 Mounting Surface Profile-2

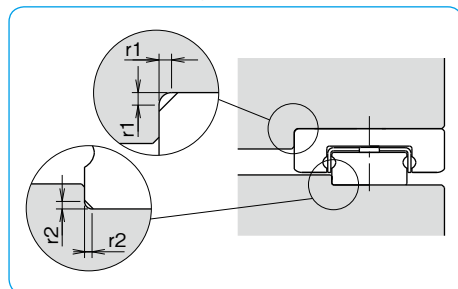

Recommended Torque Value

The bed should be tightened with a consistent torque by using a torque wrench. Table G-11 lists the recommended torque.

| size | torque |
|------|--------|
| M1 | 0.03 |
| M1.6 | 0.15 |
| M2 | 0.3 |

(for stainless steel screw A2-70)


Table G-9 Shoulder Height on Mounting Reference Surface unit : mm

| part number | shoulder height for table h1 | shoulder height for bed h2 |
|-------------|---------------------------------|-------------------------------|
| SYBS 6 | 1.0 | 0.5 |
| SYBS 8 | 1.2 | 0.8 |
| SYBS12 | 1.5 | 0.8 |
| SYBS17 | 2.5 | 1 |

Table G-10 Maximum Corner Radius unit : mm

| part number | mounting surface for | |
|-------------|----------------------|------|
| | table | bed |
| | r1 | r2 |
| SYBS 6 | 0.1 | 0.05 |
| SYBS 8 | 0.15 | 0.1 |
| SYBS12 | 0.15 | 0.1 |
| SYBS17 | 0.3 | 0.3 |

Figure G-27 Profile of SYBS Bed

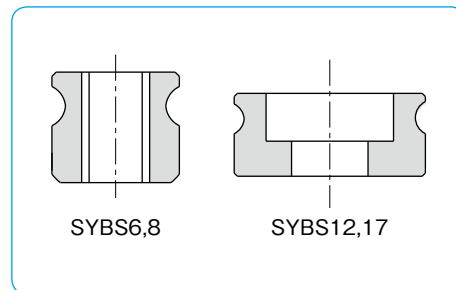

Mounting Example and Mounting Screw

All the mounting holes are for SYBS6,8,12 fully through-hole. Mount SYBS6,8,12 as illustrated in Figure G-28 after considering the size of mounting screw, the maximum penetration depth, and the height of the bed. Make certain that the mounting screws do not interfere with the ball cage; otherwise, the accuracy and travel life will be affected adversely. Special screws for SYBS type are available from NB. Please refer to Table G-12 for dimensions of mounting screws.

Figure G-28 Mounting Example


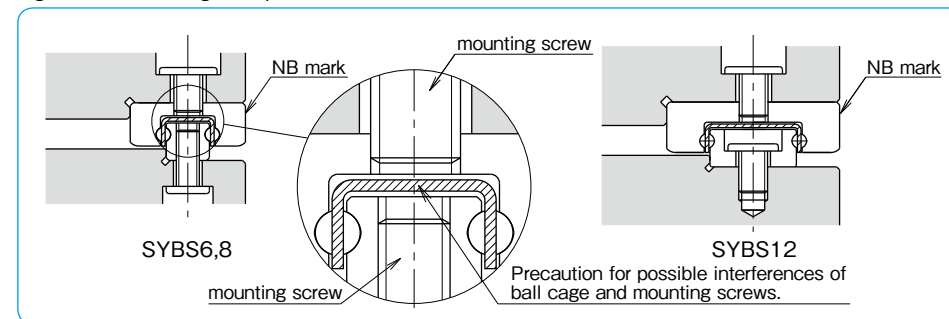


Table G-12 Mounting Screw (stainless steel)

| M (size) | D mm | H mm | pitch mm | L mm |
|----------|------|------|----------|---------|
| M1 | 1.8 | 0.45 | 0.25 | 5 |
| M1.4 | 2.5 | 0.5 | 0.3 | 6 |
| M1.6 | 2.3 | 0.5 | 0.35 | 4, 5, 6 |
| M2 | 3 | 0.6 | 0.4 | 6 |

Figure G-29 Mounting Screw

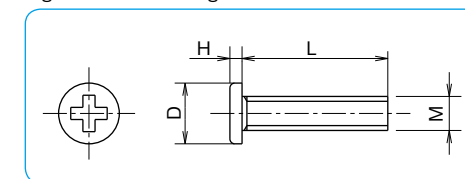

USE AND HANDLING PRECAUTIONS

Preload

The SYBS miniature slide is provided with a slightly positive clearance type only.

End Piece

On both ends of the SYBS miniature slide bed section, screws are attached to prevent the ball cage from escaping. Please note that the screws are designed only to prevent the ball cage from escaping and are not intended for the use as a mechanical stopper. The ball cage may become deformed on contact with the stopper and this will result in a negative affect of the accuracy and travel life.

Lubrication

NB miniature slide SYBS type is supplied with an initial application of lithium soap grease No.0 and therefore is ready for immediate use. Make sure to relubricate with a similar type of grease periodically according to the operating conditions. For use in clean rooms or vacuum environments, miniature slide tables without grease or with customer specified grease are available. NB also provides low

dust generation grease. Please refer to page Eng-40 for details.


Cage Slippage

For the SYBS type, the cage can slip under high-speed motion, vertical application, unbalanced-loading, and vibrating conditions. It is advised that the motion speed be kept under 0.5m/s under general operating conditions. It is also recommended that the table be cycled to perform the maximum stroke several times, so that the cage returns to its center position.



Allowable Load

The allowable load is a load under which the sum of elastic deformation of the rolling element and the raceway in the contact area subject to the maximum contact stress is small enough to guarantee smooth rolling movement. When very smooth and highly accurate liner motion is required, make sure to use the product within the allowable load values.

SYBS TYPE

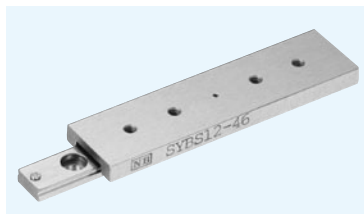

part number structure

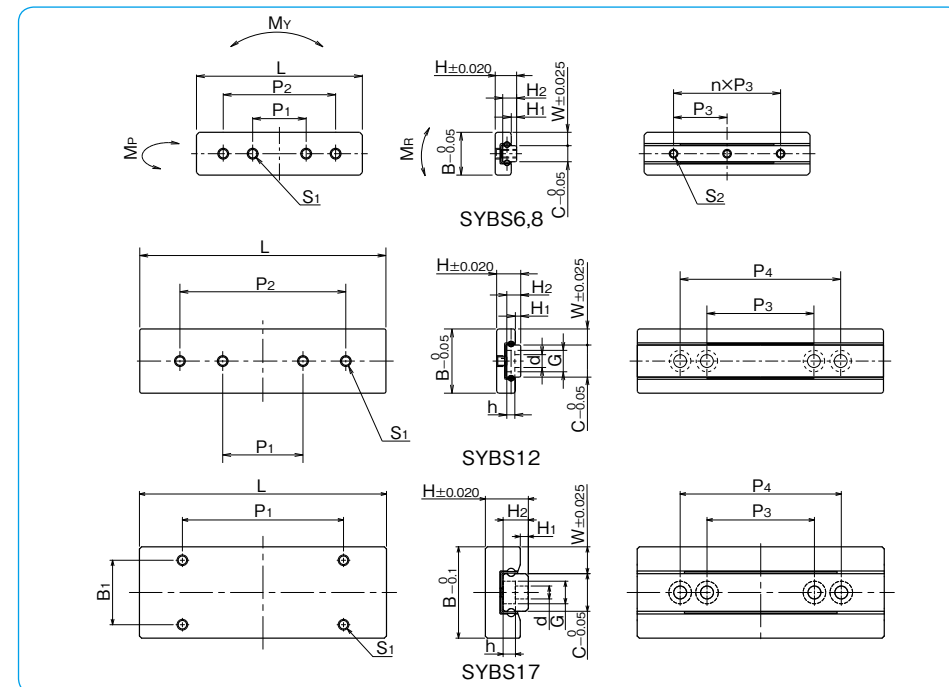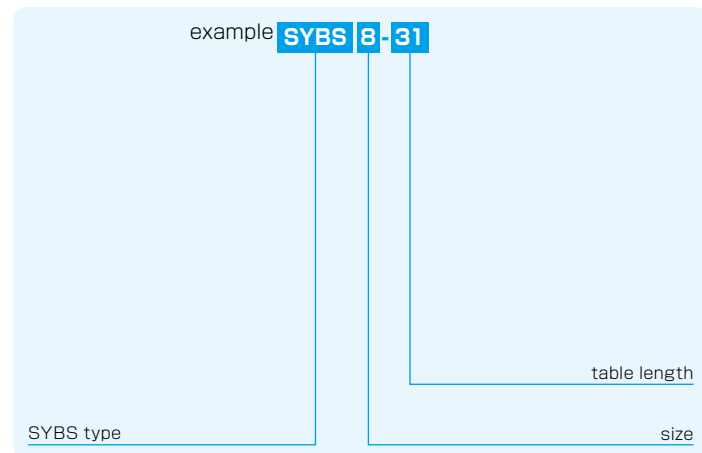

| part number | major dimensions | | | | tabel-top dimensions | | | | | | S ₁ maximum screw penetration depth mm |
|------------------|------------------|---------|----------------------|--------------|----------------------|---------|----------------------|----------------------|----------------------|------|---|
| | H mm | W mm | H ₁ mm | stroke mm | B mm | L mm | P ₁ mm | P ₂ mm | B ₁ mm | | |
| SYBS 6-13 | 3.2 | 2 | 0.7 | 5 | 6 | 13 | 6.0 | — | — | M1.4 | 0.5 |
| SYBS 6-21 | | | | 12 | | 21 | 10.0 | — | — | | |
| SYBS 8-11 | 4 | 2.5 | 1 | 4 | 8 | 11 | 5.5 | — | — | M1.6 | 0.7 |
| SYBS 8-21 | | | | 12 | | 21 | 10.0 | — | — | | |
| SYBS 8-31 | | | | 18 | | 31 | 10.0 | 21 | — | | |
| SYBS12-23 | 4.5 | 3 | 1 | 12 | 12 | 23 | 8.0 | — | — | M2 | 1.2 |
| SYBS12-31 | | | | 18 | | 31 | 15.0 | — | — | | |
| SYBS12-46 | | | | 28 | | 46 | 15.0 | 31 | — | | |
| SYBS17-23 | 8 | 5 | 1.5 | 14 | 17 | 23 | 10.0 | — | — | M2 | 3 |
| SYBS17-31 | | | | 19 | | 31 | 20.0 | — | 12 | | |
| SYBS17-46 | | | | 29 | | 46 | 30.0 | — | — | | |

※1: Custom mounting screws are provided with the SYBS-12 type only. Other screw sizes are also available. (Please refer to page G-55)

| H ₂ mm | C mm | bed-surface dimensions | | | | | | basic load rating | | allowable load F N | allowable static moment | | | mass g | size |
|----------------------|---------|-------------------------|----------------|----------------------|---------|----------------------|--------|-------------------|-----------------------|--------------------------|-------------------------|-----------------------|------|--------------|------|
| | | d×G×h mm | S ₂ | P ₃ mm | n mm | P ₄ mm | C N | Co N | M _P N·m | | M _Y N·m | M _R N·m | | | |
| 2.0 | 2 | — | M1 | 7 | 1 | — | 154 | 180 | 60.1 | 0.21 | 0.25 | 0.21 | 1.4 | 6-13 | |
| | | | | 7 | 2 | — | 229 | 315 | 105 | 0.57 | 0.69 | 0.37 | 2.2 | 6-21 | |
| 2.6 | 3 | — | M1.6 | 5 | 1 | — | 201 | 211 | 70.4 | 0.23 | 0.28 | 0.35 | 2.0 | 8-11 | |
| | | | | 10 | 1 | — | 368 | 493 | 164 | 1.02 | 1.22 | 0.83 | 3.7 | 8-21 | |
| 2.6 | 6 | 2.4×4×1.5 ^{※1} | — | 10 | 2 | — | 473 | 704 | 234 | 1.97 | 2.35 | 1.19 | 5.5 | 8-31 | |
| | | | | 15 | — | — | 404 | 563 | 187 | 1.30 | 1.55 | 1.80 | 7.6 | 12-23 | |
| | | | | 15 | — | — | 473 | 704 | 234 | 1.97 | 2.35 | 2.25 | 10.2 | 12-31 | |
| | | | | 20 | — | 30 | 658 | 1,120 | 375 | 4.80 | 5.72 | 3.60 | 15.2 | 12-46 | |
| 4.7 | 7 | 2.4×4.2×2.3 | — | 15 | — | — | 775 | 888 | 296 | 2.09 | 2.49 | 3.33 | 19.2 | 17-23 | |
| | | | | 15 | — | — | 984 | 1,240 | 414 | 3.80 | 4.53 | 4.66 | 26.2 | 17-31 | |
| | | | | 20 | — | 30 | 1,350 | 1,950 | 651 | 8.75 | 10.4 | 7.32 | 38.4 | 17-46 | |

1N≒0.102kgf 1N·m≒0.102kgf·m

GONIO WAY

The NB gonio way is a curved cross roller slide way. It is a curved motion bearing utilizing low-friction, non-recirculating precision rollers. It is used when there is a need to change the gradient or obtain an accurate gradient angle without changing the center of rotation in high-precision optical and measurement equipment.

STRUCTURE AND ADVANTAGES

The NB gonio way RVF type consists of curved tracking bases with precisely ground V-grooves and flat installation surfaces, as well as curved roller cages. The NB gonio way RV type consists of curved rails with precisely machined V-grooves and curved roller cages. Precision rollers are employed as the rolling elements, since the rolling elements do not recirculate, the frictional resistance will not vary significantly, providing curved movement with extremely low frictional resistance.

Low Frictional Resistance and Minute Motion

The precision grinding and curved roller cage allow for extremely low frictional resistance. The negligible difference between static and dynamic frictions allows the gonio way to follow minute movements accurately, realizing curved movement of high accuracy.


Low Noise

Since NB gonio way employs a non-recirculating design, there is no noise from the circulating area. In addition, the curved roller cage realizes quiet operation without contact noise between the rolling elements.

High Rigidity and High Load Capacity

The rollers provide a larger contact area and less

Figure G-30 Structure of Gonio Way RVF type

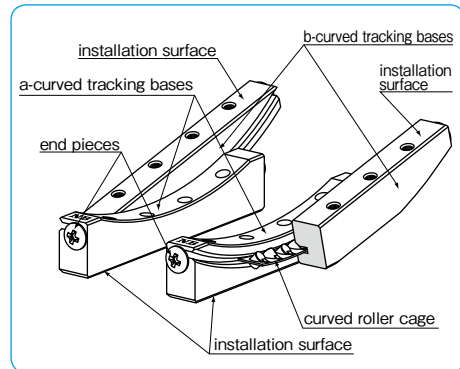

elastic deformation compared to the ball elements. Additionally, since the rollers do not recirculate, the effective number of rotating elements is larger, resulting in high rigidity and high load capacity.


Flat Installation Surface

The flat installation surfaces of the RVF type do not require complicated machining of tables and beds when installing the product. As a result, machining costs can be reduced greatly.

Same Rotation Center

The curved V-grooves, which are finished with a precise grinding process, provide an accurate center of rotation. Furthermore, the products are composed to provide identical rotation centers when products of each size are installed to two axes. (refer to Table G-17.)

Figure G-31 Structure of Gonio Way RV type

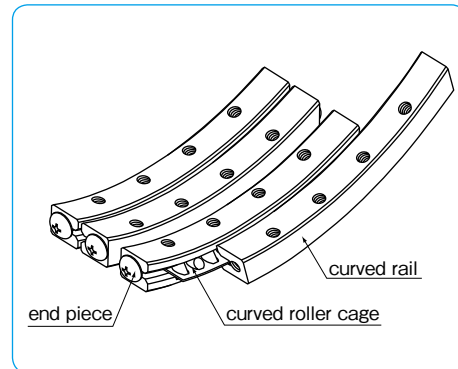


ACCURACY OF RVF TYPE

The accuracies of the gonio way RVF type are represented by mutual dimensional errors of four rails, which are measured along the overall length using the procedure as shown in Figure G-32.

Table G-13 Accuracy unit: μm

| part number | mutual error between A and B mutual error between C and D | mutual error between E and F mutual error between H and I |
|-------------|--|--|
| RVF2050- 70 | 10 | 10 |
| RVF2050- 87 | | |
| RVF2050-103 | | |
| RVF2050-120 | | |
| RVF3070- 85 | | |
| RVF3070-110 | | |
| RVF3100-125 | | |
| RVF3100-160 | | |

Figure G-32 Accuracy Measuring Method

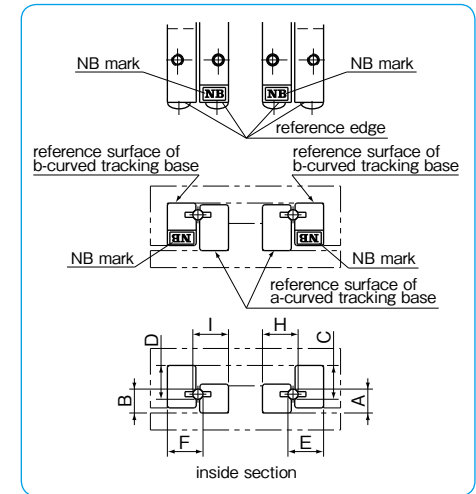


ACCURACY OF RV TYPE

The accuracies of the gonio way RV type are represented by mutual dimensional errors of four rails, which are measured along the overall length using the procedure as shown in Figure G-33.

Table G-14 Accuracy unit: μm

| part number | accuracy |
|-------------|----------|
| RV2040- 50 | 10 |
| RV2060- 60 | |
| RV3070- 90 | |
| RV3070-110 | |
| RV3100-160 | |

Figure G-33 Accuracy Measuring Method

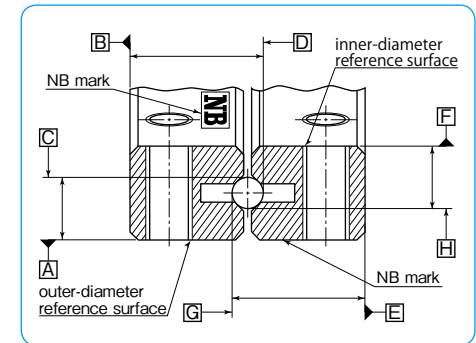

The reference surfaces are located on the opposite side of the NB mark. There are inner reference surface and outer reference surface in one set of RV.

RATED LIFE

The life of a gonio way is obtained using the following equations.

Rated Life


$$L = \frac{90}{\theta} \times \left(\frac{f_r}{f_w} \times \frac{C}{P} \right)^{\frac{10}{3}}$$

L: travel life (10°cycles) θ: rotating angle (degree)
 C: basic dynamic load rating (N) P: applied load (N)
 f_r: temperature coefficient f_w: applied load coefficient
 ※Refer to page Eng-5 for the coefficients.

Life Time

$$L_h = \frac{L \times 10^6}{60 \times n}$$

L_h: life time (hr)
 n: number of cycles per minute (cpm)



MOUNTING OF RVF TYPE

Accuracy of Mounting Surface

To maximize the performance of NB gonio way, it is important to finish the installation surface with high accuracies.

- Parallelism of surface 1 against surface A
- Perpendicularity of surface 2 against surface A
- Perpendicularity of surface 5 against surface A
- Parallelism of surface 3 against surface B
- Perpendicularity of surface 4 against surface B
- Perpendicularity of surface 6 against surface B
- Parallelism of surface 2 against surface C
- Parallelism of surface 4 against surface C

Figure G-34 Accuracy of Mounting Surface


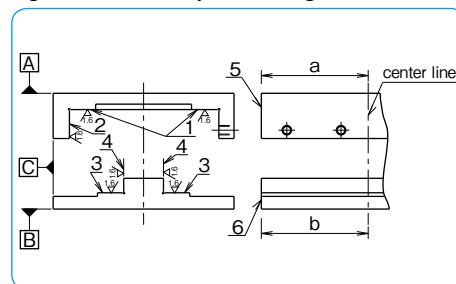


Figure G-35 Example of Installation of RVF type

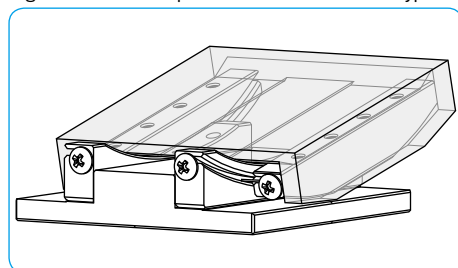


Installation Procedure

Setting the curved tracking bases temporarily

- (1) Remove burrs, stains, and dust from the installation surfaces of the curved tracking bases of tables and beds. Foreign particles must be kept out of the assembly work as well.
- (2) Apply low viscosity oil to contact surfaces, check the reference edges of an a-curved tracking base and bed, and then tighten the screws temporarily. (Figure G-36a)
- (3) Align the reference edges (NB mark side) of a b-curved tracking base and an a-curved tracking base to the same orientation. Then, insert the curved roller cages between the curved tracking bases at the center area. Make sure that the curved roller cages will not interfere with the curved raceway grooves of the curved roller tracking bases. (Figure G-36b)
- (4) Check the reference edge of the table, set the table over the b-curved tracking base, and then secure the table temporarily. (Figure G-36c)

Figure G-36 Installation Method (1)

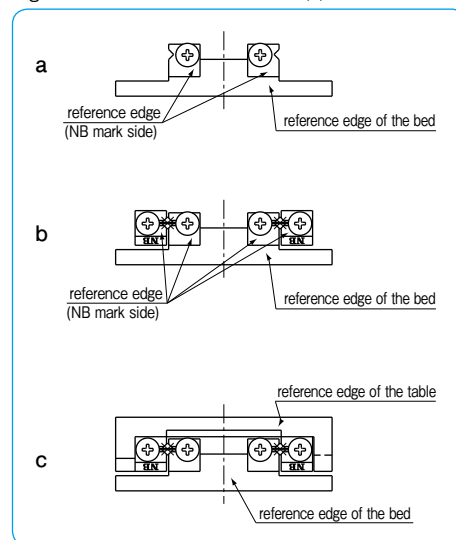

Setting four curved tracking bases in parallel position

- (5) Move the table to the maximum stroke ends of both sides and adjust the setting so that the curved roller cage is positioned at the center of the curved tracking base.
- (6) Move the table to the center position and tighten the adjustment screws with ※slightly strong torque by using a torque wrench. (Figure G-37d)
 ※"Slightly strong torque" here means slightly stronger than the torque at which the oscillation of the dial indicator is stabilized at the minimum value when the table is moved right and left, or when pressure is applied to the rolling direction while the dial indicator is attached to the side face (reference side) of the table. (Figure G-37i)
- (7) Move the table to the maximum stroke end of one side and tighten the adjustment screws on the curved roller cage with the same torque as in step (6). (Figure G-37e)
- (8) Move the table to the maximum stroke end of the other side and tighten the adjustment screws with a torque wrench by repeating the procedure above. (Figure G-37f)

Securing the curved tracking bases

- (9) Mount an edge reference plate between the reference edge of the a-curved tracking base and end piece, press it against the reference edge of the bed, and then tighten only the mounting screws in the middle. (Figure G-37g)
- (10) Repeat the procedure above to mount an edge reference plate between the reference edge of the b-curved tracking base and the end piece. Press it against the reference edge of the bed, and then tighten only the mounting screws in the middle. (Figure G-37h) In order to maintain parallelism of curved tracking bases, do not cycle the table during this process and make sure that there is no clearance between the edge of the table and the edge reference plate.
- (11) Secure the rest of the mounting screws on the curved roller cage one by one by moving the table as instructed in steps (7) and (8).

Adjusting the preload

- (12) Move the table to the right and left with the test indicator attached to the side face of the table (reference side). Or, apply pressure in the rolling direction and confirm that the oscillation of the indicator is stabilized at the minimum level. (Figure G-37i)
- (13) Return the mounting screws on the b-curved tracking base at the adjustment screw side to the temporary setting.
- (14) Return the table to the center position, slightly loosen the adjustment screws in the middle, and then gradually loosen the adjustment screws on the curved roller cage while moving the table as instructed in steps (7) and (8). Make sure not to reduce the preload too much.
- (15) Finally, secure the b-curved tracking base at the adjustment screw side, which has been installed temporarily. Secure the mounting screws on the curved roller cage one by one by moving the table as instructed above.

Figure G-37 Installation Method (2)

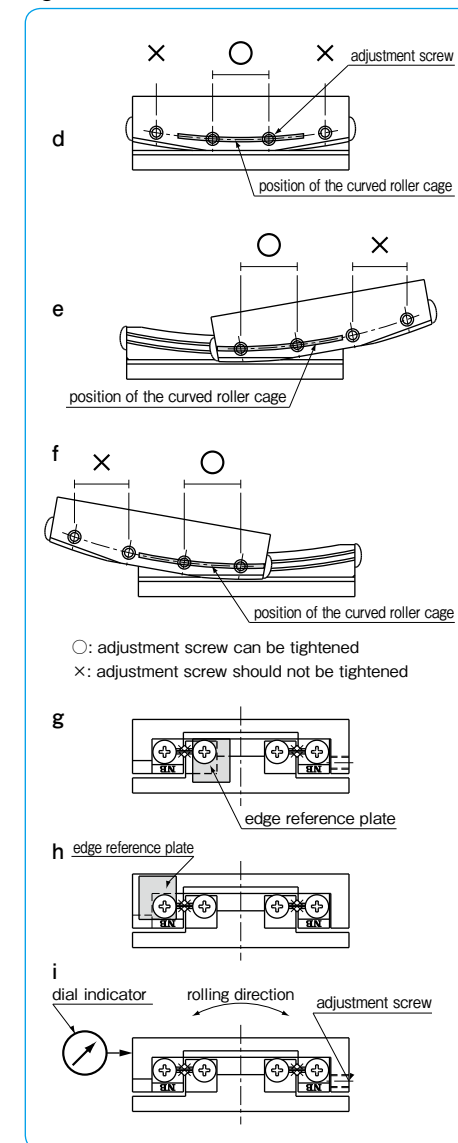


Table G-15 Recommended Torque for Mounting Screw

| size | tightening torque |
|------|-------------------|
| M2.5 | 0.5 |
| M3 | 1.1 |

(for stainless steel screw A2-70)

MOUNTING OF RV TYPE

Accuracy of Mounting Surface

The accuracy of surfaces 1, 2, 3, and 4 (Figure G-38) directly affect the motion accuracy. To maximize the performance of NB gonio way, it is important to finish the installation surface with high accuracies.

Figure G-38 Accuracy of Mounting Surface


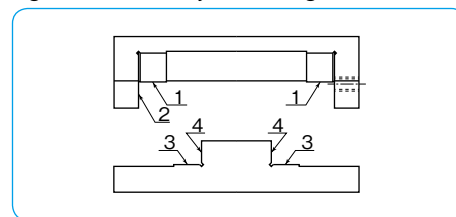



Figure G-39 Example of Installation

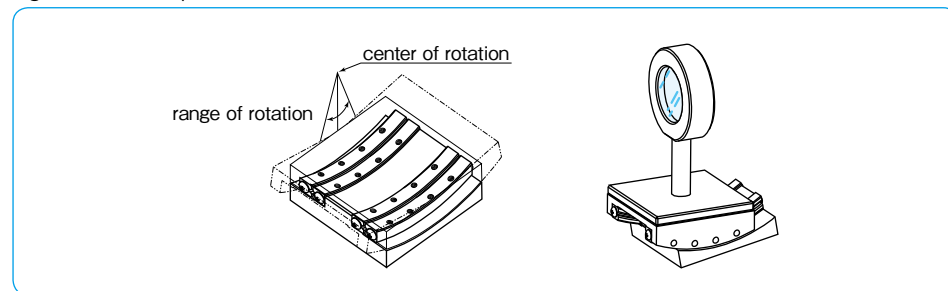

Installation Procedure

- (1) Remove burrs, dirt, dust, etc. from the table and the installation surfaces of the bed.
- (2) Apply a low viscosity oil to contact surfaces. Fix the rail ①inner-diameter reference surface, ②outer-diameter reference surface and ③outer-diameter reference surface by tightening screws to the specified torque. (Table G-16, Figure G-40a)
- (3) Temporarily attach the rail ④inner-diameter reference surface on curved rail to the adjustment side. (Figure G-40b)
- (4) Remove the end pieces on one side of the rails and insert roller cages to the center. (Figure G-40c)
- (5) Re-attach end pieces.
- (6) Move the table to the right and left (in the direction of the stroke) to position roller cages at the center of the curved rails.
- (7) Set an indicator at the side of the table on the reference surface. (Figure G-40d)
- (8) Move the table to one of the stroke ends and tighten the adjustment screws slightly. (Figure G-41e)

Figure G-40 Installation Method (1)

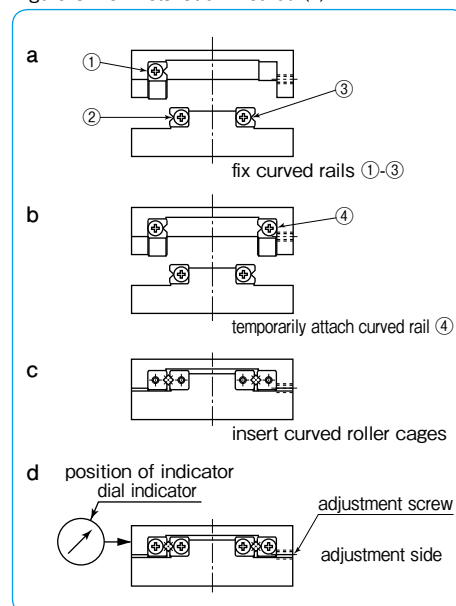


- (9) Move the table fully to the other stroke end and tighten the adjustment screws slightly. (Figure G-41f)
- (10) Move the table to the center and lightly tighten adjustment screws. (Figure G-41g)
- (11) Repeat steps (8)~(10) until there is no clearance around the table. If there is no clearance, the indicator will show a minimum fluctuation value when the table is moved to the right and left. Exercise care so as not to apply an excessive preload.
- (12) Repeat steps (8)~(10) and tighten the adjustment screws uniformly by using a torque wrench.
- (13) Fix the rail ④inner-diameter reference surface. Tighten the mounting screws sequentially by moving the table in the same manner as with the adjustment screws.

Table G-16 Recommended Torque for Mounting Screw unit: N · m

| size | torque |
|------|--------|
| M3 | 1 |

(for stainless steel screw A2-70)

Figure G-41 Installation Method (2)

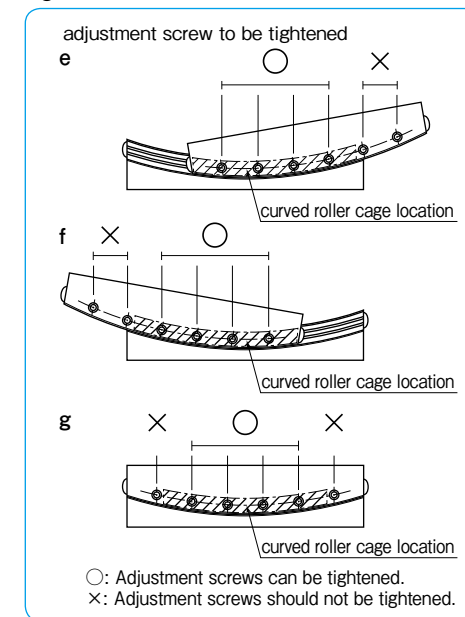


RVF TYPE 2 AXES AND SPECIAL SPECIFICATIONS

When incorporating RVF type units onto two axes as illustrated in Figure G-42, adjust the height of one lifting axis as instructed in Table G-17. Then, adjust dimension b (the height of the installation surface of the a-curved tracking base) in Figure G-42 according to the table in order to obtain the identical rotation center for the two axes. In addition, requests can be made for custom specifications including table units fitted for two axes, non-standard lengths for curved tracking bases, the radius of rotation, the rotation range, and the number of rollers. Contact NB for further information.

Table G-17 Two Axes Specification unit:mm

| part number combination | a | R ₁ | R ₂ |
|-------------------------|----|----------------|----------------|
| RVF2050- 70 | 17 | 70 | 87 |
| RVF2050- 87 | | | |
| RVF2050-103 | 17 | 103 | 120 |
| RVF2050-120 | | | |
| RVF3070- 85 | 25 | 85 | 110 |
| RVF3070-110 | | | |
| RVF3100-125 | 35 | 125 | 160 |
| RVF3100-160 | | | |

Figure G-42 Two Axes Specification

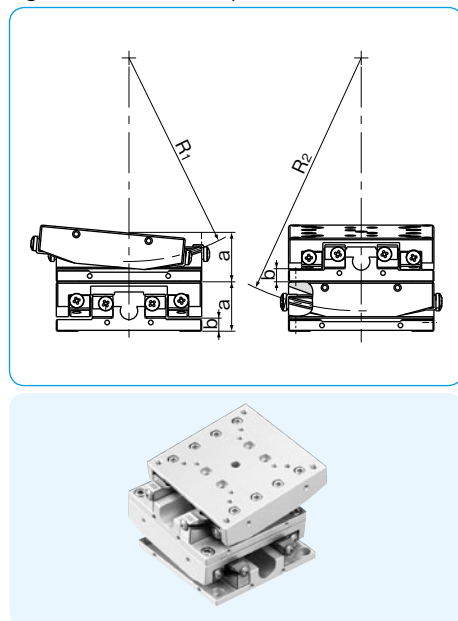

USE AND HANDLING PRECAUTIONS

Lubrication

NB gonio ways are lubricated using lithium soap No.00 based grease prior to shipment, so they can be used immediately. Make sure to relubricate with a similar type of grease periodically according to the operating conditions. NB also provides low dust generation grease for the linear system. Please refer to page Eng-40 for further details.

Dust Prevention

If a foreign matter, such as dust and dirt, enters the inside of the NB gonio way, it will deteriorate the accuracy and life of the system. A gonio way used in a harsh environment should be protected with a cover.

Operating Environment

The recommended operating temperature range of the NB gonio way is -20°C to 110°C.

Adjustment

Inaccuracy in mounting surface or improper adjustment of preload will reduce the motion accuracy, resulting in skewing and shortening of gonio way life. The adjustment should be carried out carefully.

Cage Slippage

For the NB Gonio Way, the cage can slip under high-speed motion, vertical application, unbalanced-loading, and vibrating conditions. It is recommended that the rotation range be set with sufficient margin and an excessive preload should be avoided. It is also recommended that the rails be cycled to perform the maximum stroke several times, so that the cage returns to its center position.

End Pieces

End pieces are attached to each end of the NB gonio way to prevent removal of the curved roller cage. Do not use as a mechanical stopper.

Careful Handling

Dropping the NB gonio way causes the rolling elements to make dents in the raceway surface. This will prevent smooth motion and will also affect accuracy. Be sure to handle the product with care.

Use as a Set


The accuracy of the rails has been matched within each set. Note that the accuracy will be affected when the rails of different sets are combined.

Allowable Load

The allowable load is a load under which the sum of elastic deformation of the rolling element and the raceway in the contact area subject to the maximum contact stress is small enough to guarantee smooth rolling movement. When very smooth and highly accurate motion is required, make sure to use the product within the allowable load.

RVF TYPE

— Gonio Way flat-installation-surface —

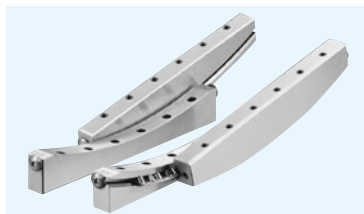

part number structure

example **RVF 3 100-125-16Z**



RVF type

size

rail length

number of rollers

radius from rotation center

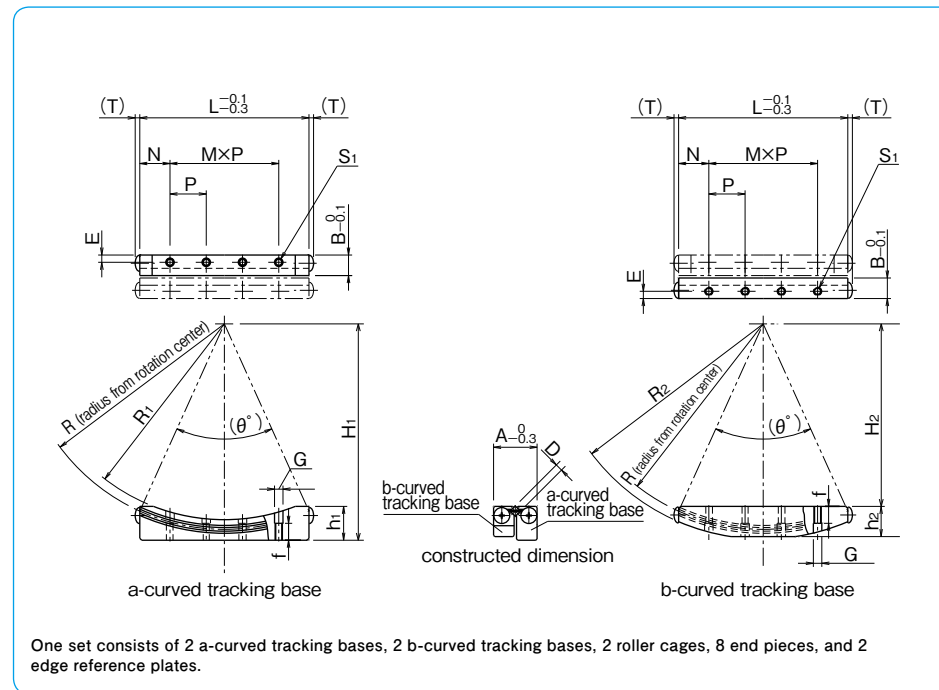

| part number | rotation range | roller diameter D mm | number of rollers Z | major dimensions | | | | | | | | | |
|-----------------|----------------|----------------------|---------------------|------------------|------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|------|------|
| | | | | L mm | R mm | R ₁ mm | R ₂ mm | H ₁ mm | H ₂ mm | h ₁ mm | h ₂ mm | A mm | B mm |
| RVF2050- 70-10Z | ± 5° | 2 | 10 | 50 | 70 | 67 | 73 | 72.5 | 64.5 | 7.5 | 7.5 | 15 | 7.25 |
| RVF2050- 87-10Z | | | 87 | | 84 | 89.5 | 89.5 | 81.5 | 7.5 | 7.5 | | | |
| RVF2050-103-10Z | | | 103 | | 100 | 106 | 105.5 | 97.5 | 7.5 | 8 | | | |
| RVF2050-120- 9Z | | | 120 | | 117 | 123 | 122.5 | 114.5 | 7.5 | 8 | | | |
| RVF3070- 85-10Z | ± 10° | 3 | 10 | 70 | 85 | 81 | 89 | 89.5 | 75.5 | 14 | 12.5 | 18 | 8.5 |
| RVF3070-110-10Z | | | 110 | | 106 | 114 | 114.5 | 100.5 | 12.8 | 12.5 | | | |
| RVF3100-125-16Z | | | 125 | | 121 | 129 | 129.5 | 110.5 | 17.5 | 18 | | | |
| RVF3100-160-14Z | | | 160 | | 156 | 164 | 164.5 | 145.5 | 15 | 18 | | | |


※ Please refer to page G-70 for information on cage dimensions.

| M×P mm | N mm | E mm | S ₁ | f mm | G mm | T mm | θ° | basic load rating | | allowable load F N | mass (one set) g | part number |
|--------|------|------|----------------|------|------|------|-------|-------------------|-------------|--------------------|------------------|-----------------|
| | | | | | | | | dynamic C N | static Co N | | | |
| 3×12.5 | 6.25 | 2.5 | M2.5 | 4 | 3 | 2.7 | 41.8° | 1,180 | 2,400 | 800 | 66 | RVF2050- 70-10Z |
| | | | | | | | 33.4° | 1,060 | 2,430 | 810 | 70 | RVF2050- 87-10Z |
| 3×13 | 5.5 | 2.5 | M2.5 | 4 | 3 | 1.5 | 28.1° | 998 | 2,440 | 815 | 70 | RVF2050-103-10Z |
| | | | | | | | 24.0° | 751 | 1,970 | 657 | 70 | RVF2050-120- 9Z |
| 3×15 | 12.5 | 3 | M3 | 7 | 3.5 | 1.9 | 48.6° | 2,680 | 5,530 | 1,840 | 182 | RVF3070- 85-10Z |
| | | | | | | | 37.1° | 2,440 | 5,620 | 1,870 | 182 | RVF3070-110-10Z |
| 5×15 | 12.5 | 3 | M3 | 7 | 3.5 | 1.9 | 47.2° | 3,520 | 8,850 | 2,950 | 327 | RVF3100-125-16Z |
| | | | | | | | 36.4° | 2,860 | 7,890 | 2,630 | 323 | RVF3100-160-14Z |


1N≒0.102kgf

RV TYPE

— Gonio Way —

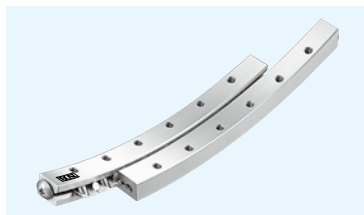


part number structure

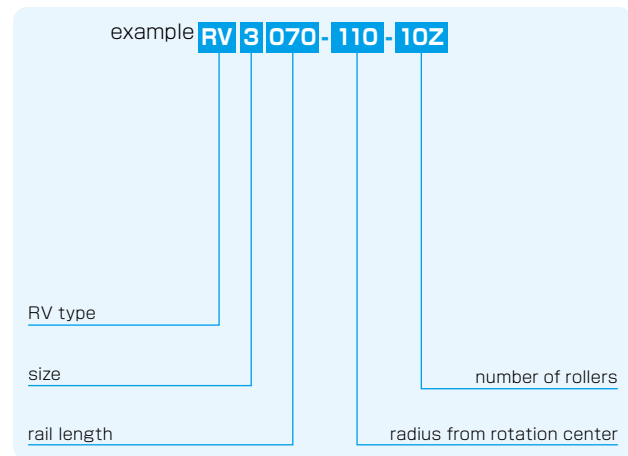

| part number | rotation range | roller diameter D mm | number of rollers Z | major dimensions | | | | | | |
|----------------|----------------|----------------------|---------------------|------------------|------|-------------------|-------------------|------|------|------|
| | | | | L mm | R mm | R ₁ mm | R ₂ mm | A mm | B mm | C mm |
| RV2040- 50- 7Z | ±10° | 2 | 7 | 40 | 50 | 53 | 47 | 15 | 6 | 7.25 |
| RV2060- 60-12Z | | | 12 | 60 | 60 | 63 | 57 | | | |
| RV3070- 90-11Z | ±10° | 3 | 11 | 70 | 90 | 94 | 86 | 18 | 8 | 8.5 |
| RV3070-110-10Z | | | 10 | 70 | 110 | 114 | 106 | | | |
| RV3100-160-14Z | | | 14 | 100 | 160 | 164 | 156 | | | |

※ Please refer to page G-70 for information on cage dimensions.

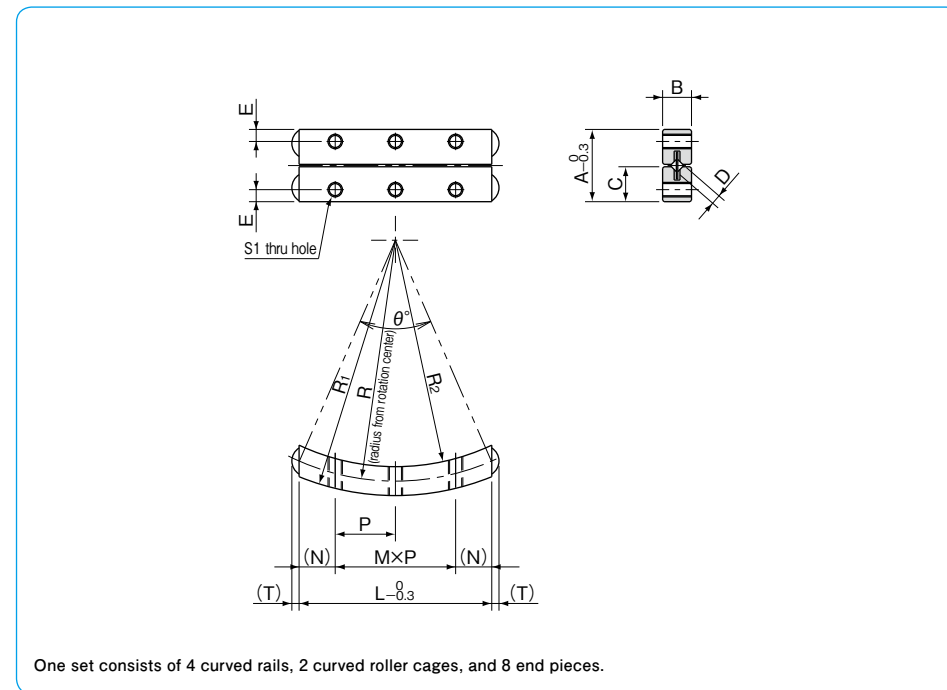




| M×P mm | N mm | E mm | S ₁ | T mm | θ° | basic load rating | | allowable load F N | mass (one set) g | part number |
|--------|-------|------|----------------|------|-------|-------------------|-------------|--------------------|------------------|----------------|
| | | | | | | dynamic C N | static Co N | | | |
| 2×12.5 | 7.5 | 2.5 | M3 | 1.5 | 47.2° | 820 | 1,440 | 482 | 49 | RV2040- 50- 7Z |
| 3×12.5 | 11.25 | | | | 60.0° | 1,490 | 2,800 | 936 | 75 | RV2060- 60-12Z |
| 3×15 | 12.5 | 3 | M3 | 1.9 | 45.8° | 2,640 | 5,550 | 1,850 | 137 | RV3070- 90-11Z |
| 3×15 | | | | | 37.1° | 2,440 | 5,620 | 1,870 | 135 | RV3070-110-10Z |
| 5×15 | | | | | 36.4° | 2,860 | 7,890 | 2,630 | 193 | RV3100-160-14Z |

1N≒0.102kgf

CR TYPE

— Standard Curved Roller Cage —

part number structure

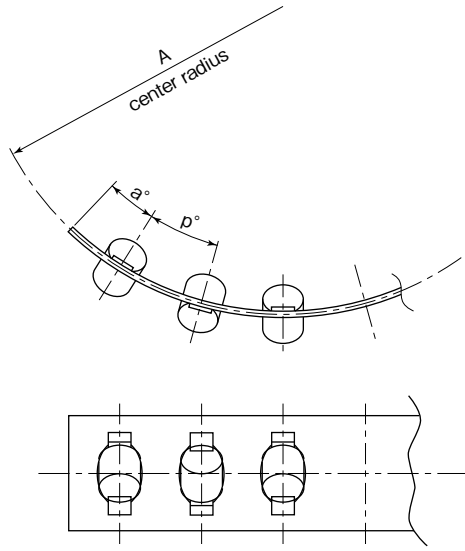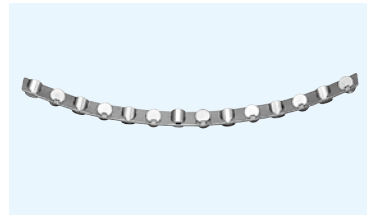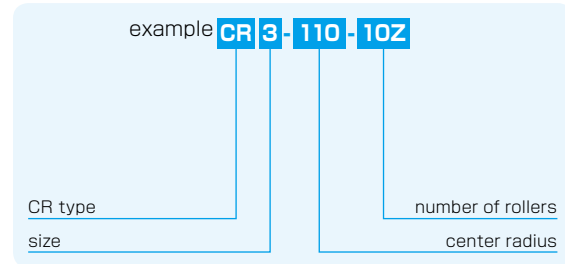

| part number | roller diameter D mm | center radius A mm | t mm | w mm | p° | a° | applicable type |
|-------------|----------------------------|--------------------------|---------|---------|------|------|--------------------|
| CR2- 50- 7Z | 2 | 50 | 0.3 | 5.6 | 4.6° | 2.9° | RV |
| CR2- 60-12Z | | 60 | | | 3.8° | 2.4° | RV |
| CR2- 70-10Z | | 70 | | | 3.3° | 2.0° | RVF |
| CR2- 87-10Z | | 87 | | | 2.6° | 1.6° | RVF |
| CR2-103-10Z | | 103 | | | 2.2° | 1.4° | RVF |
| CR2-120- 9Z | | 120 | | | 1.9° | 1.2° | RVF |
| CR3- 85-10Z | 3 | 85 | 0.4 | 7.2 | 3.4° | 2.0° | RVF |
| CR3- 90-11Z | | 90 | | | 3.2° | 1.9° | RV |
| CR3-110-10Z | | 110 | | | 2.6° | 1.5° | RVF,RV |
| CR3-125-16Z | | 125 | | | 2.3° | 1.3° | RVF |
| CR3-160-14Z | | 160 | | | 1.8° | 1.0° | RVF,RV |

ACTUATOR

ACTUATOR

- ADVANTAGES H-3
- PART NUMBER STRUCTURE .. H-4
- SPECIFICATIONS H-6
- ALLOWABLE SPEED AND STROKE LIMIT H-7
- ACCURACY H-8
- RATED LIFE H-10
- DIMENSION TABLE H-14~29
- MOTOR BRACKET CONFIGURATIONS & APPLICABLE MOTORS H-30
- EXPOSED BRACKET RO H-43
- RETURN PULLEY UNIT H-46
- LOW HOUSING H-48
- BELLOWS H-50
- SENSOR H-59
- PNP SENSOR H-70
- SENSOR SPECIFICATIONS H-71
- POSITIONING PIN HOLE H-74
- LUBRICATION H-79
- OPERATING TEMPERATURE .. H-79
- USE AND HANDLING PRECAUTIONS H-79

ACTUATOR

NB's BG type is a compact single axis actuator which integrates a slide guide and precision ball screw. BG type offers compact dimensions and outperforms conventional positioning tables.

This is made possible by a unique "U" shaped guide rail and slide block which provides multiple functions of a guide block and a ball screw nut combined into a single unit. The "U" shaped guide rail offers high rigidity against bending moment. This structural feature allows for integrated framework of machinery or equipment and can be cantilevered. Additionally, the slide block contains 4 ball circuits which delivers high load capacity, high accuracy and high rigidity.

Figure H-1 Structure of BG type


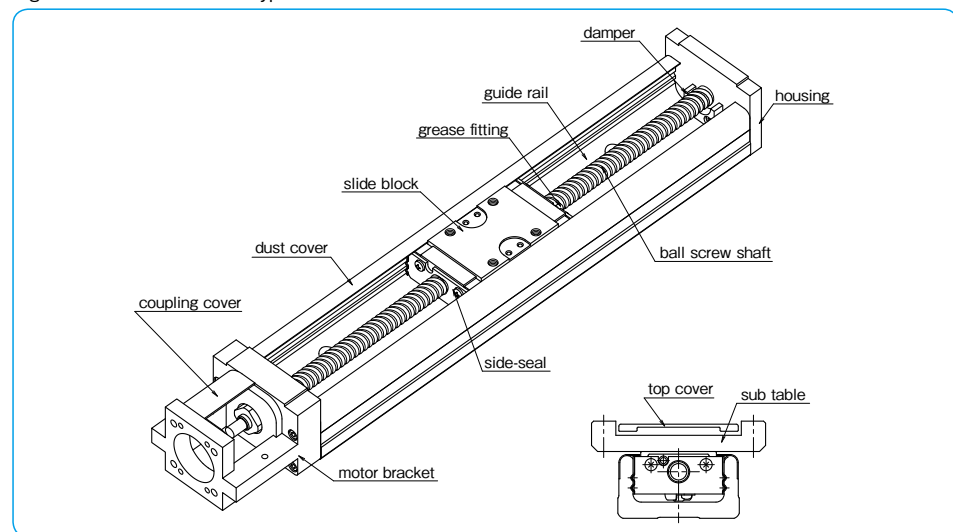


Figure H-2 Structure of With Top Cover and Bellows

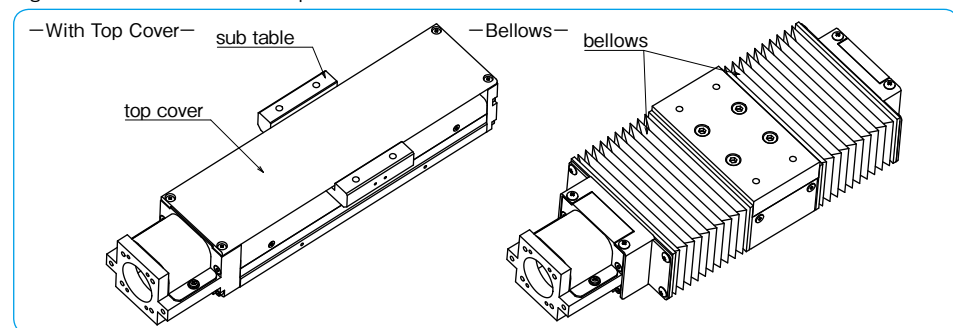

H-2

ADVANTAGES

Adjustment Free

The integration of the slide guide and precision ball screw eliminates complex precision adjustment and reduces installation time dramatically.

High Rigidity

Four-circuit and four-point contact structure and "U" shaped guide rail provide very high rigidity despite its compact configuration and can be used for cantilevered application.

High Accuracy

BG type contains four ball circuits and four-point contact ball grooves which contribute to its high rigidity. The combination of precision ground guide rail, slide block and precision ball screw provides high positioning accuracy.

Space Saving

In comparison to conventional positioning tables, the BG type allows for compact designs and dramatic space saving. The "U" shaped guide rail and integrated slide block and precision ball screw make this possible.

By utilizing four-circuit and four-point contact structure, the BG type provides extremely high rigidity. Figure H-3 shows displacement of each size of long block against radial load. Table H-3 shows the moment of inertia of area of guide rails.

Figure H-3 Block Displacement against Radial Load

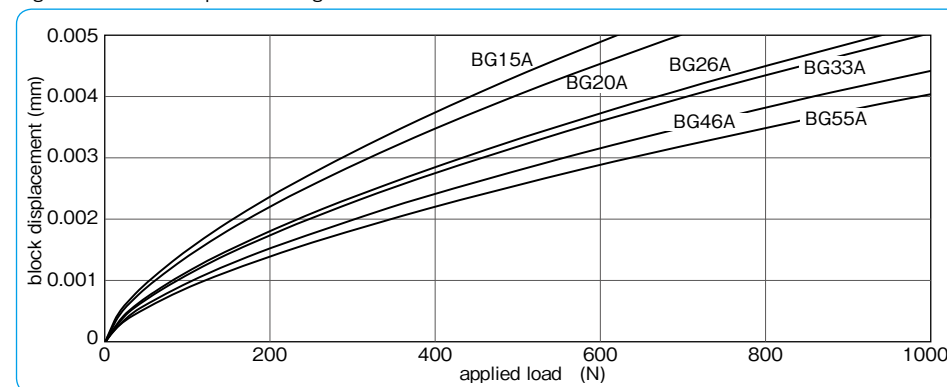


Figure H-4 Ball Contact Profile

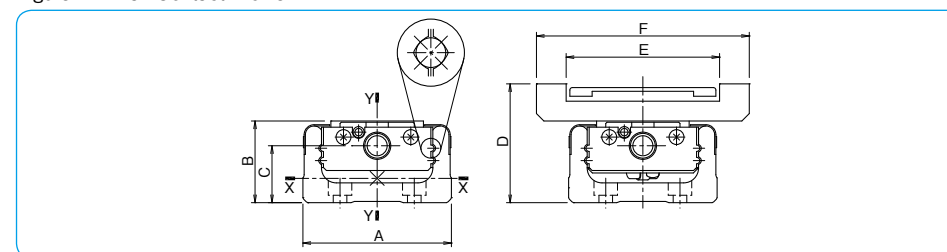



Table H-1 Moment of Inertia of Area of Guide Rail

| part number | A | B | C | D | E | F | moment of inertia of area (mm ⁴) | | mass W (kg/100mm) |
|-------------|-----|----|------|----|----|-----|--|-------------------------|-------------------|
| | | | | | | | I _x (X Axis) | I _y (Y Axis) | |
| BG15 | 30 | 15 | 9.5 | 25 | 32 | 44 | 1.22×10 ³ | 1.56×10 ⁴ | 0.12 |
| BG20 | 40 | 20 | 12.5 | 32 | 37 | 52 | 6.50×10 ³ | 6.00×10 ⁴ | 0.25 |
| BG26 | 50 | 26 | 16 | 40 | 47 | 62 | 1.69×10 ⁴ | 1.47×10 ⁵ | 0.38 |
| BG33 | 60 | 33 | 23 | 48 | 62 | 86 | 5.11×10 ⁴ | 3.42×10 ⁵ | 0.60 |
| BG46 | 86 | 46 | 32 | 68 | 88 | 112 | 2.42×10 ⁵ | 1.49×10 ⁶ | 1.24 |
| BG55 | 100 | 55 | 32 | 80 | 95 | 124 | 2.29×10 ⁵ | 2.28×10 ⁶ | 1.50 |

H-3

PART NUMBER STRUCTURE


Part number for BG type is described as follows.

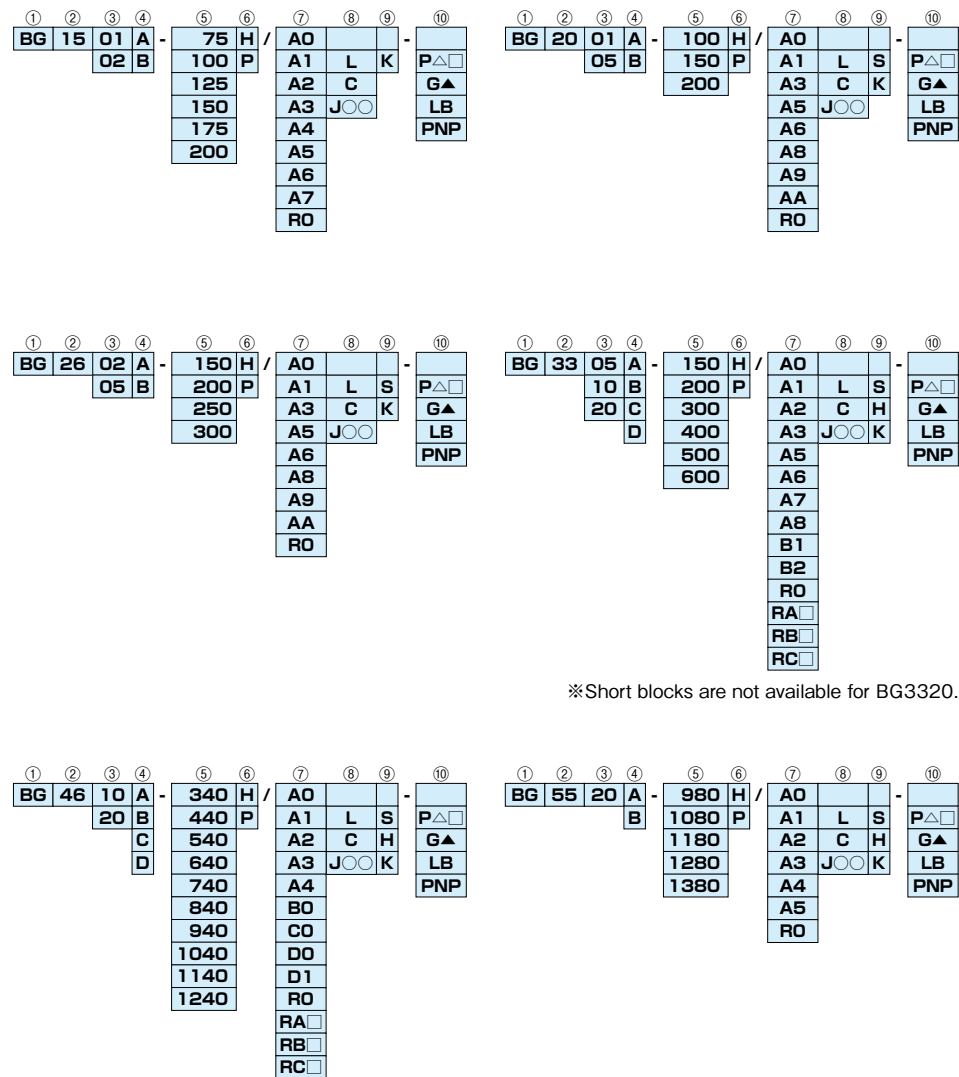


There is limitation on the length of rails depending on block type and accuracy grade. Please refer to page H-7,8.

- ① BG type
- ② size
- ③ ball screw lead
- ④ type of block


A:1 long block

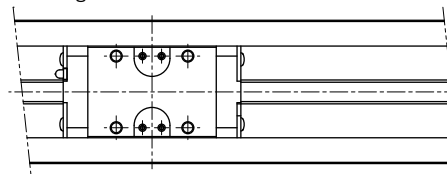


B:2 long blocks

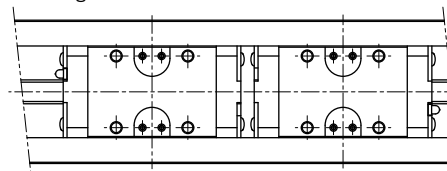

C:1 short block

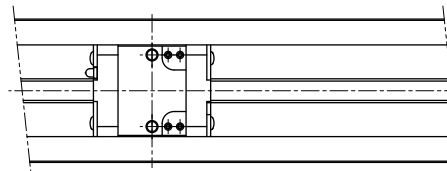

D:2 short blocks

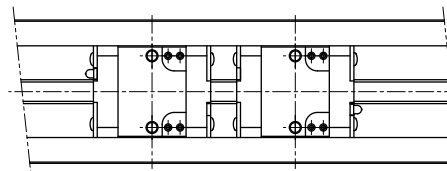

※ Drive block is located closest to motor bracket side.


- ⑦ guide rail length
※Precision grade(P) has limitation on the length of rails. Please refer to page H-8.

⑥ accuracy grade (P.H-8)


| | |
|---|-----------------|
| H | high grade |
| P | precision grade |

⑩ motor bracket (refer to page H-30,H-31)
The number in the square, □, after suffix RA, RB or RC indicates the mounting direction code. (refer to page H-46)


- ⑧ cover, low housing and bellows
none: without top cover (P.H-14~)




L:low housing (P.H-48~)



C: with top cover + sub table (P.H-15~)



J○○: with bellows (P.H-50~)



○○ sensor cable outlet position (refer to page H-50)

⑨ sensor (P.H-59~)

| | |
|------|--|
| none | without sensor |
| S | with slim-type / compact photomicro sensor |
| H | with close contact capable photomicro sensor |
| K | with proximity sensor |

⑩ option

| | |
|------|--|
| none | without option |
| P△□ | with positioning pin hole (※1) |
| G▲ | with special grease option (※2) |
| LB | with low temperature black chrome treatment (※3) |
| PNP | with PNP sensor |

In case of multiple options, add + between each option. Example: (PS+LB+PNP)

※1: △ is S, W or R (refer to page H-74)

□ is R (refer to page H-74)

※2: ▲ is U, L or F (refer to page H-79)

Grease is applied to slide guide, ball screw, and angular bearings.

※3: LB is applied to steel parts except for aluminum parts and radial bearings.

For BG15, LB is applied to steel parts except for the drive block, aluminum parts, and radial bearings.

Black chrome treatment is applied to the drive block.

SPECIFICATIONS


BG Type is categorized as either high grade (H) or precision grade (P). Precision grade(P) has limitation on the length of rails. Please refer to page H-8.

Table H-2 Specifications

| part number | | BG1501 | | BG1502 | | BG2001 | | BG2005 | | BG2602 | | BG2605 | | BG3305 | | BG3310 | | BG3320 | | BG4610 | | BG4620 | | BG5520 | | | |
|-----------------------|-----------------------|---|-----------|-----------|-----------|-----------|-----------|---|-----------|---------------|-----------|---------------|-----------|--------|-----------|--------|-----------|--------|-----------|--------|-----------|--------|-----------|--------|-----------|------|-----------|
| precision grade | | high | Precision | high | Precision | high | Precision | high | Precision | high | Precision | high | Precision | high | Precision | high | Precision | high | Precision | high | Precision | high | Precision | high | Precision | high | Precision |
| guide | radial clearance | μm -2~0 -4~-2 -2~0 -4~-2 -3~0 -6~-3 -3~0 -6~-3 -4~0 -8~-4 -4~0 -8~-4 -3~0 -7~-3 -3~0 -7~-3 -3~0 -7~-3 -5~0 -11~-5 -5~0 -11~-5 -6~0 -18~-6 | | | | | | | | | | | | | | | | | | | | | | | | | |
| | long block | basic dynamic load C | 2.42 | | 4.27 | | 7.87 | | 12.6 | | 29.8 | | 43.2 | | | | | | | | | | | | | | |
| | | basic static load Co | 4.76 | | 7.89 | | 14.98 | | 22.7 | | 51.2 | | 74.0 | | | | | | | | | | | | | | |
| | static moment | Mp | 17 | | 35 | | 99 | | 181 | | 610 | | 1,088 | | | | | | | | | | | | | | |
| | | M2p | 92 | | 199 | | 550 | | 1,035 | | 3,285 | | 5,465 | | | | | | | | | | | | | | |
| | | My | 20 | | 42 | | 118 | | 215 | | 727 | | 1,297 | | | | | | | | | | | | | | |
| | | M2y | 110 | | 237 | | 656 | | 1,233 | | 3,914 | | 6,513 | | | | | | | | | | | | | | |
| | | Me | 51 | | 101 | | 255 | | 500 | | 1,612 | | 2,701 | | | | | | | | | | | | | | |
| | | M2e | 102 | | 201 | | 509 | | 1,000 | | 3,224 | | 5,402 | | | | | | | | | | | | | | |
| | short block | basic dynamic load C | - | | - | | - | | 7.8 | | - | | 19.9 | | - | | - | | - | | - | | - | | - | | |
| | | basic static load Co | - | | - | | - | | 11.4 | | - | | 28.8 | | - | | - | | - | | - | | - | | - | | |
| | | Mp | - | | - | | - | | 49 | | - | | 207 | | - | | - | | - | | - | | - | | - | | |
| M2p | | - | | - | | - | | 368 | | - | | 1,336 | | - | | - | | - | | - | | - | | - | | | |
| My | | - | | - | | - | | 59 | | - | | 246 | | - | | - | | - | | - | | - | | - | | | |
| M2y | | - | | - | | - | | 439 | | - | | 1,593 | | - | | - | | - | | - | | - | | - | | | |
| shaft diameter | mm | 6 | | 6 | | 8 | | 10 | | 12 | | 15 | | 20 | | 20 | | 20 | | 20 | | 20 | | 20 | | | |
| | lead | 1 2 | | 1 5 | | 2 5 | | 5 10 | | 20 10 | | 20 20 | | 20 | | 20 | | 20 | | 20 | | 20 | | 20 | | | |
| spacer-ball ratio | - | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ball screw | basic dynamic load Ca | 0.39 0.54 | | 0.63 0.65 | | 2.60 2.35 | | 3.35 2.11 2.20 1.39 2.32 1.46 4.40 2.77 4.40 3.36 5.40 4.12 | | | | | | | | | | | | | | | | | | | |
| | basic static load Coa | 0.77 0.75 | | 1.34 0.92 | | 3.64 3.30 | | 5.90 2.95 3.50 1.75 4.05 2.02 7.90 3.95 7.90 5.27 10.5 7.00 | | | | | | | | | | | | | | | | | | | |
| bearing support | part number | AC4-12DF | | AC5-14DF | | AC6-16DF | | 70M8DF/GMP5 | | 7001T2DF/GMP5 | | 7002T2DF/GMP5 | | | | | | | | | | | | | | | |
| | basic dynamic load Cb | 1.21 | | 1.31 | | 1.79 | | 4.40 | | 6.77 | | 7.74 | | | | | | | | | | | | | | | |
| basic static load Cob | 1.08 | | 1.25 | | 1.76 | | 4.36 | | 7.45 | | 9.50 | | | | | | | | | | | | | | | | |

M2p, M2y and M2e are the allowable static moments when 2 blocks are used in close contact.
 ※ Please consult with NB when using BG15, BG20 and BG26 series in the Precision grade with short and frequent stroke. (short stroke: BG1501= 2mm or less, BG1502= 4mm or less, BG2001= 7mm or less, BG2005= 25mm or less, BG2602= 14mm or less and BG2605= 25mm or less)
 Short blocks are not available for BG3320.

Figure H-5 Direction of Moment

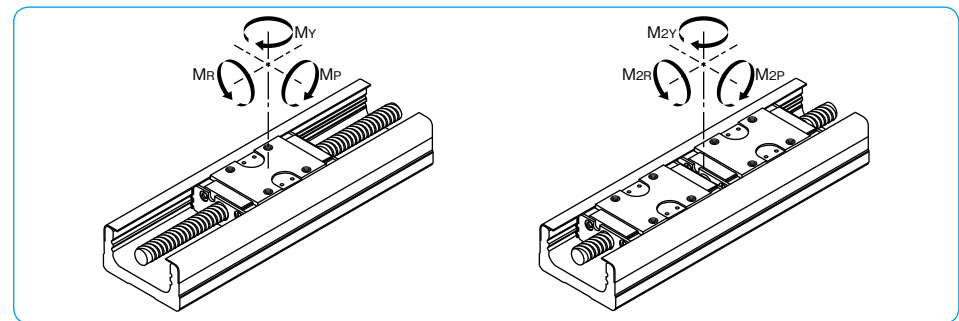

ALLOWABLE SPEED AND STROKE LIMIT


Allowable speed of BG type is subject to the type of motor and operating conditions. The speed may also be limited by the critical speed of the ball screw. Use caution when operating at high speeds or using long rails.

Table H-3 ALLOWABLE SPEED AND STROKE LIMIT

| part number | rail length | stroke limit (mm) | | | | speed (mm/sec) | | |
|-------------|-------------|-------------------|---------------|---------------|----------------|----------------|-------|-------|
| | | 1 long block | 2 long blocks | 1 short block | 2 short blocks | lead1 | lead2 | |
| BG15 | 75 | 30 | - | - | - | 185 | 370 | |
| | 100 | 55 | - | - | - | | | |
| | 125 | 80 | 46 | - | - | | | |
| | 150 | 105 | 71 | - | - | | | |
| | 175 | 130 | 96 | - | - | | | |
| 200 | 155 | 121 | - | - | - | - | | |
| BG20 | 100 | 43 | - | - | - | 187 | 925 | |
| | 150 | 93 | 51 | - | - | | | |
| | 200 | 143 | 101 | - | - | | | |
| | 200 | 143 | 101 | - | - | | | |
| BG26 | 150 | 73 | - | - | - | 281 | 694 | |
| | 200 | 123 | 61 | - | - | | | |
| | 250 | 173 | 111 | - | - | | | |
| | 300 | 223 | 161 | - | - | | | |
| BG33 | 150 | 60 | - | 85 | 34 | 550 | 1,100 | 1,500 |
| | 200 | 110 | - | 135 | 84 | | | |
| | 300 | 210 | 133 | 235 | 184 | | | |
| | 400 | 310 | 233 | 335 | 284 | | | |
| | 500 | 410 | 333 | 435 | 384 | | | |
| | 600 | 510 | 433 | 535 | 484 | | | |
| | 600 | 510 | 433 | 535 | 484 | | | |
| 310 | 620 | 620 | 620 | 620 | | | | |
| BG46 | 340 | 209 | 100 | 245 | 172 | 740 | 1,480 | |
| | 440 | 309 | 200 | 345 | 272 | | | |
| | 540 | 409 | 300 | 445 | 372 | | | |
| | 640 | 509 | 400 | 545 | 472 | | | |
| | 740 | 609 | 500 | 645 | 572 | | | |
| | 840 | 709 | 600 | 745 | 672 | | | |
| | 940 | 809 | 700 | 845 | 772 | | | |
| | 1,040 | 909 | 800 | 945 | 872 | | | |
| | 1,140 | 1,009 | 900 | 1,045 | 972 | | | |
| | 1,240 | 1,109 | 1,000 | 1,145 | 1,072 | | | |
| BG55 | 980 | 834 | 711 | - | - | - | - | - |
| | 1,080 | 934 | 811 | - | - | | | |
| | 1,180 | 1,034 | 911 | - | - | | | |
| | 1,280 | 1,134 | 1,011 | - | - | | | |
| | 1,380 | 1,234 | 1,111 | - | - | | | |
| | 1,380 | 1,234 | 1,111 | - | - | | | |

Short block type is not available for lead 20.

Figure H-6 Guide Rail Length and Allowable Speed

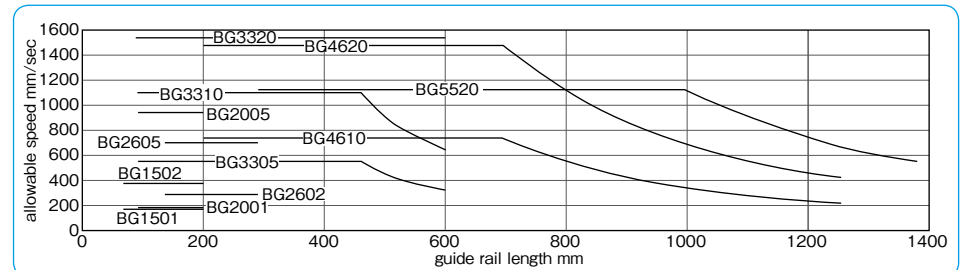

ACCURACY

Table H-4 shows accuracy of BG type.

Table H-4 Accuracy

| part number | rail length mm | positioning repeatability | | positioning accuracy | | running parallelism B | | backlash | | ※starting torque | | | |
|-------------|----------------|---------------------------|--------------|----------------------|--------------|-----------------------|--------------|----------|--------------|------------------|---------------|----|----|
| | | high μm | precision μm | high μm | precision μm | high μm | precision μm | high μm | precision μm | high N·m | precision N·m | | |
| BG15 | 75 | ±3 | ±1 | 40 | 20 | 20 | 10 | 5 | 2 | 0.01 | 0.012 | | |
| | 100 | | | | | | | | | | | | |
| | 125 | | | | | | | | | | | | |
| | 150 | | | | | | | | | | | | |
| | 175 | | | | | | | | | | | | |
| 200 | | | | | | | | | | | | | |
| BG20 | 100 | ±3 | ±1 | 50 | 20 | 25 | 10 | 5 | 2 | 0.01 | 0.012 | | |
| | 150 | | | | | | | | | | | | |
| | 200 | | | | | | | | | | | | |
| BG26 | 150 | ±3 | ±1 | 50 | 20 | 25 | 10 | 5 | 2 | 0.015 | 0.04 | | |
| | 200 | | | | | | | | | | | | |
| | 250 | | | | | | | | | | | | |
| | 300 | | | | | | | | | | | | |
| BG33 | 150 | ±3 (±5) | ±1 (±3) | 30 | 15 | 25 | 10 | 5 | 2 | 0.07 | 0.15 | | |
| | 200 | | | | | | | | | | | | |
| | 300 | | | 35 | 20 | | | | | | | | |
| | 400 | | | 40 | 25 | | | | | | | 15 | |
| | 500 | | | 70 | — | | | | | | | 35 | — |
| 600 | — | — | — | — | — | — | — | — | — | — | | | |
| BG46 | 340 | ±3 (±5) | ±1 (±3) | 35 | 20 | 35 | 15 | 5 | 2 | 0.10 | 0.15 | | |
| | 440 | | | | | | | | | | | | |
| | 540 | | | 40 | 25 | | | | | | | | |
| | 640 | | | 50 | 30 | | | | | | | 40 | 20 |
| | 740 | | | 80 | — | | | | | | | 50 | — |
| | 840 | | | — | — | | | | | | | — | — |
| | 940 | | | — | — | | | | | | | — | — |
| | 1,040 | | | — | — | | | | | | | — | — |
| 1,140 | — | — | — | — | | | | | | | | | |
| 1,240 | — | — | — | — | | | | | | | | | |
| BG55 | 980 | ±3 | ±1 | 80 | 35 | 50 | 25 | 5 | 2 | 0.12 | 0.17 | | |
| | 1,080 | | | 40 | 30 | | | | | | 0.20 | | |
| | 1,180 | | | — | — | | | | | | — | — | |
| | 1,280 | | | — | — | | | | | | — | — | |
| | 1,380 | | | — | — | | | | | | — | — | |

Above values are measured by using our selected motors.
 ※ Above specifications are based on using NB standard grease. Other grease may cause deviations.
 The values in the parentheses are positioning repeatability when used with return pulley unit.


Positioning Repeatability

After setting an arbitrary position, from one end, move the drive block to this position and measure the stop position. Repeat the positioning and measurement process 7 times with respect to the setting position at the midpoint and near both ends of travel. Take the maximum difference and divide it by 2, then indicate it with a positive and negative sign as the test result.

Positioning Repeatability

$$= \pm \frac{1}{2} ((\text{maximum value of } \ell_n) - (\text{minimum value of } \ell_n))$$

Figure H-7 Positioning Repeatability

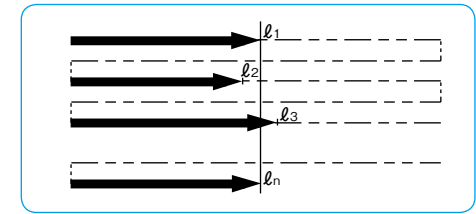


Positioning Accuracy

Positioning is performed in one direction and the resulting position is set as the datum point. Take the difference between the actual travel distance and the commanded travel distance from the datum point. Continuing in the same direction (without returning to the start point) repeat this process randomly several times until nearing to the stroke limit. Express the accuracy by the absolute maximum difference.

$$\text{Positioning Accuracy} = (\Delta \ell_n)_{\text{max}}$$


Figure H-8 Positioning Accuracy

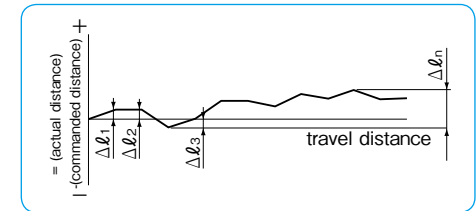

Running Parallelism B

After fixing the guide rail onto the surface plate, placing the dial test indicator on the center of the slide block and connecting the indicator probe onto the mounting surface, run the block over the entire travel distance. Take the maximum deviation in readings as the test result.

Figure H-9 Running Parallelism

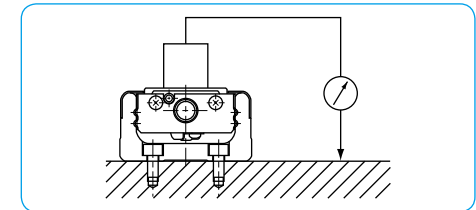


Backlash

Using the feed screw to move the slide block a little, take the dial test indicator reading and make it the datum point. While in this position, thrust the block by a certain force in the same direction without using the feed screw. Release the thrust and read the return, then take the difference from the datum point. Repeat the same process at the midpoint and near both ends of travel. Take the maximum difference as the test result.

$$\text{Backlash} = \Delta \ell$$

Figure H-10 Backlash

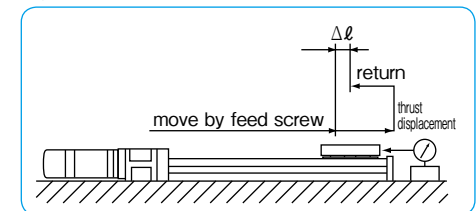

RATED LIFE

To obtain the rated life of the BG type, calculate the rated life of the guide portion, ball screw portion and support bearing portion. Use the minimum value as the rated life of the BG type.

A. Life of Guide Portion

Use the following equation for calculating the rated life of guide portion.

$$L_G = \left(\frac{f_c}{f_w} \cdot \frac{C}{P_T} \right)^3 \cdot 50 \quad \dots\dots\dots (1)$$

L_G : rated life (km) f_c : contact coefficient (refer to Table H-5)
 f_w : applied load coefficient (refer to Table H-6)
 C : basic dynamic load rating (N)
 P_T : calculated load applied to one block (N)

A.1. Calculation of P_T

Before calculating the rated life using the equation (1), the calculated load applied to one block (P_T) needs to be obtained in consideration of the moment load, etc. that will be actually applied. For rapidly-accelerating or short stroke motion, P_T needs to be calculated with acceleration taken into consideration. The calculation of this acceleration will be carried out for the mass applied to BG. Obtain the calculated load during uniform motion, acceleration, and deceleration, and use the average value of the three as P_T .

For the calculation of P_T , select an appropriate equation depending on the installation conditions of the guide.

It is also possible to calculate P_T without including the effect of acceleration by using the equation " $P_T = P_{TC}$ (see the equations (2), (5), and (8)). In this case, however, the obtained value is a rough approximation, so a selection with sufficient margin is recommended.

Table H-5 Contact Coefficient (f_c)

| number of blocks in close contact on one axis | contact coefficient (f_c) |
|---|-------------------------------|
| 1 | 1.0 |
| 2 | 0.81 |

Table H-6 Applied Load Coefficient (f_w)

| operating conditions | | applied load coefficient (f_w) |
|----------------------|-----------------|------------------------------------|
| vibration, impact | velocity | |
| none | 0.25m/s or less | 1.0 ~ 1.5 |
| low | 1m/s or less | 1.5 ~ 2.0 |
| high | 1m/s or more | 2.0 ~ 3.5 |

Table H-7 Moment Equivalent Coefficient

| | E_p (E2p) | E_y (E2y) | E_r (E2r) |
|------------|-----------------------|-----------------------|-----------------------|
| BG15 * * A | 2.82×10^{-1} | 2.37×10^{-1} | 9.35×10^{-2} |
| BG15 * * B | 5.16×10^{-2} | 4.33×10^{-2} | 4.67×10^{-2} |
| BG20 * * A | 2.25×10^{-1} | 1.89×10^{-1} | 7.84×10^{-2} |
| BG20 * * B | 3.98×10^{-2} | 3.34×10^{-2} | 3.92×10^{-2} |
| BG26 * * A | 1.51×10^{-1} | 1.27×10^{-1} | 5.88×10^{-2} |
| BG26 * * B | 2.72×10^{-2} | 2.28×10^{-2} | 2.94×10^{-2} |
| BG33 * * A | 1.26×10^{-1} | 1.06×10^{-1} | 4.55×10^{-2} |
| BG33 * * B | 2.20×10^{-2} | 1.84×10^{-2} | 2.27×10^{-2} |
| BG33 * * C | 2.31×10^{-1} | 1.94×10^{-1} | 4.55×10^{-2} |
| BG33 * * D | 3.09×10^{-2} | 2.59×10^{-2} | 2.27×10^{-2} |
| BG46 * * A | 8.39×10^{-2} | 7.04×10^{-2} | 3.17×10^{-2} |
| BG46 * * B | 1.56×10^{-2} | 1.31×10^{-2} | 1.59×10^{-2} |
| BG46 * * C | 1.39×10^{-1} | 1.17×10^{-1} | 3.17×10^{-2} |
| BG46 * * D | 2.15×10^{-2} | 1.81×10^{-2} | 1.59×10^{-2} |
| BG55 * * A | 6.80×10^{-2} | 5.71×10^{-2} | 2.74×10^{-2} |
| BG55 * * B | 1.35×10^{-2} | 1.14×10^{-2} | 1.37×10^{-2} |

*The E2 coefficient is for two blocks being used in close contact.

A.1.a. P_T for Horizontal Move (Horizontal Mounting)

i) during uniform motion (P_{TC})

$$P_{TC} = \frac{1}{n} \cdot W + E_p \cdot M_{pL} + E_y \cdot M_{yL} + E_r \cdot M_{rL} \quad \dots\dots\dots (2)$$

ii) during acceleration (P_{Ta})

$$P_{Ta} = \frac{1}{n} \cdot W + E_p(M_{pL} + m \cdot \alpha_a \cdot Z) + E_y(M_{yL} + m \cdot \alpha_a \cdot X) + E_r \cdot M_{rL} \quad \dots\dots\dots (3)$$

Note that the values of ($M_{pL} + m \cdot \alpha_a \cdot Z$) and ($M_{yL} + m \cdot \alpha_a \cdot X$) will be treated as 0 (zero) when the calculated value is negative.


iii) during deceleration (P_{Td})

$$P_{Td} = \frac{1}{n} \cdot W + E_p(M_{pL} + m \cdot \alpha_d \cdot Z) + E_y(M_{yL} + m \cdot \alpha_d \cdot X) + E_r \cdot M_{rL} \quad \dots\dots\dots (4)$$

Note that the values of ($M_{pL} + m \cdot \alpha_d \cdot Z$) and ($M_{yL} + m \cdot \alpha_d \cdot X$) will be treated as 0 (zero) when the calculated value is negative.

P_{TC} : calculated load applied to a block during uniform motion (N) P_{Ta} : calculated load applied to a block during accelerating (N)
 P_{Td} : calculated load applied to a block during decelerating (N) n : number of blocks of BG W : applied load (N) m : carrying mass (kg)
 α_a : acceleration during accelerating (m/sec²) α_d : acceleration during decelerating (m/sec²) (the negative value)
 X : distance between the center of BG and the center of the carrying mass (mm)
 Y : distance between the center of BG and the center of the carrying mass (mm)
 Z : distance between the center of BG ball screw and the center of the carrying mass (mm)
 E_p : moment equivalent coefficient in the pitching direction (refer to Table H-7)
 E_y : moment equivalent coefficient in the yawing direction (refer to Table H-7)
 E_r : moment equivalent coefficient in the rolling direction (refer to Table H-7)
 M_{pL} : applied moment in the pitching direction (N · mm) $M_{pL} = W \cdot Y$
 M_{yL} : applied moment in the yawing direction (N · mm) $M_{yL} = 0$
 M_{rL} : applied moment in the rolling direction (N · mm) $M_{rL} = W \cdot X$ *Refer to Fig.H-5 for the direction of moment.

Figure H-11



In case of load coming from different direction other than the direction shown in the drawing W+m, please contact NB.

A.1.b. P_T for Horizontal Move (Wall Mounting)

i) during uniform motion (P_{TC})

$$P_{TC} = \frac{1}{1.19 \cdot n} \cdot W + E_p \cdot M_{pL} + E_y \cdot M_{yL} + E_r \cdot M_{rL} \quad \dots\dots\dots (5)$$

ii) during acceleration (P_{Ta})

$$P_{Ta} = \frac{1}{1.19 \cdot n} \cdot W + E_p(M_{pL} + m \cdot \alpha_a \cdot Z) + E_y(M_{yL} + m \cdot \alpha_a \cdot X) + E_r \cdot M_{rL} \quad \dots\dots\dots (6)$$

Note that the values of ($M_{pL} + m \cdot \alpha_a \cdot Z$) and ($M_{yL} + m \cdot \alpha_a \cdot X$) will be treated as 0 (zero) when the calculated value is negative.


iii) during deceleration (P_{Td})

$$P_{Td} = \frac{1}{1.19 \cdot n} \cdot W + E_p(M_{pL} + m \cdot \alpha_d \cdot Z) + E_y(M_{yL} + m \cdot \alpha_d \cdot X) + E_r \cdot M_{rL} \quad \dots\dots\dots (7)$$

Note that the values of ($M_{pL} + m \cdot \alpha_d \cdot Z$) and ($M_{yL} + m \cdot \alpha_d \cdot X$) will be treated as 0 (zero) when the calculated value is negative.

P_{TC} : calculated load applied to a block during uniform motion (N) P_{Ta} : calculated load applied to a block during accelerating (N)
 P_{Td} : calculated load applied to a block during decelerating (N) n : number of blocks of BG W : applied load (N) m : carrying mass (kg)
 α_a : acceleration during accelerating (m/sec²) α_d : acceleration during decelerating (m/sec²) (the negative value)
 X : distance between the center of BG and the center of the carrying mass (mm)
 Y : distance between the center of BG and the center of the carrying mass (mm)
 Z : distance between the center of BG ball screw and the center of the carrying mass (mm)
 E_p : moment equivalent coefficient in the pitching direction (refer to Table H-7) E_y : moment equivalent coefficient in the yawing direction (refer to Table H-7) E_r : moment equivalent coefficient in the rolling direction (refer to Table H-7)
 M_{pL} : applied moment in the pitching direction (N · mm) $M_{pL} = 0$
 M_{yL} : applied moment in the yawing direction (N · mm) $M_{yL} = W \cdot Y$
 M_{rL} : applied moment in the rolling direction (N · mm) $M_{rL} = W \cdot Z$ *Refer to Fig. H-5 for the direction of moment.

Figure H-12



In case of load coming from different direction other than the direction shown in the drawing W+m, please contact NB.

A.1.c. P_T for Vertical Move

i) during uniform motion (P_{Tc})

$$P_{Tc} = E_p \cdot M_{pL} + E_y \cdot M_{yL} + E_r \cdot M_{rL} \quad \dots \quad (8)$$

ii) during acceleration (P_{Ta})

$$P_{Ta} = E_p(M_{pL} + m \cdot \alpha_a \cdot Z) + E_y(M_{yL} + m \cdot \alpha_a \cdot X) + E_r \cdot M_{rL} \quad \dots \quad (9)$$

Note that the values of (M_{pL}+m·α_a·Z) and (M_{yL}+m·α_a·X) will be treated as 0 (zero) when the calculated value is negative.


iii) during deceleration (P_{Td})

$$P_{Td} = E_p(M_{pL} + m \cdot \alpha_d \cdot Z) + E_y(M_{yL} + m \cdot \alpha_d \cdot X) + E_r \cdot M_{rL} \quad \dots \quad (10)$$

Note that the values of (M_{pL}+m·α_d·Z) and (M_{yL}+m·α_d·X) will be treated as 0 (zero) when the calculated value is negative.

P_{Tc}: calculated load applied to a block during uniform motion(N) P_{Ta}: calculated load applied to a block during accelerating(N) P_{Td}: calculated load applied to a block during decelerating(N) n: number of blocks of BG W: applied load(N) m: carrying mass(kg) α_a: acceleration during accelerating(m/sec²) α_d: acceleration during decelerating(m/sec²) (the negative value) X: distance between the center of BG and the center of the carrying mass(mm) Y: distance between the center of BG and the center of the carrying mass(mm) Z: distance between the center of BG ball screw and the center of the carrying mass(mm) E_p: moment equivalent coefficient in the pitching direction (refer to Table H-7) E_y: moment equivalent coefficient in the yawing direction (refer to Table H-7) E_r: moment equivalent coefficient in the rolling direction (refer to Table H-7) M_{pL}: applied moment in the pitching direction (N·mm) M_{pL}=W·Z M_{yL}: loaded moment in the yawing direction (N·mm) M_{yL}=W·X M_{rL}: applied moment in the rolling direction (N·mm) M_{rL}=0 ※Refer to Fig. H-5 for the direction of moment.

Figure H-13




A.1.d.

Obtain the calculated load applied to a block (P_T) by calculating the average load of each motion using an appropriate equation among those shown above according to the application.

$$P_T = \sqrt[3]{\frac{1}{S_1+S_2+S_3} (P_{Ta}^3 \cdot S_1 + P_{Tc}^3 \cdot S_2 + P_{Td}^3 \cdot S_3)} \quad \dots \quad (11)$$

P_T: calculated load applied to one block (N) S₁: travel distance during acceleration (mm) (refer to Figure H-14) S₂: travel distance during uniform motion (mm) (refer to Figure H-14) S₃: travel distance during deceleration (mm) (refer to Figure H-14) P_{Ta}: calculated load applied to one block during accelerating (N): equation (3), (6), and (9) P_{Tc}: calculated load applied to one block during uniform motion (N): equation (2), (5), and (8) P_{Td}: calculated load applied to one block during decelerating (N): equation (4), (7), and (10)

Figure H-14

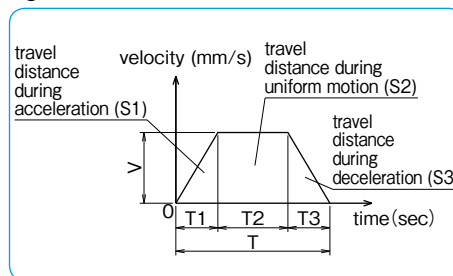

B. Life of Ball Screw and Support Bearing

The life of ball screw and support bearing can be calculated using a common equation, as shown below. Compare the dynamic load rating of the ball screw and the support bearing and apply smaller value for calculation.

$$L_a = \left(\frac{1}{f_w} \cdot \frac{C_a \text{ or } C_b}{P_a} \right)^3 \cdot \ell \quad \dots \quad (12)$$

L_a: rated life (km) f_w: applied load coefficient (refer to Table H-6) C_a: basic dynamic load rating of the ball screw (N) C_b: basic dynamic load rating of the support bearing (N) P_a: axial load (N) ℓ: ball screw lead (mm)

B.1. Calculation of Pa

Before calculating the life using the equation (12), calculate Pa with acceleration taken into consideration. Calculate the load in each axial direction during uniform motion, acceleration, and deceleration and the obtained value is used as Pa.

B.1.a. For Horizontal Move

i) during uniform motion (P_{ac})

$$P_{ac} = \mu \cdot W + F + f_b \cdot n \quad \dots \quad (13)$$

ii) during acceleration (P_{aa})

$$P_{aa} = \mu \cdot W + F + f_b \cdot n + (m + m_b \cdot n) \alpha_a \quad \dots \quad (14)$$

iii) during deceleration (P_{ad})

$$P_{ad} = \mu \cdot W + F + f_b \cdot n + (m + m_b \cdot n) \alpha_d \quad \dots \quad (15)$$

B.1.b. For Vertical Move

i) during uniform motion (P_{ac})

$$P_{ac} = (m + m_b \cdot n)g + F + f_b \cdot n \quad \dots \quad (16)$$

ii) during acceleration (P_{aa})

$$P_{aa} = (m + m_b \cdot n) \cdot (g + \alpha_a) + F + f_b \cdot n \quad \dots \quad (17)$$

iii) during deceleration (P_{ad})

$$P_{ad} = (m + m_b \cdot n) \cdot (g + \alpha_d) + F + f_b \cdot n \quad \dots \quad (18)$$

B.1.c.

Obtain the average axial load (Pa) using an appropriate formula among those shown above depending on the application.

$$P_a = \sqrt[3]{\frac{1}{S_1+S_2+S_3} (P_{aa}^3 \cdot S_1 + P_{ac}^3 \cdot S_2 + P_{ad}^3 \cdot S_3)} \quad \dots \quad (19)$$

P_a: average axial load (N) S₁: travel distance during acceleration (mm) (refer to Table H-14) S₂: travel distance during uniform motion (mm) (refer to Table H-14) S₃: travel distance during deceleration (mm) (refer to Table H-14) P_{aa}: axial load during accelerating (N): formulas (14) and (17) P_{ac}: axial load during uniform motion (N): formulas (13) and (16) P_{ad}: axial load during decelerating (N): formulas (15) and (18)


Table H-8 Sliding Resistance (f_b) of a Single Block (Seal Resistance) unit: N

| | high grade (H) | precision grade (P) |
|------|----------------|---------------------|
| BG15 | 0.8 | 1.8 |
| BG20 | 2.3 | 4.9 |
| BG26 | 5.4 | 9.8 |
| BG33 | 4.4 | 10.2 |
| BG46 | 7.4 | 13.3 |
| BG55 | 9 | 16 |

P_{ac}: axial load rating during uniform motion (N) P_{aa}: axial load rating during accelerating (N) P_{ad}: axial load rating during decelerating (N) μ: friction coefficient W: load applied to a block (N) F: external force (load) applied to the axial direction (N) f_b: sliding resistance of a single block (N) (refer to Table H-8) n: number of blocks of BG m: carrying mass (kg) m_b: mass of a block of BG (kg) (refer to P.H14~29) α_a: acceleration during accelerating (m/s²) α_d: acceleration during decelerating (m/s²) g: acceleration of gravity

BG15 –Without Top Cover–


A (1 long block)
B (2 long blocks in close contact)

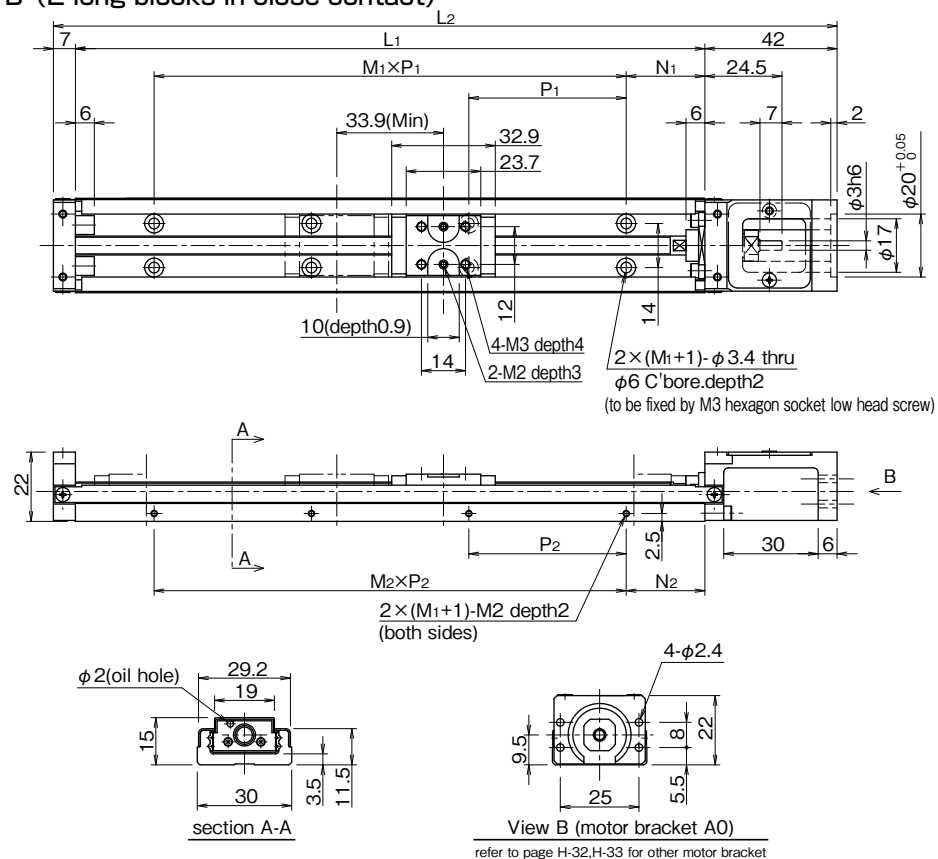

refer to page H-32,H-33 for other motor bracket

BG15 –With Top Cover–

A (1 long block)
B (2 long blocks in close contact)

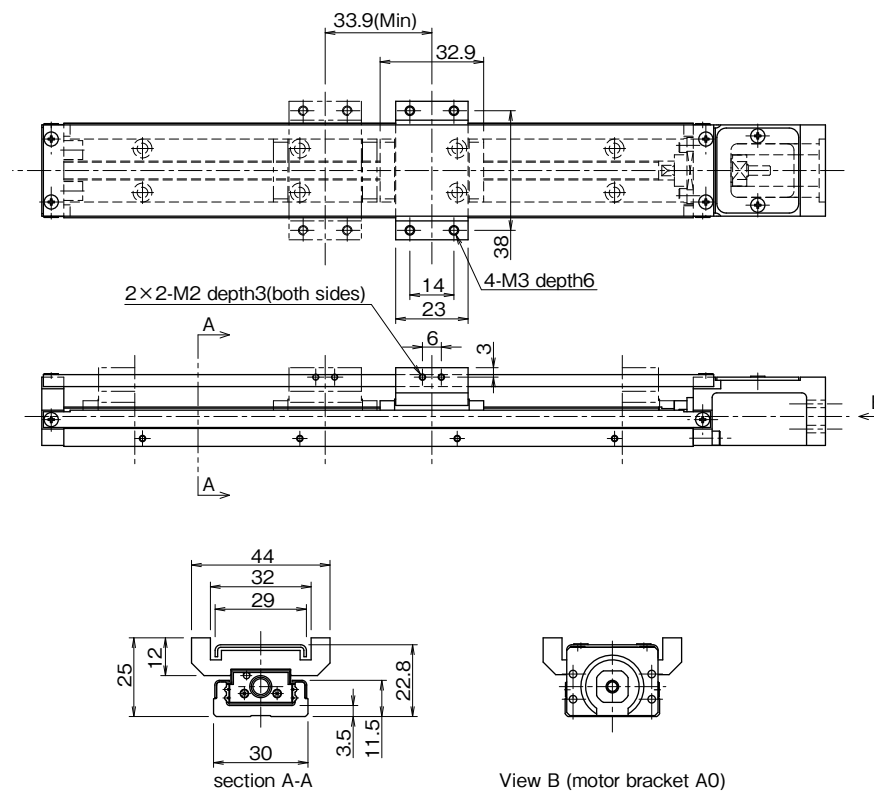

refer to page H-32,H-33 for other motor bracket

| part number ^{※3※4} | stroke limit mm ^{※1} | dimensions mm | | | | | | block mass kg ^{※2} | | total mass kg | |
|-----------------------------|----------------------------------|----------------|----------------|----------------|--------------------------------|----------------|--------------------------------|-----------------------------|----------------|-------------------|----------------|
| | | L ₁ | L ₂ | N ₁ | M ₁ ×P ₁ | N ₂ | M ₂ ×P ₂ | without top cover | with top cover | without top cover | with top cover |
| BG15□□ A-75 | 30 | 75 | 124 | 12.5 | 1×50 | 12.5 | 1×50 | 0.03 | 0.05 | 0.21 | 0.24 |
| B | — | — | — | — | — | — | — | — | — | — | — |
| BG15□□ A-100 | 55 | 100 | 149 | 25 | 1×50 | 25 | 1×50 | 0.03 | 0.05 | 0.25 | 0.28 |
| B | — | — | — | — | — | — | — | — | — | — | — |
| BG15□□ A-125 | 80 | 125 | 174 | 12.5 | 2×50 | 12.5 | 2×50 | 0.03 | 0.05 | 0.28 | 0.31 |
| B | 46 | | | | | | | 0.06 | 0.10 | 0.32 | 0.37 |
| BG15□□ A-150 | 105 | 150 | 199 | 25 | — | 25 | — | 0.03 | 0.05 | 0.32 | 0.35 |
| B | 71 | | | | | | | 0.06 | 0.10 | 0.35 | 0.40 |
| BG15□□ A-175 | 130 | 175 | 224 | 12.5 | 3×50 | 12.5 | 3×50 | 0.03 | 0.05 | 0.35 | 0.39 |
| B | 96 | | | | | | | 0.06 | 0.10 | 0.39 | 0.44 |
| BG15□□ A-200 | 155 | 200 | 249 | 25 | — | 25 | — | 0.03 | 0.05 | 0.39 | 0.42 |
| B | 121 | | | | | | | 0.06 | 0.10 | 0.42 | 0.48 |


※1: Stroke limit is a drive distance between both ends of the dampers.
 ※2: Mass stated "with top cover" includes mass of sub tables.
 ※3: For B type (2 long blocks), drive block is located closest to motor bracket side.
 ※4: □ is ball screw lead.

inertia (reference values) unit: kg · m²

| part number | rail length mm | long block | | | |
|-------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| | | without top cover | | with top cover | |
| | | A 1 block | B 2 block | A 1 block | B 2 block |
| BG1501 | 75 | 1.06×10 ⁻⁷ | — | 1.07×10 ⁻⁷ | — |
| | 100 | 1.31×10 ⁻⁷ | — | 1.31×10 ⁻⁷ | — |
| | 125 | 1.56×10 ⁻⁷ | 1.56×10 ⁻⁷ | 1.56×10 ⁻⁷ | 1.58×10 ⁻⁷ |
| | 150 | 1.80×10 ⁻⁷ | 1.81×10 ⁻⁷ | 1.81×10 ⁻⁷ | 1.82×10 ⁻⁷ |
| | 175 | 2.05×10 ⁻⁷ | 2.06×10 ⁻⁷ | 2.06×10 ⁻⁷ | 2.07×10 ⁻⁷ |
| BG1502 | 200 | 2.30×10 ⁻⁷ | 2.31×10 ⁻⁷ | 2.31×10 ⁻⁷ | 2.32×10 ⁻⁷ |
| | 75 | 1.09×10 ⁻⁷ | — | 1.11×10 ⁻⁷ | — |
| | 100 | 1.33×10 ⁻⁷ | — | 1.35×10 ⁻⁷ | — |
| | 125 | 1.58×10 ⁻⁷ | 1.62×10 ⁻⁷ | 1.60×10 ⁻⁷ | 1.66×10 ⁻⁷ |
| | 150 | 1.83×10 ⁻⁷ | 1.86×10 ⁻⁷ | 1.85×10 ⁻⁷ | 1.90×10 ⁻⁷ |
| 175 | 2.08×10 ⁻⁷ | 2.11×10 ⁻⁷ | 2.10×10 ⁻⁷ | 2.15×10 ⁻⁷ | |
| 200 | 2.33×10 ⁻⁷ | 2.36×10 ⁻⁷ | 2.35×10 ⁻⁷ | 2.40×10 ⁻⁷ | |

BG20 – Without Top Cover –

- A (1 long block)
- B (2 long blocks in close contact)

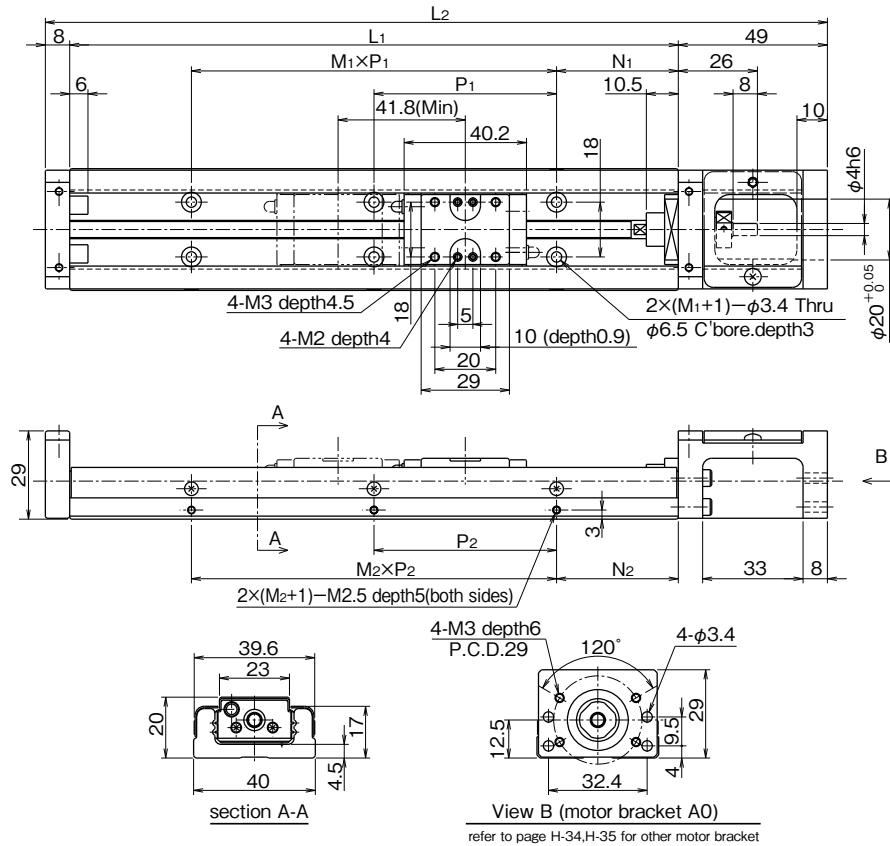


| part number ^{※3※4} | stroke limit mm ^{※1} | dimensions mm | | dimensions mm | | | block mass kg ^{※2} | | total mass kg | | |
|-----------------------------|-------------------------------|----------------|----------------|----------------|--------------------------------|----------------|--------------------------------|-------------------|----------------|-------------------|----------------|
| | | L ₁ | L ₂ | N ₁ | M ₁ ×P ₁ | N ₂ | M ₂ ×P ₂ | without top cover | with top cover | without top cover | with top cover |
| BG20□□A-100 | 43 | 100 | 157 | 20 | 1×60 | 20 | 1×60 | 0.07 | 0.11 | 0.45 | 0.50 |
| B | — | — | — | — | — | — | — | — | — | — | — |
| BG20□□A-150 | 93 | 150 | 207 | 15 | 2×60 | 15 | 2×60 | 0.07 | 0.11 | 0.58 | 0.63 |
| B | 51 | — | — | — | | — | | — | — | 0.14 | 0.22 |
| BG20□□A-200 | 143 | 200 | 257 | 40 | 2×60 | 40 | 2×60 | 0.07 | 0.11 | 0.71 | 0.77 |
| B | 101 | — | — | — | | — | | — | — | 0.14 | 0.22 |

※1 : Stroke limit is a drive distance between both ends of the dampers.
 ※2 : Mass stated "with top cover" includes mass of sub tables.
 ※3 : For B type (2 long blocks), drive block is located closest to motor bracket side.
 ※4 : □ is ball screw lead.

BG20 – With Top Cover –

- A (1 long block)
- B (2 long blocks in close contact)

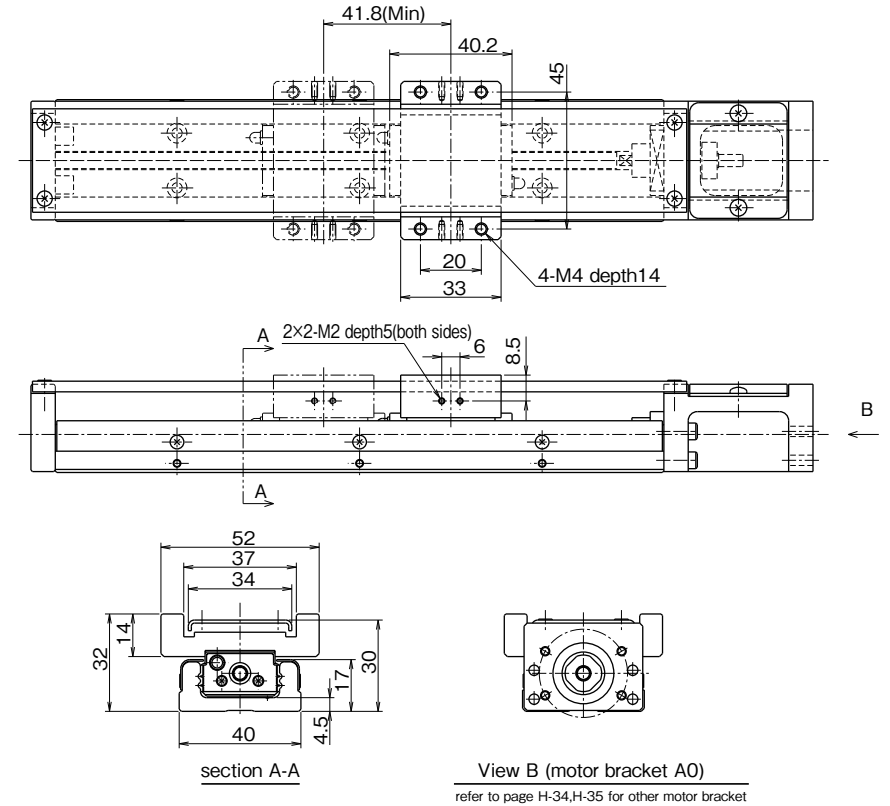


inertia (reference values) unit : kg · m²

| part number | rail length mm | long block | | | |
|-------------|----------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | | without top cover | | with top cover | |
| | | A 1 block | B 2 block | A 1 block | B 2 block |
| BG2001 | 100 | 1.34 × 10 ⁻⁷ | — | 1.35 × 10 ⁻⁷ | — |
| | 150 | 1.83 × 10 ⁻⁷ | 1.85 × 10 ⁻⁷ | 1.84 × 10 ⁻⁷ | 1.87 × 10 ⁻⁷ |
| | 200 | 2.33 × 10 ⁻⁷ | 2.35 × 10 ⁻⁷ | 2.34 × 10 ⁻⁷ | 2.37 × 10 ⁻⁷ |
| BG2005 | 100 | 1.76 × 10 ⁻⁷ | — | 2.00 × 10 ⁻⁷ | — |
| | 150 | 2.26 × 10 ⁻⁷ | 2.70 × 10 ⁻⁷ | 2.50 × 10 ⁻⁷ | 3.18 × 10 ⁻⁷ |
| | 200 | 2.76 × 10 ⁻⁷ | 3.20 × 10 ⁻⁷ | 3.00 × 10 ⁻⁷ | 3.68 × 10 ⁻⁷ |


BG33 –Without Top Cover–

- A (1 long block)
- B (2 long blocks in close contact)

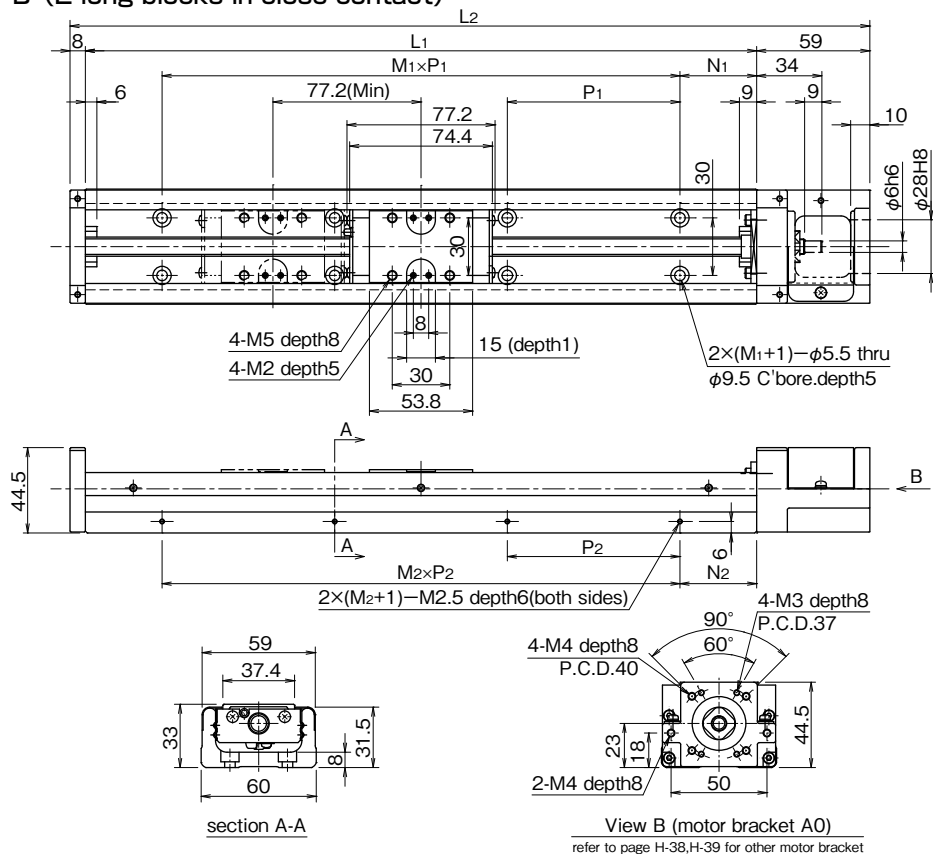

BG33 –With Top Cover–

- A (1 long block)
- B (2 long blocks in close contact)

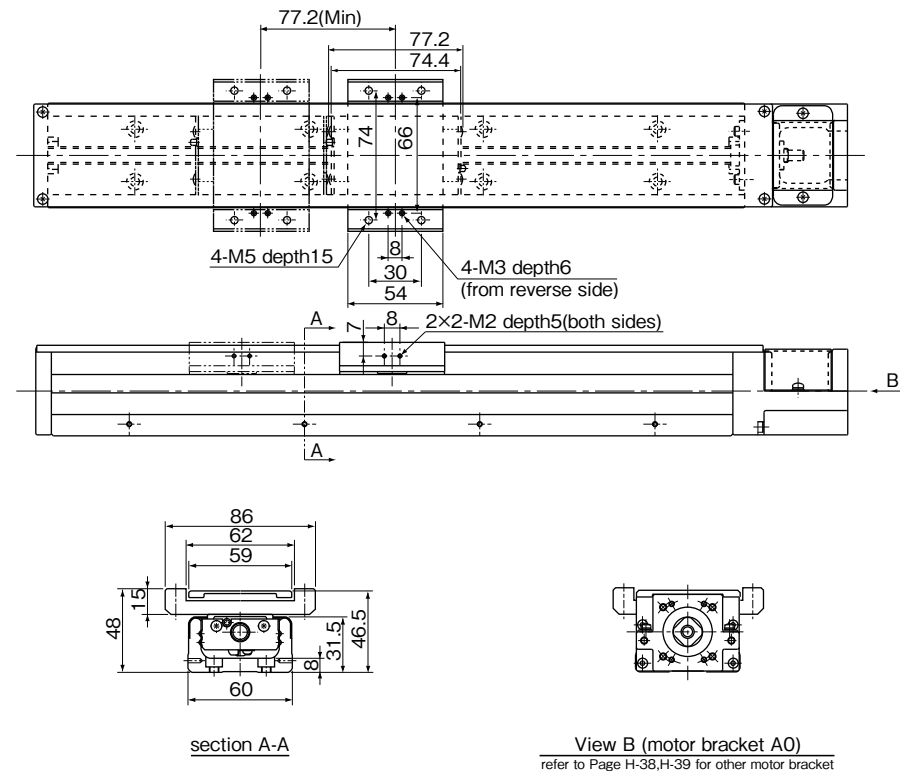

| part number ^{※3※4} | stroke limit mm ^{※1} | dimensions mm | | | | | | block mass kg ^{※2} | | total mass kg | | |
|-----------------------------|-------------------------------|----------------|----------------|----------------|--------------------------------|----------------|--------------------------------|-----------------------------|----------------|-------------------|----------------|-----|
| | | L ₁ | L ₂ | N ₁ | M ₁ ×P ₁ | N ₂ | M ₂ ×P ₂ | without top cover | with top cover | without top cover | with top cover | |
| BG33□□A-150 | 60 | 150 | 217 | 25 | 1×100 | 25 | 1×100 | 0.3 | 0.4 | 1.6 | 1.8 | |
| B | — | — | — | — | — | — | — | — | — | — | — | |
| BG33□□A-200 | 110 | 200 | 267 | 50 | 1×100 | 50 | 1×100 | 0.3 | 0.4 | 2 | 2.1 | |
| B | — | — | — | — | — | — | — | — | — | — | — | |
| BG33□□A-300 | 210 | 300 | 367 | 50 | 2×100 | 50 | 2×100 | 0.3 | 0.4 | 2.6 | 2.8 | |
| B | 133 | | | | | | | 0.6 | 0.8 | 2.9 | 3.2 | |
| BG33□□A-400 | 310 | 400 | 467 | | | | | 3×100 | 0.3 | 0.4 | 3.2 | 3.5 |
| B | 233 | | | | | | | | 0.6 | 0.8 | 3.6 | 3.9 |
| BG33□□A-500 | 410 | 500 | 567 | | | | | 4×100 | 0.3 | 0.4 | 3.9 | 4.2 |
| B | 333 | | | | | | | | 0.6 | 0.8 | 4.2 | 4.6 |
| BG33□□A-600 | 510 | 600 | 667 | 5×100 | 0.3 | 0.4 | 4.6 | 4.9 | | | | |
| B | 433 | | | | 0.6 | 0.8 | 4.9 | 5.3 | | | | |

※1 : Stroke limit is a drive distance between both ends of the dampers.
 ※2 : Mass stated "with top cover" includes mass of sub tables.
 ※3 : For B type (2 long blocks), drive block is located closest to motor bracket side.
 ※4 : □ is ball screw lead.


inertia (reference values) unit : kg · m²

| part number | rail length mm | long block | | | |
|-------------|----------------|-----------------------|-----------------------|-----------------------|-----------------------|
| | | without top cover | | with top cover | |
| | | A 1 block | B 2 block | A 1 block | B 2 block |
| BG3305 | 150 | 1.64×10 ⁻⁶ | — | 1.71×10 ⁻⁶ | — |
| | 200 | 2.02×10 ⁻⁶ | — | 2.09×10 ⁻⁶ | — |
| | 300 | 2.79×10 ⁻⁶ | 2.99×10 ⁻⁶ | 2.86×10 ⁻⁶ | 3.13×10 ⁻⁶ |
| | 400 | 3.55×10 ⁻⁶ | 3.75×10 ⁻⁶ | 3.62×10 ⁻⁶ | 3.89×10 ⁻⁶ |
| | 500 | 4.32×10 ⁻⁶ | 4.52×10 ⁻⁶ | 4.39×10 ⁻⁶ | 4.66×10 ⁻⁶ |
| | 600 | 5.08×10 ⁻⁶ | 5.28×10 ⁻⁶ | 5.15×10 ⁻⁶ | 5.42×10 ⁻⁶ |
| BG3310 | 150 | 2.19×10 ⁻⁶ | — | 2.47×10 ⁻⁶ | — |
| | 200 | 2.57×10 ⁻⁶ | — | 2.85×10 ⁻⁶ | — |
| | 300 | 3.34×10 ⁻⁶ | 4.14×10 ⁻⁶ | 3.61×10 ⁻⁶ | 4.69×10 ⁻⁶ |
| | 400 | 4.10×10 ⁻⁶ | 4.90×10 ⁻⁶ | 4.38×10 ⁻⁶ | 5.46×10 ⁻⁶ |
| | 500 | 4.87×10 ⁻⁶ | 5.67×10 ⁻⁶ | 5.15×10 ⁻⁶ | 6.22×10 ⁻⁶ |
| | 600 | 5.63×10 ⁻⁶ | 6.43×10 ⁻⁶ | 5.91×10 ⁻⁶ | 6.99×10 ⁻⁶ |
| BG3320 | 150 | 5.94×10 ⁻⁶ | — | 7.06×10 ⁻⁶ | — |
| | 200 | 6.74×10 ⁻⁶ | — | 7.85×10 ⁻⁶ | — |
| | 300 | 8.33×10 ⁻⁶ | 1.15×10 ⁻⁵ | 9.44×10 ⁻⁶ | 1.38×10 ⁻⁵ |
| | 400 | 9.91×10 ⁻⁶ | 1.31×10 ⁻⁵ | 1.10×10 ⁻⁵ | 1.53×10 ⁻⁵ |
| | 500 | 1.15×10 ⁻⁵ | 1.47×10 ⁻⁵ | 1.26×10 ⁻⁵ | 1.69×10 ⁻⁵ |
| | 600 | 1.31×10 ⁻⁵ | 1.63×10 ⁻⁵ | 1.42×10 ⁻⁵ | 1.85×10 ⁻⁵ |

BG33 –Without Top Cover–

C (1 short block)

D (2 short blocks in close contact)

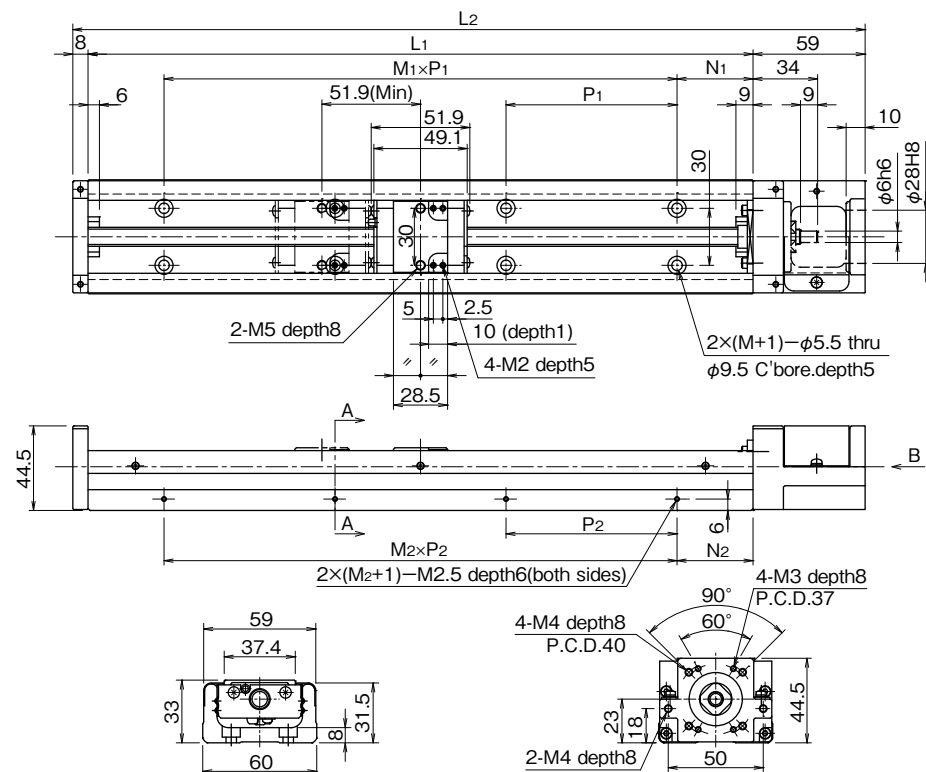


section A-A

View B (motor bracket A0)
refer to page H-38,H-39 for other motor bracket

BG33 –With Top Cover–

C (1 short block)

D (2 short blocks in close contact)

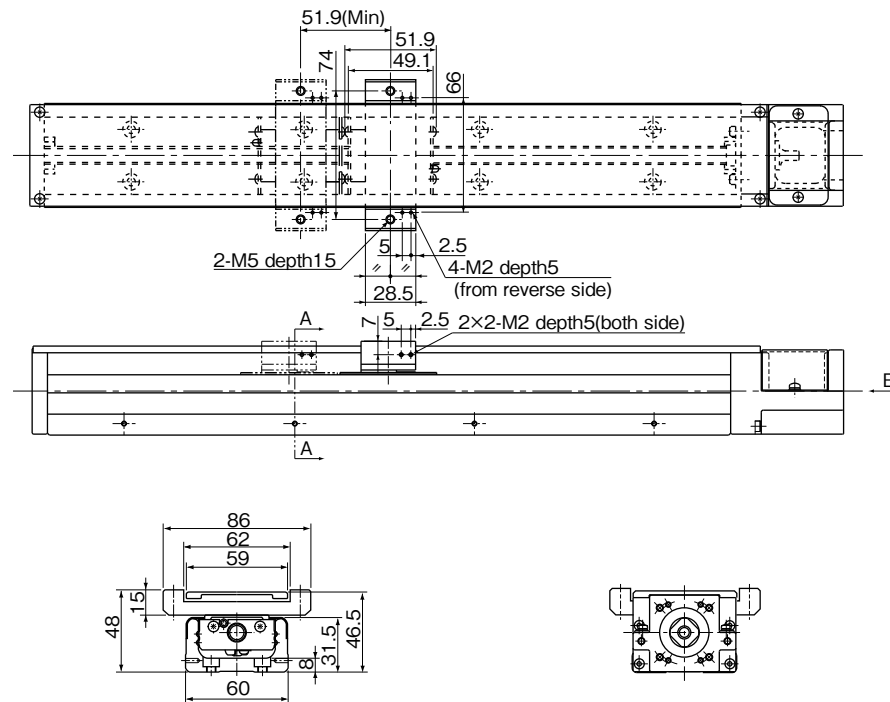

section A-A

View B (motor bracket A0)
refer to page H-38,H-39 for other motor bracket

| part number ^{※3※4} | stroke limit mm ^{※1} | dimensions mm | | | | | block mass kg ^{※2} | | total mass kg | | |
|-----------------------------|-------------------------------|----------------|----------------|----------------|--------------------------------|----------------|--------------------------------|-------------------|----------------|-------------------|----------------|
| | | L ₁ | L ₂ | N ₁ | M ₁ ×P ₁ | N ₂ | M ₂ ×P ₂ | without top cover | with top cover | without top cover | with top cover |
| BG33□□C-150 | 85 | 150 | 217 | 25 | 1×100 | 25 | 1×100 | 0.15 | 0.2 | 1.5 | 1.6 |
| | 34 | | | | | | | 0.3 | 0.4 | 1.7 | 1.9 |
| BG33□□C-200 | 135 | 200 | 267 | 50 | 2×100 | 50 | 2×100 | 0.15 | 0.2 | 1.8 | 2 |
| | 84 | | | | | | | 0.3 | 0.4 | 2 | 2.2 |
| BG33□□C-300 | 235 | 300 | 367 | 50 | 3×100 | 50 | 3×100 | 0.15 | 0.2 | 2.5 | 2.6 |
| | 184 | | | | | | | 0.3 | 0.4 | 2.7 | 2.9 |
| BG33□□C-400 | 335 | 400 | 467 | 50 | 4×100 | 50 | 4×100 | 0.15 | 0.2 | 3.1 | 3.3 |
| | 284 | | | | | | | 0.3 | 0.4 | 3.3 | 3.5 |
| BG33□□C-500 | 435 | 500 | 567 | 50 | 5×100 | 50 | 5×100 | 0.15 | 0.2 | 3.8 | 4 |
| | 384 | | | | | | | 0.3 | 0.4 | 3.9 | 4.2 |
| BG33□□C-600 | 535 | 600 | 667 | 50 | 5×100 | 50 | 5×100 | 0.15 | 0.2 | 4.4 | 4.7 |
| | 484 | | | | | | | 0.3 | 0.4 | 4.6 | 4.9 |

※1: Stroke limit is a drive distance between both ends of the dampers.

※2: Mass stated "with top cover" includes mass of sub tables.

※3: For D type (2 short blocks), drive block is located closest to motor bracket side.

※4: □ is ball screw lead.

※5: Ball screw lead of 20mm is not available for BG33 short block type.


inertia (reference values)

unit : kg · m²

| part number | rail length mm | short block | | | |
|-------------|----------------|-----------------------|-----------------------|-----------------------|-----------------------|
| | | without top cover | | with top cover | |
| | | C | D | C | D |
| BG3305 | 150 | 1.56×10 ⁻⁶ | 1.64×10 ⁻⁶ | 1.60×10 ⁻⁶ | 1.71×10 ⁻⁶ |
| | 200 | 1.94×10 ⁻⁶ | 2.03×10 ⁻⁶ | 1.98×10 ⁻⁶ | 2.10×10 ⁻⁶ |
| | 300 | 2.71×10 ⁻⁶ | 2.79×10 ⁻⁶ | 2.75×10 ⁻⁶ | 2.86×10 ⁻⁶ |
| | 400 | 3.48×10 ⁻⁶ | 3.56×10 ⁻⁶ | 3.51×10 ⁻⁶ | 3.63×10 ⁻⁶ |
| | 500 | 4.24×10 ⁻⁶ | 4.32×10 ⁻⁶ | 4.28×10 ⁻⁶ | 4.39×10 ⁻⁶ |
| | 600 | 5.01×10 ⁻⁶ | 5.09×10 ⁻⁶ | 5.04×10 ⁻⁶ | 5.16×10 ⁻⁶ |
| BG3310 | 150 | 1.88×10 ⁻⁶ | 2.21×10 ⁻⁶ | 2.02×10 ⁻⁶ | 2.49×10 ⁻⁶ |
| | 200 | 2.27×10 ⁻⁶ | 2.59×10 ⁻⁶ | 2.40×10 ⁻⁶ | 2.87×10 ⁻⁶ |
| | 300 | 3.03×10 ⁻⁶ | 3.36×10 ⁻⁶ | 3.17×10 ⁻⁶ | 3.64×10 ⁻⁶ |
| | 400 | 3.80×10 ⁻⁶ | 4.12×10 ⁻⁶ | 3.94×10 ⁻⁶ | 4.40×10 ⁻⁶ |
| | 500 | 4.56×10 ⁻⁶ | 4.89×10 ⁻⁶ | 4.70×10 ⁻⁶ | 5.17×10 ⁻⁶ |
| | 600 | 5.33×10 ⁻⁶ | 5.65×10 ⁻⁶ | 5.47×10 ⁻⁶ | 5.93×10 ⁻⁶ |

BG46 –Without Top Cover–

- A (1 long block)
- B (2 long blocks in close contact)

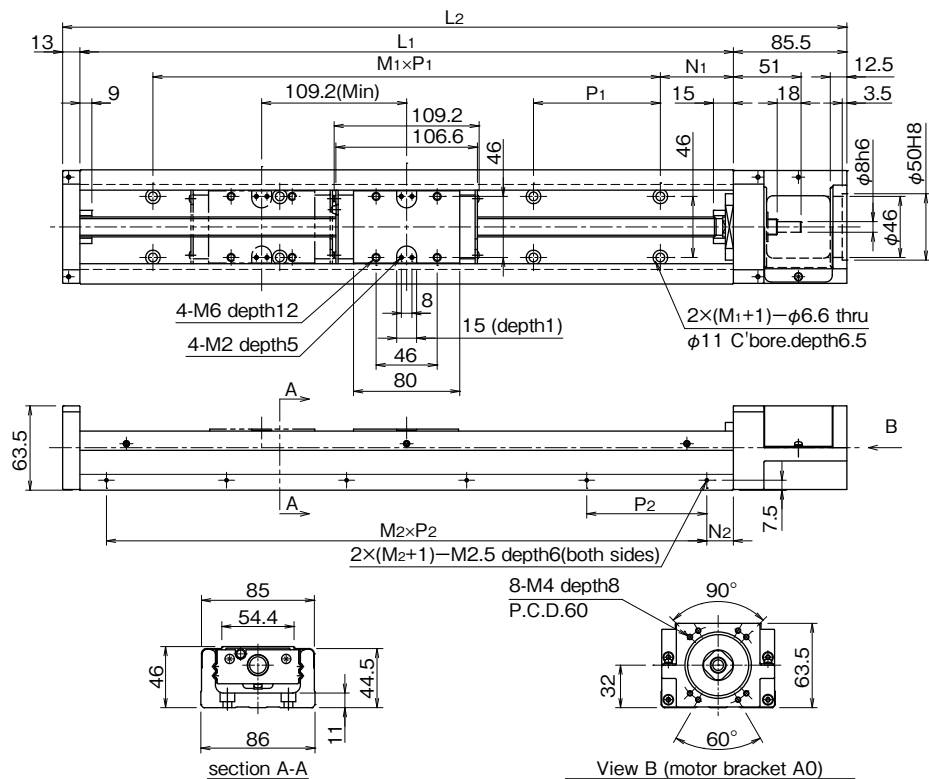


View B (motor bracket A0)
refer to page H-40,H-41 for other motor bracket

| part number ^{※3※4} | stroke limit mm ^{※1} | dimensions mm | | block mass kg ^{※2} | | total mass kg | |
|-----------------------------|-------------------------------|----------------|----------------|-----------------------------|----------------|-------------------|----------------|
| | | L ₁ | L ₂ | without top cover | with top cover | without top cover | with top cover |
| BG46□□A-340 | 209 | 340 | 438.5 | 2×100 | 3×100 | 0.9 | 6.5 |
| B | 100 | | | | | 1.8 | 7.5 |
| BG46□□A-440 | 309 | 440 | 538.5 | 3×100 | 4×100 | 0.9 | 8 |
| B | 200 | | | | | 1.8 | 8.5 |
| BG46□□A-540 | 409 | 540 | 638.5 | 4×100 | 5×100 | 0.9 | 9 |
| B | 300 | | | | | 1.8 | 10 |
| BG46□□A-640 | 509 | 640 | 738.5 | 5×100 | 6×100 | 0.9 | 10.5 |
| B | 400 | | | | | 1.8 | 11.5 |
| BG46□□A-740 | 609 | 740 | 838.5 | 6×100 | 7×100 | 0.9 | 12 |
| B | 500 | | | | | 1.8 | 13 |
| BG46□□A-840 | 709 | 840 | 938.5 | 7×100 | 8×100 | 0.9 | 13 |
| B | 600 | | | | | 1.8 | 14 |
| BG46□□A-940 | 809 | 940 | 1,038.5 | 8×100 | 9×100 | 0.9 | 14.5 |
| B | 700 | | | | | 1.8 | 15.5 |
| BG46□□A-1040 | 909 | 1,040 | 1,138.5 | 9×100 | 10×100 | 0.9 | 16 |
| B | 800 | | | | | 1.8 | 17 |
| BG46□□A-1140 | 1,009 | 1,140 | 1,238.5 | 10×100 | 11×100 | 0.9 | 17.5 |
| B | 900 | | | | | 1.8 | 18 |
| BG46□□A-1240 | 1,109 | 1,240 | 1,338.5 | 11×100 | 12×100 | 0.9 | 18.5 |
| B | 1,000 | | | | | 1.8 | 19.5 |

※1 : Stroke limit is a drive distance between both ends of the dampers.
 ※2 : Mass stated "with top cover" includes mass of sub tables.
 ※3 : For B type (2 long blocks), drive block is located closest to motor bracket side.
 ※4 : □ is ball screw lead.

BG46 –With Top Cover–

- A (1 long block)
- B (2 long blocks in close contact)

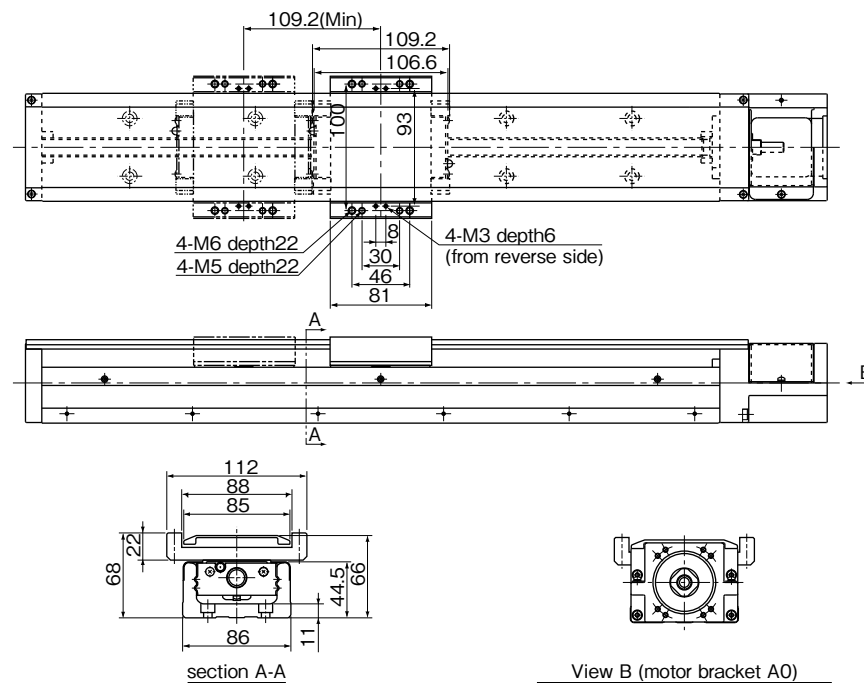


View B (motor bracket A0)
refer to page H-40,H-41 for other motor bracket

inertia (reference values) unit : kg · m²

| part number | rail length mm | long block | | | |
|-------------|----------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | | without top cover | | with top cover | |
| | | A 1 block | B 2 block | A 1 block | B 2 block |
| BG4610 | 340 | 1.79 × 10 ⁻⁵ | 2.02 × 10 ⁻⁵ | 1.87 × 10 ⁻⁵ | 2.17 × 10 ⁻⁵ |
| | 440 | 2.18 × 10 ⁻⁵ | 2.41 × 10 ⁻⁵ | 2.25 × 10 ⁻⁵ | 2.56 × 10 ⁻⁵ |
| | 540 | 2.57 × 10 ⁻⁵ | 2.79 × 10 ⁻⁵ | 2.64 × 10 ⁻⁵ | 2.95 × 10 ⁻⁵ |
| | 640 | 2.95 × 10 ⁻⁵ | 3.18 × 10 ⁻⁵ | 3.03 × 10 ⁻⁵ | 3.33 × 10 ⁻⁵ |
| | 740 | 3.34 × 10 ⁻⁵ | 3.57 × 10 ⁻⁵ | 3.42 × 10 ⁻⁵ | 3.72 × 10 ⁻⁵ |
| | 840 | 3.73 × 10 ⁻⁵ | 3.96 × 10 ⁻⁵ | 3.80 × 10 ⁻⁵ | 4.11 × 10 ⁻⁵ |
| | 940 | 4.12 × 10 ⁻⁵ | 4.35 × 10 ⁻⁵ | 4.19 × 10 ⁻⁵ | 4.50 × 10 ⁻⁵ |
| | 1,040 | 4.50 × 10 ⁻⁵ | 4.74 × 10 ⁻⁵ | 4.58 × 10 ⁻⁵ | 4.88 × 10 ⁻⁵ |
| | 1,140 | 4.89 × 10 ⁻⁵ | 5.12 × 10 ⁻⁵ | 4.97 × 10 ⁻⁵ | 5.27 × 10 ⁻⁵ |
| | 1,240 | 5.28 × 10 ⁻⁵ | 5.51 × 10 ⁻⁵ | 5.35 × 10 ⁻⁵ | 5.66 × 10 ⁻⁵ |
| BG4620 | 340 | 2.47 × 10 ⁻⁵ | 3.39 × 10 ⁻⁵ | 2.78 × 10 ⁻⁵ | 3.99 × 10 ⁻⁵ |
| | 440 | 2.86 × 10 ⁻⁵ | 3.77 × 10 ⁻⁵ | 3.17 × 10 ⁻⁵ | 4.38 × 10 ⁻⁵ |
| | 540 | 3.25 × 10 ⁻⁵ | 4.16 × 10 ⁻⁵ | 3.55 × 10 ⁻⁵ | 4.77 × 10 ⁻⁵ |
| | 640 | 3.63 × 10 ⁻⁵ | 4.55 × 10 ⁻⁵ | 3.94 × 10 ⁻⁵ | 5.16 × 10 ⁻⁵ |
| | 740 | 4.03 × 10 ⁻⁵ | 4.94 × 10 ⁻⁵ | 4.33 × 10 ⁻⁵ | 5.55 × 10 ⁻⁵ |
| | 840 | 4.41 × 10 ⁻⁵ | 5.34 × 10 ⁻⁵ | 4.71 × 10 ⁻⁵ | 5.93 × 10 ⁻⁵ |
| | 940 | 4.80 × 10 ⁻⁵ | 5.72 × 10 ⁻⁵ | 5.09 × 10 ⁻⁵ | 6.32 × 10 ⁻⁵ |
| | 1,040 | 5.19 × 10 ⁻⁵ | 6.11 × 10 ⁻⁵ | 5.48 × 10 ⁻⁵ | 6.71 × 10 ⁻⁵ |
| | 1,140 | 5.57 × 10 ⁻⁵ | 6.50 × 10 ⁻⁵ | 5.87 × 10 ⁻⁵ | 7.09 × 10 ⁻⁵ |
| | 1,240 | 5.96 × 10 ⁻⁵ | 6.89 × 10 ⁻⁵ | 6.26 × 10 ⁻⁵ | 7.48 × 10 ⁻⁵ |

BG46 –Without Top Cover–

C (1 short block)
D (2 short blocks in close contact)

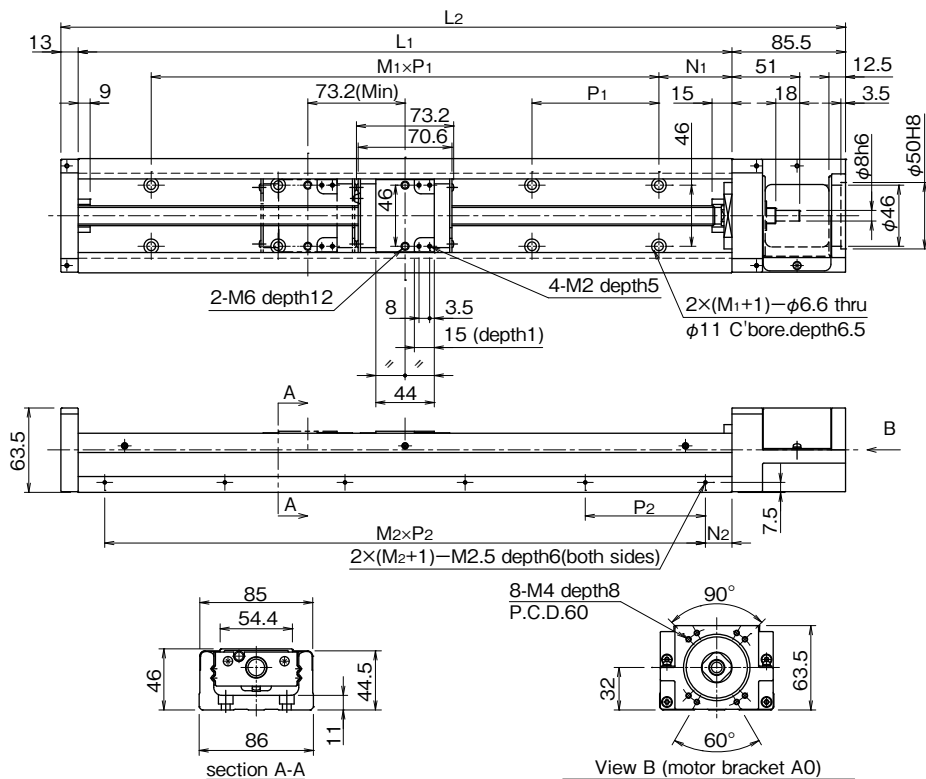


View B (motor bracket A0)
refer to page H-40,H-41 for other motor bracket

| part number ^{#3#4} | stroke limit mm ^{#1} | dimensions mm | | | | block mass kg ^{#2} | | total mass kg | | | |
|-----------------------------|-------------------------------|----------------|----------------|----------------|--------------------------------|-----------------------------|--------------------------------|-------------------|----------------|------|------|
| | | L ₁ | L ₂ | N ₁ | M ₁ ×P ₁ | N ₂ | M ₂ ×P ₂ | without top cover | with top cover | | |
| BG46□□C-340 | 245 | 340 | 438.5 | 70 | 2×100 | 20 | 3×100 | 0.5 | 0.7 | 6 | 6.5 |
| | D | | | | | | | 172 | 1 | 1.4 | 6.5 |
| BG46□□C-440 | 345 | 440 | 538.5 | | 3×100 | | 4×100 | 0.5 | 0.7 | 7.5 | 8 |
| | D | | | | | | | 272 | 1 | 1.4 | 8 |
| BG46□□C-540 | 445 | 540 | 638.5 | | 4×100 | | 5×100 | 0.5 | 0.7 | 8.5 | 9.5 |
| | D | | | | | | | 372 | 1 | 1.4 | 9.5 |
| BG46□□C-640 | 545 | 640 | 738.5 | | 5×100 | | 6×100 | 0.5 | 0.7 | 10 | 10.5 |
| | D | | | | | | | 472 | 1 | 1.4 | 10.5 |
| BG46□□C-740 | 645 | 740 | 838.5 | | 6×100 | | 7×100 | 0.5 | 0.7 | 11.5 | 12 |
| | D | | | | | | | 572 | 1 | 1.4 | 12 |
| BG46□□C-840 | 745 | 840 | 938.5 | | 7×100 | | 8×100 | 0.5 | 0.7 | 13 | 13.5 |
| | D | | | | | | | 672 | 1 | 1.4 | 13.5 |
| BG46□□C-940 | 845 | 940 | 1,038.5 | 8×100 | 9×100 | 0.5 | 0.7 | 14 | 15 | | |
| | D | | | | | 772 | 1 | 1.4 | 14.5 | 15.5 | |
| BG46□□C-1040 | 945 | 1,040 | 1,138.5 | 9×100 | 10×100 | 0.5 | 0.7 | 15.5 | 16.5 | | |
| | D | | | | | 872 | 1 | 1.4 | 16 | 17 | |
| BG46□□C-1140 | 1,045 | 1,140 | 1,238.5 | 10×100 | 11×100 | 0.5 | 0.7 | 17 | 18 | | |
| | D | | | | | 972 | 1 | 1.4 | 17.5 | 18.5 | |
| BG46□□C-1240 | 1,145 | 1,240 | 1,338.5 | 11×100 | 12×100 | 0.5 | 0.7 | 18.5 | 19 | | |
| | D | | | | | 1,072 | 1 | 1.4 | 19 | 20 | |

※1: Stroke limit is a drive distance between both ends of the dampers.
 ※2: Mass stated "with top cover" includes mass of sub tables.
 ※3: For D type (2 short blocks), drive block is located closest to motor bracket side.
 ※4: □ is ball screw lead.

BG46 –With Top Cover–

C (1 short block)
D (2 short blocks in close contact)

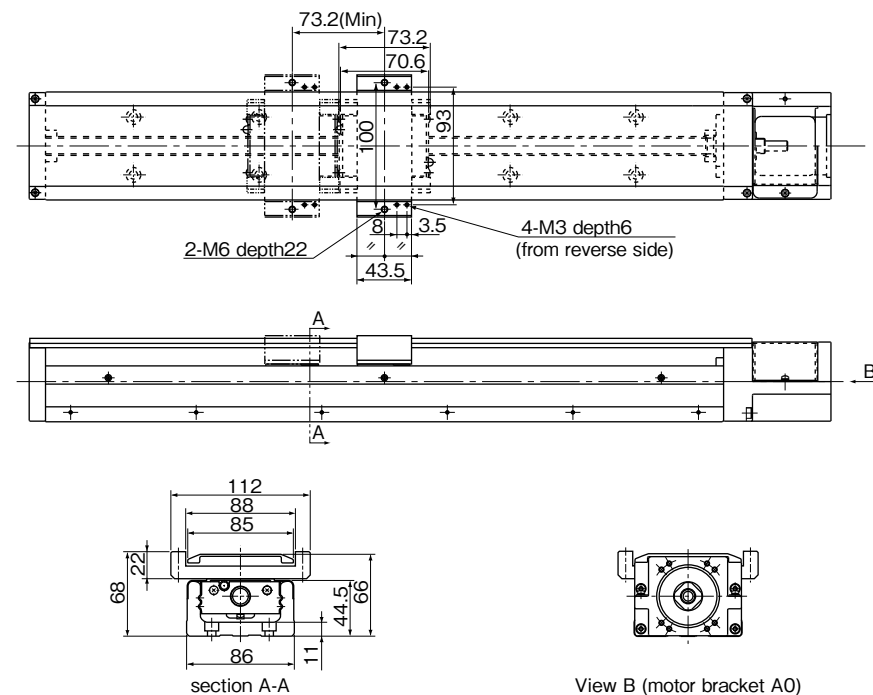


View B (motor bracket A0)
refer to page H-40,H-41 for other motor bracket

inertia (reference values) unit: kg · m²

| part number | rail length mm | short block | | | | |
|-------------|----------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | | without top cover | | with top cover | | |
| | | C 1 block | D 2 block | C 1 block | D 2 block | |
| BG4610 | 340 | 1.69 × 10 ⁻⁵ | 1.82 × 10 ⁻⁵ | 1.74 × 10 ⁻⁵ | 1.92 × 10 ⁻⁵ | |
| | 440 | 2.08 × 10 ⁻⁵ | 2.20 × 10 ⁻⁵ | 2.13 × 10 ⁻⁵ | 2.31 × 10 ⁻⁵ | |
| | 540 | 2.46 × 10 ⁻⁵ | 2.59 × 10 ⁻⁵ | 2.52 × 10 ⁻⁵ | 2.69 × 10 ⁻⁵ | |
| | 640 | 2.85 × 10 ⁻⁵ | 2.98 × 10 ⁻⁵ | 2.90 × 10 ⁻⁵ | 3.08 × 10 ⁻⁵ | |
| | 740 | 3.24 × 10 ⁻⁵ | 3.37 × 10 ⁻⁵ | 3.29 × 10 ⁻⁵ | 3.47 × 10 ⁻⁵ | |
| | 840 | 3.63 × 10 ⁻⁵ | 3.75 × 10 ⁻⁵ | 3.67 × 10 ⁻⁵ | 3.83 × 10 ⁻⁵ | |
| | 940 | 4.02 × 10 ⁻⁵ | 4.14 × 10 ⁻⁵ | 4.06 × 10 ⁻⁵ | 4.22 × 10 ⁻⁵ | |
| | 1,040 | 4.41 × 10 ⁻⁵ | 4.53 × 10 ⁻⁵ | 4.44 × 10 ⁻⁵ | 4.61 × 10 ⁻⁵ | |
| | 1,140 | 4.79 × 10 ⁻⁵ | 4.92 × 10 ⁻⁵ | 4.83 × 10 ⁻⁵ | 4.99 × 10 ⁻⁵ | |
| | 1,240 | 5.18 × 10 ⁻⁵ | 5.30 × 10 ⁻⁵ | 5.22 × 10 ⁻⁵ | 5.38 × 10 ⁻⁵ | |
| | BG4620 | 340 | 2.07 × 10 ⁻⁵ | 2.58 × 10 ⁻⁵ | 2.27 × 10 ⁻⁵ | 2.98 × 10 ⁻⁵ |
| | | 440 | 2.46 × 10 ⁻⁵ | 2.96 × 10 ⁻⁵ | 2.66 × 10 ⁻⁵ | 3.37 × 10 ⁻⁵ |
| 540 | | 2.84 × 10 ⁻⁵ | 3.35 × 10 ⁻⁵ | 3.05 × 10 ⁻⁵ | 3.76 × 10 ⁻⁵ | |
| 640 | | 3.23 × 10 ⁻⁵ | 3.74 × 10 ⁻⁵ | 3.44 × 10 ⁻⁵ | 4.14 × 10 ⁻⁵ | |
| 740 | | 3.62 × 10 ⁻⁵ | 4.13 × 10 ⁻⁵ | 3.82 × 10 ⁻⁵ | 4.53 × 10 ⁻⁵ | |
| 840 | | 4.02 × 10 ⁻⁵ | 4.51 × 10 ⁻⁵ | 4.17 × 10 ⁻⁵ | 4.82 × 10 ⁻⁵ | |
| 940 | | 4.41 × 10 ⁻⁵ | 4.90 × 10 ⁻⁵ | 4.56 × 10 ⁻⁵ | 5.21 × 10 ⁻⁵ | |
| 1,040 | | 4.80 × 10 ⁻⁵ | 5.29 × 10 ⁻⁵ | 4.95 × 10 ⁻⁵ | 5.59 × 10 ⁻⁵ | |
| 1,140 | | 5.18 × 10 ⁻⁵ | 5.68 × 10 ⁻⁵ | 5.34 × 10 ⁻⁵ | 5.98 × 10 ⁻⁵ | |
| 1,240 | | 5.57 × 10 ⁻⁵ | 6.06 × 10 ⁻⁵ | 5.72 × 10 ⁻⁵ | 6.37 × 10 ⁻⁵ | |

BG55 –Without Top Cover–

- A (1 long block)
- B (2 long blocks in close contact)

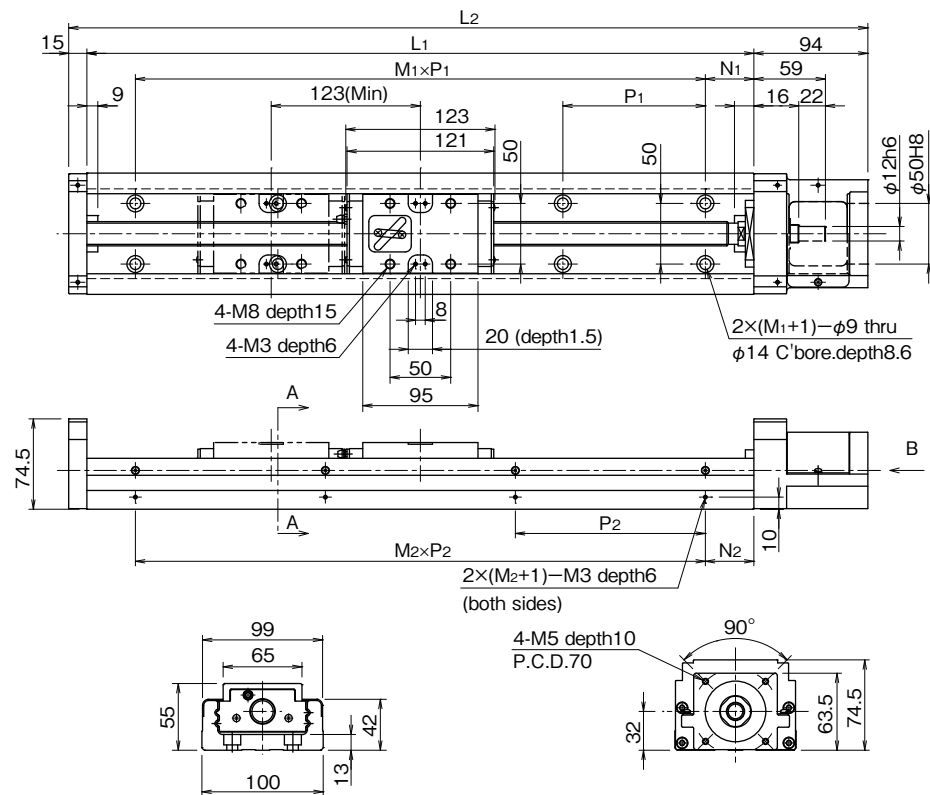


section A-A

View B (motor bracket A0)
refer to page H-42,H-43 for other motor bracket

BG55 –With Top Cover–

- A (1 long block)
- B (2 long blocks in close contact)

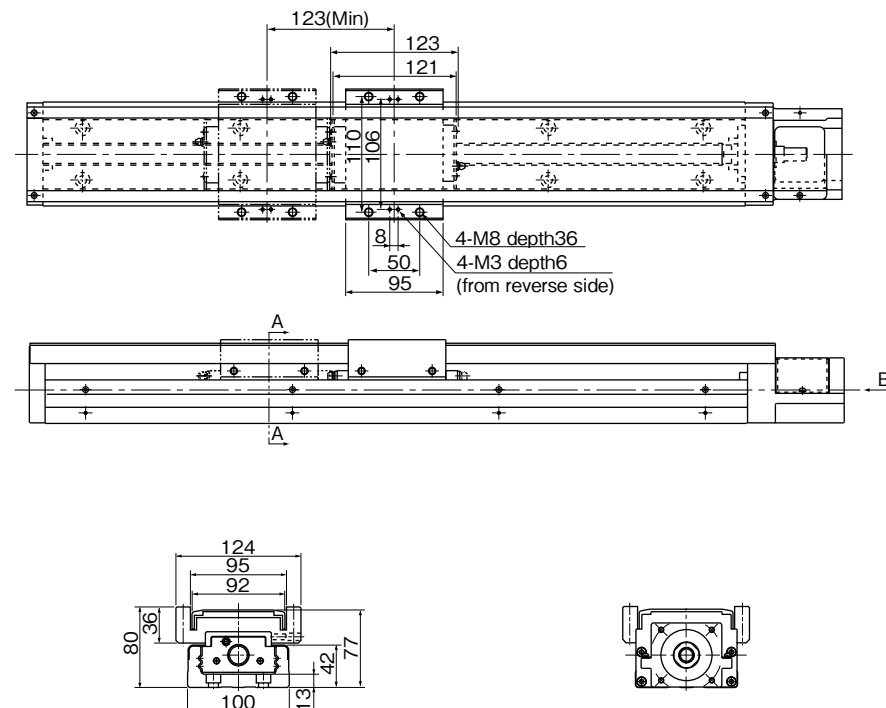

section A-A

View B (motor bracket A0)
refer to page H-42,H-43 for other motor bracket

| part number ^{※3※4} | stroke limit mm ^{※1} | dimensions mm | | block mass kg ^{※2} | | | total mass kg | | | | |
|-----------------------------|-------------------------------|----------------|----------------|-----------------------------|----------------|-------------------|----------------|-----|-----|----|----|
| | | L ₁ | L ₂ | without top cover | with top cover | without top cover | with top cover | | | | |
| BG55□□A-980 | 834 | 980 | 1,089 | 40 | 6×150 | 90 | 4×200 | 1.7 | 2.3 | 20 | 21 |
| | 711 | | | | | | | 3.4 | 4.6 | 22 | 24 |
| BG55□□A-1080 | 934 | 1,080 | 1,189 | 15 | 7×150 | 40 | 5×200 | 1.7 | 2.3 | 22 | 23 |
| | 811 | | | | | | | 3.4 | 4.6 | 24 | 26 |
| BG55□□A-1180 | 1,034 | 1,180 | 1,289 | 65 | 90 | 90 | 6×200 | 1.7 | 2.3 | 23 | 25 |
| | 911 | | | | | | | 3.4 | 4.6 | 25 | 27 |
| BG55□□A-1280 | 1,134 | 1,280 | 1,389 | 40 | 8×150 | 40 | 6×200 | 1.7 | 2.3 | 25 | 27 |
| | 1,011 | | | | | | | 3.4 | 4.6 | 27 | 29 |
| BG55□□A-1380 | 1,234 | 1,380 | 1,489 | 15 | 9×150 | 90 | 6×200 | 1.7 | 2.3 | 27 | 29 |
| | 1,111 | | | | | | | 3.4 | 4.6 | 29 | 31 |

※1: Stroke limit is a drive distance between both ends of the dampers.
 ※2: Mass stated "with top cover" includes mass of sub tables.
 ※3: For B type (2 long blocks), drive block is located closest to motor bracket side.
 ※4: □ is ball screw lead.

inertia (reference values) unit: kg · m²

| part number | rail length mm | long block | | | |
|-------------|----------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | | without top cover | | with top cover | |
| | | A 1 block | B 2 block | A 1 block | B 2 block |
| BG5520 | 980 | 1.46 × 10 ⁻⁴ | 1.64 × 10 ⁻⁴ | 1.52 × 10 ⁻⁴ | 1.76 × 10 ⁻⁴ |
| | 1,080 | 1.59 × 10 ⁻⁴ | 1.76 × 10 ⁻⁴ | 1.65 × 10 ⁻⁴ | 1.88 × 10 ⁻⁴ |
| | 1,180 | 1.71 × 10 ⁻⁴ | 1.88 × 10 ⁻⁴ | 1.77 × 10 ⁻⁴ | 2.00 × 10 ⁻⁴ |
| | 1,280 | 1.83 × 10 ⁻⁴ | 2.00 × 10 ⁻⁴ | 1.89 × 10 ⁻⁴ | 2.12 × 10 ⁻⁴ |
| | 1,380 | 1.95 × 10 ⁻⁴ | 2.13 × 10 ⁻⁴ | 2.01 × 10 ⁻⁴ | 2.25 × 10 ⁻⁴ |

MOTOR BRACKET CONFIGURATIONS & APPLICABLE MOTORS

NB provides optional motor brackets to easily install most popular motors.

Table H-9 (1) Applicable Motors

| Applicable motors | | | Output flange | BG15 | BG20 | BG26 | BG33 | BG46 | BG55 | | |
|-------------------|------------------|---------------------|-----------------|---------------|---------------|---------------|---------------|---------------|---------------|----|----|
| | | | | P.H-32 ~33 | P.H-34 ~35 | P.H-36 ~37 | P.H-38 ~39 | P.H-40 ~41 | P.H-42 ~43 | | |
| AC Servo motor | Panasonic | E | MUMA5A | 50W | - | AA | AA | B2 | - | - | |
| | | | MUMA01 | 100W | - | AA | AA | B2 | - | - | |
| | | | MUMA02 | 200W | - | - | - | A7 | A2 | - | |
| | | | MUMA04 | 400W | - | - | - | - | - | - | |
| | | A4 | MSMD5A | 50W | - | A3 | A3 | A2 | C0 | - | |
| | | | MSMD01 | 100W | - | - | - | A7 | A2 | - | |
| | | | MSMD02 | 200W | - | - | - | - | - | - | |
| | | | MSMD04 | 400W | - | - | - | - | A3 | A2 | |
| | | A5 | MSME5A | 50W | - | A3 | A3 | A2 | C0 | - | |
| | MSME01 | | 100W | - | - | - | - | A2 | - | | |
| | MSME02 | | 200W | - | - | - | A7 | A2 | - | | |
| | MSME04 | | 400W | - | - | - | - | - | - | | |
| | MSME08 | | 750W | - | - | - | - | A3 | A2 | | |
| | YASKAWA ELECTRIC | MITSUBISHI ELECTRIC | J2-Jr | HC-AQ0135 | 10W | - | - | - | - | - | |
| | | | | HC-AQ0235 | 20W | A1 | A8 | A8 | - | - | |
| | | | | HC-AQ0335 | 30W | - | - | - | - | - | |
| | | | J4 | HG-KR(MR)053 | 50W | - | A1 | A1 | A1 | B0 | - |
| | | | | HG-KR(MR)13 | 100W | - | - | - | A6 | A1 | A0 |
| HG-KR(MR)23 | | | | 200W | - | - | - | - | - | - | |
| HG-KR(MR)43 | | | | 400W | - | - | - | - | A4 | A1 | |
| J3 | | | HF-KP(MP)053 | 50W | - | A1 | A1 | A1 | B0 | - | |
| | | | HF-KP(MP)13 | 100W | - | - | - | - | - | - | |
| | | HF-KP(MP)23 | 200W | - | - | - | A6 | A1 | A0 | | |
| | | HF-KP(MP)43 | 400W | - | - | - | - | - | - | | |
| | | HF-KP(MP)73 | 750W | - | - | - | - | A4 | A1 | | |
| Σ-V | | mini | SGMMV-A1 | 10W | - | - | - | - | - | | |
| | | | SGMMV-A2 | 20W | A2 | A9 | A9 | - | - | | |
| | | | SGMMV-A3 | 30W | - | - | - | - | - | | |
| | | Σ-V | SGMJV(SGMAV)-A5 | 50W | - | A1 | A1 | A1 | B0 | - | |
| | | | SGMJV(SGMAV)-01 | 100W | - | - | - | - | - | - | |
| | | | SGMAV-C2 | 150W | - | - | - | - | - | - | |
| | SGMJV(SGMAV)-02 | | 200W | - | - | - | A6 | A1 | A0 | | |
| | SGMJV(SGMAV)-04 | | 400W | - | - | - | - | - | - | | |
| | SGMAV-06 | | 550W | - | - | - | - | A4 | A1 | | |
| Σ-III | SGMAS-A5 | 50W | - | A1 | A1 | A1 | B0 | - | | | |
| | SGMAS-01 | 100W | - | - | - | - | - | - | | | |
| | SGMAS-C2 | 150W | - | - | - | - | - | - | | | |
| | SGMAS-02 | 200W | - | - | - | A6 | A1 | A0 | | | |
| | SGMAS-04 | 400W | - | - | - | - | - | - | | | |
| SGMAS-08 | 750W | - | - | - | - | A4 | A1 | | | | |

Table H-9 (2) Applicable Motors


| Applicable motors | | | Output flange | BG15 | BG20 | BG26 | BG33 | BG46 | BG55 | |
|-------------------|------------------|----------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|----|
| | | | | P.H-32 ~33 | P.H-34 ~35 | P.H-36 ~37 | P.H-38 ~39 | P.H-40 ~41 | P.H-42 ~43 | |
| AC Servo motor | SANYO DENKI | Q | Q1AA04003D | 30W | - | A1 | A1 | A1 | B0 | - |
| | | | Q1AA04005D | 50W | - | - | - | - | - | - |
| | | | Q1AA04010D | 100W | - | - | - | A6 | A1 | A0 |
| | | | Q1AA06020D | 200W | - | - | - | - | - | - |
| | | | Q1AA06040D | 400W | - | - | - | - | A4 | A1 |
| | | Q1AA07075D | 750W | - | - | - | - | - | - | |
| | | R | R2AA04005 | 50W | - | A1 | A1 | A1 | B0 | - |
| | | | R2AA04010 | 100W | - | - | - | A6 | A1 | A0 |
| | | | R2AA06020 | 200W | - | - | - | - | - | - |
| | R2AA08075 | | 750W | - | - | - | - | A4 | A1 | |
| | Stepper motor | ORIENTAL MOTOR | α step | ASC3* | □28 | A3 | A6 | A6 | - | - |
| | | | | AS46,ASC46 | □42 | - | A5 | A5 | B1 | - |
| | | | | AS6*,ASC66 | □60 | - | - | - | A8 | D0 |
| | | | | AS9* | □85 | - | - | - | - | D1 |
| | | | | AR4,ARL4 | □42 | - | A5 | A5 | B1 | - |
| | | | | AR6,ARL6 | □60 | - | - | - | - | D0 |
| | | | AR9,ARL9 | □85 | - | - | - | - | D1 | |
| | | | 5 phase motor | CSK51,CRK51 | □20 | A5 | - | - | - | - |
| CSK52,CRK52 | | | | □28 | A3 | A6 | A6 | - | - | |
| CSK54,CRK54 | | □42 | | - | A5 | A5 | B1 | - | | |
| CSK56,CRK56 | | □60 | | - | - | - | A8 | D0 | | |
| CSK59 | | □85 | | - | - | - | - | D1 | | |
| RK54 | | □42 | | - | A5 | A5 | B1 | - | | |
| RK56 | | □60 | | - | - | - | A8 | D0 | | |
| RK59 | | □85 | | - | - | - | - | D1 | | |
| RKS54 | | □42 | | - | A5 | A5 | B1 | - | | |
| RKS56 | | □60 | - | - | - | - | D0 | | | |
| RKS59 | | □85 | - | - | - | - | D1 | | | |
| 2 phase motor | PK22,CSK22 | □28 | A3 | A6 | A6 | - | - | | | |
| | PK24,CSK24,UMK24 | □42 | - | A5 | A5 | B1 | - | | | |
| | PK26,CSK26,UMK26 | □60 | - | - | - | A5 | - | | | |
| SH528 | □28 | A3 | A6 | A6 | - | - | | | | |
| SANYO DENKI | 5 phase motor | 103H(F,M)55 | □42 | - | A5 | A5 | B1 | - | | |
| | | 103H(F,M)785 | □60 | - | - | - | A8 | D0 | | |
| | | 103H(F,M)858 | □85 | - | - | - | - | D1 | | |
| TECHNO DRIVE | 5 phase motor | *K-S52* | □28 | A4 | - | - | - | - | | |
| | | *K-S54* | □42 | - | A5 | A5 | B1 | - | | |
| | | *K-S(M)56* | □60 | - | - | - | A8 | D0 | | |
| | | *K-M(G)59* | □85 | - | - | - | - | D1 | | |

NB can provide other types of motor brackets. Please contact NB for details.

BG15


Figures inside () indicates mass of the motor mount adapter plate.

A0

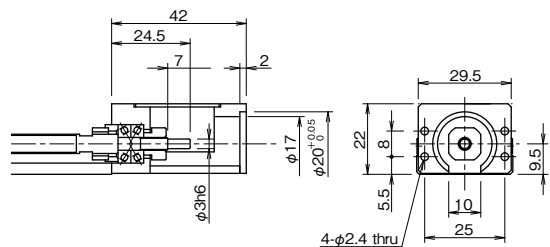


A1 (Mass: 9g)

Recommended Coupling: XBW-15C2(Nabeya Bi-tech Kaisha)
SFC-005DA2(Miki Pully Co., Ltd.)

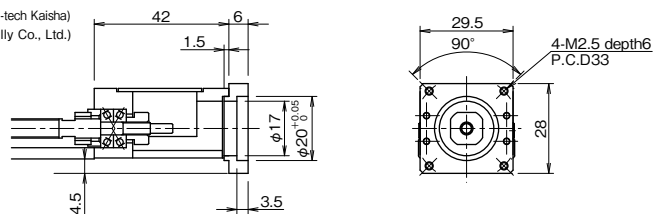


A2 (Mass: 8g)

Recommended Coupling: LAD-15C(Sakai Manufacturing Co., Ltd.)
XBW-15C2(Nabeya Bi-tech Kaisha)
SFC-005DA2(Miki Pully Co., Ltd.)

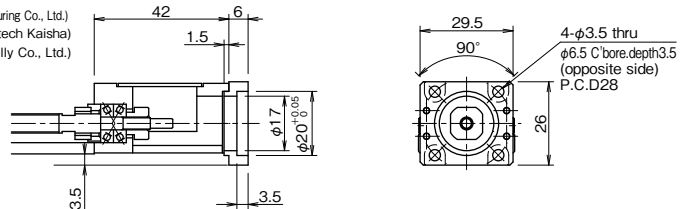


A3 (Mass: 9g)

Recommended Coupling: LAD-15C(Sakai Manufacturing Co., Ltd.)
XBW-15C2(Nabeya Bi-tech Kaisha)
SFC-005DA2(Miki Pully Co., Ltd.)

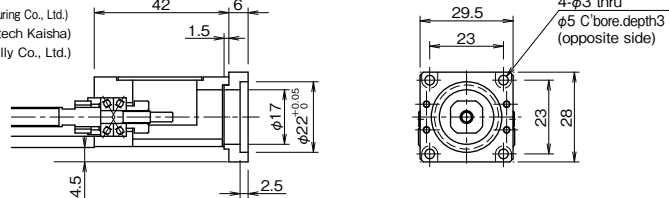


A4 (Mass: 8g)

Recommended Coupling: LAD-15C(Sakai Manufacturing Co., Ltd.)
XBW-15C2(Nabeya Bi-tech Kaisha)
SFC-005DA2(Miki Pully Co., Ltd.)

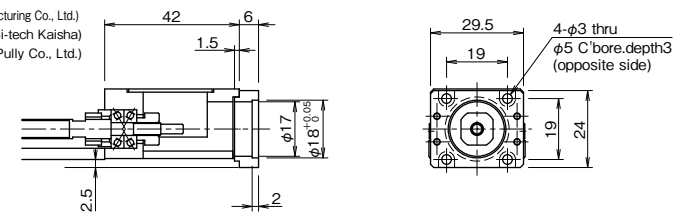


A5 (Mass: 4g)

Recommended Coupling: XBW-15C2(Nabeya Bi-tech Kaisha)

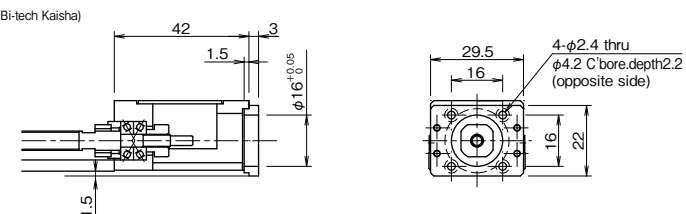


A6 (Mass: 4g)

Recommended Coupling: XBW-15C2(Nabeya Bi-tech Kaisha)

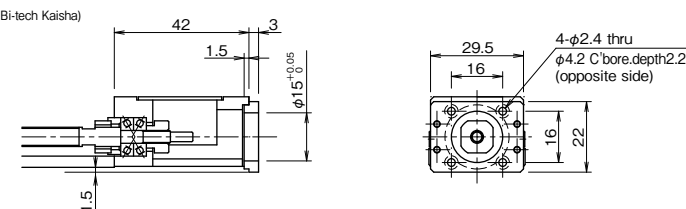

A7 (Mass: 11g)

Recommended Coupling: LAD-15C(Sakai Manufacturing Co., Ltd.)
XBW-15C2(Nabeya Bi-tech Kaisha)

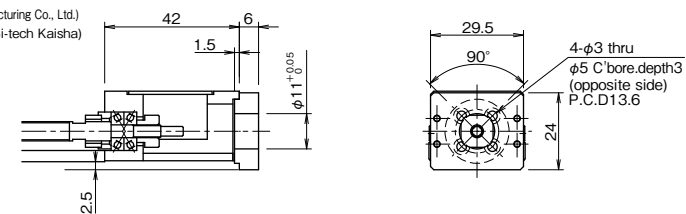


Attach the motor to the motor mount adapter plate first.

BG20


Figures inside () indicates mass of the motor mount adapter plate.

A0

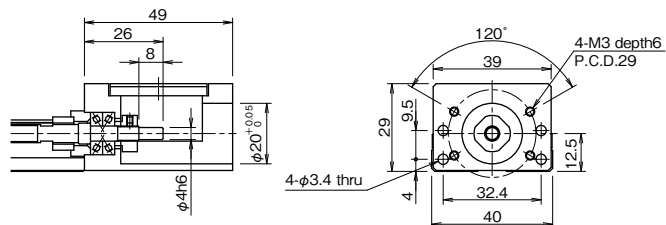


A1 (Mass: 38g)

Recommended Coupling: SFC-010DA2(Miki Pulley Co., Ltd.)
XBW-19C2(Nabeya Bi-tech Kaisha)

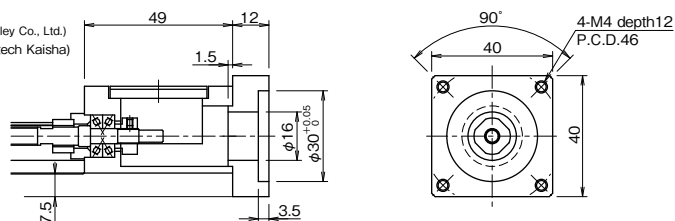


A3 (Mass: 39g)

Recommended Coupling: SFC-010DA2(Miki Pulley Co., Ltd.)
XBW-19C2(Nabeya Bi-tech Kaisha)

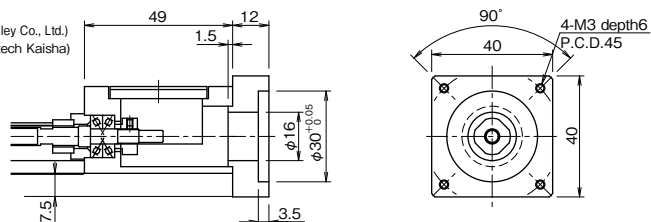


A5 (Mass: 26g)

Recommended Coupling: SFC-010DA2(Miki Pulley Co., Ltd.)
XBW-19C2(Nabeya Bi-tech Kaisha)

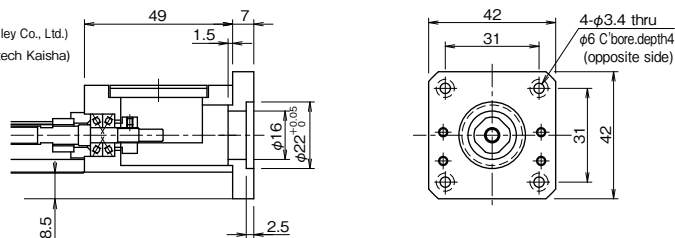


A6 (Mass: 10g)

Recommended Coupling: SFC-010DA2(Miki Pulley Co., Ltd.)
XBW-19C2(Nabeya Bi-tech Kaisha)

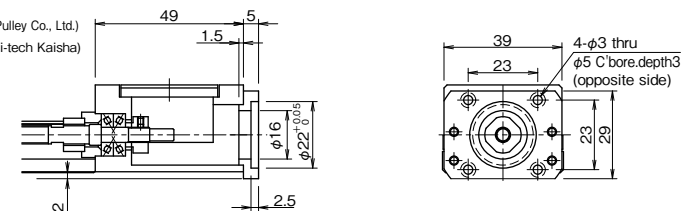


A8 (Mass: 12g)

Recommended Coupling: SFC-010DA2(Miki Pulley Co., Ltd.)
XBW-19C2(Nabeya Bi-tech Kaisha)

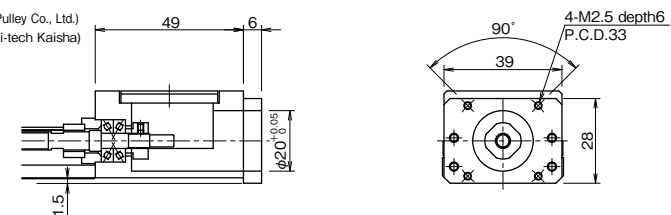


A9 (Mass: 14g)

Recommended Coupling: SFC-010DA2(Miki Pulley Co., Ltd.)
XBW-19C2(Nabeya Bi-tech Kaisha)

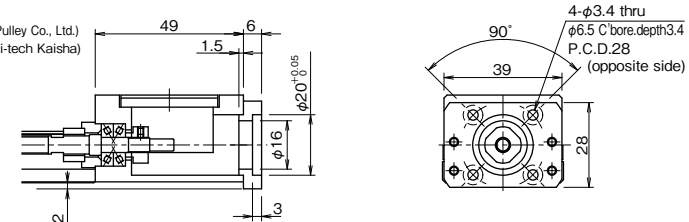

AA (Mass: 46g)









Recommended Coupling: SFC-010DA2(Miki Pulley Co., Ltd.)
XBW-19C2(Nabeya Bi-tech Kaisha)

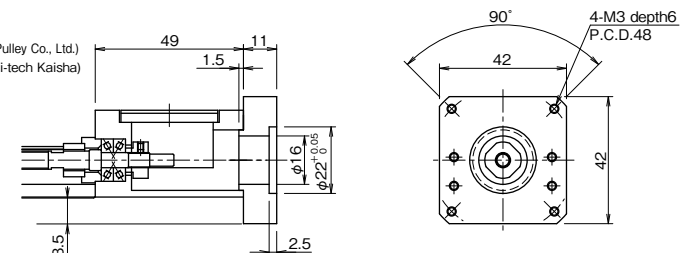

For configurations A5, A6, A9 and AA, attach the motor to the motor mount adapter plate first.

BG26

Figures inside () indicates mass of the motor mount adapter plate.

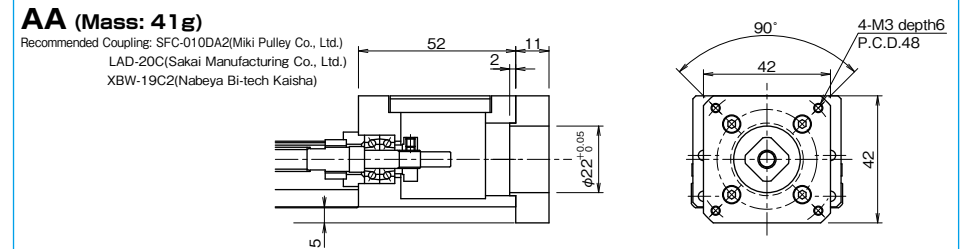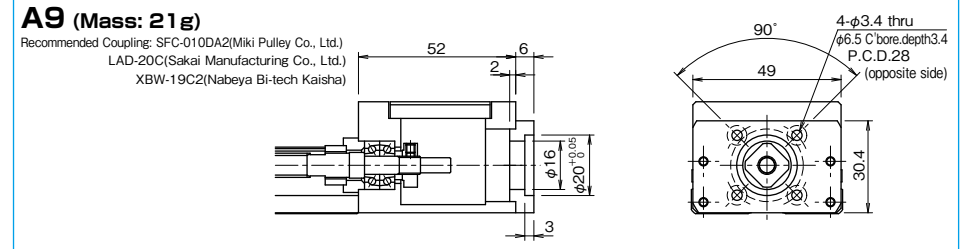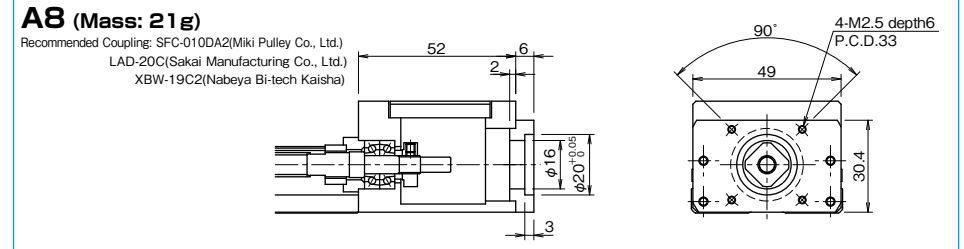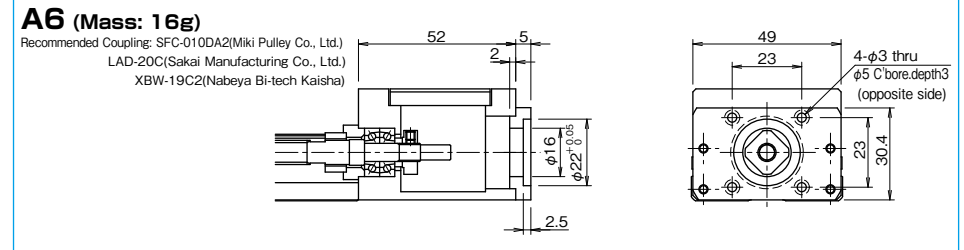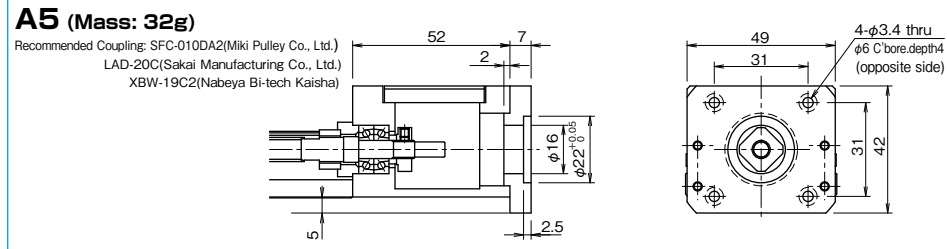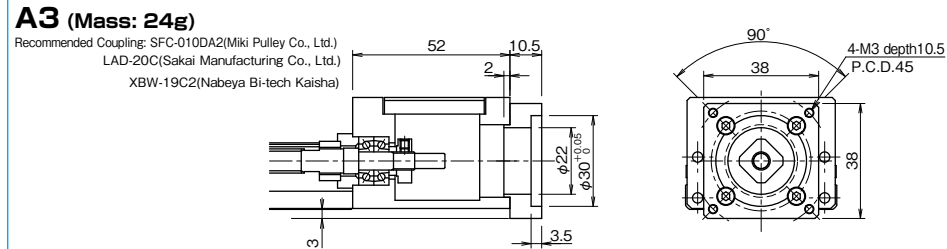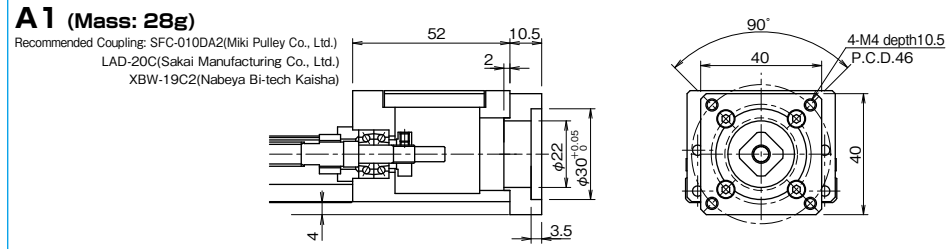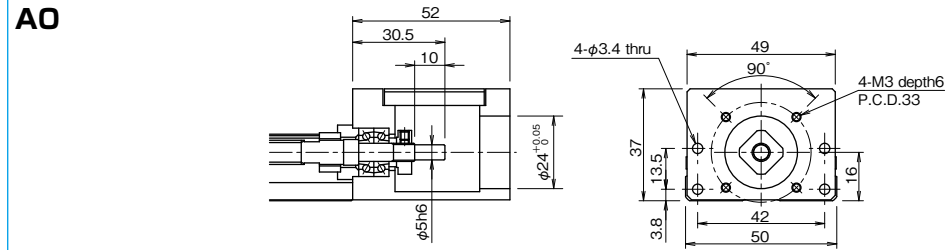


For configurations A5, A6 and A9, attach the motor to the motor mount adapter plate first.

BG33


Figures inside () indicates mass of the motor mount adapter plate.

A0

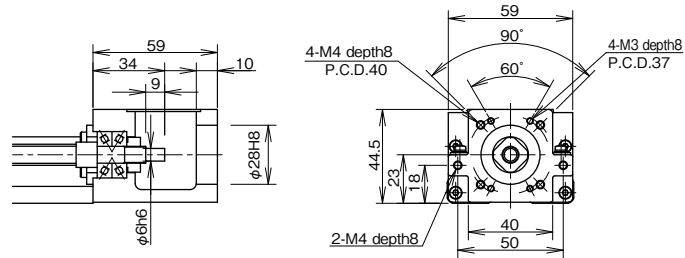


A1 (Mass: 66g)

Recommended Coupling: SFC-020DA2(Miki Pulley Co., Ltd.)
LAD-25C(Sakai Manufacturing Co., Ltd.)
XBW-25C2(Nabeya Bi-tech Kaisha)

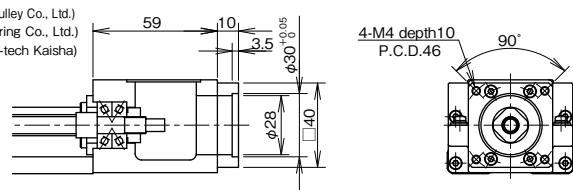


A2 (Mass: 67g)

Recommended Coupling: SFC-020DA2(Miki Pulley Co., Ltd.)
LAD-25C(Sakai Manufacturing Co., Ltd.)
XBW-25C2(Nabeya Bi-tech Kaisha)

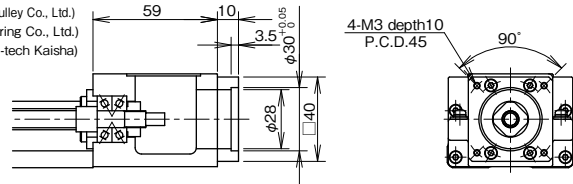


A3 (Mass: 133g)

Recommended Coupling: SFC-020DA2(Miki Pulley Co., Ltd.)
LAD-25C(Sakai Manufacturing Co., Ltd.)
XBW-25C2(Nabeya Bi-tech Kaisha)

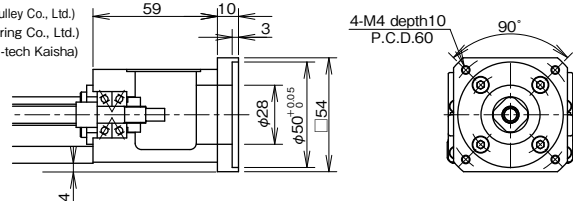


A5 (Mass: 125g)

Recommended Coupling: SFC-020DA2(Miki Pulley Co., Ltd.)
LAD-25C(Sakai Manufacturing Co., Ltd.)
XBW-25C2(Nabeya Bi-tech Kaisha)

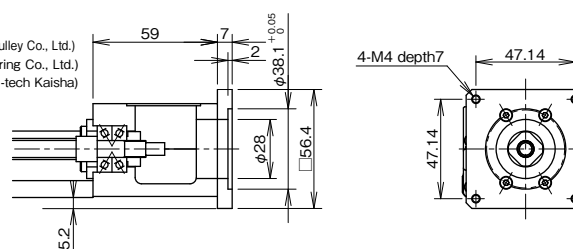


A6 (Mass: 215g)

Recommended Coupling: XBW-27C2(Nabeya Bi-tech Kaisha)

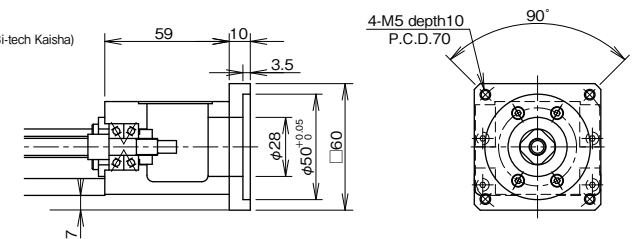

A7 (Mass: 215g)


Recommended Coupling: XBW-27C2(Nabeya Bi-tech Kaisha)

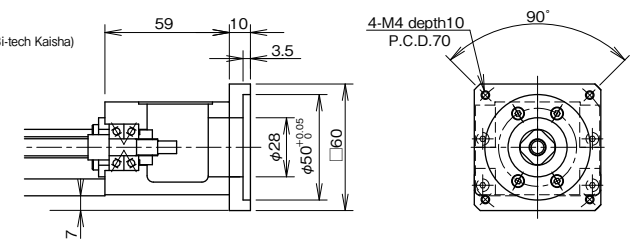

A8 (Mass: 212g)


Recommended Coupling: SFC-020DA2(Miki Pulley Co., Ltd.)
LAD-25C(Sakai Manufacturing Co., Ltd.)
XBW-25C2(Nabeya Bi-tech Kaisha)

*Please contact NB when you use αSTEP motor (Oriental Motor Co., Ltd.).

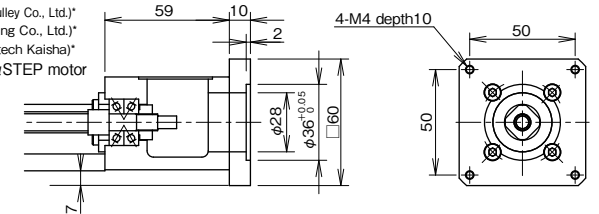


B1 (Mass: 111g)

Recommended Coupling: SFC-010DA2(Miki Pulley Co., Ltd.)
LAD-20C(Sakai Manufacturing Co., Ltd.)
XBW-19C2(Nabeya Bi-tech Kaisha)

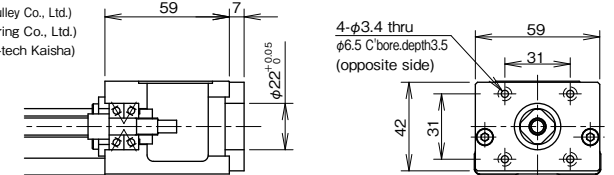

B2 (Mass: 167g)










Recommended Coupling: LAD-25C(Sakai Manufacturing Co., Ltd.)
XBW-19C2(Nabeya Bi-tech Kaisha)

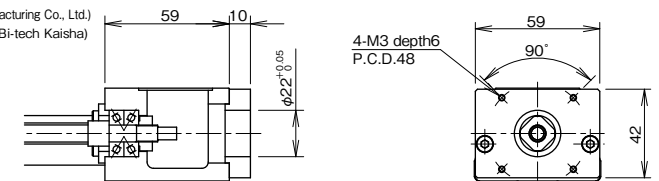

For configurations B1 and B2, attach the motor to the motor mount adapter plate first.

BG46


Figures inside () indicates mass of the motor mount adapter plate.

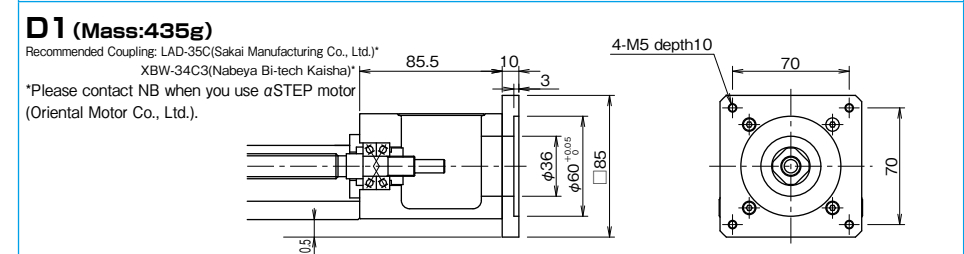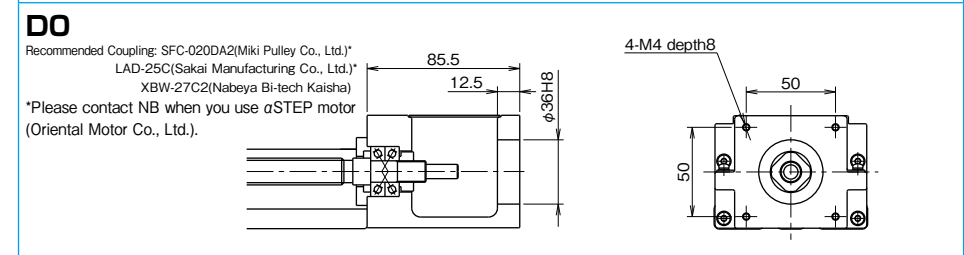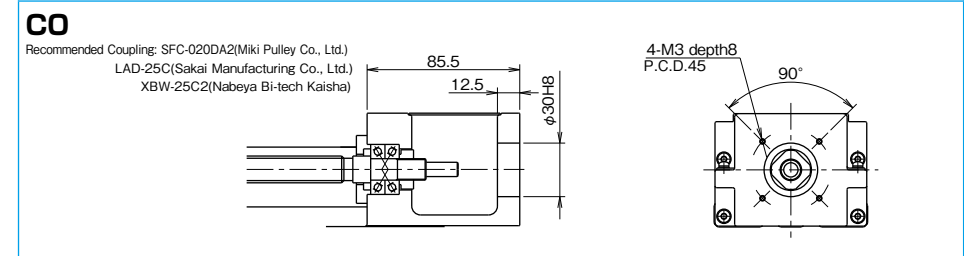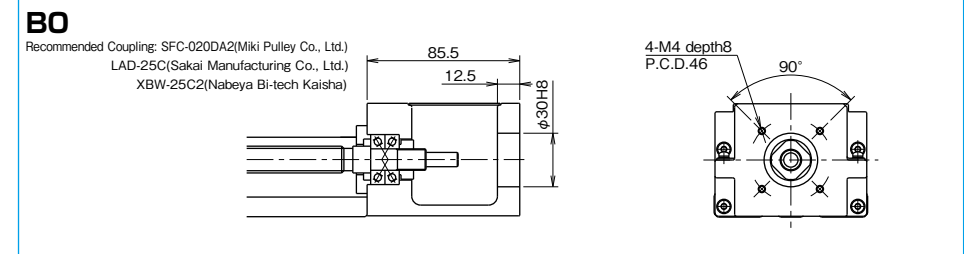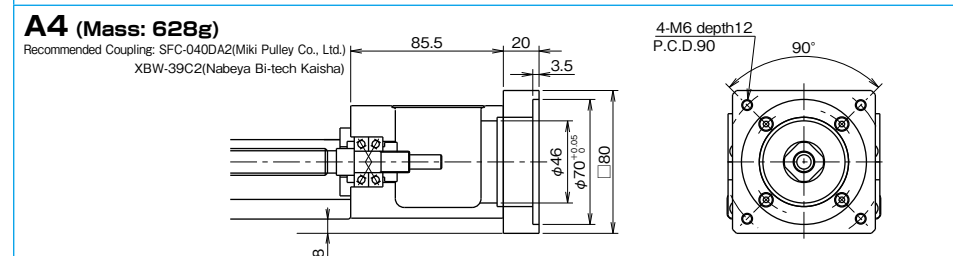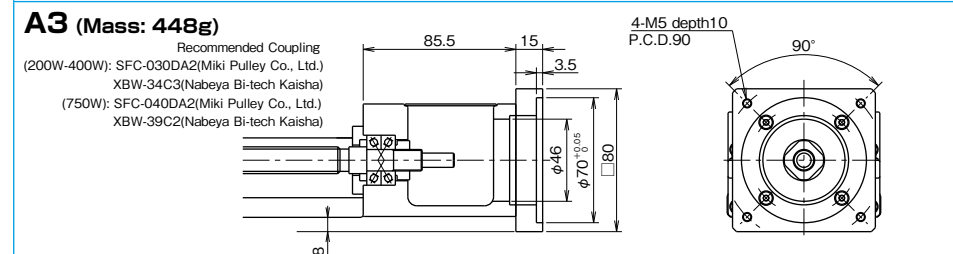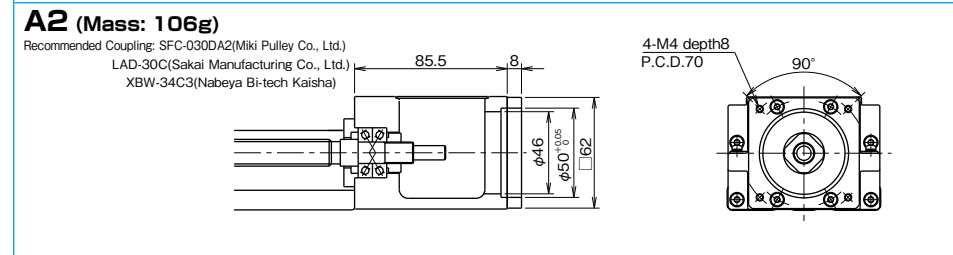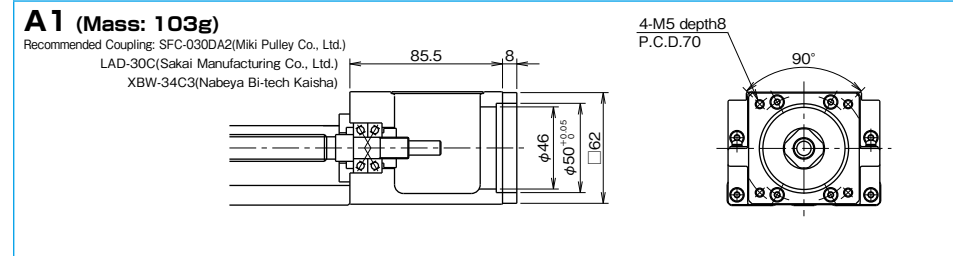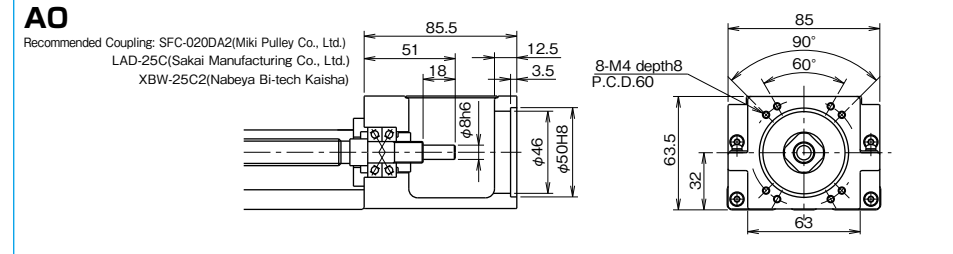

EXPOSED BRACKET R0


The ball screw shaft end is exposed with the exposed bracket R0 type.
Please fabricate an original bracket in case the standard brackets are not applicable.

BG15

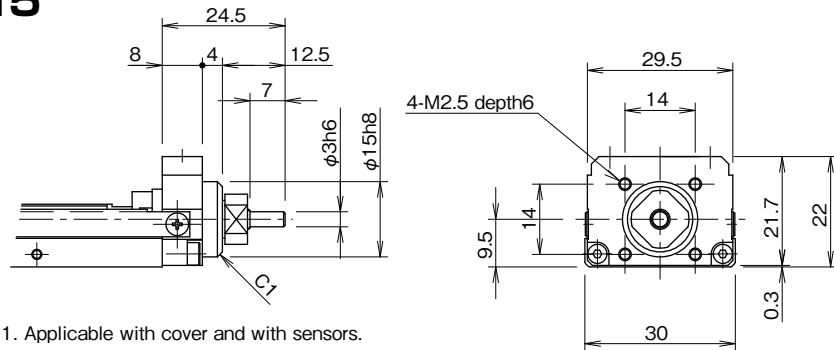


1. Applicable with cover and with sensors.
2. Mass is 0.04kg less than the mass in the table on page H-14.

BG20

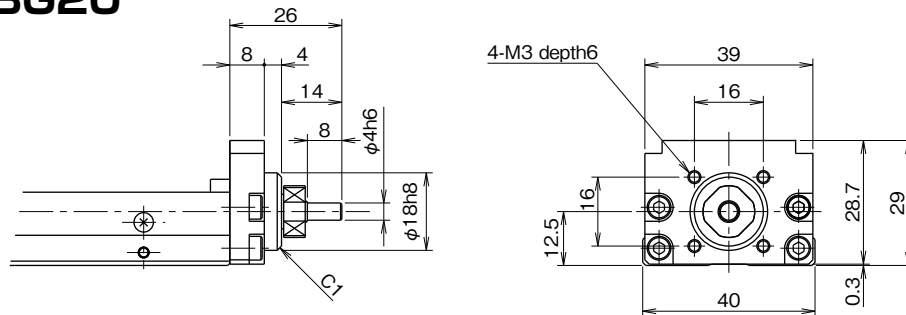


1. Applicable with cover and with sensors.
2. Mass is 0.04kg less than the mass in the table on page H-16.

BG26

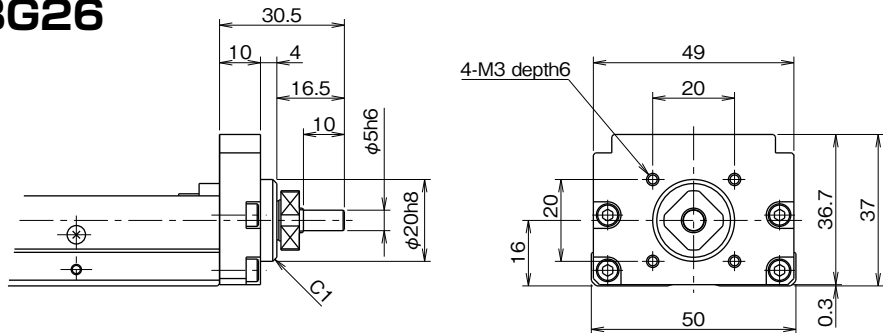


1. Applicable with cover and with sensors.
2. Mass is 0.08kg less than the mass in the table on page H-18.

BG33

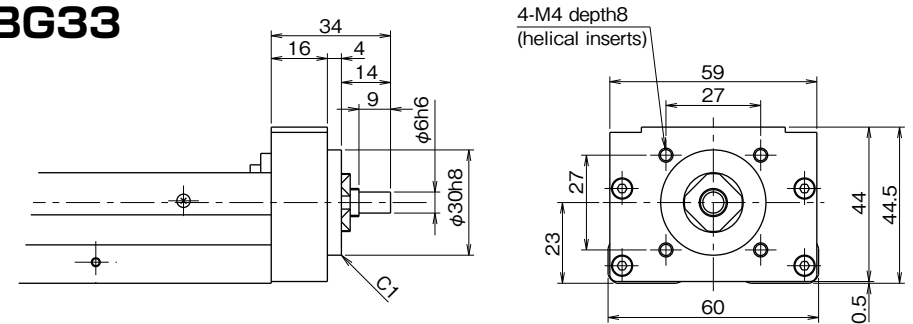


1. Applicable with cover and with sensors.
2. Mass is 0.1kg less than the mass in the table on page H-20,H-22.

BG46

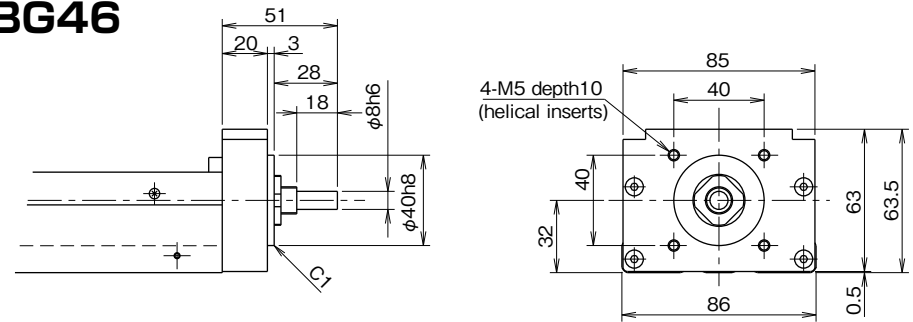

1. Applicable with cover and with sensors.
2. Mass is 0.3kg less than the mass in the table on page H-24,H-26.

BG55

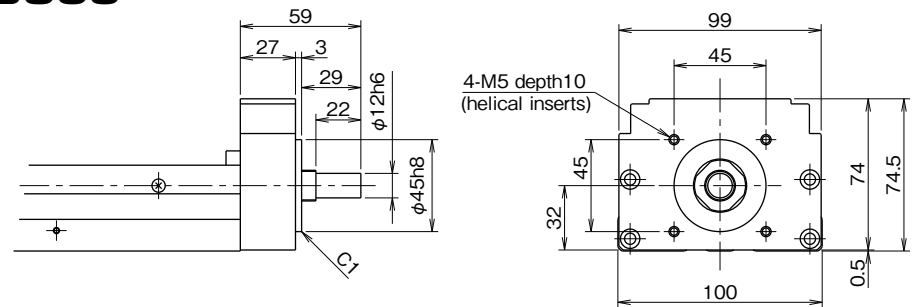


1. Applicable with cover and with sensors.
2. Mass is 0.3kg less than the mass in the table on page H-28.

RETURN PULLEY UNIT

Return pulley units in which a motor is connected with a timing belt are available for BG type. Its return structure allows the reduction of total length (available for BG33 and BG46).

BG33

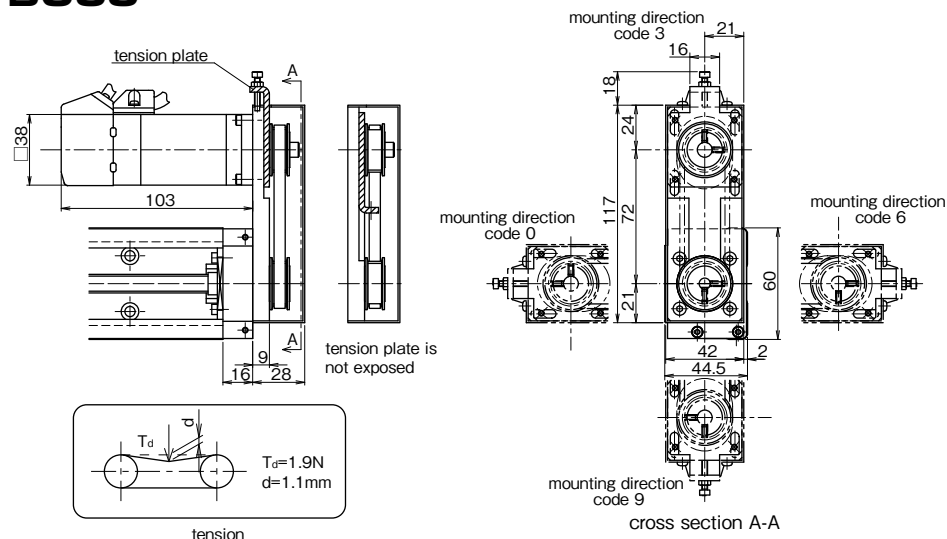


- This drawing shows RA for MSMA01(Panasonic).
- Installation position of Pulley Unit can be selected at 90° intervals (mounting direction code).
- Applicable with cover and with sensors.
Precaution for applying H type sensors
When the motor is positioned at direction 3 or 9, H type sensors interfere if mounted on the side of motor. H type sensors must be mounted opposite to the motor.
- Tension plate can be built in and is not exposed. (not applicable to RC)
- Mass is added 0.2kg to the mass on page H-20~23.
- Inertia is added $2.22 \times 10^{-6} \text{kg} \cdot \text{m}^2$ to the value of Table on page H-20~23. (motor inertia not included)
- Part number structure BG33***-****/☆☆□
☆☆: Symbol of applicable motor bracket (refer to Table H-10)
□: Mounting direction code (refer to cross section A-A)

Table H-10 Applicable Motor

| motor bracket | applicable motors | | output | flange | motor diameter |
|---------------|------------------------|--------------------|---------|--------|----------------|
| RA | Panasonic | MINAS SERIES | 50~100W | □38 | φ8 |
| RB | YASKAWA ELECTRIC | SIGMA SERIES | 50~100W | □40 | φ8 |
| | MITSUBISHI ELECTRIC | MELSERVO SERIES | 50~100W | □40 | |
| | SANYO DENKI | SANMOTIONQ1 SERIES | 50~100W | □40 | |
| RC | 5 PHASE STEPPING MOTOR | | - | □42 | φ5 |

Please contact NB for other stepper motors.

BG46

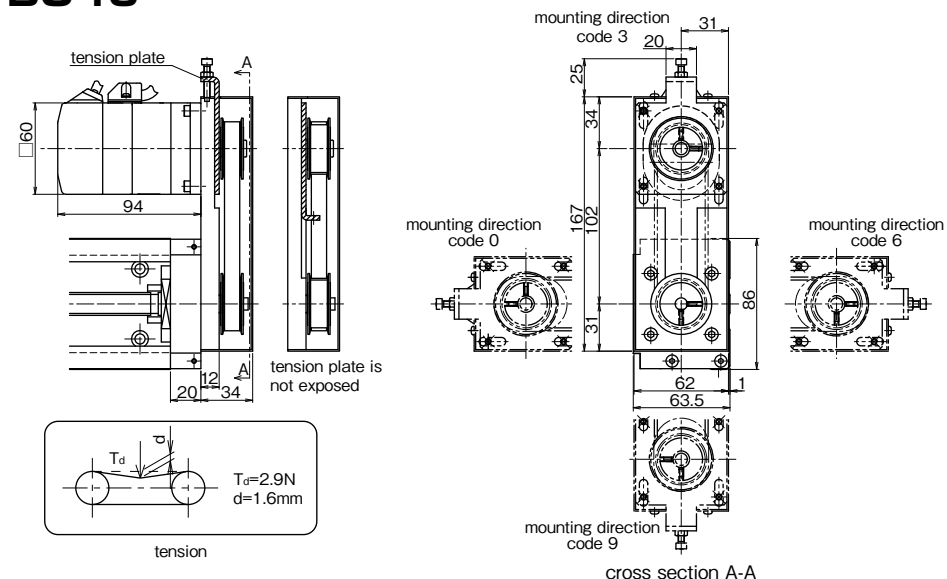

- This drawing shows RA for MSMA01(Panasonic).
- Installation position of Pulley Unit can be selected at 90° intervals (mounting direction code).
- Applicable with cover and with sensors.
Precaution for applying H type sensors
When the motor is positioned at direction 3 or 9, H type sensors interfere if mounted on the side of motor. H type sensors must be mounted opposite to the motor.
- Tension plate can be built in and is not exposed.
- Mass is added 0.7kg to the mass on page H-24~27.
- Inertia is added $1.24 \times 10^{-6} \text{kg} \cdot \text{m}^2$ to the value of Table on page H-24~27. (motor inertia not included)
- Part number structure BG46***-****/☆☆□
☆☆: Symbol of applicable motor bracket (refer to Table H-11)
□: Mounting direction code (refer to cross section A-A)

Table H-11 Applicable Motor

| motor bracket | applicable motors | | output | flange | motor diameter |
|---------------|------------------------|--------------------|--------|--------|----------------|
| RA | Panasonic | MINAS SERIES | 200W | □60 | φ11 |
| RB | YASKAWA ELECTRIC | SIGMA SERIES | 200W | □60 | φ14 |
| | MITSUBISHI ELECTRIC | MELSERVO SERIES | 200W | □60 | |
| | SANYO DENKI | SANMOTIONQ1 SERIES | 200W | □60 | |
| RC | 5 PHASE STEPPING MOTOR | | - | □60 | φ8 |


Please contact NB for other stepper motors.

Return pulley units is available for sizes other than BG33 and BG46. Please contact NB.

LOW HOUSING


NB provides low housing with actuators. The height of housing is lower than the block. When the length of work is longer than the block, mounted with standatad housing, the housing contact works. It is recommended to take low housing when long work is mounted. Please note that the height of motor bracket cannot be lower any more.

BG15

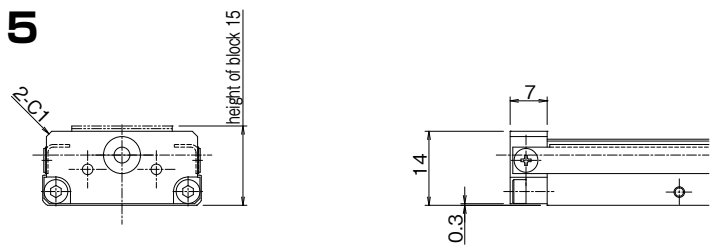


•Mass is 0.005Kg less than the mass on page H-14.

BG20

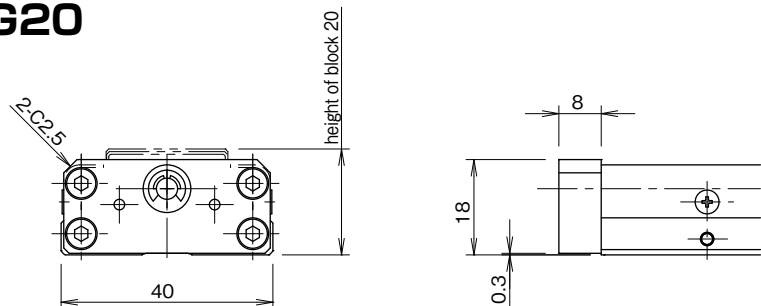


•Mass is 0.01Kg less than the mass on page H-16.

BG26

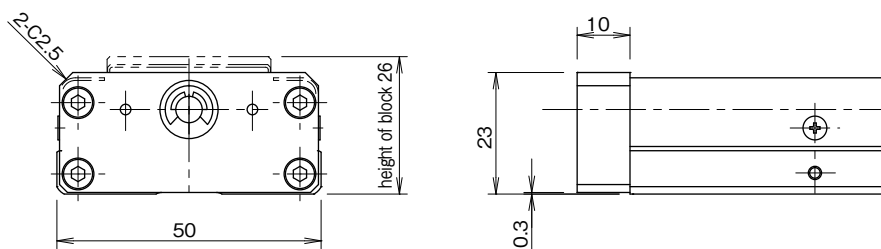


•Mass is 0.02Kg less than the mass on page H-18.

BG33

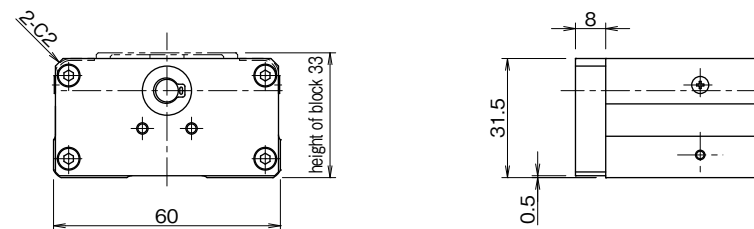


•Mass is 0.02Kg less than the mass on page P.H-20,22.

BG46

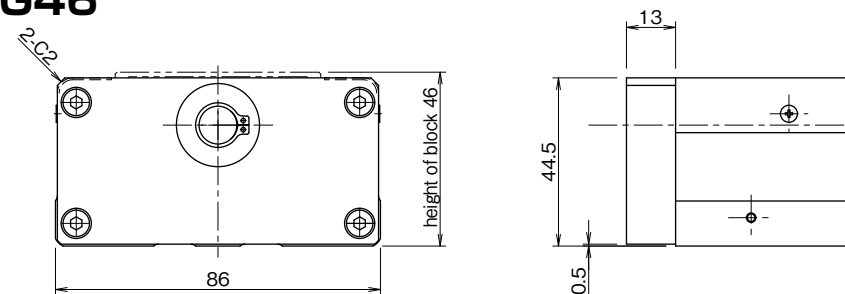

•Mass is 0.05Kg less than the mass on page P.H-24,26.

BG55

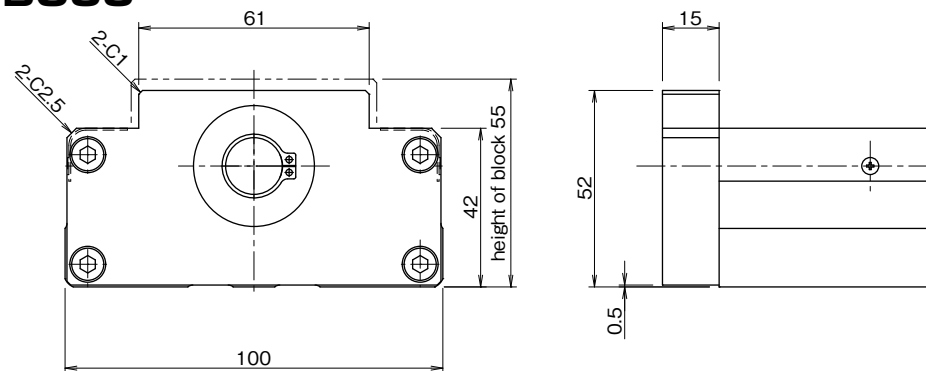

•Mass is 0.1Kg less than the mass on page P.H-28.


BELLOWS

BG type can be specified with a cover or bellows for dust prevention. Bellows are securely fixed for various installation methods in positioning and directions. Sensor for bellows is limited to K (proximity sensor) type only, which is pre-installed at proper positions. Please pay attention to the stroke limit of BG with bellows that is shorter than the standard stroke limit.

— Position of Sensor Cable Outlet —

The positions of the outlet for sensor cables can be selected as Figure H-15 shows.

Figure H-15 Position of Sensor Cable Outlet

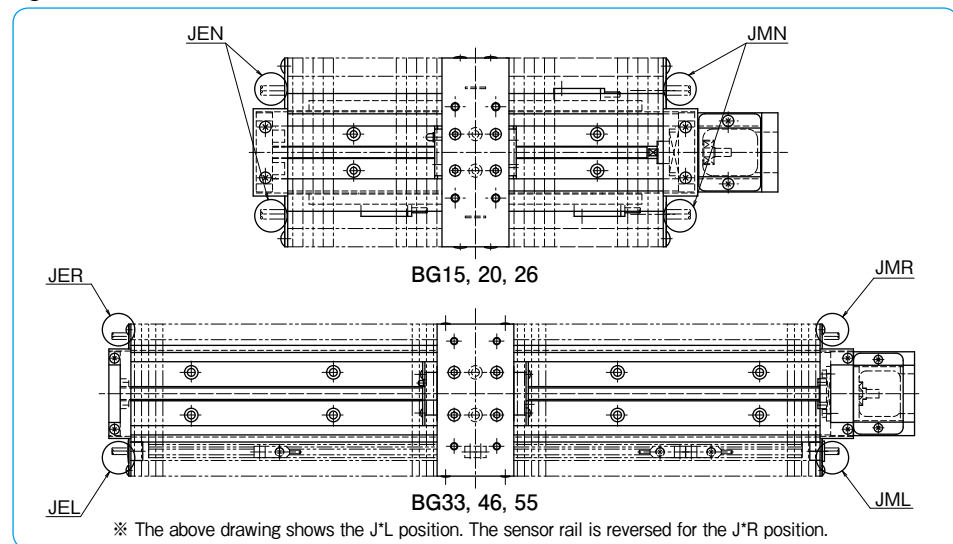


part number structure for bellows

1. J (for the first symbol)
2. Specification of the position of the sensor cable outlet
Please select the motor side or the housing side.
M: motor side E: housing side (end plate side)
3. Specification of the position of the sensor rail
Please select the right hand or the left hand.
R: on the right from the motor side
L: on the left from the motor side
※N for BG15, 20, and 26 since the sensors are mounted on both the right and left hand.
4. JNN for without sensors
5. Sensor type is K (proximity sensor) type only (APM-D3 series: YAMATAKE CORPORATION).

— Sensor Timing Chart —


The following chart shows the standard sensor arrangement.

Figure H-16 Sensor Timing Chart

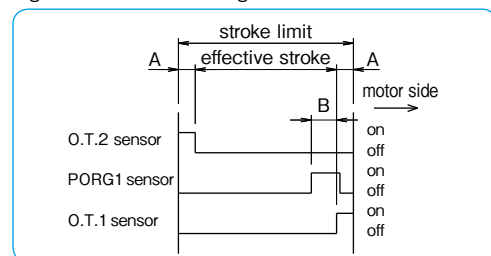


| part number | A | B |
|-------------|----|----|
| BG15 | 5 | 8 |
| BG20 | 5 | 8 |
| BG26 | 5 | 13 |
| BG33 | 10 | 13 |
| BG46 | 10 | 13 |
| BG55 | 10 | 13 |

BG15
A(1 long block)

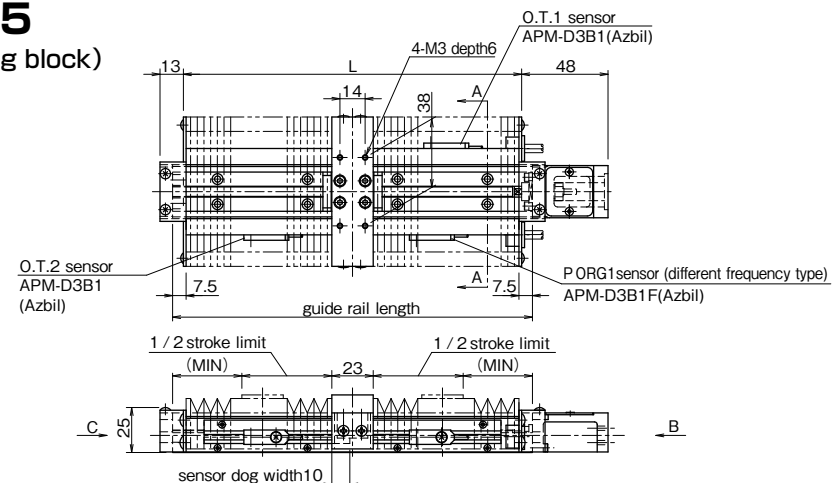

B(2 long blocks in close contact)

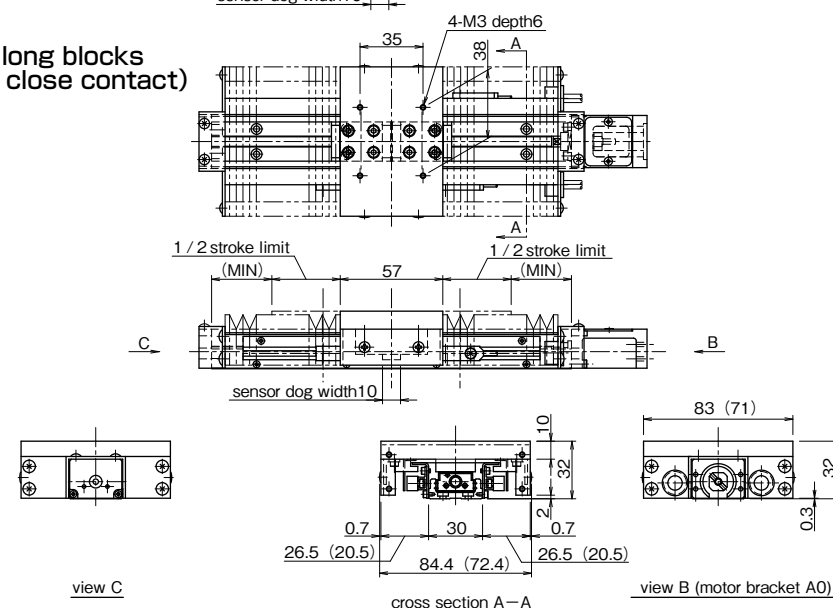


1. The drawings show the "JMN" configuration.
2. The numbers in the parentheses are the dimensions when sensors are not selected.
3. Please refer to page H-14 for dimensions that are not shown on the drawings.
4. material of bellows: composite resin sheet (black)

| rail length | L | 1 long block | | 2 long blocks | | | |
|-------------|-----|--------------|------------------|---------------|--------------|------------------|------|
| | | stroke limit | effective stroke | MIN | stroke limit | effective stroke | MIN |
| 75 | — | — | — | — | — | — | — |
| 100 | — | — | — | — | — | — | — |
| 125 | 113 | 43 | 33 | 29.5 | — | — | — |
| 150* | 138 | 60 | 50 | 33.5 | 40 | 30 | 26.5 |
| 175 | 163 | 85 | 75 | 33.5 | 59 | 49 | 29.5 |
| 200 | 188 | 100 | 90 | 38.5 | 76 | 60 | 33.5 |


※ The rail mounting holes at the center cannot be used for the rail length 150 with two long blocks.

BG20

A(1 long block)

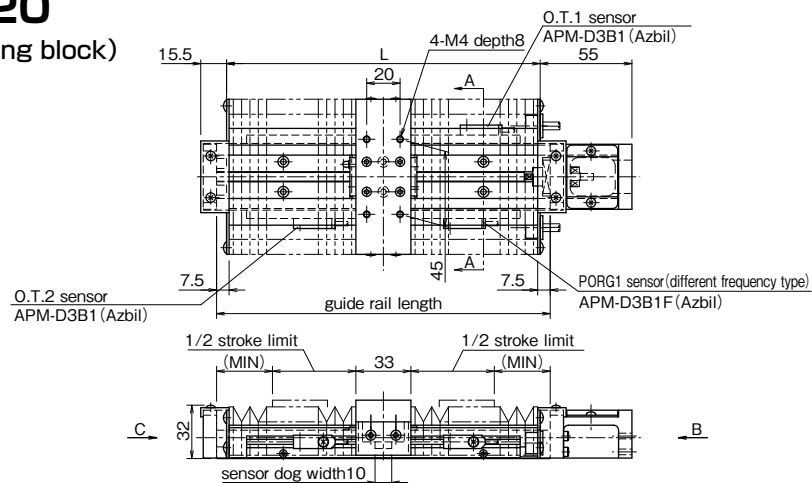

B(2 long blocks in close contact)

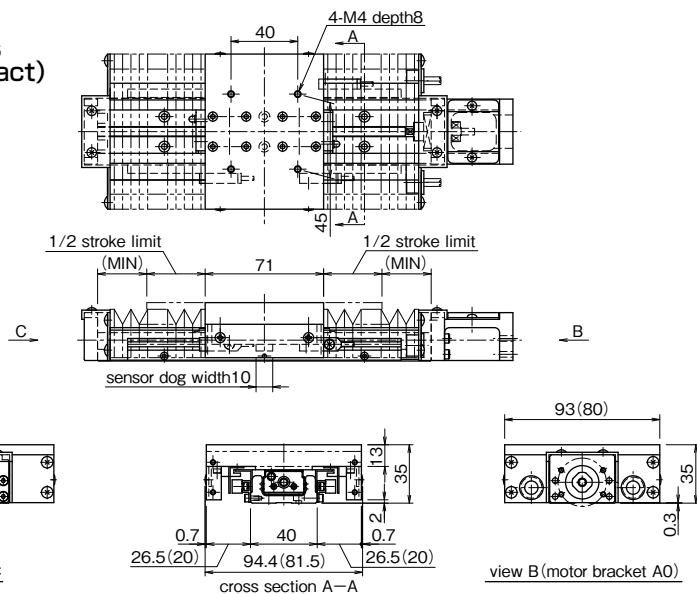


- 1.The drawings show the "JMN" configuration.
- 2.The numbers in the parentheses are the dimensions when sensors are not selected.
- 3.Please refer to page H-16 for dimensions that are not shown on the drawings.
- 4.material of bellows: composite resin sheet (black)

| rail length | L | 1 long block | | | 2 long blocks | | |
|-------------|-----|--------------|------------------|------|---------------|------------------|------|
| | | stroke limit | effective stroke | MIN | stroke limit | effective stroke | MIN |
| 100 | - | - | - | - | - | - | - |
| 150* | 138 | 58 | 48 | 29.5 | 32 | 22 | 23.5 |
| 200 | 188 | 100 | 90 | 33.5 | 70 | 60 | 29.5 |


*The rail mounting holes at the center cannot be used for the rail length 150 with two long blocks.

BG26

A(1 long block)

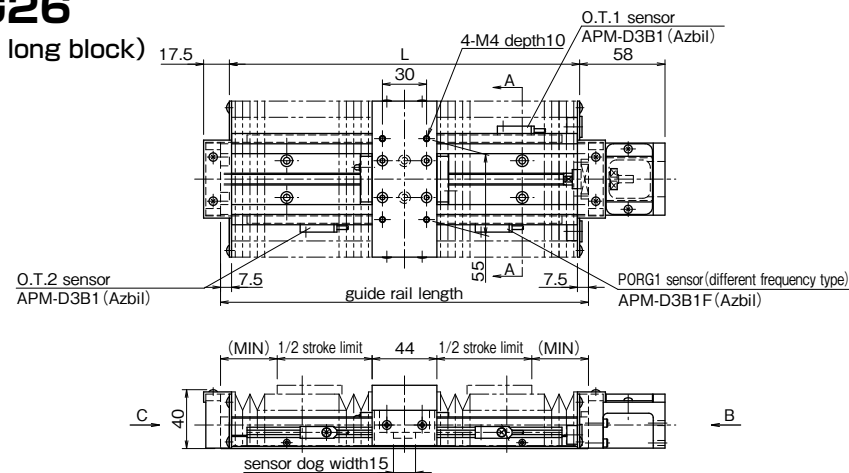

B(2 long blocks in close contact)

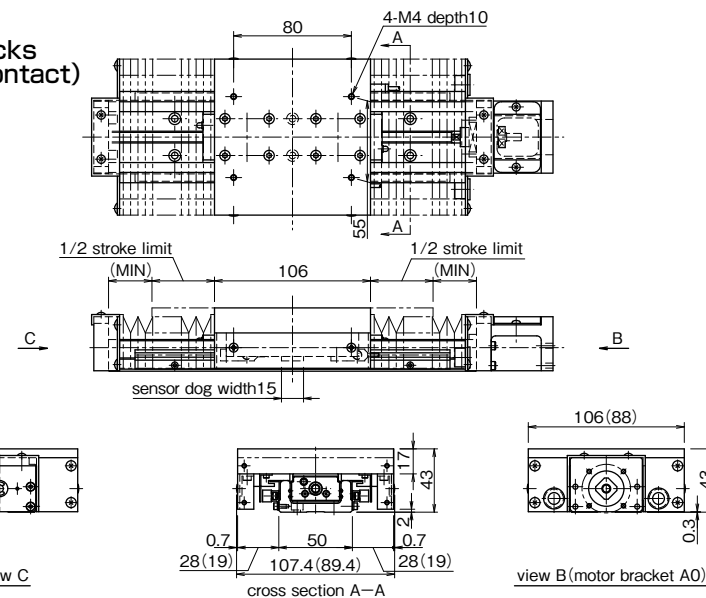


- 1.The drawings show the "JMN" configuration.
- 2.The numbers in the parentheses are the dimensions when sensors are not selected.
- 3.Please refer to page H-18 for dimensions that are not shown on the drawings.
- 4.material of bellows: composite resin sheet (black)

| rail length | L | 1 long block | | | 2 long blocks | | |
|-------------|-----|--------------|------------------|------|---------------|------------------|------|
| | | stroke limit | effective stroke | MIN | stroke limit | effective stroke | MIN |
| 150 | 138 | 53 | 43 | 26.5 | - | - | - |
| 200* | 188 | 97 | 87 | 29.5 | 41 | 31 | 26.5 |
| 250 | 238 | 129 | 119 | 38.5 | 85 | 75 | 29.5 |
| 300 | 288 | 169 | 159 | 43.5 | 127 | 117 | 33.5 |


*The rail mounting holes at the center cannot be used for the rail length 200 with two long blocks.

BG33

A(1 long block)

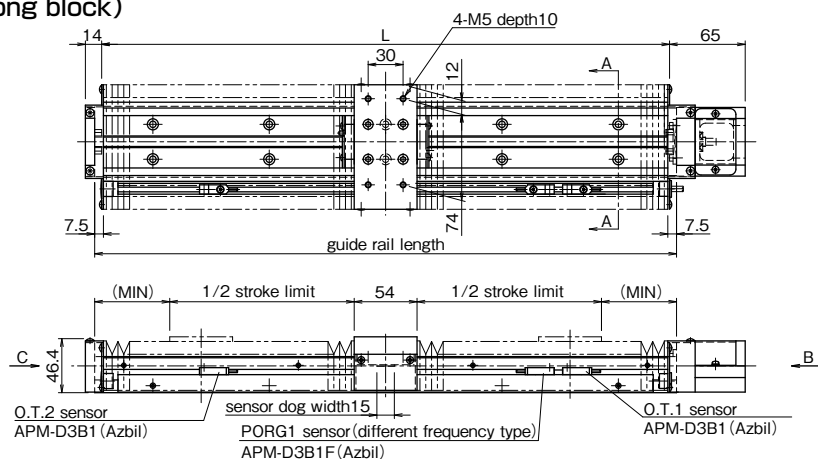

B(2 long blocks in close contact)

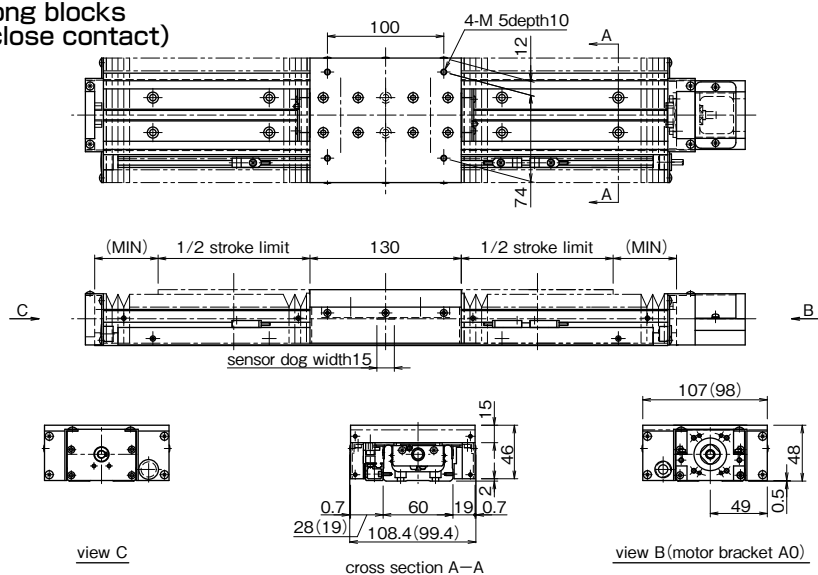


- The drawings show the "JML" configuration. The cross sections become reversed when "J*R" is selected.
- The numbers in the parentheses are the dimensions when sensors are not selected.
- Please refer to page H-20 for dimensions that are not shown on the drawings.
- material of bellows: composite resin sheet (black)

| rail length | L | 1 long block | | | 2 long blocks | | |
|-------------|-----|--------------|------------------|------|---------------|------------------|------|
| | | stroke limit | effective stroke | MIN | stroke limit | effective stroke | MIN |
| 150 | - | - | - | - | - | - | - |
| 200 | 188 | 79 | 59 | 33.5 | - | - | - |
| 300* | 288 | 159 | 139 | 43.5 | 103 | 83 | 33.5 |
| 400 | 388 | 237 | 217 | 54.5 | 183 | 163 | 43.5 |
| 500 | 488 | 317 | 297 | 64.5 | 261 | 241 | 54.5 |
| 600 | 588 | 395 | 375 | 75.5 | 341 | 321 | 64.5 |


*The rail mounting holes at the center cannot be used for the rail length 300 with two long blocks.

BG33

C(1 short block)

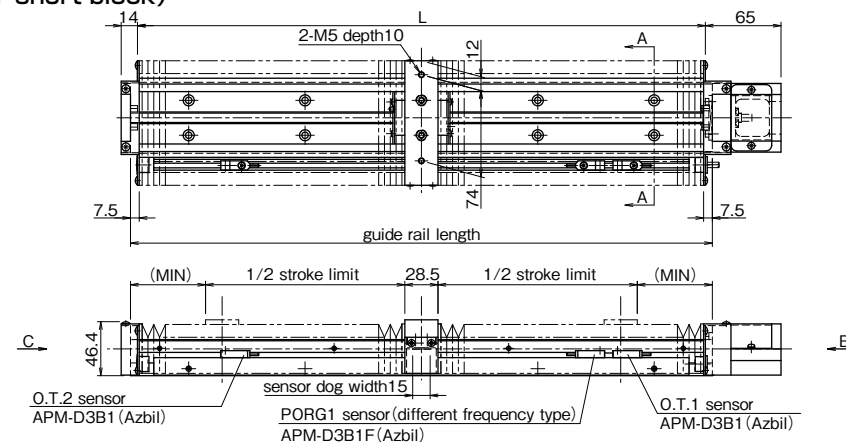

D(2 short blocks in close contact)

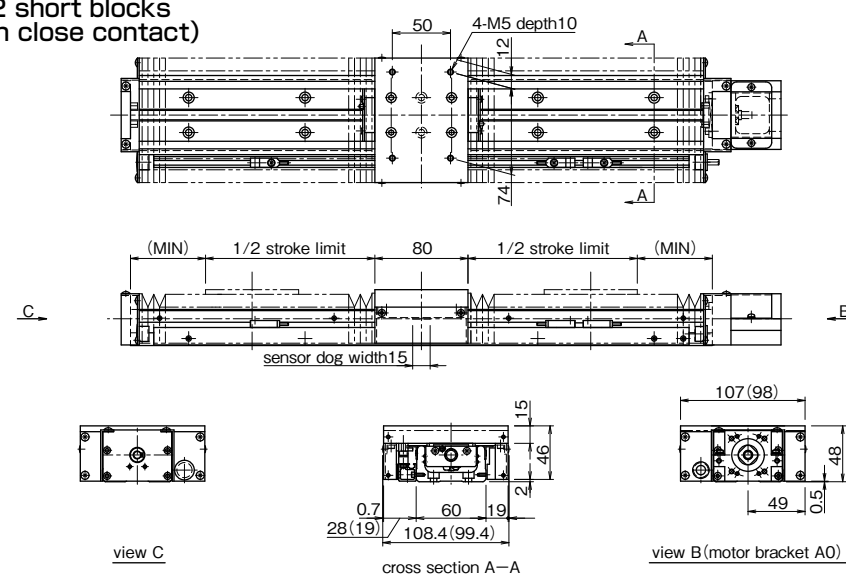


- The drawings show the "JML" configuration. The cross sections become reversed when "J*R" is selected.
- The numbers in the parentheses are the dimensions when sensors are not selected.
- Please refer to page H-22 for dimensions that are not shown on the drawings.
- material of bellows: composite resin sheet (black)


| rail length | L | 1 short block | | | 2 short blocks | | |
|-------------|-----|---------------|------------------|------|----------------|------------------|------|
| | | stroke limit | effective stroke | MIN | stroke limit | effective stroke | MIN |
| 150 | 138 | 68.5 | 48.5 | 26.5 | - | - | - |
| 200 | 188 | 104.5 | 84.5 | 33.5 | 67 | 47 | 26.5 |
| 300 | 288 | 184.5 | 164.5 | 43.5 | 143 | 123 | 38.5 |
| 400 | 388 | 262.5 | 242.5 | 54.5 | 211 | 191 | 54.5 |
| 500 | 488 | 342.5 | 322.5 | 64.5 | 291 | 271 | 64.5 |
| 600 | 588 | 404.5 | 384.5 | 83.5 | 369 | 349 | 75.5 |

BG55

A (1 long block)

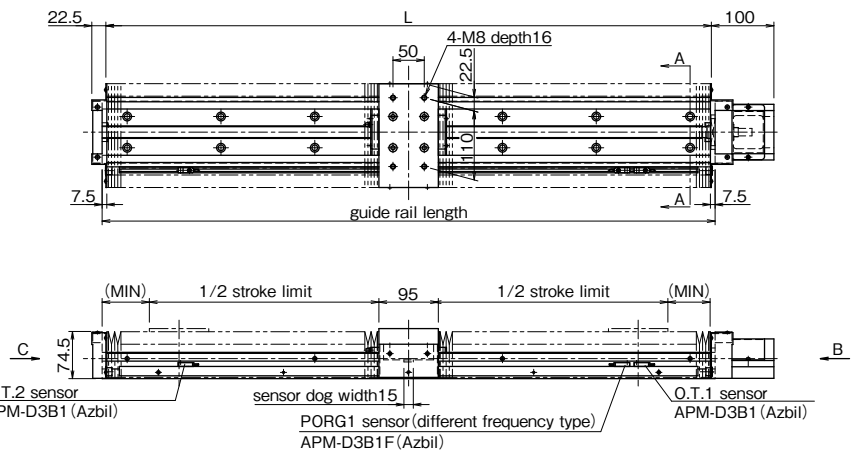

B (2 long blocks in close contact)

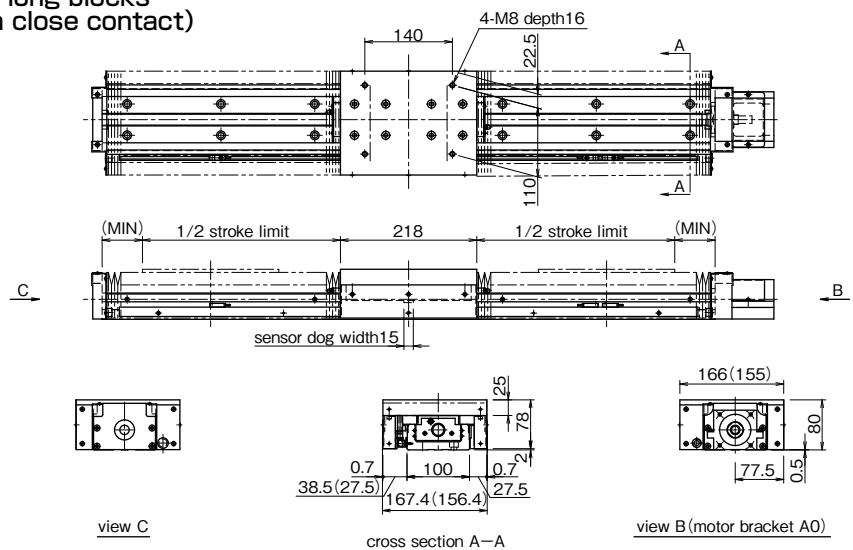

- The drawings show the "JML" configuration. The cross sections become reversed when "J*R" is selected.
- The numbers in the parentheses are the dimensions when sensors are not selected.
- Please refer to page H-28 for dimensions that are not shown on the drawings.
- material of bellows: composite resin sheet (black)

| rail length | L | 1 long block | | 2 long blocks | | | |
|-------------|-------|--------------|------------------|---------------|--------------|------------------|------|
| | | stroke limit | effective stroke | MIN | stroke limit | effective stroke | MIN |
| 980 | 968 | 734 | 714 | 75.5 | 633 | 613 | 64.5 |
| 1,080 | 1,068 | 812 | 792 | 86.5 | 711 | 691 | 75.5 |
| 1,180 | 1,168 | 912 | 892 | 86.5 | 789 | 769 | 86.5 |
| 1,280 | 1,268 | 992 | 972 | 96.5 | 889 | 869 | 86.5 |
| 1,380 | 1,368 | 1,070 | 1,050 | 107.5 | 969 | 949 | 96.5 |

SENSOR

Photomicro sensor or proximity sensor can be attached to the BG actuator with our optional sensor-mounting rail (the same length as the guide rail length). Tapped holes are machined on both sides of the guide rail, allowing attachment of sensor to either side. Standard positioning (without special instruction from customer) would be to the left of the motor mount end. Sensor option includes the items that are listed below. Three types of sensor rail are available. (see Figure H-17) For details, please refer to page H-59 ~ H-69. Depending on sizes, some sensor rail are not available.

Table H-12 NPN Sensor

| sensor code | sensor type | BG15 | BG20 | BG26 | BG33 | BG46 | BG55 |
|-------------|--|------|------------------------------------|------|------|------|---|
| S | slim/compact type photomicro sensor | — | PM-L24 [3pcs] ^{※1} (SUNX) | | | | EE-SX674 [3pcs] ^{※2} (OMRON) |
| H | close contact capable photomicro sensor | | | | | | EE-SX671 [3pcs] ^{※2} (OMRON) |
| K | proximity sensor (N.C.contact) ^{※3} | | | | | | APM-D3B1 [2pcs] ^{※1} APM-D3B1F [1pcs] ^{※1※4} (Azbil) |

- ※1 : length of cable: 1m
- ※2 : 3 pcs of sensor connector will be attached
- ※3 : normal close contact
- ※4 : different frequency type


Figure H-17 Sensor rail

| sensor rail No. | sensor rail1 | sensor rail2 | sensor rail3 |
|-----------------|--------------|--------------|--------------|
| | part number | | |
| BG15 | ○ | × | × |
| BG20 | ○ | × | × |
| BG26 | ○ | × | × |
| BG33 | ○ | ○ | ○ |
| BG46 | ○ | ○ | ○ |
| BG55 | ○ | ○ | ○ |


BG15

K Specification (Proximity Sensor)


—Without Top Cover—

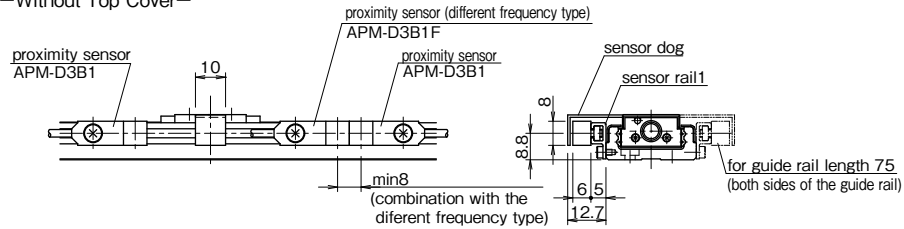

—With Top Cover—

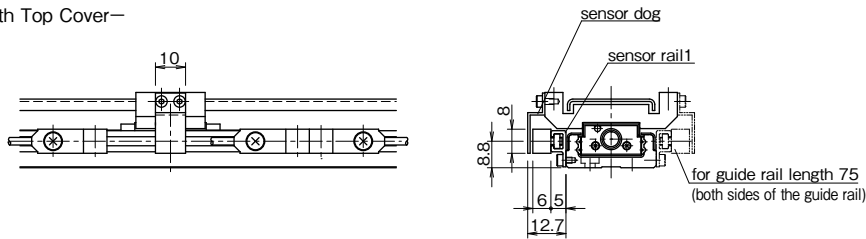


- accessories
 proximity sensor (APM-D3B1, Azbil) 2 pcs
 proximity sensor (different frequency type)(APM-D3B1F, Azbil) 1 pc
 sensor rail 1 pc
 sensor dog 1 pc
 *2 pcs of sensor dogs for BG15A-75
 (refer to the figure on the right.)

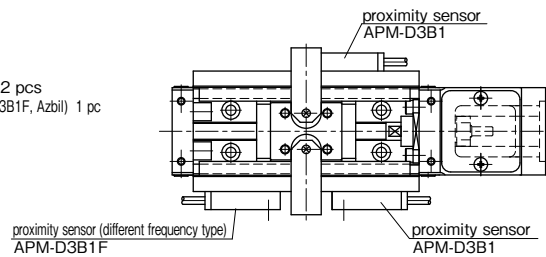


BG20

S Specification (Compact Photomicro Sensor)

—Without Top Cover—

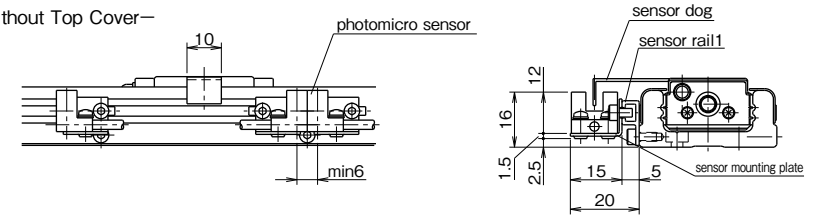


—With Top Cover—

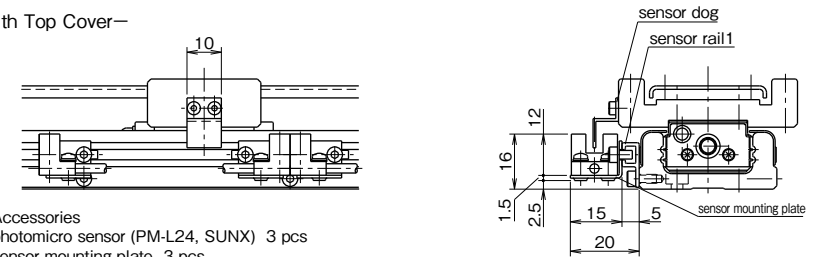


- Accessories
 photomicro sensor (PM-L24, SUNX) 3 pcs
 sensor mounting plate 3 pcs
 sensor rail 1 pc
 sensor dog 1 pc

K Specification (Proximity Sensor)

—Without Top Cover—

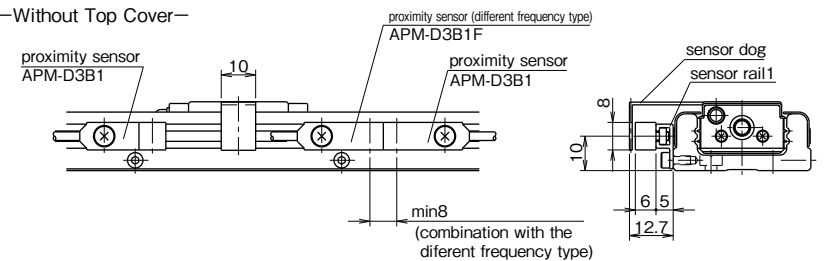

—With Top Cover—

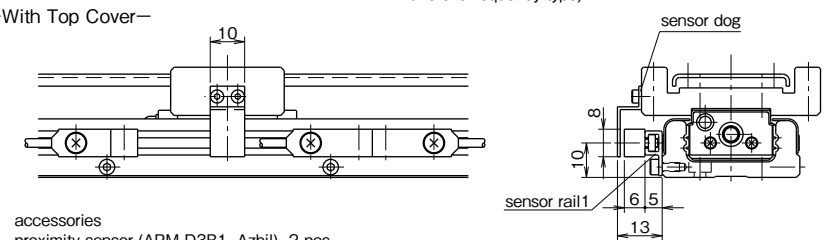


- accessories
 proximity sensor (APM-D3B1, Azbil) 2 pcs
 proximity sensor (different frequency type)(APM-D3B1F, Azbil) 1 pc
 sensor rail 1 pc
 sensor dog 1 pc


BG26

S Specification (Compact Photomicro Sensor)

—Without Top Cover—

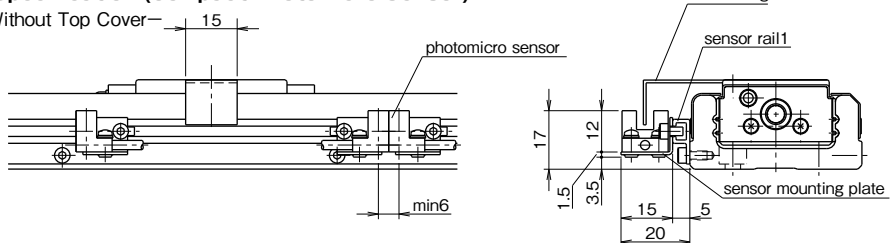


—With Top Cover—

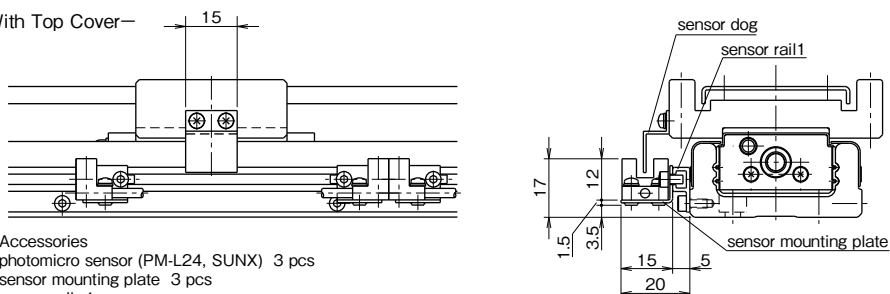


- Accessories
 photomicro sensor (PM-L24, SUNX) 3 pcs
 sensor mounting plate 3 pcs
 sensor rail 1 pc
 sensor dog 1 pc

K Specification (Proximity Sensor)

—Without Top Cover—

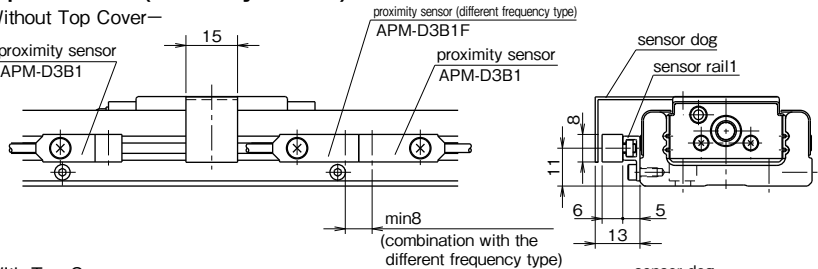

—With Top Cover—

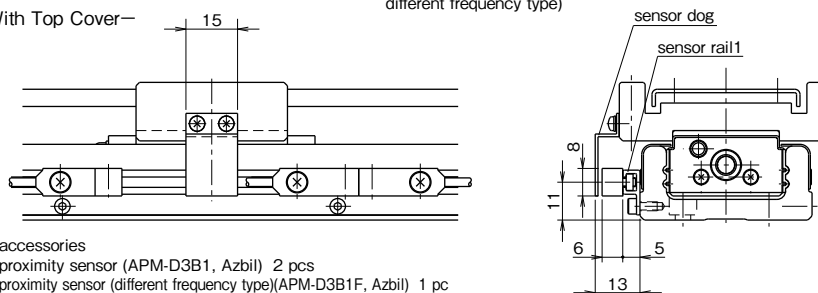


- accessories
 proximity sensor (APM-D3B1, Azbil) 2 pcs
 proximity sensor (different frequency type)(APM-D3B1F, Azbil) 1 pc
 sensor rail 1 pc
 sensor dog 1 pc


BG33

S Specification (Slim-Type Photomicro Sensor)

—Without Top Cover—

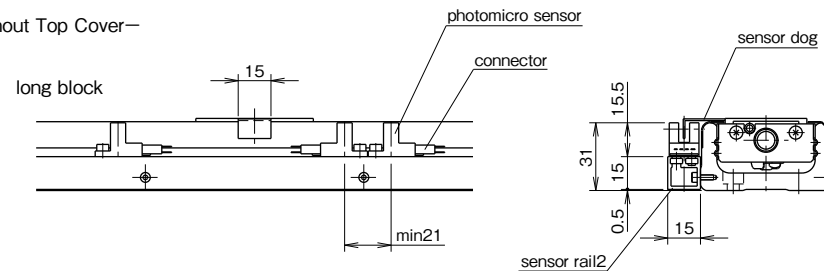

—With Top Cover—

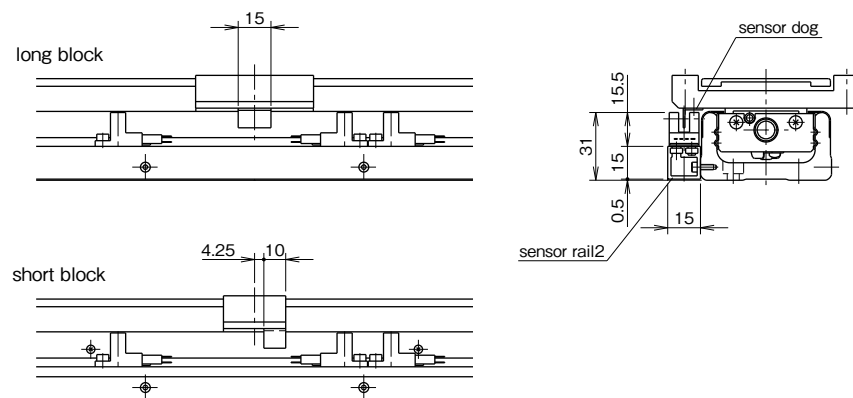


- accessories
 photomicro sensor (EE-SX674, OMRON) 3 pcs
 connector (EE-1001, OMRON) 3 pcs
 sensor rail 1 pc
 sensor dog *1 pc
 * 2 pcs for BG33D-150.


BG33

H Specification (Close Contact Capable Photomicro Sensor)

—Without Top Cover—

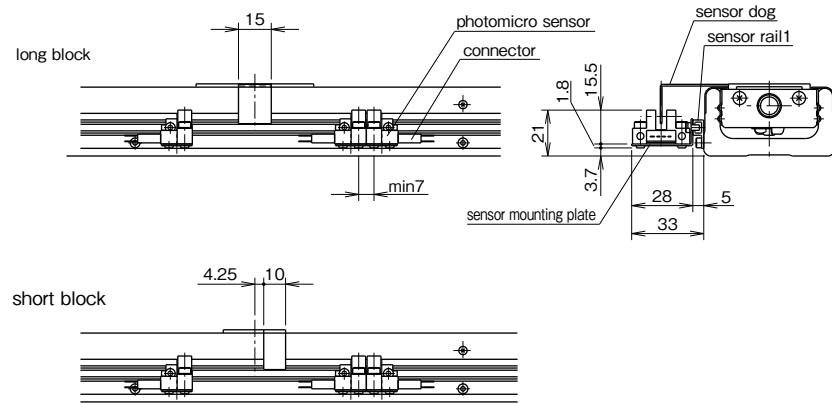

—With Top Cover—

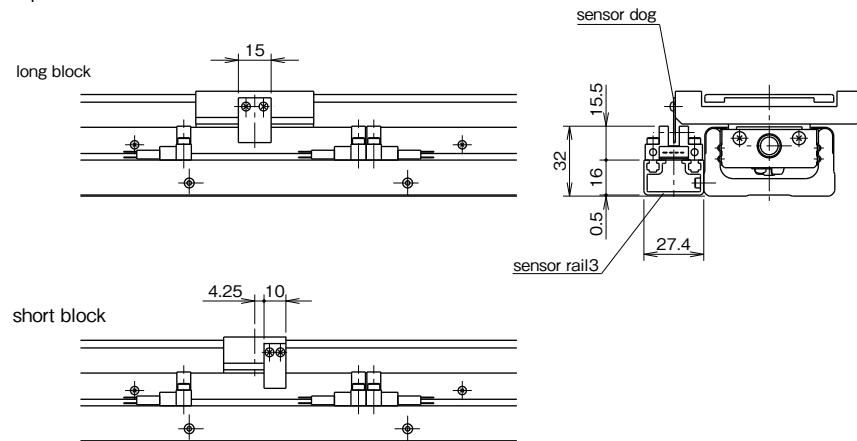


- accessories
 photomicro sensor (EE-SX671, OMRON) 3 pcs
 connector (EE-1001, OMRON) 3 pcs
 sensor mounting plate (only for the without cover type) 3 pcs
 sensor rail 1 pc
 sensor dog *1 pcs
 * 2 pcs for BG33D-150.


BG33

K Specification (Proximity Sensor)

—Without Top Cover—

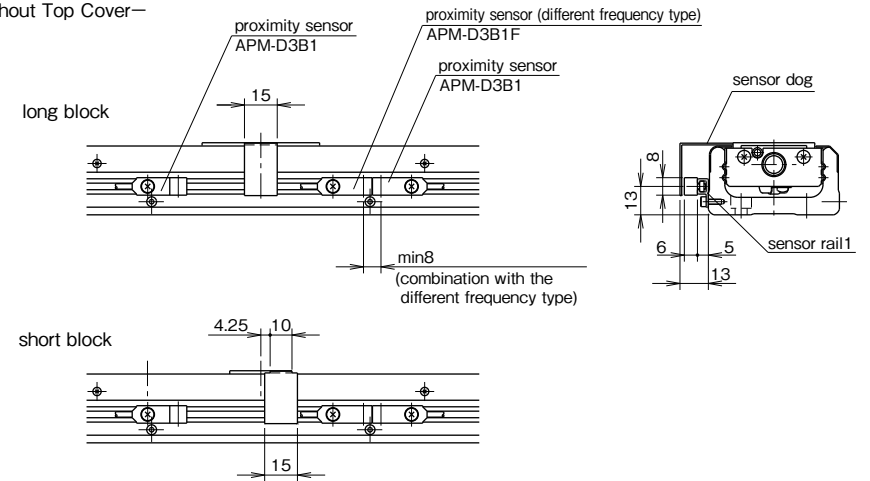

—With Top Cover—

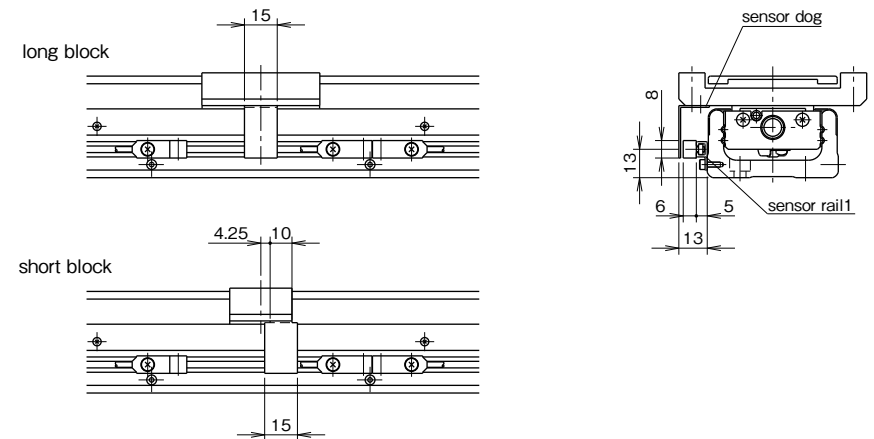


- accessories
 proximity sensor (APM-D3B1, Azbil) 2 pcs
 proximity sensor (different frequency type)(APM-D3B1F, Azbil) 1 pc
 sensor rail 1 pc
 sensor dog *1 pc
 * 2 pcs for BG33D-150.


BG46

S Specification (Slim-Type Photomicro Sensor)

—Without Top Cover—

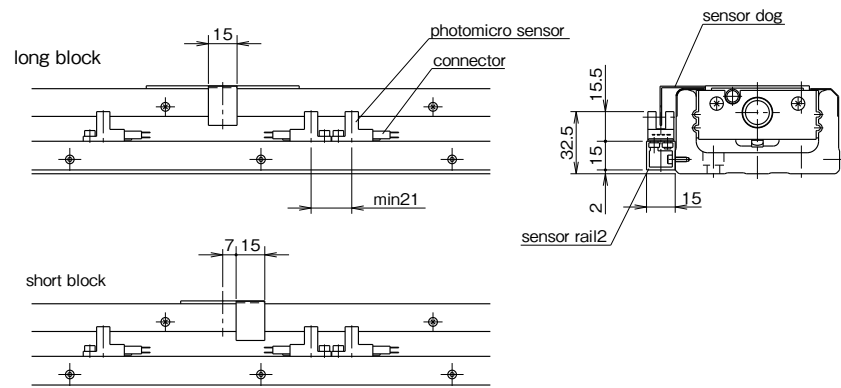

—With Top Cover—

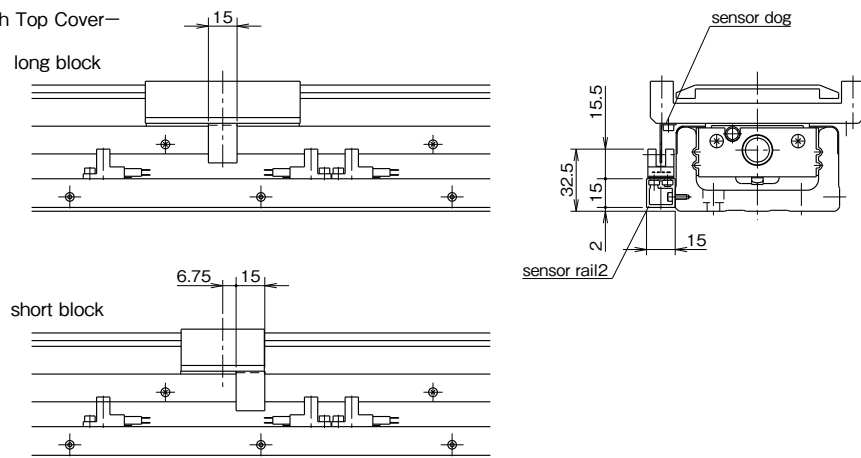


- accessories
 photomicro sensor (EE-SX674, OMRON) 3 pcs
 connector (EE-1001, OMRON) 3 pcs
 sensor rail 1 pc
 sensor dog 1 pc


BG46

H Specification (Close Contact Capable Photomicro Sensor)

—Without Top Cover—

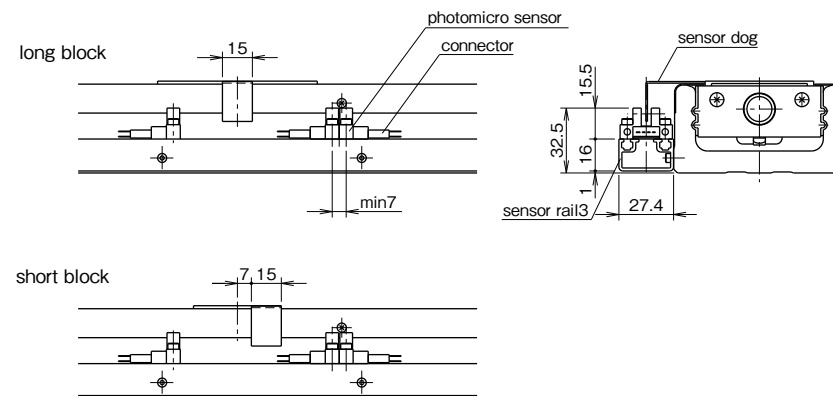

—With Top Cover—

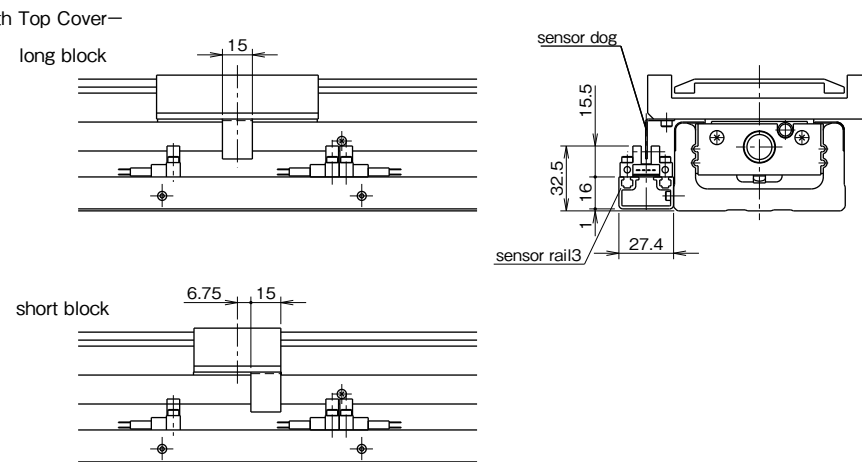


- accessories
 photomicro sensor (EE-SX671, OMRON) 3 pcs
 connector (EE-1001, OMRON) 3 pcs
 sensor rail 1 pc
 sensor dog 1 pc


BG46

K Specification (Proximity Sensor)

—Without Top Cover—

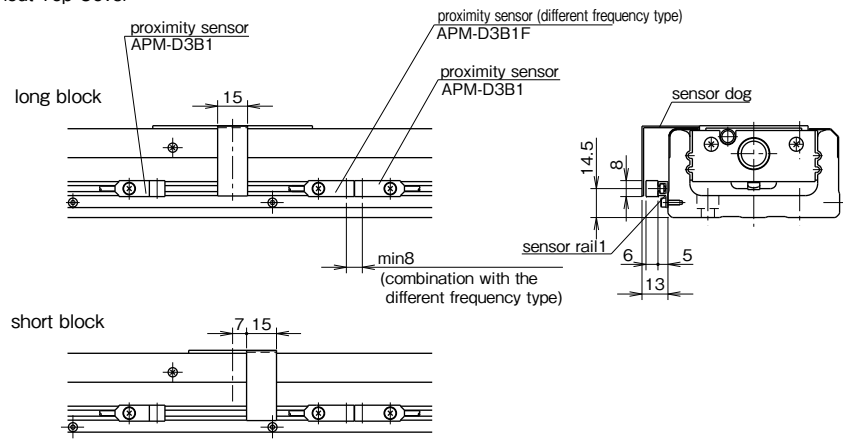

—With Top Cover—

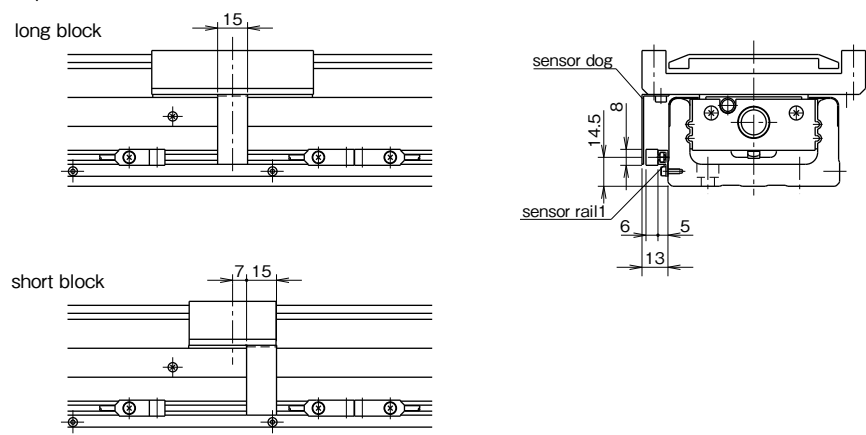


- accessories
 proximity sensor (APM-D3B1, Azbil) 2 pcs
 proximity sensor (different frequency type)(APM-D3B1F, Azbil) 1 pc
 sensor rail 1 pc
 sensor dog 1 pc


BG55

S Specification (Compact Photomicro Sensor)

—Without Top Cover—

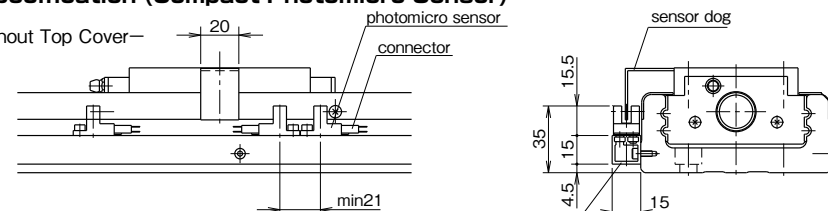


—With Top Cover—

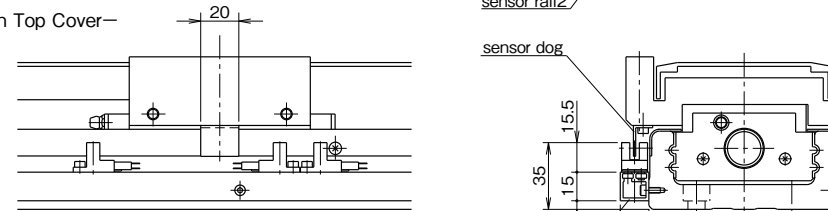


- accessories
 photomicro sensor (EE-SX674, OMRON) 3 pcs
 connector (EE-1001, OMRON) 3 pcs
 sensor rail 1 pc
 sensor dog 1 pc

H Specification (Close Contact Capable Photomicro Sensor)

—Without Top Cover—

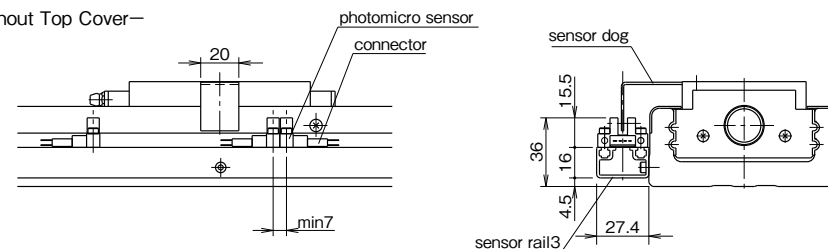

—With Top Cover—

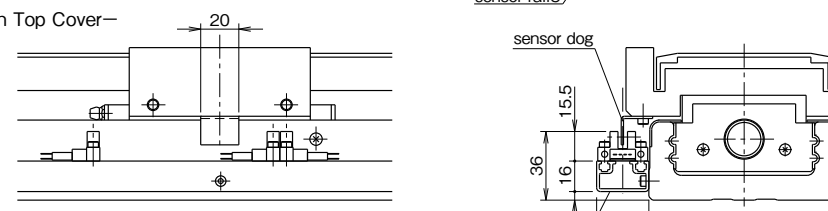


- accessories
 photomicro sensor (EE-SX671, OMRON) 3 pcs
 connector (EE-1001, OMRON) 3 pcs
 sensor rail 1 pc
 sensor dog 1 pc


BG55

K Specification (Proximity Sensor)

—Without Top Cover—

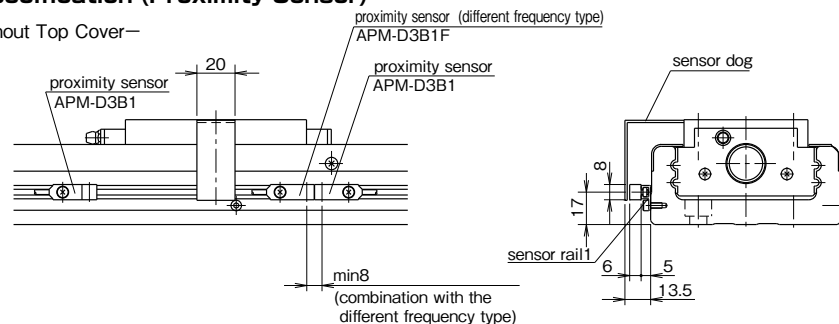

—With Top Cover—

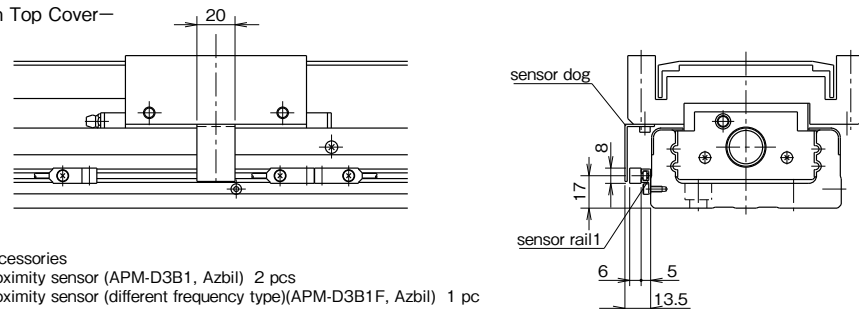

- accessories
 proximity sensor (APM-D3B1, Azbil) 2 pcs
 proximity sensor (different frequency type)(APM-D3B1F, Azbil) 1 pc
 sensor rail 1 pc
 sensor dog 1 pc

PNP SENSOR

For the BG type sensors can be changed to the PNP type by adding a sensor option code "PNP" at the end of the part number.

Refer to Table H-12 for the model number of PNP type sensors.

Table H-13 PNP Sensor Type

| sensor code | sensor type | BG15 | BG20 | BG26 | BG33 | BG46 | BG55 |
|-------------|---|------|---------------------------|---|------|------|------------------------------|
| S | slim/compact type photomicro sensor | — | PM-L24 P [3pcs] ※1 (SUNX) | — | — | — | EE-SX674P [3pcs] ※2 |
| H | close contact capable photomicro sensor | — | — | — | — | — | EE-SX671P [3pcs] ※2 (OMRON) |
| K | proximity sensor (N.C. contact) ※3 | — | — | APM-D3E1 [2pcs] ※1 APM-D3E1F [1pcs] ※1※4 (Azbil) | — | — | — |


※ 1 : length of cable: 1m
 ※ 2 : 3 pcs of sensor connector will be attached
 ※ 3 : normal close contact
 ※ 4 : different frequency type

SENSOR SPECIFICATIONS


slim-type, close contact capable photomicro sensor (symbol: S,H)/ OMRON CORPORATION

| type | NPN TYPE | EE-SX674 | EE-SX671 |
|---|---|---|-----------|
| | PNP TYPE | EE-SX674P | EE-SX671P |
| sensing distance | 5mm (slot width) | | |
| standard sensing object | opaque: 2×0.8mm min. | | |
| differential travel | 0.025mm | | |
| power supply voltage | 5 to 24 VDC ±10%, ripple(P-P): 10% max. | | |
| current consumption | 12mA max. (NPN), 12 mA max.(PNP) | | |
| control output | NPN TYPE | NPN open collector output models: At 5 to 24 VDC: 100-mA load current (Ic) with a residual voltage of 0.8V max.40-mA load current (Ic) with a residual voltage of 0.4V max. | |
| | PNP TYPE | PNP open collector output models: At 5 to 24 VDC: 50-mA load current (Ic) with a residual voltage of 1.3V max. | |
| output operation | Dark-On (+, L terminal open-circuit), Light-On (+, L terminal short-circuit) | | |
| response frequency | 1kHz max. (3kHz average) | | |
| operation indicator | operation indicator (red) lit with incident | | |
| ambient illumination (on receiver lens) | fluorescent light: 1000 lx max. | | |
| ambient temperature | operating: -25 to 55°C storage: -30 to 80°C | | |
| ambient humidity | operating: 5 to 85%RH storage: 5 to 95%RH | | |
| vibration resistance | destruction: 20 to 2000Hz, (with a peak acceleration of 100m/s ²) 1.5mm double amplitude for 2hrs (with 4-minute cycles) each in X,Y, and Z directions | | |
| shock resistance | destruction: 500m/s ² for 3 times each in X,Y, and Z directions | | |
| degree of protection | IEC60529 IP50 | | |
| connection method | connector type (direct soldering possible) | | |
| weight | approx. 3g | | |
| material | case | Polybutylene terephthalate (PBT) | |
| | cover | Polycarbonate (PC) | |
| | emitter/receiver | Polycarbonate (PC) | |

NPN TYPE
CIRCUIT DIAGRAM

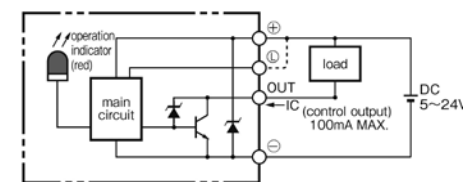

PNPTYPE
CIRCUIT DIAGRAM

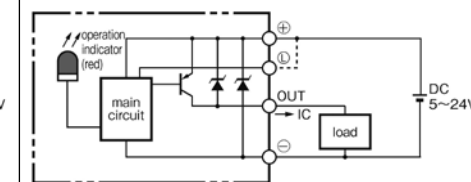


Please read the specifications and precautions of the manufacturer's catalog.


compact photomicro sensor (symbol: S)/ Panasonic Electric Works SUNX Co.,Ltd.

| | | |
|--------------------------|--|--|
| type | NPN TYPE | PM-L24 |
| | PNP TYPE | PM-L24P |
| sensing range | 5mm (fixed) | |
| minimum sensing object | 0.8×1.8mm min. opaque | |
| hysteresis | 0.05mm or less | |
| repeatability | 0.03mm or less | |
| supply voltage | 5 to 24 VDC ±10%, ripple(P-P) 10% or less | |
| current consumption | 15mA or less | |
| output | NPN TYPE | NPN open-collector transistor maximum sink current: 50mA, applied voltage: 30VDC or less (between output and 0V) residual voltage: 0.7V or less (at 50mA sink current) 0.4V or less (at 16mA sink current) |
| | PNP TYPE | PNP open-collector transistor maximum source current: 50mA, applied voltage: 30VDC or less (between output and +V) residual voltage: 0.7V or less (at 50mA sink current) 0.4V or less (at 16mA sink current) |
| output operation | Incorporated with 2 outputs: Light-ON/Dark-ON | |
| response time | under light received condition: 20μs or less under light interrupted condition: 100μs or less (response frequency: 1kHz or more) | |
| operation indicator | vermillion LED (lights up under light received condition) | |
| ambient illuminance | fluorescent light: 1000lx at the light-receiving face | |
| ambient temperature | operating: -25 to 55°C (No dew condensation or icing allowed.) storage: -30 to 80°C | |
| ambient humidity | 35 to 85% RH storage: 35 to 85%RH | |
| voltage withstandability | 1000V AC for one min. between all supply terminals connected together and enclosure | |
| insulation resistance | 50MΩ, or more, with 250V DC megger between all supply terminals connected together and enclosure | |
| vibration resistance | 10 to 2,000Hz frequency, 1.5mm amplitude in X, Y, and Z directions for two hours each | |
| shock resistance | 15,000m/s ² acceleration (1,500 G approx.) in X, Y, and Z directions for three times each | |
| cable | 0.09mm ² 4-core cabtyre cable 1m long | |
| weight | approx. 10g | |
| material | case | Polybutylene telephthalate (PBT) |
| | cover | Polycarbonate |

NPN TYPE
CIRCUIT DIAGRAM

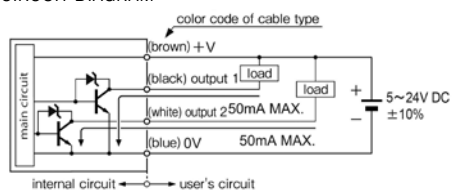

PNP TYPE
CIRCUIT DIAGRAM

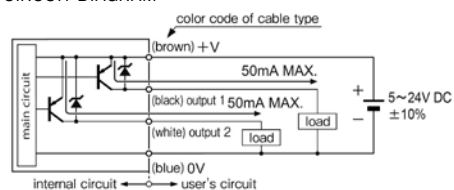


Please read the specifications and precautions of the manufacturer's catalog.


proximity sensor (symbol: K)/ Azbil CORPORATION

| | | |
|--|--|---|
| type | NPN TYPE | APM-D3B1,APM-D3B1F(different-frequency type) |
| | PNP TYPE | APM-D3E1,APM-D3E1F(different-frequency type) |
| rated sensing distance | 2.5mm±15% | |
| standard target object | 15×15mm, 1mm thick iron | |
| differential travel | 15% max. of sensing distance | |
| rated supply voltage | 12/24VDC | |
| operating voltage range | 10.8 to 26.4 VDC (ripple voltage 10% max.) | |
| current consumption | 10mA max. | |
| control output | NPN TYPE | NPN transistor open collector switching current: 30mA max. (resistive load) voltage drop: 1V max. (switching current 30mA) output dielectric strength: 26.4V |
| | PNP TYPE | PNP transistor open collector switching current: 30mA max. (resistive load) voltage drop: 1V max. (switching current 30mA) output dielectric strength: 26.4V |
| operation mode | normally closed (N.C.) | |
| operating frequency | 120Hz | |
| indicator lamps | lights (red) when object approaches | |
| operating temperature range | -10 to 55°C storage: -25 to 70°C | |
| operating humidity range | 35 to 85% RH | |
| ambient illumination(on receiver lens) | fluorescent light: 1000lxmax. | |
| dielectric strength | 1000V AC (50/60Hz) for one min. between case and electrically live metals | |
| insulation resistance | 50MΩ min. (by 500V DC megger) | |
| vibration resistance | 10 to 55Hz, 1.5mm peak-to-peak amplitude, 2hrs in X, Y, and Z directions | |
| voltage withstandability | 1000V AC(50/60Hz) for one min. between all supply terminals connected together and enclosure | |
| insulation resistance | 50MΩ, or more(with 500V DC megger) | |
| shock resistance | 500m/s ² 3 times in Y,Y, and Z directions | |
| protection | IP67 (IEC 529) | |
| weight | approx. 10g (only mass: 1m cable is attached) | |

NPN TYPE
CIRCUIT DIAGRAM

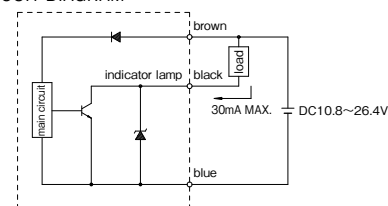

PNP TYPE
CIRCUIT DIAGRAM

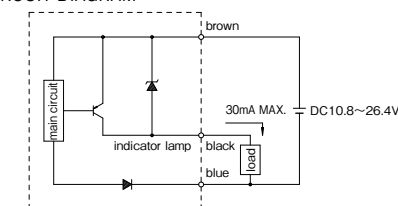


Please read the specifications and precautions of the manufacturer's catalog.

POSITIONING PIN HOLE

For the BG type, positioning pin holes can be provided on the slide block and sub table by adding the option code "PS" or "PW" in the end of the part number. The option code "PR" is used to provide the guide rail with positioning pin holes. When positioning pin holes are necessary on both the slide block/sub table and guide rail, please add the option code "PSR" or "PWR"

Table H-14 Chart For Positioning

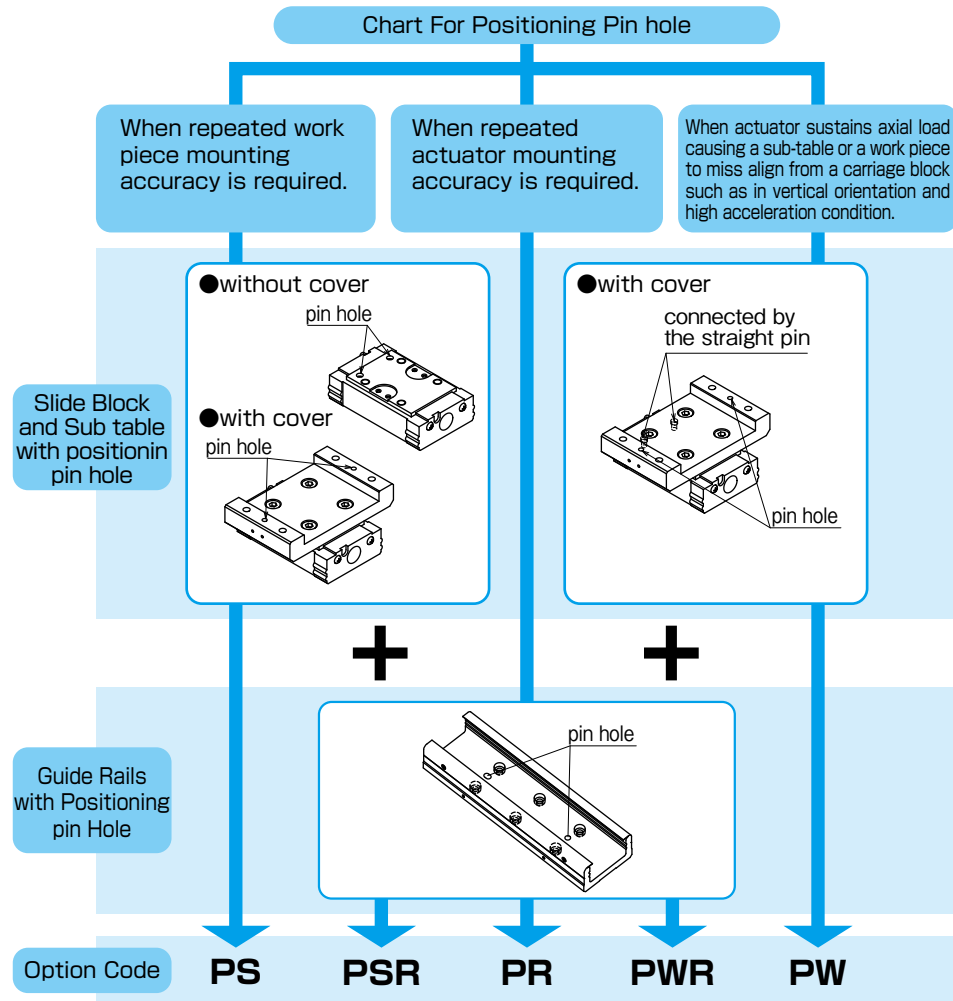


Positioning Pin Hole for Slide Block and Sub Table

It is useful when exacting reassembly positioning is required. In case of two blocks used, both blocks are processed. When the code "PS" is added, the drilling is processed only on the mounting surface (slide block or sub table). When the code "PW" is specified for a BG with a top cover (except for BG15), the slide block and sub table are connected by the straight pins at the location where the "PS" option specifies on the slide block. Note that NB does not supply straight pins for the "PS" option.

BG15A,B (long block)


(PS Option)
-With Top Cover-

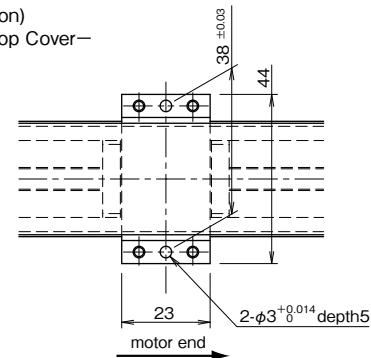


※Please contact NB for the without-top-cover option or the "PW" option.

BG20A,B (long block)

(PS Option)
-Without Top Cover-

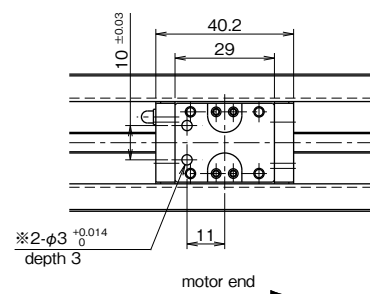


-With Top Cover-

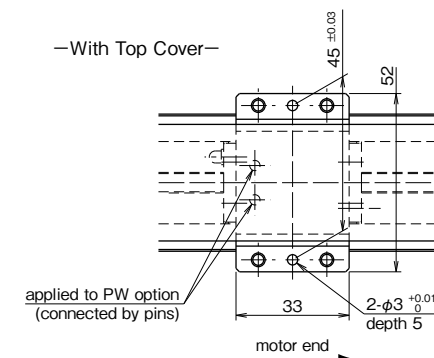


※For some cases, a shallow counterbore of φ4 will be machined at the hole area with "※" to remove a hardened layer.

BG26A,B (long block)

(PS Option)
-Without Top Cover-

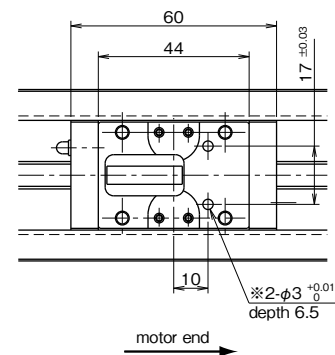

-With Top Cover-

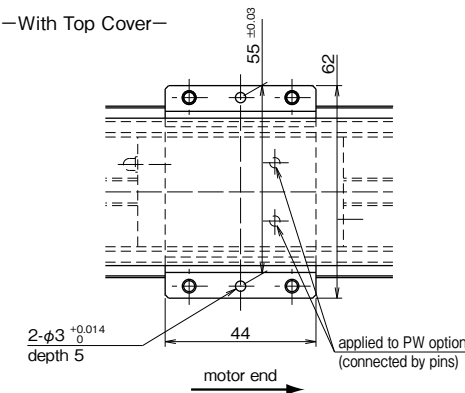


※For some cases, a shallow counterbore of φ4 will be machined at the hole area with "※" to remove a hardened layer.


BG33A,B (long block)

(PS Option)

—Without Top Cover—

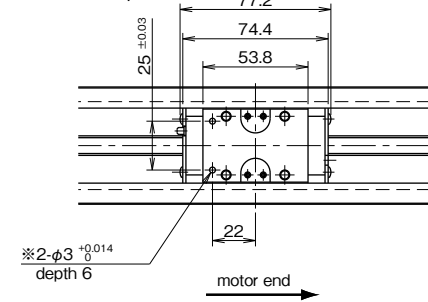

—With Top Cover—

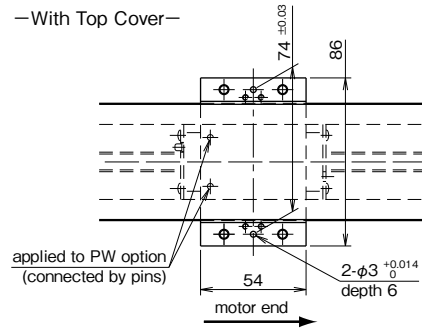


※For some cases, a shallow counterbore of φ4 will be machined at the hole area with "※" to remove a hardened layer.


BG33C,D (short block)

(PS Option)

—Without Top Cover—

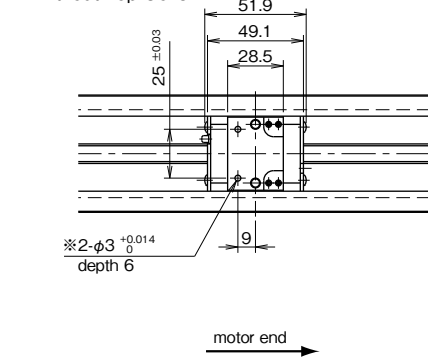

—With Top Cover—

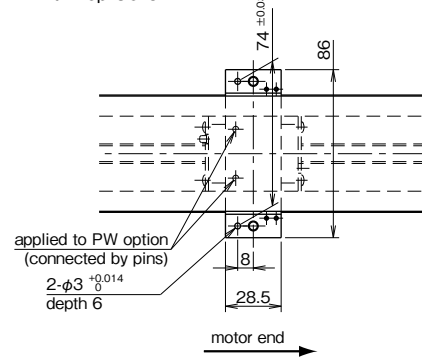


※For some cases, a shallow counterbore of φ4 will be machined at the hole area with "※" to remove a hardened layer.


BG46A,B (long block)

(PS Option)

—Without Top Cover—

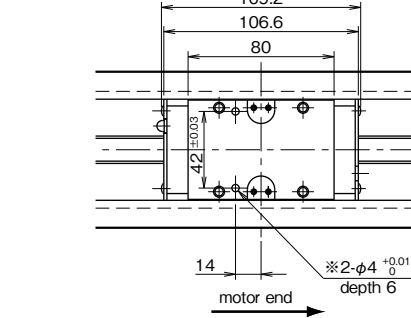

—With Top Cover—

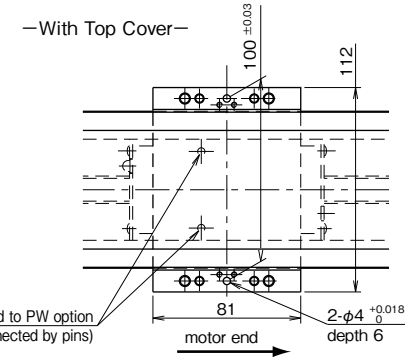


※For some cases, a shallow counterbore of φ5 will be machined at the hole area with "※" to remove a hardened layer.


BG46C,D (short block)

(PS Option)

—Without Top Cover—

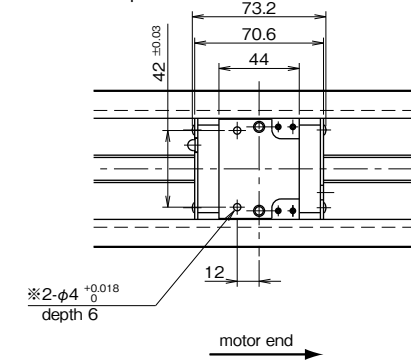

—With Top Cover—

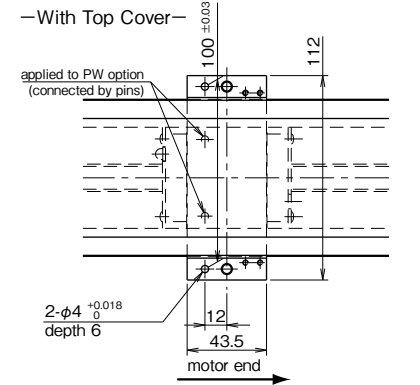


※For some cases, a shallow counterbore of φ5 will be machined at the hole area with "※" to remove a hardened layer.


BG55A,B (long block)

(PS Option)

—Without Top Cover—

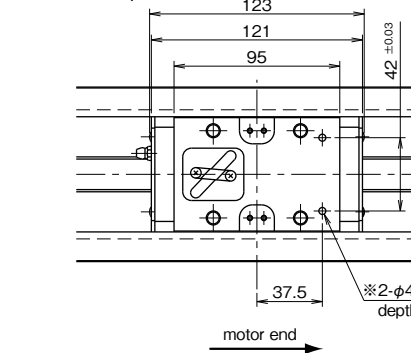

—With Top Cover—

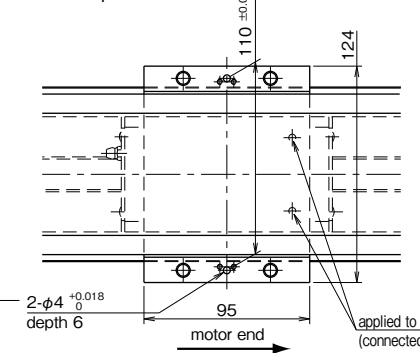

※For some cases, a shallow counterbore of φ5 will be machined at the hole area with "※" to remove a hardened layer.

POSITIONING PIN HOLE FOR GUIDE RAIL

It is useful to use positioning pin holes on the guide rail when exacting reassembly positioning is required. After the insertion of the straight pins in the BG guide rail base, the pins might interfere with the slide block. In the positioning process, please consider the BG base thickness. The length of the pin in the BG base shall be shorter than the BG base thickness. Please make sure that the pins shall not interfere with the slide block. Table H-15 shows the pin length in the BG base. Note that NB does not supply straight pins for the guide rail. (Parallel pin type A is recommended.)

Figure H-18 Positioning Pin Hole Location

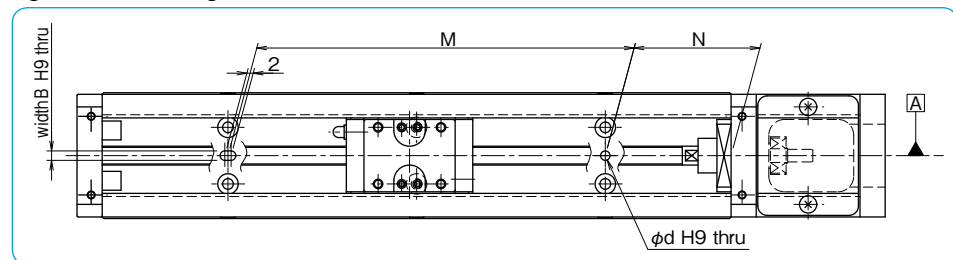


Table H-15 Positioning Pin Hole for Guide Rail

unit:mm

| part number | pin length (BG base thickness) | major dimensions | | | | φd | B |
|-------------|-----------------------------------|------------------|-------|-------|-----------------------------------|----------------------------------|---|
| | | rail length | N | M | | | |
| BG15 | 3.5 or less | 75 | 12.5 | 50 | φ3 ^{+0.025} ₀ | 3 ^{+0.025} ₀ | |
| | | 100 | 25 | | | | |
| | | 125 | 12.5 | 100 | | | |
| | | 150 | 25 | | | | |
| | | 175 | 12.5 | | | | |
| BG20 | 4.5 or less | 200 | 25 | 150 | | | |
| | | 100 | 20 | 60 | | | |
| | | 150 | 15 | 120 | | | |
| BG26 | 6 or less | 200 | 40 | 80 | | | |
| | | 150 | 35 | | | | |
| | | 200 | 20 | | 160 | | |
| | | 250 | 45 | | | | |
| BG33 | 8 or less | 300 | 30 | 240 | | | |
| | | 150 | 25 | 100 | | | |
| | | 200 | 50 | | | | |
| | | 300 | | | 200 | | |
| | | 400 | | | 300 | | |
| 500 | 400 | | | | | | |
| BG46 | 11 or less | 600 | | 70 | 500 | | |
| | | 340 | 200 | | | | |
| | | 440 | 300 | | | | |
| | | 540 | 400 | | | | |
| | | 640 | 500 | | | | |
| | | 740 | 600 | | | | |
| | | 840 | 700 | | | | |
| | | 940 | 800 | | | | |
| | | 1,040 | 900 | | | | |
| | | 1,140 | 1,000 | | | | |
| BG55 | 13 or less | 1,240 | 1,100 | 1,050 | | | |
| | | 980 | 40 | | 900 | | |
| | | 1,080 | 15 | | | | |
| | | 1,180 | 65 | | | | |
| | | 1,280 | 40 | | 1,200 | | |
| | 1,380 | 15 | 1,350 | | | | |

LUBRICATION

- BG type contains a lithium soap based grease. (Multemp PS No.2, KYODO YUSHI) Apply similar type of grease for the lubrication as required depending on the operating conditions.
- Use the grease fitting to lubricate the slide block. For ball screw portion apply grease directly to the surface of screw shaft.
- ※ BG15 slide block has φ2mm oil holes instead of grease fitting.
- Unless otherwise instructed, a grease fitting is located as shown in Figure H-19.
- The grease can be changed to a high function type by adding a special grease option at the end of the part number. Please refer to Table H-16 for the grease type. Also refer to page Eng-40 for further details.

Figure H-19 Location of Grease Fitting

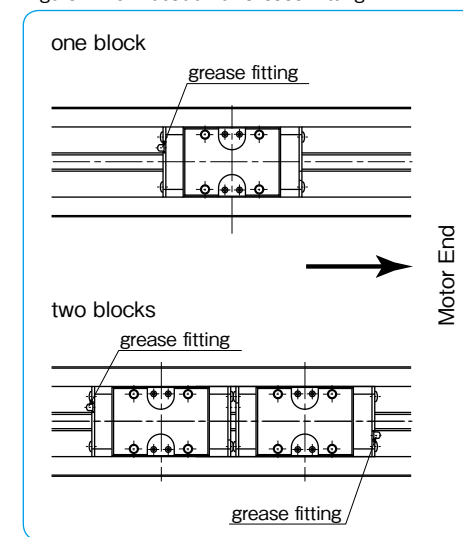


Table H-16 Applicable Grease

| grease option | features | product name |
|-----------------|--|-------------------------------|
| none (standard) | — | Multemp PS No.2 (KYODO YUSHI) |
| GU | urea-type low dust generation grease; low sliding resistance | KGU Grease |
| GLA | lithium-type low dust generation grease | KGLA Grease |
| GF | urea-type anti-fretting grease | KGF Grease |

OPERATING TEMPERATURE

- Resin parts are incorporated in the BG type. Please avoid using BG type above 80°C. Please use the product at 55°C or lower when sensor/bellows are optioned.

USE AND HANDLING PRECAUTIONS

- Please handle as a precision component and avoid excessive vibration or shock.
- Rough handling will affect the smooth motion and reduce the precision performance and life time.
- DO NOT DISASSEMBLE. The accuracy of BG type is preadjusted when assembled.
- Please allow for extra stroke length. If the guide block repeatedly collides with damper, it may cause damage.
- Please never touch the area at both stroke ends during operation. There is a danger for the fingers to be caught at the stroke end. Please pay enough attention to the guide rail area even when not in operation, there is a danger for the fingers to be injured by the dust cover.
- Depending upon the operating environment, dust and foreign particles may contaminate BG type and disrupt the ball circulation and precision performance.

SLIDE SCREW

| | |
|------------------------------|----------|
| SLIDE SCREW | |
| STRUCTURE AND ADVANTAGES |I-2 |
| SIZE SELECTION |I-3 |
| INSTALLATION |I-6 |
| USE AND HANDLING PRECAUTIONS |I-6 |
| SPECIAL REQUIREMENTS |I-6 |
| DIMENSION TABLE |I-7 |

SLIDE SCREW

The NB slide screw converts rotational motion into linear motion by utilizing the friction between radial ball bearings and a shaft. This simple mechanism eases maintenance and installation work. The slide screw is most commonly used as transport devices in many types of machines, and is not intended for accurate positioning requirements.

STRUCTURE AND ADVANTAGES

The NB slide screw consists of two aluminum blocks, each with three radial bearings with a fixed angle between them. A round shaft is inserted between the two blocks, and its rotation produces linear motion determined by the contact angle between the shaft and the bearings. For variable loads, the thrust is adjusted by turning the spring loaded thrust adjustment bolts.


Linear Motion on Round-shaft

The NB slide screw is suitable for long-stroke applications using a standard linear shaft.

High Machine Efficiency

The slide screw utilizes the rotational motion of the bearings and drive shaft to achieve machine efficiency as high as 90%.

Figure I-1 Structure of NB Slide Screw

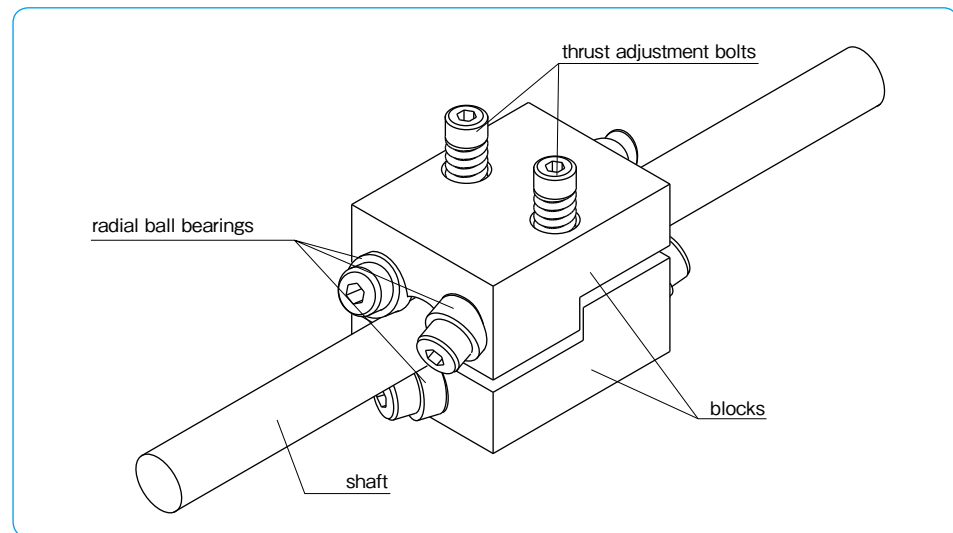

SIZE SELECTION

Required Thrust

Tightening of the bolts creates a thrust force by pushing the bearings against the shaft. This results in a constant force being applied to the bearings regardless of the load.

The thrust should not be greater than required force in the application.

For the horizontal application, the frictional resistance is calculated by the following equation.

$$F_1 = \mu \cdot g \cdot W \dots\dots\dots (1)$$

F₁: frictional resistance (N) μ: friction coefficient
W: mass of work (kg)
g: gravitational acceleration (9.8 m/sec²)

A sufficient safety margin should be achieved by setting μ = 0.01. Also, the inertia at starting and stopping should be taken into consideration.

$$F_2 = W \frac{dv}{dt} \dots\dots\dots (2)$$

F₂: inertia (N) W: mass of work (kg)
dv/dt: acceleration (9.8m/sec²)

Therefore, the required thrust is its maximum at starting point due to the combination of frictional resistance and inertia.

$$F = F_1 + F_2 \dots\dots\dots (3)$$

F: thrust (N) F₁: frictional resistance (N) F₂: inertia (N)

Rated Life

The rated life is expressed in terms of the number of revolutions of the drive shaft by Equation (4). The corresponding total travel distance and life time are given in Equations (5) and (6) respectively.

Rated life

$$L = \left(\frac{C_r}{F}\right)^3 10^6 \dots\dots\dots (4)$$

Total travel distance

$$L_s = \frac{L \cdot \ell}{10^6} \dots\dots\dots (5)$$

Life time

$$L_h = \frac{L}{60 \cdot n} \dots\dots\dots (6)$$

L: rated life (rev) C_r: basic dynamic load rating (thrust) (N)
F: thrust (N) L_s: travel life (km) ℓ: lead (mm)
L_h: life time (hr) n: revolutions per min (rpm)

Table I-1 Basic Dynamic Load Rating (Thrust)

| part number | C _r :basic dynamic load rating (thrust) (N) |
|-------------|--|
| SS 6 | 98 |
| SS 8 | 294 |
| SS10 | 441 |
| SS12 | 588 |
| SS13 | 588 |
| SS16 | 784 |
| SS20 | 1,080 |
| SS25 | 1,470 |
| SS30 | 2,160 |

Allowable Rotational Speed

When the rotational speed is increased and approaches the shaft resonant frequency, the shaft is disabled from further operation. This speed is called the critical speed and can be obtained by the following equation. In order to leave a sufficient safety margin, the maximum operating speed should be set at about 80% of the calculated value.

$$N_c = \frac{60\lambda^2}{2\pi L^2} \cdot \sqrt{\frac{EI \times 10^3}{\gamma A}} \dots\dots\dots (7)$$

N_c : critical speed (rpm)
 E : modulus of direct elasticity (N/mm²)
 γ : density (kg/mm³)
 λ : installation coefficient (refer to Figure I-3)
 L : support distance (mm)
 I : geometrical moment of inertia (mm⁴)
 A : cross-sectional area of the shaft (mm²)

If modulus of direct elasticity is 2.06×10^5 N/mm² and density is 7.85×10^{-6} kg/mm³, the critical speed for a solid shaft is:

$$N_c = 12.2 \cdot \frac{\lambda^2}{L^2} \cdot D \times 10^6 \dots\dots\dots (8)$$

N_c : critical speed (rpm)
 λ : installation coefficient (refer to Figure I-3)
 L : support distance (mm) D : shaft diameter (mm)

Figure I-3 Mounting of Slide Screw


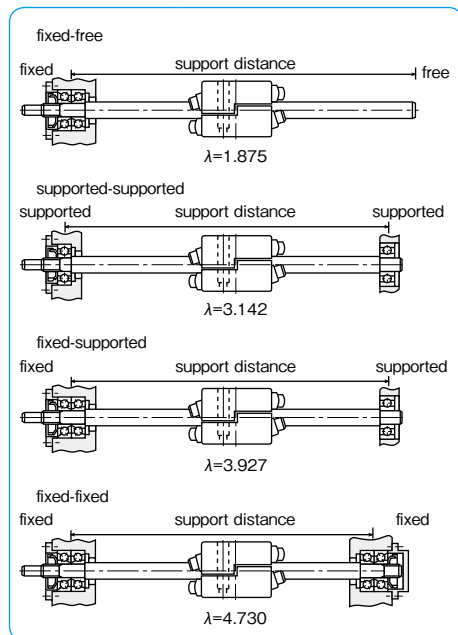


Figure I-2 Critical Speed and Support Distance

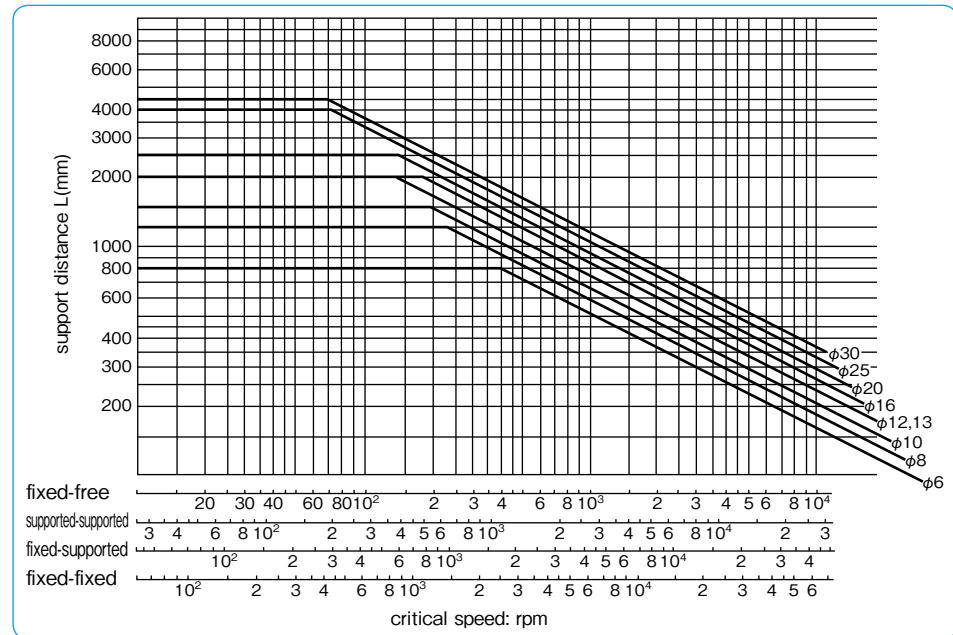

Calculation Example

1. Selecting a slide screw that satisfies the following conditions:

- Support method: fixed-supported
- Support distance: 1,500 mm
- External force: 98 N
- Table mass: 50 kg
- Stroke distance: 1,200 mm
- Friction coefficient: 0.01
- Maximum speed of transfer: 12 m/min
- Cycles per minute: 4

● Determination of required thrust:

$$F = 98 + (0.01 \times 50 \times 9.8) = 102.9 \text{ N}$$

Therefore, based on the maximum thrust in the dimension table, at least SS10 is required in size.

● Allowable rotational speed:

From Equation (8), according to the conditions, the critical speed N_c is:

$$N_c = 12.2 \cdot \frac{\lambda^2}{L^2} \cdot D \times 10^6 \quad \left[\begin{array}{l} \lambda = 3.927 \\ L = 1500 \text{ mm} \end{array} \right]$$

$$= 83.6 \text{ D rev}$$

Applying a safety factor of 0.8, the maximum speed is given by:

$$V_{\text{max}} = \frac{0.8 \cdot N_c \cdot \ell}{1000} \text{ m/min}$$

(ℓ : lead mm)

The following table summarizes the results of the calculations above for SS10 to SS16.

Table I-2 Maximum Speed

| part number | shaft diameter D mm | lead ℓ mm | critical speed N_c rpm | maximum speed V_{max} m/min |
|-------------|---------------------|----------------|--------------------------|--------------------------------------|
| SS10-10 | 10 | 10 | 836 | 6.68 |
| SS10-15 | | 15 | | 10.0 |
| SS12-12 | 12 | 12 | 1,000 | 9.63 |
| SS12-18 | | 18 | | 14.4 |
| SS13-13 | 13 | 13 | 1,080 | 11.3 |
| SS13-15 | | 15 | | 13.0 |
| SS16-16 | 16 | 16 | 1,330 | 17.1 |
| SS16-24 | | 24 | | 25.6 |

Therefore, the SS13-15 and SS16-16 slide screws satisfy the given conditions.

● Life Calculation

The life for the SS13-15 slide screw is calculated as follows. The rated life is obtained using Equation (4).

$$L = \left[\frac{C_F}{F} \right]^3 \times 10^6 = 186 \times 10^6 \text{ rev}$$

The average number of rotations that satisfies the conditions is:

$$n = \frac{1,200 \times 2 \times 4}{15} = 640 \text{ rev}$$

The life in terms of time is:

$$L_h = \frac{L}{60 \times n} = 4,840 \text{ (h)}$$

For the SS16-16 slide screw:

$$L = 4.40 \times 10^6 \text{ rev}$$

$$n = 600 \text{ rev}$$

$$L_h = 12,200 \text{ (h)}$$

2. Determining the maximum speed of transfer under the following conditions:

Support method: fixed-supported

Support distance: 2,000mm

Slide screw selected: SS16-16

The critical speed is obtained from Equation (8):

$$N_c = 12.2 \cdot \frac{\lambda^2}{L^2} \cdot D \times 10^6 \quad \left[\begin{array}{l} \lambda = 3.927 \\ L = 2000 \text{ mm} \\ D = 16 \text{ mm} \end{array} \right]$$

$$= 752 \text{ rpm}$$

Applying a safety factor of 0.8, the maximum speed of transfer is:

$$V_{\text{max}} = \frac{0.8 \cdot N_c \cdot \ell}{1000} \text{ m/min } (\ell: \text{lead mm})$$

$$= 9.6 \text{ m/min}$$

INSTALLATION

1. Clean dust from drive shaft.
2. Place shaft between upper and lower blocks. Lightly tighten thrust adjustment bolts until the clearance between the shaft and the bearings diminishes.
3. Temporarily attach the slide screw to the table.
4. Adjust the parallelism between the slide screw and the linear motion guides by manually moving the table back and forth. Fix the shaft accurately after the required parallelism is achieved.
5. Tighten the thrust adjustment bolts evenly while applying a thrust force to the table until slippage disappears. Care should be required to avoid excessive tightening which results in shortening the rated life.


USE AND HANDLING PRECAUTIONS

- It is recommended to use a heat-treated ground shaft such as NB shaft to prevent wear and to obtain smooth motion. (refer to page F-2)
- Since the slide screw utilizes the friction between the bearings and the shaft, the lead varies due to the effect of load variation, movement direction, and shaft conditions. As the values of standard lead are advisory, highly accurate positioning can be obtained by attaching a linear scale to the table.
- If the slide screw and linear motion guides are not parallel, an unbalanced load will be applied to the slide screw. Exercise care in controlling the parallelism.
- The slide screw slips on the shaft, if an excessive load is applied, in order to prevent damage. However, frequent slippage should be avoided in order not to shorten the travel life.
- Please transfer the radial load to linear motion guides since the radial load on the slide screw shortens the rated life. For long stroke applications, it is recommended to use linear and rotary motion components such as Slide Rotary Bush (refer to page E-10) along with a slide screw.



SPECIAL REQUIREMENTS

NB can fabricate slide screws to meet special requirements, including screws with a special lead or a reverse lead. Contact NB for further information.

SS TYPE

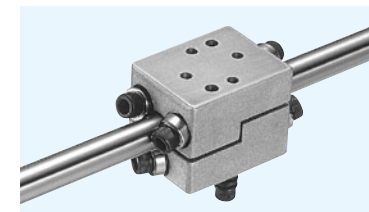

part number structure

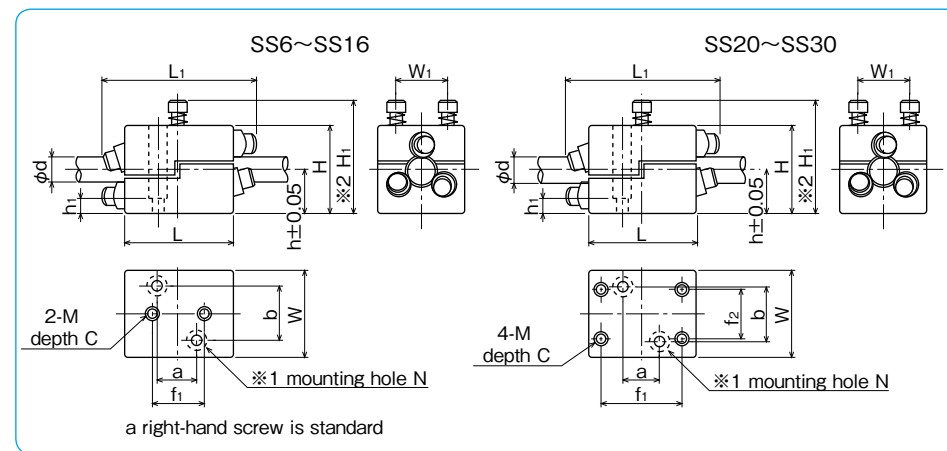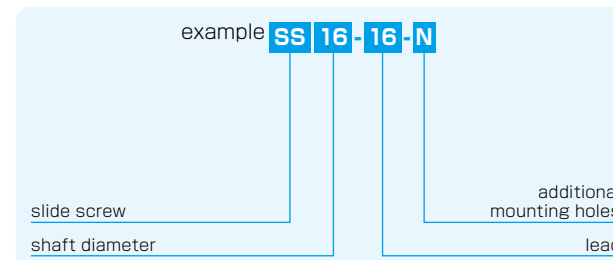

| part number | shaft diameter d | major dimensions | | | | | | | | | | | | | | standard lead ※3 | maximum thrust | maximum tightening torque | mass | |
|-------------|---------------------|------------------|----|----|----|----------------|----------------|----------------|----------------|----------------|----|----|----|------|----|---------------------|----------------|---------------------------|------|----------------|
| | | H | W | L | h | H ₁ | L ₁ | W ₁ | f ₁ | f ₂ | a | b | M | C | N | | | | | h ₁ |
| SS 6 | 6 | 20.5 | 20 | 25 | 10 | 28 | 36 | 12 | 10 | — | — | — | M3 | 6.5 | — | — | 6, 9 | 24.5 | 0.03 | 0.03 |
| SS 8 | 8 | 28.5 | 28 | 40 | 14 | 40 | 56 | 18 | 18 | — | — | — | M4 | 9 | — | — | 8,12 | 73.5 | 0.14 | 0.09 |
| SS10 | 10 | 36.5 | 36 | 46 | 18 | 51 | 62 | 24 | 20 | — | 20 | 24 | M4 | 12 | M4 | 8 | 10,15 | 118 | 0.25 | 0.17 |
| SS12 | 12 | 40.5 | 40 | 50 | 20 | 54 | 72 | 25 | 25 | — | 20 | 25 | M5 | 12.5 | M4 | 10 | 12,18 | 147 | 0.31 | 0.22 |
| SS13 | 13 | 40.5 | 40 | 50 | 20 | 54 | 72 | 25 | 25 | — | 20 | 25 | M5 | 12.5 | M4 | 10 | 13,15 | 147 | 0.31 | 0.22 |
| SS16 | 16 | 50.5 | 50 | 60 | 25 | 62 | 86 | 32 | 30 | — | 25 | 32 | M5 | 16 | M5 | 10 | 16,24 | 196 | 0.41 | 0.39 |
| SS20 | 20 | 60.5 | 60 | 70 | 30 | 71 | 97 | 40 | 50 | 40 | 30 | 40 | M6 | 12 | M6 | 10 | 20,30 | 265 | 0.56 | 0.57 |
| SS25 | 25 | 76.5 | 76 | 80 | 38 | 82 | 110 | 50 | 60 | 50 | 32 | 50 | M8 | 12 | M8 | 15 | 25 | 392 | 1.1 | 1.05 |
| SS30 | 30 | 89 | 90 | 88 | 44 | 92 | 127 | 60 | 60 | 70 | 36 | 60 | M8 | 15 | M8 | 15 | 30,45 | 539 | 1.4 | 1.65 |

※1 The mounting holes are machined on request. 1N≐0.102kgf 1N·m≐0.102kgf·m
 ※2 H₁ is the minimum height when the maximum thrust is applied.
 ※3 The values of standard lead are advisory.







A large, light blue, stylized letter 'W' logo is positioned in the background on the right side of the slide. The 'W' is composed of thick white outlines. To the right of the 'W' logo, there is a vertical column of light blue rounded rectangular shapes, resembling a stack of papers or a sidebar.

TECHNICAL REFERENCE



DEFINITIONS AND DESIGNATIONS OF GEOMETRICAL DEVIATIONS (JIS B0621)

TOLERANCING OF FORM, ORIENTATION, LOCATION AND RUN-OUT (JIS B0021)



STRAIGHTNESS Straightness indicates the degree of deviation of a straight portion from the geometrical straight line.
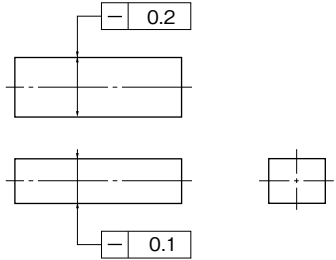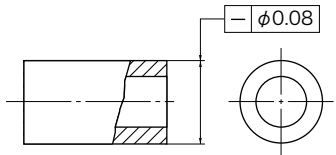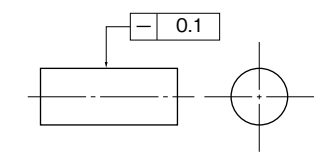
| | |
|--|--|
| <p>Straightness of two directions perpendicular to each other (Axis of a rectangular parallelepiped)</p>  | <p>Space inside the prism enclosed by two pairs of parallel planes with intervals of 0.2mm and 0.1mm in the directions of indicated arrows</p>  |
| <p>Straightness with no direction defined (Axis of a cylinder)</p>  | <p>Space inside a cylinder with a diameter of 0.08mm</p>  |
| <p>Straightness of a surface element (Generatrix of a cylinder)</p>  | <p>Space between a pair of parallel straight lines with an interval of 0.1mm on an arbitrary plane including the axis</p>  |



FLATNESS Flatness indicates the degree of deviation of a flat portion from the geometrical plane.
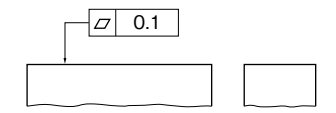
| | |
|---|--|
| <p>General flatness</p>  | <p>Space between a pair of parallel planes with an interval of 0.1mm</p>  |
|---|--|



CIRCULARITY Circularity indicates the degree of deviation of a circular portion from the geometrical circle.
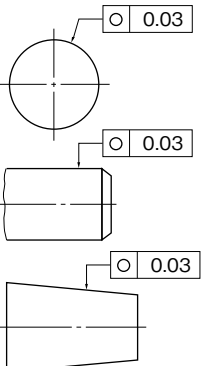
| | |
|---|---|
|  | <p>Space between two concentric circles with a radius difference of 0.03mm. Applicable to an arbitrary cross section perpendicular to the axis.</p>  |
|---|---|

CYLINDRICITY Cylindricity indicates the degree of deviation of a cylindrical portion from the geometrical cylindrical surface.


| | |
|--|--|
|  | <p>Space between two concentric cylinders with a radius difference of 0.1mm</p>  |
|--|--|

PARALLELISM Parallelism assumes a combination of two straight portions, a straight portion and a flat portion, or two flat portions which must be parallel to each other. Parallelism indicates, with one of the two portions as a reference, the degree of deviation of the other straight or flat portion from the geometrical straight line or plane parallel to the reference straight line or plane.

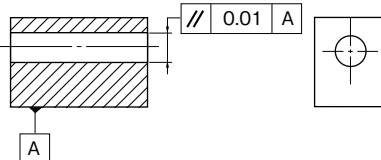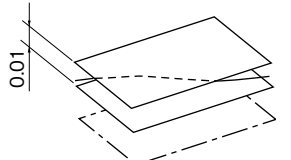
| | |
|---|--|
| <p>Parallelism of a straight portion with respect to the reference plane (Axis of a hole)</p>  | <p>Space between two parallel planes with an interval of 0.01mm, parallel to the reference plane</p>  |
|---|--|

PERPENDICULARITY Perpendicularity assumes a combination of two straight portions, a straight portion and a flat portion, or two flat portions which must be perpendicular to each other. Perpendicularity indicates, with one of the two portions as a reference, the degree of deviation of the other straight or flat portion from the geometrical straight line or plane.


Perpendicularity of a flat portion with respect to the reference straight line (with the axis of a cylinder as a reference)




Space between two parallel planes with an interval of 0.08mm, perpendicular to the reference straight line



Perpendicularity of a flat portion with respect to the reference plane




Space between two parallel planes with an interval of 0.08mm, perpendicular to the reference plane




CONCENTRICITY Concentricity indicates the degree of deviation from the axis which must be on the same straight line as the reference axis.

Concentricity of a cylindrical portion

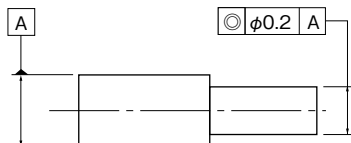

Space inside a cylinder with a diameter of 0.2mm, concentric with the reference axis



Hardness Conversion Table

| Rockwell C scale hardness HRC (load150kg) | Vickers Hardness HV | Brinell hardness HBW | | Rockwell hardness | | Shore hardness HS |
|---|---------------------|----------------------|-----------------|---|--|-------------------|
| | | standard sphere | tungsten sphere | HRA A scale load 60 kg brale pressure point | HRBS B scale load 100 kg 1/16-inch-diameter sphere | |
| 68 | 940 | — | — | 85.6 | — | 97 |
| 67 | 900 | — | — | 85.0 | — | 95 |
| 66 | 865 | — | — | 84.5 | — | 92 |
| 65 | 832 | — | 739 | 83.9 | — | 91 |
| 64 | 800 | — | 722 | 83.4 | — | 88 |
| 63 | 772 | — | 705 | 82.8 | — | 87 |
| 62 | 746 | — | 688 | 82.3 | — | 85 |
| 61 | 720 | — | 670 | 81.8 | — | 83 |
| 60 | 697 | — | 654 | 81.2 | — | 81 |
| 59 | 674 | — | 634 | 80.7 | — | 80 |
| 58 | 653 | — | 615 | 80.1 | — | 78 |
| 57 | 633 | — | 595 | 79.6 | — | 76 |
| 56 | 613 | — | 577 | 79.0 | — | 75 |
| 55 | 595 | — | 560 | 78.5 | — | 74 |
| 54 | 577 | — | 543 | 78.0 | — | 72 |
| 53 | 560 | — | 525 | 77.4 | — | 71 |
| 52 | 544 | 500 | 512 | 76.8 | — | 69 |
| 51 | 528 | 487 | 496 | 76.3 | — | 68 |
| 50 | 513 | 475 | 481 | 75.9 | — | 67 |
| 49 | 498 | 464 | 469 | 75.2 | — | 66 |
| 48 | 484 | 451 | 455 | 74.7 | — | 64 |
| 47 | 471 | 442 | 443 | 74.1 | — | 63 |
| 46 | 458 | 432 | 432 | 73.6 | — | 62 |
| 45 | 446 | 421 | 421 | 73.1 | — | 60 |
| 44 | 434 | 409 | 409 | 72.5 | — | 58 |
| 43 | 423 | 400 | 400 | 72.0 | — | 57 |
| 42 | 412 | 390 | 390 | 71.5 | — | 56 |
| 41 | 402 | 381 | 381 | 70.9 | — | 55 |
| 40 | 392 | 371 | 371 | 70.4 | — | 54 |
| 39 | 382 | 362 | 362 | 69.9 | — | 52 |
| 38 | 372 | 353 | 353 | 69.4 | — | 51 |
| 37 | 363 | 344 | 344 | 68.9 | — | 50 |
| 36 | 354 | 336 | 336 | 68.4 | (109.0) | 49 |
| 35 | 345 | 327 | 327 | 67.9 | (108.5) | 48 |
| 34 | 336 | 319 | 319 | 67.4 | (108.0) | 47 |
| 33 | 327 | 311 | 311 | 66.8 | (107.5) | 46 |
| 32 | 318 | 301 | 301 | 66.3 | (107.0) | 44 |
| 31 | 310 | 294 | 294 | 65.8 | (106.0) | 43 |
| 30 | 302 | 286 | 286 | 65.3 | (105.5) | 42 |
| 29 | 294 | 279 | 279 | 64.7 | (104.5) | 41 |
| 28 | 286 | 271 | 271 | 64.3 | (104.0) | 41 |
| 27 | 279 | 264 | 264 | 63.8 | (103.0) | 40 |
| 26 | 272 | 258 | 258 | 63.3 | (102.5) | 38 |
| 25 | 266 | 253 | 253 | 62.8 | (101.5) | 38 |
| 24 | 260 | 247 | 247 | 62.4 | (101.0) | 37 |
| 23 | 254 | 243 | 243 | 62.0 | 100.0 | 36 |
| 22 | 248 | 237 | 237 | 61.5 | 99.0 | 35 |
| 21 | 243 | 231 | 231 | 61.0 | 98.5 | 35 |
| 20 | 238 | 226 | 226 | 60.5 | 97.8 | 34 |
| (18) | 230 | 219 | 219 | — | 96.7 | 33 |
| (16) | 222 | 212 | 212 | — | 95.5 | 32 |
| (14) | 213 | 203 | 203 | — | 93.9 | 31 |
| (12) | 204 | 194 | 194 | — | 92.3 | 29 |
| (10) | 196 | 187 | 187 | — | 90.7 | 28 |
| (8) | 188 | 179 | 179 | — | 89.5 | 27 |
| (6) | 180 | 171 | 171 | — | 87.1 | 26 |
| (4) | 173 | 165 | 165 | — | 85.5 | 25 |
| (2) | 166 | 158 | 158 | — | 83.5 | 24 |
| (0) | 160 | 152 | 152 | — | 81.7 | 24 |

Shaft Dimensional Tolerance

| diameter category mm greater than or less than | a13 | | c12 | | d6 | | e6 | | f5 | | f6 | | g5 | | g6 | | h5 | | h6 | | h7 | | h8 | | h9 | | h10 | |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower |
| — 3 | -270 | -410 | -60 | -160 | -20 | -26 | -14 | -20 | -6 | -10 | -6 | -12 | -2 | -6 | -2 | -8 | 0 | -4 | 0 | -6 | 0 | -10 | 0 | -14 | 0 | -25 | 0 | -40 |
| 3 6 | -270 | -450 | -70 | -190 | -30 | -38 | -20 | -28 | -10 | -15 | -10 | -18 | -4 | -9 | -4 | -12 | 0 | -5 | 0 | -8 | 0 | -12 | 0 | -18 | 0 | -30 | 0 | -48 |
| 6 10 | -280 | -500 | -80 | -230 | -40 | -49 | -25 | -34 | -13 | -19 | -13 | -22 | -5 | -11 | -5 | -14 | 0 | -6 | 0 | -9 | 0 | -15 | 0 | -22 | 0 | -36 | 0 | -58 |
| 10 14 | -290 | -560 | -95 | -275 | -50 | -61 | -32 | -43 | -16 | -24 | -16 | -27 | -6 | -14 | -6 | -17 | 0 | -8 | 0 | -11 | 0 | -18 | 0 | -27 | 0 | -43 | 0 | -70 |
| 14 18 | -300 | -630 | -110 | -320 | -65 | -78 | -40 | -53 | -20 | -29 | -20 | -33 | -7 | -16 | -7 | -20 | 0 | -9 | 0 | -13 | 0 | -21 | 0 | -33 | 0 | -52 | 0 | -84 |
| 18 24 | -310 | -700 | -120 | -370 | -80 | -96 | -50 | -66 | -25 | -36 | -25 | -41 | -9 | -20 | -9 | -25 | 0 | -11 | 0 | -16 | 0 | -25 | 0 | -39 | 0 | -62 | 0 | -100 |
| 24 30 | -320 | -770 | -130 | -440 | -100 | -119 | -60 | -79 | -30 | -43 | -30 | -49 | -10 | -23 | -10 | -29 | 0 | -13 | 0 | -19 | 0 | -30 | 0 | -46 | 0 | -74 | 0 | -120 |
| 30 40 | -340 | -800 | -140 | -440 | -120 | -142 | -72 | -94 | -36 | -51 | -36 | -58 | -12 | -27 | -12 | -34 | 0 | -15 | 0 | -22 | 0 | -35 | 0 | -54 | 0 | -87 | 0 | -140 |
| 40 50 | -360 | -820 | -150 | -450 | -145 | -170 | -85 | -110 | -43 | -61 | -43 | -68 | -14 | -32 | -14 | -39 | 0 | -18 | 0 | -25 | 0 | -40 | 0 | -63 | 0 | -100 | 0 | -160 |
| 50 65 | -380 | -920 | -170 | -520 | -160 | -199 | -100 | -129 | -50 | -70 | -50 | -79 | -15 | -35 | -15 | -44 | 0 | -20 | 0 | -29 | 0 | -46 | 0 | -72 | 0 | -115 | 0 | -185 |
| 65 80 | -410 | -950 | -180 | -530 | -170 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |
| 80 100 | -440 | -1090 | -200 | -600 | -190 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |
| 100 120 | -460 | -1090 | -200 | -600 | -190 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |
| 120 140 | -480 | -1150 | -210 | -610 | -190 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |
| 140 160 | -500 | -1210 | -220 | -630 | -190 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |
| 160 180 | -520 | -1270 | -230 | -630 | -190 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |
| 180 200 | -540 | -1330 | -240 | -700 | -190 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |
| 200 225 | -560 | -1390 | -250 | -740 | -190 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |
| 225 250 | -580 | -1450 | -260 | -740 | -190 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |
| 250 280 | -600 | -1510 | -270 | -820 | -190 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |
| 280 315 | -620 | -1570 | -280 | -820 | -190 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |
| 315 355 | -640 | -1630 | -290 | -900 | -190 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |
| 355 400 | -660 | -1690 | -300 | -900 | -190 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |
| 400 450 | -680 | -1750 | -310 | -970 | -190 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |
| 450 500 | -700 | -1810 | -320 | -970 | -190 | -222 | -110 | -142 | -56 | -79 | -56 | -88 | -17 | -40 | -17 | -49 | 0 | -23 | 0 | -32 | 0 | -52 | 0 | -81 | 0 | -130 | 0 | -210 |

Housing Bore Dimensional Tolerance

| diameter category mm greater than or less than | E10 | | E11 | | F6 | | F7 | | F8 | | G6 | | G7 | | H5 | | H6 | | H7 | | H8 | | H9 | | H10 | |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower |
| — 3 | +54 | +14 | +74 | +14 | +12 | +6 | +16 | +6 | +20 | +6 | +8 | +2 | +12 | +2 | +4 | 0 | +6 | 0 | +10 | 0 | +14 | 0 | +25 | 0 | +40 | 0 |
| 3 6 | +68 | +20 | +95 | +20 | +18 | +10 | +22 | +10 | +28 | +10 | +12 | +4 | +16 | +4 | +5 | 0 | +8 | 0 | +12 | 0 | +18 | 0 | +30 | 0 | +48 | 0 |
| 6 10 | +83 | +25 | +115 | +25 | +22 | +13 | +28 | +13 | +35 | +13 | +14 | +5 | +20 | +5 | +6 | 0 | +9 | 0 | +15 | 0 | +22 | 0 | +36 | 0 | +58 | 0 |
| 10 14 | +102 | +32 | +142 | +32 | +27 | +16 | +34 | +16 | +43 | +16 | +17 | +6 | +24 | +6 | +8 | 0 | +11 | 0 | +18 | 0 | +27 | 0 | +43 | 0 | +70 | 0 |
| 14 18 | +124 | +40 | +170 | +40 | +33 | +20 | +41 | +20 | +53 | +20 | +20 | +7 | +28 | +7 | +9 | 0 | +13 | 0 | +21 | 0 | +33 | 0 | +52 | 0 | +84 | 0 |
| 18 24 | +150 | +50 | +210 | +50 | +41 | +25 | +50 | +25 | +64 | +25 | +25 | +9 | +34 | +9 | +11 | 0 | +16 | 0 | +25 | 0 | +39 | 0 | +62 | 0 | +100 | 0 |
| 24 30 | +180 | +60 | +250 | +60 | +49 | +30 | +60 | +30 | +76 | +30 | +29 | +10 | +40 | +10 | +13 | 0 | +19 | 0 | +30 | 0 | +46 | 0 | +74 | 0 | +120 | 0 |
| 30 40 | +212 | +72 | +292 | +72 | +58 | +36 | +71 | +36 | +90 | +36 | +34 | +12 | +47 | +12 | +15 | 0 | +22 | 0 | +35 | 0 | +54 | 0 | +87 | 0 | +140 | 0 |
| 40 50 | +245 | +85 | +335 | +85 | +68 | +43 | +83 | +43 | +106 | +43 | +39 | +14 | +54 | +14 | +18 | 0 | +25 | 0 | +40 | 0 | +63 | 0 | +100 | 0 | +160 | 0 |
| 50 65 | +285 | +100 | +390 | +100 | +79 | +50 | +96 | +50 | +122 | +50 | +44 | +15 | +61 | +15 | +20 | 0 | +29 | 0 | +46 | 0 | +72 | 0 | +115 | 0 | +185 | 0 |
| 65 80 | +320 | +110 | +430 | +110 | +88 | +56 | +108 | +56 | +137 | +56 | +49 | +17 | +69 | +17 | +23 | 0 | +32 | 0 | +52 | 0 | +81 | 0 | +130 | 0 | +210 | 0 |
| 80 100 | +355 | +125 | +485 | +125 | +98 | +62 | +119 | +62 | +151 | +62 | +54 | +18 | +75 | +18 | +25 | 0 | +36 | 0 | +57 | 0 | +89 | 0 | +140 | 0 | +230 | 0 |
| 100 120 | +385 | +135 | +535 | +135 | +108 | +68 | +131 | +68 | +165 | +68 | +60 | +20 | +83 | +20 | +27 | 0 | +40 | 0 | +63 | 0 | +97 | 0 | +155 | 0 | +250 | 0 |

unit : μm

| diameter category mm greater than or less than | js5 | | js6 | | j5 | | j6 | | k5 | | k6 | | m5 | | m6 | | n5 | | n6 | | p5 | | p6 | | r6 | | r7 | | |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---|
| | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | |
| — 3 | ±2 | ±3 | ±2 | +4 | -2 | +4 | 0 | +6 | 0 | +6 | +2 | +8 | +2 | +8 | +4 | +10 | +4 | +10 | +6 | +12 | +6 | +12 | +6 | +16 | +10 | +20 | +10 | — | 3 |
| 3 6 | ±2.5 | ±4 | +3 | -2 | +6 | -2 | +6 | +1 | +9 | +1 | +9 | +4 | +12 | +4 | +13 | +8 | +16 | +8 | +17 | +12 | +20 | +12 | +23 | +15 | +27 | +15 | 3 | 6 | |
| 6 10 | ±3 | ±4.5 | +4 | -2 | +7 | -2 | +7 | +1 | +10 | +1 | +12 | +6 | +15 | +6 | +16 | +10 | +19 | +10 | +21 | +15 | +24 | +15 | +28 | +19 | +34 | +19 | 6 | 10 | |
| 10 14 | ±4 | ±5.5 | +5 | -3 | +8 | -3 | +9 | +1 | +12 | +1 | +15 | +7 | +18 | +7 | +20 | +12 | +23 | +12 | +26 | +18 | +29 | +18 | +34 | +23 | +41 | +23 | 10 | 14 | |
| 14 18 | ±4.5 | ±6.5 | +5 | -4 | +9 | -4 | +11 | +2 | +15 | +2 | +17 | +8 | +21 | +8 | +24 | +15 | +28 | +15 | +31 | +22 | +36 | +22 | +41 | +28 | +49 | +28 | 14 | 18 | |
| 18 24 | ±5.5 | ±8 | +6 | -5 | +11 | -5 | +13 | +2 | +18 | +2 | +20 | +9 | +25 | +9 | +28 | +17 | +33 | +17 | +37 | +26 | +42 | +26 | +50 | +34 | +59 | +34 | 18 | 24 | |
| 24 30 | ±6.5 | ±9.5 | +6 | -7 | +12 | -7 | +15 | +2 | +21 | +2 | +24 | +11 | +30 | +11 | +33 | +20 | +39 | +20 | +45 | +32 | +51 | +32 | +60 | +41 | +71 | +41 | 24 | 30 | |
| 30 40 | ±7.5 | ±11 | +6 | -9 | +13 | -9 | +18 | +3 | +25 | +3 | +28 | +13 | +35 | +13 | +38 | +23 | +45 | +23 | +52 | +37 | +59 | +37 | +73 | +51 | | | | | |

INDEX

| | |
|--------------------------|--|
| A | |
| AK | Slide Bush: Compact Block Type C- 120 |
| AK-G | Slide Bush: Compact Block Type C- 120 |
| AK-GW | Slide Bush: Double-Wide Compact Block Type C- 124 |
| AK-R | Slide Rotary Bush: Compact Block Type E- 22 |
| AK-RW | Slide Rotary Bush: Double-Wide Compact Block Type E- 23 |
| AK-W | Slide Bush: Double-Wide Compact Block Type C- 122 |
| AKS | Slide Bush: Compact Block Type, Anticorrosion C- 120 |
| AKS-G | Slide Bush: Compact Block Type, Anticorrosion C- 120 |
| AKS-GW | Slide Bush: Double-Wide Compact Block Type, Anticorrosion C- 122 |
| AKS-W | Slide Bush: Double-Wide Compact Block Type, Anticorrosion C- 122 |
| B | |
| BG | Actuator: Integrated Guide and Ball Screw System H- 1 |
| BT | Slide Way: Special Mounting Screw G- 9 |
| C | |
| CD | Slide Bush: Clearance Adjustable Type C- 136 |
| CDS | Slide Bush: Clearance Adjustable Type, Anticorrosion C- 136 |
| CE | Slide Bush: Non-Clearance Adjustable Type C- 134 |
| CES | Slide Bush: Non-Clearance Adjustable Type, Anticorrosion C- 134 |
| CR | Gonio Way: Curved Roller Cage G- 70 |
| F | |
| F | Slide Guide: Special Cap A- 15 |
| FLM | Slide Bush: Felt Seal C- 11 |
| FP | Ball Spline: Lock Plate B- 15 |
| G | |
| GG1 | Grease Gun Set Eng- 43 |
| GM | Slide Bush: Light Weight Single Type C- 114 |
| GM-W | Slide Bush: Light Weight Double-Wide Type C- 115 |
| K | |
| KB | Slide Bush (Euro Standard): Standard Type C- 78 |
| KB-AJ | Slide Bush (Euro Standard): Clearance Adjustable Type C- 80 |
| KB-G | Slide Bush (Euro Standard): Standard Type C- 78 |
| KB-G-AJ | Slide Bush (Euro Standard): Clearance Adjustable Type C- 80 |
| KB-G-OP | Slide Bush (Euro Standard): Open Type C- 82 |
| KB-GW | Slide Bush (Euro Standard): Double-Wide Type C- 84 |
| KB-OP | Slide Bush (Euro Standard): Open Type C- 82 |
| KB-W | Slide Bush (Euro Standard): Double-Wide Type C- 84 |
| KBF | Slide Bush (Euro Standard): Round Flange Type C- 86 |
| KBF-G | Slide Bush (Euro Standard): Round Flange Type C- 86 |
| KBF-GW | Slide Bush (Euro Standard): Round Flange Double-Wide Type C- 90 |
| KBF-W | Slide Bush (Euro Standard): Round Flange Double-Wide Type C- 90 |
| KBFC | Slide Bush (Euro Standard): Center Mount Round Flange Type C- 94 |
| KBFC-G | Slide Bush (Euro Standard): Center Mount Round Flange Type C- 94 |

| | |
|-----------------------------|---|
| KBK | Slide Bush (Euro Standard): Square Flange Type C- 88 |
| KBK-G | Slide Bush (Euro Standard): Square Flange Type C- 88 |
| KBK-GW | Slide Bush (Euro Standard): Square Flange Double-Wide Type C- 92 |
| KBK-W | Slide Bush (Euro Standard): Square Flange Double-Wide Type C- 92 |
| KBKC | Slide Bush (Euro Standard): Center Mount Square Flange Type C- 96 |
| KBKC-G | Slide Bush (Euro Standard): Center Mount Square Flange Type C- 96 |
| KBS | Slide Bush (Euro Standard): Standard Type, Anticorrosion C- 78 |
| KBS-AJ | Slide Bush (Euro Standard): Clearance Adjustable Type, Anticorrosion C- 80 |
| KBS-G | Slide Bush (Euro Standard): Standard Type, Anticorrosion C- 78 |
| KBS-G-AJ | Slide Bush (Euro Standard): Clearance Adjustable Type, Anticorrosion C- 80 |
| KBS-G-OP | Slide Bush (Euro Standard): Open Type, Anticorrosion C- 82 |
| KBS-GW | Slide Bush (Euro Standard): Double-Wide Type, Anticorrosion C- 84 |
| KBS-OP | Slide Bush (Euro Standard): Open Type, Anticorrosion C- 82 |
| KBS-W | Slide Bush (Euro Standard): Double-Wide Type, Anticorrosion C- 84 |
| KBSF | Slide Bush (Euro Standard): Round Flange Type, Anticorrosion C- 86 |
| KBSF-G | Slide Bush (Euro Standard): Round Flange Type, Anticorrosion C- 86 |
| KBSF-GW | Slide Bush (Euro Standard): Round Flange Double-Wide Type, Anticorrosion C- 90 |
| KBSF-W | Slide Bush (Euro Standard): Round Flange Double-Wide Type, Anticorrosion C- 90 |
| KBSFC | Slide Bush (Euro Standard): Center Mount Round Flange Type, Anticorrosion C- 94 |
| KBSFC-G | Slide Bush (Euro Standard): Center Mount Round Flange Type, Anticorrosion C- 94 |
| KBSK | Slide Bush (Euro Standard): Square Flange Type, Anticorrosion C- 88 |
| KBSK-G | Slide Bush (Euro Standard): Square Flange Type, Anticorrosion C- 88 |
| KBSK-GW | Slide Bush (Euro Standard): Square Flange Double-Wide Type, Anticorrosion C- 92 |
| KBSK-W | Slide Bush (Euro Standard): Square Flange Double-Wide Type, Anticorrosion C- 92 |
| KBSKC | Slide Bush (Euro Standard): Center Mount Square Flange Type, Anticorrosion C- 96 |
| KBSKC-G | Slide Bush (Euro Standard): Center Mount Square Flange Type, Anticorrosion C- 96 |
| KGF-Grease | Anti-fretting/Anticorrosion Eng- 42 |
| KGL-Grease | Low Dust-generation Eng- 40 |
| KGU-Grease | Low Dust-generation Eng- 40 |
| L | |
| LP | Ball Spline: Lock Plate B- 16 |
| LWA | Shaft (Inch Standard): Low Shaft Support Rail F- 19 |
| N | |
| NV | Slide Way: STUDROLLER System G- 10 |
| NVS | Slide Way: STUDROLLER System, Anticorrosion G- 10 |
| NVS-RNS | Slide Way: STUDROLLER System, Special Environment Type, Anticorrosion G- 14 |
| NVT | Slide Table: STUDROLLER System G- 30 |
| NVTS | Slide Table: STUDROLLER System, Anticorrosion G- 30 |
| NYT | Slide Table:STUDROLLER System Compact Type G- 34 |
| NYT-D | Slide Table:STUDROLLER System Compact Type with Counterbored Rail G- 36 |
| NYTS | Slide Table:STUDROLLER System Compact Type,Anticorrosion G- 34 |
| NYTS-D | Slide Table:STUDROLLER System Compact Type with Counterbored Rail,Anticorrosion G- 36 |

P
PC Shaft: Pre-Cut Slide Shaft F- 32

R
R Slide Way: Roller Cage G- 5
RA Slide Way: Aluminum Roller Cage G- 5
RAS Slide Way: Aluminum Roller Cage, Anticorrosion G- 5
RK Slide Rotary Bush E- 27
RS Slide Way: Roller Cage, Anticorrosion G- 5
RV Gonio Way G- 68
RVF Gonio Way: Flat-installation-surface Type G- 66

SA
SA Shaft: Shaft Support Rail F- 14

SE
SEB-A Slide Guide: Miniature Type A- 34
SEB-A-N Slide Guide: Miniature Type with Tapped Hole Rail A- 34
SEB-AY Slide Guide: Miniature Long Type A- 34
SEB-AY-N Slide Guide: Miniature Long Type with Tapped Hole Rail A- 34
SEB-WA Slide Guide: Miniature Wide Type A- 38
SEB-WA-N Slide Guide: Miniature Wide Type with Tapped Hole Rail A- 38
SEB-WAY Slide Guide: Miniature Wide and Long Type A- 38
SEB-WAY-N Slide Guide: Miniature Wide and Long Type with Tapped Hole Rail A- 38
SEB-WD Slide Guide: Miniature Wide Type A- 38
SEB-WD-N Slide Guide: Miniature Wide Type with Tapped Hole Rail A- 38
SEBS-A Slide Guide: Miniature Type, Anticorrosion A- 34
SEBS-A-N Slide Guide: Miniature Type with Tapped Hole Rail, Anticorrosion A- 34
SEBS-AY Slide Guide: Miniature Long Type, Anticorrosion A- 34
SEBS-AY-N Slide Guide: Miniature Long Type with Tapped Hole Rail, Anticorrosion A- 34
SEBS-B Slide Guide (Retained Ball): Miniature Type A- 26
SEBS-B-N Slide Guide (Retained Ball): Miniature Type with Tapped Hole Rail A- 26
SEBS-BM Slide Guide (Retained Ball): Miniature All Stainless Type A- 26
SEBS-BM-N Slide Guide (Retained Ball): Miniature All Stainless Type with Tapped Hole Rail A- 26
SEBS-BS Slide Guide (Retained Ball): Miniature Short Type A- 26
SEBS-BS-N Slide Guide (Retained Ball): Miniature Short Type with Tapped Hole Rail A- 26
SEBS-BSM Slide Guide (Retained Ball): Miniature All Stainless Short Type A- 26
SEBS-BSM-N Slide Guide (Retained Ball): Miniature All Stainless Short Type with Tapped Hole Rail A- 26
SEBS-BY Slide Guide (Retained Ball): Miniature Long Type A- 26
SEBS-BY-N Slide Guide (Retained Ball): Miniature Long Type with Tapped Hole Rail A- 26
SEBS-BYD Slide Guide (Retained Ball): Miniature Long Type A- 26
SEBS-BYD-N Slide Guide (Retained Ball): Miniature Long Type with Tapped Hole Rail A- 26
SEBS-BYDM Slide Guide (Retained Ball): Miniature All Stainless Long Type A- 26
SEBS-BYDM-N Slide Guide (Retained Ball): Miniature All Stainless Long Type with Tapped Hole Rail A- 26
SEBS-BYM Slide Guide (Retained Ball): Miniature All Stainless Long Type A- 26
SEBS-BYM-N Slide Guide (Retained Ball): Miniature All Stainless Long Type with Tapped Hole Rail A- 26

SEBS-WA Slide Guide: Miniature Wide Type, Anticorrosion A- 38
SEBS-WA-N Slide Guide: Miniature Wide Type with Tapped Hole Rail, Anticorrosion A- 38
SEBS-WAY Slide Guide: Miniature Wide and Long Type, Anticorrosion A- 38
SEBS-WAY-N Slide Guide: Miniature Wide and Long Type with Tapped Hole Rail, Anticorrosion A- 38
SEBS-WB Slide Guide (Retained Ball): Miniature Wide Type A- 30
SEBS-WB-N Slide Guide (Retained Ball): Miniature Wide Type with Tapped Hole Rail A- 30
SEBS-WBS Slide Guide (Retained Ball): Miniature Wide and Short Type A- 30
SEBS-WBS-N Slide Guide (Retained Ball): Miniature Wide and Short Type with Tapped Hole Rail A- 30
SEBS-WBY Slide Guide (Retained Ball): Miniature Wide and Long Type A- 30
SEBS-WBY-N Slide Guide (Retained Ball): Miniature Wide and Long Type with Tapped Hole Rail, Anticorrosion A- 30
SEBS-WD Slide Guide: Miniature Wide Type, Anticorrosion A- 38
SEBS-WD-N Slide Guide: Miniature Wide Type with Tapped Hole Rail, Anticorrosion A- 38
SER-A Slide Guide (Roller Element): Miniature Type A- 46
SER-A-N Slide Guide (Roller Element): Miniature Type with Tapped Hole Rail A- 46
SER-WA Slide Guide (Roller Element): Miniature Wide Type A- 48
SER-WA-N Slide Guide (Roller Element): Miniature Wide Type with Tapped Hole Rail A- 48
SERS-A Slide Guide (Roller Element): Miniature Type, Anticorrosion A- 46
SERS-A-N Slide Guide (Roller Element): Miniature Type with Tapped Hole Rail, Anticorrosion A- 46
SERS-WA Slide Guide (Roller Element): Miniature Wide Type, Anticorrosion A- 48
SERS-WA-N Slide Guide (Roller Element): Miniature Wide Type with Tapped Hole Rail, Anticorrosion A- 48

SF
SF Shaft: NBCA Shaft F- 22
SFS Shaft: NBCA Stainless Steel Shaft F- 23
SFW Shaft: NBCA Inch Shaft F- 24
SFW-FS102 Shaft: Format Single End Tapped Inch Shaft F- 28
SFW-FS103 Shaft: Format Both End Tapped Inch Shaft F- 29
SFW-FS115 Shaft: Format Single End Threaded Inch Shaft F- 30
SFW-FS116 Shaft: Format Both End Threaded Inch Shaft F- 31
SFW-PD Shaft: NBCA Inch Pre-Drilled Shaft F- 26
SFWS Shaft: NBCA Inch Shaft, Anticorrosion F- 25
SFWS-FS102 Shaft: Format Single End Tapped Inch Shaft, Anticorrosion F- 28
SFWS-FS103 Shaft: Format Both End Tapped Inch Shaft, Anticorrosion F- 29
SFWS-PD Shaft: NBCA Inch Pre-Drilled Shaft, Anticorrosion F- 27

SG
SGL-E Slide Guide: High Rigidity Flange Type (Short Configuration) A- 62
SGL-F Slide Guide: High Rigidity Non-Flange Type (Short Configuration) A- 54
SGL-HTE Slide Guide: High Rigidity Flange Type (Standard Configuration) A- 66
SGL-HTEX Slide Guide: High Rigidity Flange Type (Standard Configuration) A- 70
SGL-HTF Slide Guide: High Rigidity Non-Flange Type (Standard Configuration) A- 58
SGL-HYE Slide Guide: High Rigidity Flange Type (Long Configuration) A- 68
SGL-HYF Slide Guide: High Rigidity Non-Flange Type (Long Configuration) A- 60
SGL-TE Slide Guide: High Rigidity Flange Type (Standard Configuration) A- 64
SGL-TF Slide Guide: High Rigidity Non-Flange Type (Standard Configuration) A- 56

| | | |
|--------------------------|---|-------|
| SGLS-F | Slide Guide: High Rigidity Non-Flange Type (Short Configuration),Anticorrosion | A- 54 |
| SGLS-TF | Slide Guide: High Rigidity Non-Flange Type (Standard Configuration),Anticorrosion | A- 56 |
| SGW-TE | Slide Guide: High Rigidity Wide Flange Type | A- 78 |
| SGW-TF | Slide Guide: High Rigidity Wide Non-Flange Type | A- 76 |

SH

| | | |
|-------------------------|--|-------|
| SH | Shaft: Shaft Supporter | F- 12 |
| SH-A | Shaft: Aluminum Shaft Supporter | F- 11 |
| SHF | Shaft: Shaft Supporter Flange Type | F- 13 |
| SHF-FC | Shaft: Shaft Supporter Flange Type Cast Iron | F- 13 |

SM

| | | |
|---------------------------|---|--------|
| SM | Slide Bush: Standard Type | C- 14 |
| SM-AJ | Slide Bush: Clearance Adjustable Type | C- 16 |
| SM-G | Slide Bush: Standard Type | C- 14 |
| SM-G-L | Slide Bush: Long Type | C- 20 |
| SM-G-AJ | Slide Bush: Clearance Adjustable Type | C- 16 |
| SM-G-OP | Slide Bush: Open Type | C- 18 |
| SM-GW | Slide Bush: Double-Wide Type | C- 22 |
| SM-OP | Slide Bush: Open Type | C- 18 |
| SM-W | Slide Bush: Double-Wide Type | C- 22 |
| SMA | Slide Bush: Block Type | C- 116 |
| SMA-G | Slide Bush: Block Type | C- 116 |
| SMA-GW | Slide Bush: Double-Wide Block Type | C- 118 |
| SMA-R | Slide Rotary Bush: Block Type | E- 20 |
| SMA-RW | Slide Rotary Bush: Double-Wide Block Type | E- 21 |
| SMA-W | Slide Bush: Double-Wide Block Type | C- 118 |
| SMD | Slide Bush: Clearance Adjustable Open Block Type | C- 132 |
| SMD-G | Slide Bush: Clearance Adjustable Open Block Type | C- 132 |
| SME | Slide Bush: Open Block Type | C- 128 |
| SME-G | Slide Bush: Open Block Type | C- 128 |
| SME-GW | Slide Bush: Double-Wide Open Block Type | C- 130 |
| SME-W | Slide Bush: Double-Wide Open Block Type | C- 130 |
| SMF | Slide Bush: Round Flange Type | C- 24 |
| SMF-E | Slide Bush: Round Flange Pilot End Type | C- 30 |
| SMF-G | Slide Bush: Round Flange Type | C- 24 |
| SMF-G-E | Slide Bush: Round Flange Pilot End Type | C- 30 |
| SMF-GW | Slide Bush: Round Flange Double-Wide Type | C- 38 |
| SMF-GW-E | Slide Bush: Round Flange Double-Wide Pilot End Type | C- 50 |
| SMF-W | Slide Bush: Round Flange Double-Wide Type | C- 38 |
| SMF-W-E | Slide Bush: Round Flange Double-Wide Pilot End Type | C- 50 |
| SMFC | Slide Bush: Center Mount Round Flange Type | C- 44 |
| SMFC-G | Slide Bush: Center Mount Round Flange Type | C- 44 |
| SMJ | Slide Bush: Clearance Adjustable Block Type | C- 126 |
| SMJ-G | Slide Bush: Clearance Adjustable Block Type | C- 126 |

| | | |
|----------------------------|--|--------|
| SMK | Slide Bush: Square Flange Type | C- 26 |
| SMK-E | Slide Bush: Square Flange Pilot End Type | C- 32 |
| SMK-G | Slide Bush: Square Flange Type | C- 26 |
| SMK-G-E | Slide Bush: Square Flange Pilot End Type | C- 32 |
| SMK-G-L | Slide Bush: Square Flange Long Type | C- 36 |
| SMK-GW | Slide Bush: Square Flange Double-Wide Type | C- 40 |
| SMK-GW-E | Slide Bush: Square Flange Double-Wide Pilot End Type | C- 52 |
| SMK-W | Slide Bush: Square Flange Double-Wide Type | C- 40 |
| SMK-W-E | Slide Bush: Square Flange Double-Wide Pilot End Type | C- 52 |
| SMKC | Slide Bush: Center Mount Square Flange Type | C- 46 |
| SMKC-G | Slide Bush: Center Mount Square Flange Type | C- 46 |
| SMP | Slide Bush: Pillow Block Type | C- 124 |
| SMP-G | Slide Bush: Pillow Block Type | C- 124 |
| SMP-R | Slide Rotary Bush: Pillow Block Type | E- 24 |
| SMS | Slide Bush: Standard Type, Anticorrosion | C- 14 |
| SMS-AJ | Slide Bush: Clearance Adjustable Type, Anticorrosion | C- 16 |
| SMS-G | Slide Bush: Standard Type, Anticorrosion | C- 14 |
| SMS-G-AJ | Slide Bush: Clearance Adjustable Type, Anticorrosion | C- 16 |
| SMS-G-OP | Slide Bush: Open Type, Anticorrosion | C- 18 |
| SMS-GW | Slide Bush: Double-Wide Type, Anticorrosion | C- 22 |
| SMS-OP | Slide Bush: Open Type, Anticorrosion | C- 18 |
| SMS-W | Slide Bush: Double-Wide Type, Anticorrosion | C- 22 |
| SMSA | Slide Bush: Block Type, Anticorrosion | C- 116 |
| SMSA-G | Slide Bush: Block Type, Anticorrosion | C- 116 |
| SMSA-GW | Slide Bush: Double-Wide Block Type, Anticorrosion | C- 118 |
| SMSA-W | Slide Bush: Double-Wide Block Type, Anticorrosion | C- 118 |
| SMSD | Slide Bush: Clearance Adjustable Open Block Type, Anticorrosion | C- 132 |
| SMSD-G | Slide Bush: Clearance Adjustable Open Block Type, Anticorrosion | C- 132 |
| SMSE | Slide Bush: Open Block Type, Anticorrosion | C- 128 |
| SMSE-G | Slide Bush: Open Block Type, Anticorrosion | C- 128 |
| SMSE-GW | Slide Bush: Double-Wide Open Block Type, Anticorrosion | C- 130 |
| SMSE-W | Slide Bush: Double-Wide Open Block Type, Anticorrosion | C- 130 |
| SMSF | Slide Bush: Round Flange Type, Anticorrosion | C- 24 |
| SMSF-E | Slide Bush: Round Flange Pilot End Type, Anticorrosion | C- 30 |
| SMSF-G | Slide Bush: Round Flange Type, Anticorrosion | C- 24 |
| SMSF-G-E | Slide Bush: Round Flange Pilot End Type, Anticorrosion | C- 30 |
| SMSF-GW | Slide Bush: Round Flange Double-Wide Type, Anticorrosion | C- 38 |
| SMSF-GW-E | Slide Bush: Round Flange Double-Wide Pilot End Type, Anticorrosion | C- 50 |
| SMSF-W | Slide Bush: Round Flange Double-Wide Type, Anticorrosion | C- 38 |
| SMSF-W-E | Slide Bush: Round Flange Double-Wide Pilot End Type, Anticorrosion | C- 50 |
| SMSFC | Slide Bush: Center Mount Round Flange Type, Anticorrosion | C- 44 |
| SMSFC-G | Slide Bush: Center Mount Round Flange Type, Anticorrosion | C- 44 |
| SMSJ | Slide Bush: Clearance Adjustable Block Type, Anticorrosion | C- 126 |

| | | |
|----------------------------|---|--------|
| SMSJ-G | Slide Bush: Clearance Adjustable Block Type, Anticorrosion | C- 126 |
| SMSK | Slide Bush: Square Flange Type, Anticorrosion | C- 26 |
| SMSK-E | Slide Bush: Square Flange Pilot End Type, Anticorrosion | C- 32 |
| SMSK-G | Slide Bush: Square Flange Type, Anticorrosion | C- 26 |
| SMSK-G-E | Slide Bush: Square Flange Pilot End Type, Anticorrosion | C- 32 |
| SMSK-GW | Slide Bush: Square Flange Double-Wide Type, Anticorrosion | C- 40 |
| SMSK-GW-E | Slide Bush: Square Flange Double-Wide Pilot End Type, Anticorrosion | C- 52 |
| SMSK-W | Slide Bush: Square Flange Double-Wide Type, Anticorrosion | C- 40 |
| SMSK-W-E | Slide Bush: Square Flange Double-Wide Pilot End Type, Anticorrosion | C- 52 |
| SMSKC | Slide Bush: Center Mount Square Flange Type, Anticorrosion | C- 46 |
| SMSKC-G | Slide Bush: Center Mount Square Flange Type, Anticorrosion | C- 46 |
| SMST | Slide Bush: Two Side Cut Flange Type, Anticorrosion | C- 28 |
| SMST-E | Slide Bush: Two Side Cut Pilot End Flange Type, Anticorrosion | C- 34 |
| SMST-G | Slide Bush: Two Side Cut Flange Type, Anticorrosion | C- 28 |
| SMST-G-E | Slide Bush: Two Side Cut Pilot End Flange Type, Anticorrosion | C- 34 |
| SMST-GW | Slide Bush: Two Side Cut Double-Wide Flange Type, Anticorrosion | C- 42 |
| SMST-GW-E | Slide Bush: Two Side Cut Double-Wide Flange Pilot End Type, Anticorrosion | C- 54 |
| SMST-W | Slide Bush: Two Side Cut Double-Wide Flange Type, Anticorrosion | C- 42 |
| SMST-W-E | Slide Bush: Two Side Cut Double-Wide Flange Pilot End Type, Anticorrosion | C- 54 |
| SMSTC | Slide Bush: Two Side Cut Center Flange Type, Anticorrosion | C- 48 |
| SMSTC-G | Slide Bush: Two Side Cut Center Flange Type, Anticorrosion | C- 48 |
| SMT | Slide Bush: Two Side Cut Flange Type | C- 28 |
| SMT-E | Slide Bush: Two Side Cut Pilot End Flange Type | C- 34 |
| SMT-G | Slide Bush: Two Side Cut Flange Type | C- 28 |
| SMT-G-E | Slide Bush: Two Side Cut Pilot End Flange Type | C- 34 |
| SMT-GW | Slide Bush: Two Side Cut Double-Wide Flange Type | C- 42 |
| SMT-GW-E | Slide Bush: Two Side Cut Double-Wide Flange Pilot End Type | C- 54 |
| SMT-W | Slide Bush: Two Side Cut Double-Wide Flange Type | C- 42 |
| SMT-W-E | Slide Bush: Two Side Cut Double-Wide Flange Pilot End Type | C- 54 |
| SMTC | Slide Bush: Two Side Cut Center Flange Type | C- 48 |
| SMTC-G | Slide Bush: Two Side Cut Center Flange Type | C- 48 |

SN

| | | |
|-----------------------|--|------|
| SN | Shaft: NB Shaft | F- 6 |
| SNB | Shaft: NB Center-lined Tapped Shaft | F- 9 |
| SNS | Shaft: NB Shaft, Anticorrosion | F- 7 |
| SNSB | Shaft: NB Center-lined Tapped Shaft, Anticorrosion | F- 9 |
| SNT | Shaft: NB Pipe Shaft | F- 8 |

SP

| | | |
|-------------------------|--|-------|
| SPB | Rotary Ball Spline | B- 44 |
| SPB-KP | Rotary Ball Spline, Compact Type | B- 42 |
| SPBF | Ball Screw Spline | B- 58 |
| SPBR | Ball Screw Spline | B- 56 |
| SPLFS | Stroke Ball Spline | B- 50 |

| | | |
|----------------------|------------------------------|-------|
| SPR | Rotary Ball Spline | B- 40 |
|----------------------|------------------------------|-------|

SR

| | | |
|-------------------------|--|-------|
| SR | Stroke Bush: Standard | E- 6 |
| SR-B | Stroke Bush: Double Retainer Type | E- 8 |
| SR-BUU | Stroke Bush: Double Retainer Type with Seals | E- 9 |
| SR-UU | Stroke Bush: Standard with Seals | E- 7 |
| SRE | Slide Rotary Bush | E- 16 |
| SREK | Slide Rotary Bush: Square Flange Type | E- 18 |

SS

| | | |
|---------------------------|--|-------|
| SS | Slide Screw | I- 7 |
| SSP | Ball Spline: Cylindrical Type | B- 18 |
| SSP-AM | Ball Spline: Compact Cylindrical Type | B- 20 |
| SSP-C | Ball Spline: Commercial Spline Assembly with SSP nut | B- 30 |
| SSPF | Ball Spline: Round Flange Type | B- 24 |
| SSPFS | Ball Spline: Round Flange Type, Anticorrosion | B- 24 |
| SSPF-C | Ball Spline: Commercial Spline Assembly with SSPF nut | B- 30 |
| SSPM | Ball Spline: Cylindrical Keyless Type | B- 22 |
| SSPK-AM | Ball Spline: Light and Compact Flange Type | B- 28 |
| SSPKS-AM | Ball Spline: Light and Compact Flange Type Anticorrosion | B- 28 |
| SSPS | Ball Spline: Cylindrical Type, Anticorrosion | B- 18 |
| SSPS-AM | Ball Spline: Compact Cylindrical Type, Anticorrosion | B- 20 |
| SSPT | Ball Spline: Two Side Cut Flange Type | B- 26 |
| SSPT-AM | Ball Spline: Compact Two Side Cut Flange Type | B- 28 |
| SSPTS-AM | Ball Spline: Compact Two Side Cut Flange Type, Anticorrosion | B- 28 |

SV

| | | |
|-----------------------|--|-------|
| SV | Slide Way | G- 16 |
| SVS | Slide Way: Anticorrosion | G- 16 |
| SVT | Slide Table | G- 38 |
| SVTS | Slide Table: Anticorrosion | G- 38 |
| SVW | Slide Way: Center Rail Type | G- 24 |
| SVWS | Slide Way: Center Rail Type, Anticorrosion | G- 24 |

SW

| | | |
|---------------------------|--|--------|
| SW | Slide Bush (Inch Standard): Standard Type | C- 98 |
| SW-AJ | Slide Bush (Inch Standard): Clearance Adjustable Type | C- 100 |
| SW-G | Slide Bush (Inch Standard): Standard Type | C- 98 |
| SW-G-AJ | Slide Bush (Inch Standard): Clearance Adjustable Type | C- 100 |
| SW-G-OP | Slide Bush (Inch Standard): Open Type | C- 102 |
| SW-GR | Slide Bush (Inch Standard): Self-Aligning Type | C- 98 |
| SW-GR-AJ | Slide Bush (Inch Standard): Self-Aligning, Clearance Adjustable Type | C- 100 |
| SW-GR-OP | Slide Bush (Inch Standard): Self-Aligning, Open Type | C- 102 |
| SW-GW | Slide Bush (Inch Standard): Double-Wide Type | C- 104 |
| SW-OP | Slide Bush (Inch Standard): Open Type | C- 102 |
| SW-W | Slide Bush (Inch Standard): Double-Wide Type | C- 104 |

| | | |
|---------------------------|---|--------|
| SWA | Slide Bush (Inch Standard): Block Type | C- 138 |
| SWA-G | Slide Bush (Inch Standard): Block Type | C- 138 |
| SWA-GR | Slide Bush (Inch Standard): Self-Aligning, Block Type | C- 138 |
| SWD | Slide Bush (Inch Standard): Clearance Adjustable Open Block Type | C- 142 |
| SWD-G | Slide Bush (Inch Standard): Clearance Adjustable Open Block Type | C- 142 |
| SWD-GR | Slide Bush (Inch Standard): Self-Aligning Clearance Adjustable Open Block Type | C- 142 |
| SWJ | Slide Bush (Inch Standard): Clearance Adjustable Block Type | C- 140 |
| SWJ-G | Slide Bush (Inch Standard): Clearance Adjustable Block Type | C- 140 |
| SWJ-GR | Slide Bush (Inch Standard): Self-Aligning Clearance Adjustable Block Type | C- 140 |
| SWF | Slide Bush (Inch Standard): Round Flange Type | C- 106 |
| SWF-G | Slide Bush (Inch Standard): Round Flange Type | C- 106 |
| SWF-GW | Slide Bush (Inch Standard): Round Flange Double-Wide Type | C- 110 |
| SWF-W | Slide Bush (Inch Standard): Round Flange Double-Wide Type | C- 110 |
| SWK | Slide Bush (Inch Standard): Square Flange Type | C- 108 |
| SWK-G | Slide Bush (Inch Standard): Square Flange Type | C- 108 |
| SWK-GW | Slide Bush (Inch Standard): Square Flange Double-Wide Type | C- 112 |
| SWK-W | Slide Bush (Inch Standard): Square Flange Double-Wide Type | C- 112 |
| SWS | Slide Bush (Inch Standard): Standard Type, Anticorrosion | C- 98 |
| SWS-AJ | Slide Bush (Inch Standard): Clearance Adjustable Type, Anticorrosion | C- 100 |
| SWS-G | Slide Bush (Inch Standard): Standard Type, Anticorrosion | C- 98 |
| SWS-G-AJ | Slide Bush (Inch Standard): Clearance Adjustable Type, Anticorrosion | C- 100 |
| SWS-G-OP | Slide Bush (Inch Standard): Open Type, Anticorrosion | C- 102 |
| SWS-GW | Slide Bush (Inch Standard): Double-Wide Type, Anticorrosion | C- 104 |
| SWS-OP | Slide Bush (Inch Standard): Open Type, Anticorrosion | C- 102 |
| SWS-W | Slide Bush (Inch Standard): Double-Wide Type, Anticorrosion | C- 104 |
| SWSA | Slide Bush (Inch Standard): Block Type, Anticorrosion | C- 138 |
| SWSA-G | Slide Bush (Inch Standard): Block Type, Anticorrosion | C- 138 |
| SWSD | Slide Bush (Inch Standard): Clearance Adjustable Open Block Type, Anticorrosion | C- 142 |
| SWSD-G | Slide Bush (Inch Standard): Clearance Adjustable Open Block Type, Anticorrosion | C- 142 |
| SWSF | Slide Bush (Inch Standard): Round Flange Type, Anticorrosion | C- 106 |
| SWSF-G | Slide Bush (Inch Standard): Round Flange Type, Anticorrosion | C- 106 |
| SWSF-GW | Slide Bush (Inch Standard): Round Flange Double-Wide Type, Anticorrosion | C- 110 |
| SWSF-W | Slide Bush (Inch Standard): Round Flange Double-Wide Type, Anticorrosion | C- 110 |
| SWSJ | Slide Bush (Inch Standard): Clearance Adjustable Block Type, Anticorrosion | C- 140 |
| SWSJ-G | Slide Bush (Inch Standard): Clearance Adjustable Block Type, Anticorrosion | C- 140 |
| SWSK | Slide Bush (Inch Standard): Square Flange Type, Anticorrosion | C- 108 |
| SWSK-G | Slide Bush (Inch Standard): Square Flange Type, Anticorrosion | C- 108 |
| SWSK-GW | Slide Bush (Inch Standard): Square Flange Double-Wide Type, Anticorrosion | C- 112 |
| SWSK-W | Slide Bush (Inch Standard): Square Flange Double-Wide Type, Anticorrosion | C- 112 |

SY

| | | |
|------------------------|--|-------|
| SYBS | Miniature Slide: Ultra Compact Type | G- 56 |
| SYT | Slide Table: Compact Type | G- 44 |
| SYT-D | Slide Table: Compact Type with Counterbored Rail | G- 48 |

| | | |
|-------------------------|---|-------|
| SYTS | Slide Table: Compact Type, Anticorrosion | G- 44 |
| SYTS-D | Slide Table: Compact Type with Counterbored Rail, Anticorrosion | G- 48 |

TK

| | | |
|------------------------|--|-------|
| TK | TOPBALL Slide Bush (Euro Standard): Standard Type | D- 8 |
| TK-OP | TOPBALL Slide Bush (Euro Standard): Open Type | D- 8 |
| TKA | Slide Bush using TOPBALL (Euro Standard): Block Type | D- 12 |
| TKA-W | Slide Bush using TOPBALL (Euro Standard): Double-Wide Block Type | D- 13 |
| TKD | Slide Bush using TOPBALL (Euro Standard): Clearance Adjustable Open Block Type | D- 16 |
| TKD-W | Slide Bush using TOPBALL (Euro Standard): Clearance Adjustable Double-Wide Open Block Type | D- 17 |
| TKE | Slide Bush using TOPBALL (Euro Standard): Open Block Type | D- 14 |
| TKE-W | Slide Bush using TOPBALL (Euro Standard): Double-Wide Open Block Type | D- 15 |

TM

| | | |
|----------------------|---|-------|
| TMA | Slide Bush using TOPBALL, Block Type | D- 19 |
| TMF | Slide Bush using TOPBALL, Round Flange Type | D- 18 |

TQ

| | | |
|--------------------------|--|-------|
| TQF-E | Slide Bush with grease fitting : Round Flange with Pilot End Type | C- 70 |
| TQF-W-E | Slide Bush with grease fitting : Round Flange Double-Wide with Pilot End Type | C- 74 |
| TQK-E | Slide Bush with grease fitting : Square Flange with Pilot End Type | C- 72 |
| TQK-W-E | Slide Bush with grease fitting : Square Flange Double-Wide with Pilot End Type | C- 76 |

TR

| | | |
|--------------------------|--|-------|
| TRF | Slide Bush: Triple-Wide Round Flange Type | C- 56 |
| TRF-E | Slide Bush: Triple-Wide Round Flange Pilot End Type | C- 66 |
| TRF-G | Slide Bush: Triple-Wide Round Flange Type | C- 56 |
| TRF-G-E | Slide Bush: Triple-Wide Round Flange Pilot End Type | C- 66 |
| TRFC | Slide Bush: Triple-Wide Intermediate Position Round Flange Type | C- 62 |
| TRFC-G | Slide Bush: Triple-Wide Intermediate Position Round Flange Type | C- 62 |
| TRK | Slide Bush: Triple-Wide Square Flange Type | C- 58 |
| TRK-E | Slide Bush: Triple-Wide Square Flange Pilot End Type | C- 68 |
| TRK-G | Slide Bush: Triple-Wide Square Flange Type | C- 58 |
| TRK-G-E | Slide Bush: Triple-Wide Square Flange Pilot End Type | C- 68 |
| TRKC | Slide Bush: Triple-Wide Intermediate Position Square Flange Type | C- 64 |
| TRKC-G | Slide Bush: Triple-Wide Intermediate Position Square Flange Type | C- 64 |
| TRT | Slide Bush: Triple-Wide Two Side Cut Flange Type | C- 60 |

TU

| | | |
|----------------------|----------------------------|---------|
| TU1 | Grease Dispenser | Eng- 43 |
|----------------------|----------------------------|---------|

TW

| | | |
|------------------------|--|-------|
| TW | TOPBALL Slide Bush (Inch Standard): Standard Type | D- 10 |
| TW-OP | TOPBALL Slide Bush (Inch Standard): Open Type | D- 10 |
| TWA | Slide Bush using TOPBALL (Inch Standard): Block Type | D- 20 |
| TWA-W | Slide Bush using TOPBALL (Inch Standard): Double-Wide Block Type | D- 21 |
| TWD | Slide Bush using TOPBALL (Inch Standard): Clearance Adjustable Open Block Type | D- 24 |
| TWD-W | Slide Bush using TOPBALL (Inch Standard): Clearance Adjustable Double-Wide Open Block Type | D- 25 |
| TWJ | Slide Bush using TOPBALL (Inch Standard): Clearance Adjustable Block Type | D- 22 |

TWJ-W Slide Bush using TOPBALL (Inch Standard): Clearance Adjustable Double-Wide Block Type . . . D- 23

W

WA Shaft (Inch Standard): Shaft Support Rail F- 18

WH-A Shaft (Inch Standard): Alminum Shaft Supporter F- 16

WSS Shaft (Inch Standard): Shaft Support Assembly F- 20

WSS-SS Shaft (Inch Standard): Shaft Support Assembly, Anticorrosion F- 21



NIPPON BEARING CO.,LTD.

2833 Chiya, Ojija-city, Niigata-pref., 947-8503 JAPAN
Phone:+81 (0) 258-82-0011 FAX:+81 (0) 258-81-1135
Overseas direct call:+81 (0) 258-82-5709
<http://www.nb-linear.co.jp>

NB CORPORATION OF AMERICA

930 Muirfield Drive, Hanover Park, IL 60133, U.S.A.
Phone: (630) 295-8880 FAX: (630) 295-8881
TOLL FREE: (800) 521-2045

Western Regional Office

46750 Lakeview Blvd, Fremont, CA 94538, U.S.A.
Phone: (510) 490-1420 FAX: (510) 490-1733
TOLL FREE: (888) 562-4175

Eastern Regional Office

500 N. Franklin Turnpike, Suite 103, Ramsey, NJ 07446, U.S.A.
Phone: (201) 236-3886 FAX: (201) 236-5112
TOLL FREE: (800) 981-8190
<http://www.nbcorporation.com>
info@nbcorporation.com

NB EUROPE B.V.

Boekweitstraat 21, 2153 GK Nieuw-Vennep, The Netherlands
Phone:+31 (0) 252-463-200 FAX:+31 (0) 252-463-209
<http://www.nbeurope.com>
info@nbeurope.com

NB CHINA CO.,LTD.

Room 108, Building 2, Randong Commercial Center No.150,
Lane 2161 Wanyuan Road, Minhang District, Shanghai 201103,
P.R. China
Phone:+86-21-5228-6811 FAX:+86-21-5228-6810
<http://www.nb-linear.co.jp/chinese/index.html>
info@nb-china.com.cn

NIPPON BEARING MALAYSIA SDN. BHD.

No.27, Jalan PJS 11/14, Bandar Sunway, 46150 Petaling Jaya,
Selangor Darul Ehsan, Malaysia
Phone:+60-3-5621-0716 FAX:+60-3-5621-0729
info@nb-linear.com.my

No.176E

First Edition: April 1, 2018

※ Specifications are subject to change without notice.
©NIPPON BEARING CO.,LTD. All rights reserved.
Reproduction Prohibited. Printed in Japan